Learning Ada

The complete contents of learn.adacore.com

LEARN.
ADACORE.COM

LEARN.
ADACORE.COM

Learning Ada

Release 2025-06

Various authors

Jun 27, 2025

CONTENTS

I Introduction to Ada **3**

1 Introduction **7**
1.1 History . . . 7
1.2 Ada today . . . 7
1.3 Philosophy . . . 8
1.4 SPARK . . . 8

2 Imperative language **9**
2.1 Hello world . . . 9
2.2 Imperative language - If/Then/Else . . . 10
2.3 Imperative language - Loops . . . 13
2.3.1 For loops . . . 13
2.3.2 Bare loops . . . 14
2.3.3 While loops . . . 15
2.4 Imperative language - Case statement . . . 16
2.5 Imperative language - Declarative regions . . . 18
2.6 Imperative language - conditional expressions . . . 20
2.6.1 If expressions . . . 20
2.6.2 Case expressions . . . 21

3 Subprograms **23**
3.1 Subprograms . . . 23
3.1.1 Subprogram calls . . . 24
3.1.2 Nested subprograms . . . 25
3.1.3 Function calls . . . 26
3.2 Parameter modes . . . 28
3.3 Subprogram calls . . . 28
3.3.1 In parameters . . . 28
3.3.2 In out parameters . . . 29
3.3.3 Out parameters . . . 30
3.3.4 Forward declaration of subprograms . . . 31
3.4 Renaming . . . 31

4 Modular programming **35**
4.1 Packages . . . 35
4.2 Using a package . . . 37
4.3 Package body . . . 37
4.4 Child packages . . . 39
4.4.1 Child of a child package . . . 41
4.4.2 Multiple children . . . 42
4.4.3 Visibility . . . 43
4.5 Renaming . . . 45

5 Strongly typed language **47**
5.1 What is a type? . . . 47

5.2 Integers . . . 47
5.2.1 Operational semantics . . . 49
5.3 Unsigned types . . . 50
5.4 Enumerations . . . 51
5.5 Floating-point types . . . 52
5.5.1 Basic properties . . . 52
5.5.2 Precision of floating-point types . . . 53
5.5.3 Range of floating-point types . . . 54
5.6 Strong typing . . . 56
5.7 Derived types . . . 58
5.8 Subtypes . . . 60
5.8.1 Subtypes as type aliases . . . 62

6 Records **65**
6.1 Record type declaration . . . 65
6.2 Aggregates . . . 66
6.3 Component selection . . . 66
6.4 Renaming . . . 67

7 Arrays **71**
7.1 Array type declaration . . . 71
7.2 Indexing . . . 74
7.3 Simpler array declarations . . . 75
7.4 Range attribute . . . 76
7.5 Unconstrained arrays . . . 78
7.6 Predefined array type: String . . . 79
7.7 Restrictions . . . 81
7.8 Returning unconstrained arrays . . . 82
7.9 Declaring arrays (2) . . . 83
7.10 Array slices . . . 84
7.11 Renaming . . . 85

8 More about types **89**
8.1 Aggregates: A primer . . . 89
8.2 Overloading and qualified expressions . . . 90
8.3 Character types . . . 93

9 Access types (pointers) **95**
9.1 Overview . . . 95
9.2 Allocation (by type) . . . 97
9.3 Dereferencing . . . 98
9.4 Other features . . . 98
9.5 Mutually recursive types . . . 99

10 More about records **101**
10.1 Dynamically sized record types . . . 101
10.2 Records with discriminant . . . 102
10.3 Variant records . . . 104

11 Fixed-point types **107**
11.1 Decimal fixed-point types . . . 107
11.2 Ordinary fixed-point types . . . 109

12 Privacy **113**
12.1 Basic encapsulation . . . 113
12.2 Abstract data types . . . 114
12.3 Limited types . . . 116
12.4 Child packages & privacy . . . 117

13 Generics **123**
13.1 Introduction . . . 123
13.2 Formal type declaration . . . 123
13.3 Formal object declaration . . . 124
13.4 Generic body definition . . . 124
13.5 Generic instantiation . . . 125
13.6 Generic packages . . . 126
13.7 Formal subprograms . . . 128
13.8 Example: I/O instances . . . 129
13.9 Example: ADTs . . . 131
13.10 Example: Swap . . . 133
13.11 Example: Reversing . . . 136
13.12 Example: Test application . . . 139

14 Exceptions **143**
14.1 Exception declaration . . . 143
14.2 Raising an exception . . . 143
14.3 Handling an exception . . . 144
14.4 Predefined exceptions . . . 146

15 Tasking **147**
15.1 Tasks . . . 147
15.1.1 Simple task . . . 147
15.1.2 Simple synchronization . . . 148
15.1.3 Delay . . . 150
15.1.4 Synchronization: rendezvous . . . 151
15.1.5 Select loop . . . 152
15.1.6 Cycling tasks . . . 154
15.2 Protected objects . . . 157
15.2.1 Simple object . . . 158
15.2.2 Entries . . . 159
15.3 Task and protected types . . . 160
15.3.1 Task types . . . 160
15.3.2 Protected types . . . 162

16 Design by contracts **165**
16.1 Pre- and postconditions . . . 165
16.2 Predicates . . . 168
16.3 Type invariants . . . 172

17 Interfacing with C **175**
17.1 Multi-language project . . . 175
17.2 Type convention . . . 175
17.3 Foreign subprograms . . . 176
17.3.1 Calling C subprograms in Ada . . . 176
17.3.2 Calling Ada subprograms in C . . . 178
17.4 Foreign variables . . . 179
17.4.1 Using C global variables in Ada . . . 179
17.4.2 Using Ada variables in C . . . 180
17.5 Generating bindings . . . 182
17.5.1 Adapting bindings . . . 183

18 Object-oriented programming **189**
18.1 Derived types . . . 190
18.2 Tagged types . . . 191
18.3 Classwide types . . . 193
18.4 Dispatching operations . . . 194
18.5 Dot notation . . . 196
18.6 Private & Limited . . . 197

18.7 Classwide access types . . . 199

19 Standard library: Containers **203**
19.1 Vectors . . . 203
19.1.1 Instantiation . . . 203
19.1.2 Initialization . . . 204
19.1.3 Appending and prepending elements . . . 204
19.1.4 Accessing first and last elements . . . 206
19.1.5 Iterating . . . 207
19.1.6 Finding and changing elements . . . 211
19.1.7 Inserting elements . . . 213
19.1.8 Removing elements . . . 214
19.1.9 Other Operations . . . 217
19.2 Sets . . . 219
19.2.1 Initialization and iteration . . . 220
19.2.2 Operations on elements . . . 221
19.2.3 Other Operations . . . 223
19.3 Indefinite maps . . . 225
19.3.1 Hashed maps . . . 226
19.3.2 Ordered maps . . . 227
19.3.3 Complexity . . . 228

20 Standard library: Dates & Times **231**
20.1 Date and time handling . . . 231
20.1.1 Delaying using date . . . 232
20.2 Real-time . . . 235
20.2.1 Benchmarking . . . 235

21 Standard library: Strings **239**
21.1 String operations . . . 239
21.2 Limitation of fixed-length strings . . . 244
21.3 Bounded strings . . . 244
21.4 Unbounded strings . . . 247

22 Standard library: Files and streams **249**
22.1 Text I/O . . . 249
22.2 Sequential I/O . . . 252
22.3 Direct I/O . . . 254
22.4 Stream I/O . . . 256

23 Standard library: Numerics **259**
23.1 Elementary Functions . . . 259
23.2 Random Number Generation . . . 260
23.3 Complex Types . . . 262
23.4 Vector and Matrix Manipulation . . . 264

24 Appendices **269**
24.1 Appendix A: Generic Formal Types . . . 269
24.1.1 Indefinite version . . . 270
24.2 Appendix B: Containers . . . 271

II Advanced Journey With Ada: A Flight In Progress 273

25 Data types **277**
25.1 Types . . . 277
25.1.1 Names . . . 277
25.1.2 Objects . . . 281
25.1.3 Scalar Types . . . 286

25.1.4 Enumerations . . . 292
25.1.5 Universal and Root Types . . . 300
25.1.6 Definite and Indefinite Subtypes . . . 302
25.1.7 Incomplete types . . . 308
25.1.8 Type view . . . 310
25.1.9 Type conversion . . . 317
25.1.10 Qualified Expressions . . . 336
25.1.11 Default initial values . . . 337
25.1.12 Deferred Constants . . . 340
25.1.13 User-defined literals . . . 342
25.2 Types and Representation . . . 350
25.2.1 Enumeration Representation Clauses . . . 350
25.2.2 Data Representation . . . 351
25.2.3 Sizes . . . 352
25.2.4 Alignment . . . 360
25.2.5 Overlapping Storage . . . 362
25.2.6 Packed Representation . . . 365
25.2.7 Record Representation and storage clauses . . . 369
25.2.8 Changing Data Representation . . . 378
25.2.9 Valid Attribute . . . 384
25.2.10 Unchecked Union . . . 387
25.2.11 Addresses . . . 393
25.2.12 Discarding names . . . 401
25.3 Shared variable control . . . 404
25.3.1 Volatile . . . 404
25.3.2 Independent . . . 406
25.3.3 Atomic . . . 411
25.3.4 Full-access only . . . 413
25.3.5 Atomic operations . . . 426
25.4 Records . . . 438
25.4.1 Default Initialization . . . 438
25.4.2 Mutually dependent types . . . 444
25.4.3 Null records . . . 446
25.4.4 Record discriminants . . . 454
25.4.5 Discriminant constraints and operations . . . 478
25.4.6 Unknown discriminants . . . 484
25.4.7 Unconstrained subtypes . . . 492
25.4.8 Variant parts . . . 494
25.4.9 Per-Object Expressions . . . 507
25.5 Aggregates . . . 512
25.5.1 Container Aggregates . . . 512
25.5.2 Record aggregates . . . 515
25.5.3 Full coverage rules for Aggregates . . . 525
25.5.4 Array aggregates . . . 527
25.5.5 Extension Aggregates . . . 546
25.5.6 Delta Aggregates . . . 553
25.6 Arrays . . . 560
25.6.1 Array constraints . . . 560
25.6.2 Multidimensional Arrays . . . 563
25.6.3 Derived array types and array subtypes . . . 571
25.7 Strings . . . 575
25.7.1 Character and String Literals . . . 575
25.7.2 Wide and Wide-Wide Strings . . . 577
25.7.3 String Encoding . . . 585
25.7.4 UTF-8 applications . . . 591
25.7.5 Image attribute . . . 601
25.7.6 `Put_Image` aspect . . . 608
25.7.7 Universal text buffer . . . 615

25.8 Numerics . . . 618
25.8.1 Numeric Literals . . . 618
25.8.2 Universal Numeric Types . . . 625
25.8.3 Base types . . . 639
25.8.4 Big Numbers . . . 644
25.9 Numeric Attributes . . . 659
25.9.1 Attributes of Modular Types . . . 659
25.9.2 Attributes of Floating-Point Types . . . 665
25.9.3 Attributes of Fixed-Point types . . . 678

26 Control Flow **687**
26.1 Expressions . . . 687
26.1.1 Expressions: Definition . . . 687
26.1.2 Conditional Expressions . . . 693
26.1.3 Quantified Expressions . . . 696
26.1.4 Declare Expressions . . . 700
26.1.5 Reduction Expressions . . . 704
26.2 Statements . . . 710
26.2.1 Simple and Compound Statements . . . 710
26.2.2 Labels . . . 711
26.2.3 Exit loop statement . . . 715
26.2.4 If, case and loop statements . . . 716
26.2.5 Block Statements . . . 720
26.2.6 Extended return statement . . . 721
26.3 Subprograms . . . 723
26.3.1 Parameter Modes and Associations . . . 723
26.3.2 Operators . . . 736
26.3.3 Expression functions . . . 742
26.3.4 Overloading . . . 745
26.3.5 Operator Overloading . . . 750
26.3.6 Operator Overriding . . . 750
26.3.7 Nonreturning procedures . . . 753
26.3.8 Inline subprograms . . . 756
26.3.9 Null Procedures . . . 758
26.4 Exceptions . . . 761
26.4.1 Classification of Errors . . . 761
26.4.2 Asserts . . . 765
26.4.3 Assertion policies . . . 767
26.4.4 Checks and exceptions . . . 770
26.4.5 `Ada.Exceptions` package . . . 786
26.4.6 Exception renaming . . . 794
26.4.7 Out and Uninitialized . . . 795
26.4.8 Suppressing checks . . . 799

27 Modular programming **803**
27.1 Packages . . . 803
27.1.1 Package renaming . . . 803
27.1.2 Private packages . . . 806
27.1.3 Private with clauses . . . 814
27.1.4 Limited Visibility . . . 817
27.1.5 Visibility . . . 822
27.1.6 Use type clause . . . 828
27.1.7 Use clauses and naming conflicts . . . 831
27.2 Subprograms and Modularity . . . 837
27.2.1 Private subprograms . . . 837

28 Resource Management **843**
28.1 Access Types . . . 843
28.1.1 Access types: Terminology . . . 843

28.1.2 Access types: Allocation . . . 845
28.1.3 Discriminants as Access Values . . . 853
28.1.4 Parameters as Access Values . . . 860
28.1.5 Self-reference . . . 870
28.1.6 Mutually dependent types using access types . . . 873
28.1.7 Dereferencing . . . 873
28.1.8 Ragged arrays . . . 880
28.1.9 Aliasing . . . 884
28.1.10 Accessibility Levels and Rules: An Introduction . . . 894
28.1.11 Unchecked Access . . . 904
28.1.12 Unchecked Deallocation . . . 906
28.1.13 Null & Not Null Access . . . 914
28.1.14 Design strategies for access types . . . 918
28.1.15 Access to subprograms . . . 926
28.1.16 Accessibility Rules and Access-To-Subprograms . . . 951
28.1.17 Access and Address . . . 955
28.2 Anonymous Access Types . . . 959
28.2.1 Named and Anonymous Access Types . . . 959
28.2.2 Anonymous Access-To-Object Types . . . 963
28.2.3 Access discriminants . . . 973
28.2.4 Self-reference . . . 980
28.2.5 Mutually dependent types using anonymous access types . . . 983
28.2.6 Access parameters . . . 983
28.2.7 User-Defined References . . . 992
28.2.8 Anonymous Access Types and Accessibility Rules . . . 1001
28.2.9 Anonymous Access-To-Subprograms . . . 1006
28.2.10 Accessibility Rules and Anonymous Access-To-Subprograms . . . 1015
28.3 Limited Types . . . 1025
28.3.1 Assignment and equality . . . 1025
28.3.2 Limited private types . . . 1033
28.3.3 Explicitly limited types . . . 1041
28.3.4 Subtypes of Limited Types . . . 1042
28.3.5 Deriving from limited types . . . 1043
28.3.6 Immutably Limited Types . . . 1051
28.3.7 Limited Types with Discriminants . . . 1053
28.3.8 Record components of limited type . . . 1059
28.3.9 Limited types and aggregates . . . 1060
28.3.10 Constructor functions for limited types . . . 1064
28.3.11 Return objects . . . 1068
28.3.12 Building objects from constructors . . . 1074
28.3.13 Limited types as parameter . . . 1078
28.4 Controlled Types . . . 1080
28.4.1 Overview . . . 1080
28.4.2 Initialization . . . 1092
28.4.3 Assignment . . . 1103
28.4.4 Finalization . . . 1109
28.4.5 Controlled Types and Exception Handling . . . 1118
28.4.6 Applications of Controlled Types . . . 1126

III Ada In Practice 1137

29 Introduction 1141
29.1 Assumptions . . . 1142
29.2 Definitions . . . 1142
29.2.1 Suppliers and Clients . . . 1142
29.2.2 Compile-time Visibility . . . 1142
29.2.3 Views . . . 1143

29.2.4 Partial and Full Views . . . 1143

30 Essential Design Idioms for Packages **1145**
30.1 Motivation . . . 1145
30.2 Implementation(s) . . . 1145
30.2.1 Named Collection of Declarations . . . 1146
30.2.2 Groups of Related Program Units . . . 1146
30.3 Notes . . . 1148

31 Abstract Data Types **1149**
31.1 Motivation . . . 1149
31.2 Implementation(s) . . . 1150
31.3 Pros . . . 1153
31.4 Cons . . . 1153
31.5 Relationship With Other Idioms . . . 1154
31.6 Notes . . . 1154

32 Abstract Data Machines **1155**
32.1 Motivation . . . 1155
32.2 Implementation(s) . . . 1155
32.3 Pros . . . 1159
32.4 Cons . . . 1159

33 Programming by Extension **1161**
33.1 Motivation . . . 1161
33.2 Implementation(s) . . . 1162
33.3 Pros . . . 1163
33.4 Cons . . . 1163
33.5 Relationship With Other Idioms . . . 1164
33.6 Notes . . . 1164

34 Constructor Functions For Abstract Data Types **1165**
34.1 Motivation . . . 1165
34.2 Implementation(s) . . . 1167
34.3 Pros . . . 1168
34.4 Cons . . . 1169
34.5 Relationship With Other Idioms . . . 1169
34.6 Notes . . . 1169

35 Controlling Object Initialization and Creation **1173**
35.1 Motivation . . . 1173
35.2 Implementation(s) . . . 1175
35.2.1 Compile-Time Legality . . . 1175
35.2.2 Run-Time Checks . . . 1180
35.2.3 Preventing Object Creation by Clients . . . 1184
35.3 Pros . . . 1190
35.4 Cons . . . 1190
35.5 Relationship With Other Idioms . . . 1190
35.6 Notes . . . 1190

36 Type Punning **1191**
36.1 Motivation . . . 1191
36.2 Implementation(s) . . . 1192
36.2.1 Overlays . . . 1192
36.2.2 Unchecked Conversions on Address Values . . . 1193
36.3 Pros . . . 1197
36.4 Cons . . . 1197
36.5 Relationship With Other Idioms . . . 1197
36.6 Notes . . . 1197

37 Using Building Blocks to Express Inheritance Idioms 1199
37.1 Motivation . . . 1199
37.1.1 Building Blocks . . . 1201
37.2 Implementation(s) . . . 1202
37.2.1 Subtype Inheritance . . . 1203
37.2.2 Implementation Inheritance . . . 1206
37.3 Pros . . . 1207
37.4 Cons . . . 1208
37.5 Relationship With Other Idioms . . . 1208

38 Providing Component Access to Enclosing Record Objects 1209
38.1 Motivation . . . 1209
38.2 Implementation(s) . . . 1210
38.3 Real-World Example . . . 1212
38.4 Pros . . . 1216
38.5 Cons . . . 1216
38.6 Relationship With Other Idioms . . . 1216
38.7 Notes . . . 1216
38.8 Full Source Code for Selected Units . . . 1217

39 Interrupt Handling 1223
39.1 Motivation . . . 1223
39.2 Implementation(s) . . . 1224
39.2.1 First Level Handler Alone . . . 1224
39.2.2 Task Notification Introduction . . . 1227
39.2.3 Task Notification With Communication . . . 1228
39.2.4 Task Notification Without Communication . . . 1231
39.3 Pros . . . 1235
39.4 Cons . . . 1235
39.5 Relationship With Other Idioms . . . 1235
39.6 What About Priorities? . . . 1235
39.7 Notes . . . 1236

40 Reducing Object Code from Generic Package Instantiations 1237
40.1 Motivation . . . 1237
40.2 Implementation(s) . . . 1238
40.3 Pros . . . 1238
40.4 Cons . . . 1239
40.5 Relationship With Other Idioms . . . 1239
40.6 Notes . . . 1239

IV Introduction To SPARK 1241

41 SPARK Overview 1245
41.1 What is it? . . . 1245
41.2 What do the tools do? . . . 1245
41.3 Key Tools . . . 1246
41.4 A trivial example . . . 1246
41.5 The Programming Language . . . 1247
41.6 Limitations . . . 1247
41.6.1 No side-effects in expressions . . . 1247
41.6.2 No aliasing of names . . . 1250
41.7 Designating SPARK Code . . . 1252
41.8 Code Examples / Pitfalls . . . 1253
41.8.1 Example #1 . . . 1253
41.8.2 Example #2 . . . 1254
41.8.3 Example #3 . . . 1255
41.8.4 Example #4 . . . 1256

41.8.5 Example #5 . . . 1257
41.8.6 Example #6 . . . 1258
41.8.7 Example #7 . . . 1259
41.8.8 Example #8 . . . 1259
41.8.9 Example #9 . . . 1260
41.8.10 Example #10 . . . 1261

42 Flow Analysis **1263**
42.1 What does flow analysis do? . . . 1263
42.2 Errors Detected . . . 1263
42.2.1 Uninitialized Variables . . . 1263
42.2.2 Ineffective Statements . . . 1264
42.2.3 Incorrect Parameter Mode . . . 1265
42.3 Additional Verifications . . . 1266
42.3.1 Global Contracts . . . 1266
42.3.2 Depends Contracts . . . 1268
42.4 Shortcomings . . . 1270
42.4.1 Modularity . . . 1270
42.4.2 Composite Types . . . 1270
42.4.3 Value Dependency . . . 1273
42.4.4 Contract Computation . . . 1274
42.5 Code Examples / Pitfalls . . . 1275
42.5.1 Example #1 . . . 1275
42.5.2 Example #2 . . . 1276
42.5.3 Example #3 . . . 1277
42.5.4 Example #4 . . . 1278
42.5.5 Example #5 . . . 1280
42.5.6 Example #6 . . . 1281
42.5.7 Example #7 . . . 1282
42.5.8 Example #8 . . . 1283
42.5.9 Example #9 . . . 1284
42.5.10 Example #10 . . . 1286

43 Proof of Program Integrity **1289**
43.1 Runtime Errors . . . 1289
43.2 Modularity . . . 1291
43.2.1 Exceptions . . . 1292
43.3 Contracts . . . 1294
43.3.1 Executable Semantics . . . 1296
43.3.2 Additional Assertions and Contracts . . . 1297
43.4 Debugging Failed Proof Attempts . . . 1299
43.4.1 Debugging Errors in Code or Specification . . . 1299
43.4.2 Debugging Cases where more Information is Required . . . 1301
43.4.3 Debugging Prover Limitations . . . 1302
43.5 Code Examples / Pitfalls . . . 1305
43.5.1 Example #1 . . . 1305
43.5.2 Example #2 . . . 1306
43.5.3 Example #3 . . . 1307
43.5.4 Example #4 . . . 1308
43.5.5 Example #5 . . . 1309
43.5.6 Example #6 . . . 1310
43.5.7 Example #7 . . . 1311
43.5.8 Example #8 . . . 1313
43.5.9 Example #9 . . . 1314
43.5.10 Example #10 . . . 1315

44 State Abstraction **1317**
44.1 What's an Abstraction? . . . 1317
44.2 Why is Abstraction Useful? . . . 1318

44.3 Abstraction of a Package's State . . . 1319
44.4 Declaring a State Abstraction . . . 1319
44.5 Refining an Abstract State . . . 1320
44.6 Representing Private Variables . . . 1321
44.7 Additional State . . . 1322
44.7.1 Nested Packages . . . 1322
44.7.2 Constants that Depend on Variables . . . 1323
44.8 Subprogram Contracts . . . 1325
44.8.1 Global and Depends . . . 1325
44.8.2 Preconditions and Postconditions . . . 1327
44.9 Initialization of Local Variables . . . 1330
44.10 Code Examples / Pitfalls . . . 1332
44.10.1 Example #1 . . . 1332
44.10.2 Example #2 . . . 1333
44.10.3 Example #3 . . . 1334
44.10.4 Example #4 . . . 1335
44.10.5 Example #5 . . . 1336
44.10.6 Example #6 . . . 1337
44.10.7 Example #7 . . . 1338
44.10.8 Example #8 . . . 1340
44.10.9 Example #9 . . . 1342
44.10.10 Example #10 . . . 1343

45 Proof of Functional Correctness 1345
45.1 Beyond Program Integrity . . . 1345
45.2 Advanced Contracts . . . 1348
45.2.1 Ghost Code . . . 1349
45.2.2 Ghost Functions . . . 1352
45.2.3 Global Ghost Variables . . . 1354
45.3 Guide Proof . . . 1356
45.3.1 Local Ghost Variables . . . 1356
45.3.2 Ghost Procedures . . . 1358
45.3.3 Handling of Loops . . . 1359
45.3.4 Loop Invariants . . . 1361
45.4 Code Examples / Pitfalls . . . 1366
45.4.1 Example #1 . . . 1366
45.4.2 Example #2 . . . 1368
45.4.3 Example #3 . . . 1369
45.4.4 Example #4 . . . 1371
45.4.5 Example #5 . . . 1372
45.4.6 Example #6 . . . 1373
45.4.7 Example #7 . . . 1375
45.4.8 Example #8 . . . 1376
45.4.9 Example #9 . . . 1377
45.4.10 Example #10 . . . 1378

V Introduction to Embedded Systems Programming 1381

46 Introduction 1385
46.1 So, what will we actually cover? . . . 1385
46.2 Definitions . . . 1386
46.3 Down To The Bare Metal . . . 1386
46.4 The Ada Drivers Library . . . 1386

47 Low Level Programming 1389
47.1 Separation Principle . . . 1389
47.2 Guaranteed Level of Support . . . 1390
47.3 Querying Implementation Limits and Characteristics . . . 1391

47.4 Querying Representation Choices . . . 1394
47.5 Specifying Representation . . . 1399
47.6 Unchecked Programming . . . 1413
47.7 Data Validity . . . 1422

48 Multi-Language Development 1425
48.1 General Interfacing . . . 1426
48.1.1 Aspect/Pragma Convention . . . 1426
48.1.2 Aspect/Pragma Import and Export . . . 1429
48.1.3 Aspect/Pragma External_Name and Link_Name . . . 1430
48.1.4 Package Interfaces . . . 1431
48.2 Language-Specific Interfacing . . . 1433
48.2.1 Package Interfaces.C . . . 1433
48.2.2 Package Interfaces.C.Strings . . . 1438
48.2.3 Package Interfaces.C.Pointers . . . 1439
48.2.4 Package Interfaces.Fortran . . . 1439
48.2.5 Machine Code Insertions (MCI) . . . 1439
48.3 When Ada Is Not the Main Language . . . 1444

49 Interacting with Devices 1447
49.1 Non-Memory-Mapped Devices . . . 1448
49.2 Memory-Mapped Devices . . . 1449
49.3 Dynamic Address Conversion . . . 1457
49.4 Address Arithmetic . . . 1459

50 General-Purpose Code Generators 1461
50.1 Aspect `Independent` . . . 1461
50.2 Aspect `Volatile` . . . 1464
50.3 Aspect `Atomic` . . . 1467
50.4 Aspect `Full_Access_Only` . . . 1468

51 Handling Interrupts 1473
51.1 Background . . . 1473
51.2 Language-Defined Interrupt Model . . . 1477
51.3 Interrupt Handlers . . . 1478
51.4 Interrupt Management . . . 1481
51.5 Associating Handlers With Interrupts . . . 1481
51.6 Interrupt Priorities . . . 1484
51.7 Common Design Idioms . . . 1486
51.7.1 Parameterizing Handlers . . . 1486
51.7.2 Multi-Level Handlers . . . 1488
51.8 Final Points . . . 1494

52 Conclusion 1495

VI What's New in Ada 2022 1497

53 Introduction 1501
53.1 References . . . 1501

54 `'Image` attribute for any type 1503
54.1 `'Image` attribute for a value . . . 1503
54.2 `'Image` attribute for any type . . . 1503
54.3 References . . . 1504

55 Redefining the `'Image` attribute 1505
55.1 What's the Root_Buffer_Type? . . . 1506
55.2 Outdated draft implementation . . . 1506
55.3 References . . . 1506

56 User-Defined Literals **1507**
56.1 Turn Ada into JavaScript . . . 1508
56.2 References . . . 1509

57 Advanced Array Aggregates **1511**
57.1 Square brackets . . . 1511
57.2 Iterated Component Association . . . 1512
57.3 References . . . 1513

58 Container Aggregates **1515**
58.1 References . . . 1519

59 Delta Aggregates **1521**
59.1 Delta aggregate for records . . . 1521
59.2 Delta aggregate for arrays . . . 1521
59.3 References . . . 1522

60 Target Name Symbol (@) **1523**
60.1 Alternatives . . . 1525
60.2 References . . . 1525

61 Enumeration representation **1527**
61.1 Literal positions . . . 1527
61.2 Representation values . . . 1528
61.3 Before Ada 2022 . . . 1529
61.4 References . . . 1530

62 Big Numbers **1531**
62.1 Big Integers . . . 1531
62.2 Tiny RSA implementation . . . 1531
62.3 Big Reals . . . 1533
62.4 References . . . 1533

63 Interfacing C variadic functions **1535**
63.1 References . . . 1536

VII Ada for the C++ or Java Developer **1539**

64 Preface **1543**

65 Basics **1545**

66 Compilation Unit Structure **1547**

67 Statements, Declarations, and Control Structures **1549**
67.1 Statements and Declarations . . . 1549
67.2 Conditions . . . 1551
67.3 Loops . . . 1552

68 Type System **1555**
68.1 Strong Typing . . . 1555
68.2 Language-Defined Types . . . 1556
68.3 Application-Defined Types . . . 1556
68.4 Type Ranges . . . 1558
68.5 Generalized Type Contracts: Subtype Predicates . . . 1559
68.6 Attributes . . . 1559
68.7 Arrays and Strings . . . 1560
68.8 Heterogeneous Data Structures . . . 1563
68.9 Pointers . . . 1564

69 Functions and Procedures **1567**
69.1 General Form . . . 1567
69.2 Overloading . . . 1568
69.3 Subprogram Contracts . . . 1569

70 Packages **1571**
70.1 Declaration Protection . . . 1571
70.2 Hierarchical Packages . . . 1572
70.3 Using Entities from Packages . . . 1572

71 Classes and Object Oriented Programming **1575**
71.1 Primitive Subprograms . . . 1575
71.2 Derivation and Dynamic Dispatch . . . 1576
71.3 Constructors and Destructors . . . 1579
71.4 Encapsulation . . . 1579
71.5 Abstract Types and Interfaces . . . 1580
71.6 Invariants . . . 1582

72 Generics **1585**
72.1 Generic Subprograms . . . 1585
72.2 Generic Packages . . . 1586
72.3 Generic Parameters . . . 1587

73 Exceptions **1589**
73.1 Standard Exceptions . . . 1589
73.2 Custom Exceptions . . . 1590

74 Concurrency **1591**
74.1 Tasks . . . 1591
74.2 Rendezvous . . . 1594
74.3 Selective Rendezvous . . . 1596
74.4 Protected Objects . . . 1597

75 Low Level Programming **1601**
75.1 Representation Clauses . . . 1601
75.2 Embedded Assembly Code . . . 1602
75.3 Interfacing with C . . . 1603

76 Conclusion **1605**

77 References **1607**

VIII Ada for the Embedded C Developer 1609

78 Introduction **1613**
78.1 So, what is this Ada thing anyway? . . . 1613
78.2 Ada — The Technical Details . . . 1615

79 The C Developer's Perspective on Ada **1617**
79.1 What we mean by Embedded Software . . . 1617
79.2 The GNAT Toolchain . . . 1617
79.3 The GNAT Toolchain for Embedded Targets . . . 1617
79.4 Hello World in Ada . . . 1618
79.5 The Ada Syntax . . . 1619
79.6 Compilation Unit Structure . . . 1620
79.7 Packages . . . 1621
79.7.1 Declaration Protection . . . 1621
79.7.2 Hierarchical Packages . . . 1622
79.7.3 Using Entities from Packages . . . 1622

79.8 Statements and Declarations . . . 1623
79.9 Conditions . . . 1629
79.10 Loops . . . 1633
79.11 Type System . . . 1639
79.11.1 Strong Typing . . . 1639
79.11.2 Language-Defined Types . . . 1643
79.11.3 Application-Defined Types . . . 1643
79.11.4 Type Ranges . . . 1646
79.11.5 Unsigned And Modular Types . . . 1649
79.11.6 Attributes . . . 1652
79.11.7 Arrays and Strings . . . 1654
79.11.8 Heterogeneous Data Structures . . . 1662
79.11.9 Pointers . . . 1663
79.12 Functions and Procedures . . . 1669
79.12.1 General Form . . . 1669
79.12.2 Overloading . . . 1672
79.12.3 Aspects . . . 1674

80 Concurrency and Real-Time **1677**
80.1 Understanding the various options . . . 1677
80.2 Tasks . . . 1677
80.3 Rendezvous . . . 1680
80.4 Selective Rendezvous . . . 1681
80.5 Protected Objects . . . 1684
80.6 Ravenscar . . . 1687

81 Writing Ada on Embedded Systems **1691**
81.1 Understanding the Ada Run-Time . . . 1691
81.2 Low Level Programming . . . 1692
81.2.1 Representation Clauses . . . 1692
81.2.2 Embedded Assembly Code . . . 1693
81.3 Interrupt Handling . . . 1694
81.4 Dealing with Absence of FPU with Fixed Point . . . 1696
81.5 Volatile and Atomic data . . . 1700
81.5.1 Volatile . . . 1701
81.5.2 Atomic . . . 1703
81.6 Interfacing with Devices . . . 1704
81.6.1 `Size` aspect and attribute . . . 1705
81.6.2 Register overlays . . . 1706
81.6.3 Data streams . . . 1709
81.7 ARM and **svd2ada** . . . 1714

82 Enhancing Verification with SPARK and Ada **1715**
82.1 Understanding Exceptions and Dynamic Checks . . . 1715
82.2 Understanding Dynamic Checks versus Formal Proof . . . 1722
82.3 Initialization and Correct Data Flow . . . 1725
82.4 Contract-Based Programming . . . 1726
82.5 Replacing Defensive Code . . . 1729
82.6 Proving Absence of Run-Time Errors . . . 1731
82.7 Proving Abstract Properties . . . 1732
82.8 Final Comments . . . 1733

83 C to Ada Translation Patterns **1735**
83.1 Naming conventions and casing considerations . . . 1735
83.2 Manually interfacing C and Ada . . . 1735
83.3 Building and Debugging mixed language code . . . 1737
83.4 Automatic interfacing . . . 1738
83.5 Using Arrays in C interfaces . . . 1738
83.6 By-value vs. by-reference types . . . 1740

83.7 Naming and prefixes . . . 1741
83.8 Pointers . . . 1742
83.9 Bitwise Operations . . . 1745
83.10 Mapping Structures to Bit-Fields . . . 1748
83.10.1 Overlays vs. Unchecked Conversions . . . 1761

84 Handling Variability and Re-usability 1765
84.1 Understanding static and dynamic variability . . . 1765
84.2 Handling variability & reusability statically . . . 1765
84.2.1 Genericity . . . 1765
84.2.2 Simple derivation . . . 1768
84.2.3 Configuration pragma files . . . 1774
84.2.4 Configuration packages . . . 1776
84.3 Handling variability & reusability dynamically . . . 1780
84.3.1 Records with discriminants . . . 1780
84.3.2 Variant records . . . 1782
84.3.3 Object orientation . . . 1790
84.3.4 Pointer to subprograms . . . 1803
84.4 Design by components using dynamic libraries . . . 1808

85 Performance considerations 1813
85.1 Overall expectations . . . 1813
85.2 Switches and optimizations . . . 1813
85.2.1 Optimizations levels . . . 1813
85.2.2 Inlining . . . 1814
85.3 Checks and assertions . . . 1815
85.3.1 Checks . . . 1815
85.3.2 Assertions . . . 1819
85.4 Dynamic vs. static structures . . . 1819
85.5 Pointers vs. data copies . . . 1820
85.5.1 Function returns . . . 1823

86 Argumentation and Business Perspectives 1827
86.1 What's the expected ROI of a C to Ada transition? . . . 1827
86.2 Who is using Ada today? . . . 1828
86.3 What is the future of the Ada technology? . . . 1828
86.4 Is the Ada toolset complete? . . . 1829
86.5 Where can I find Ada or SPARK developers? . . . 1829
86.6 How to introduce Ada and SPARK in an existing code base? . . . 1829

87 Conclusion 1831

88 Appendix A: Hands-On Object-Oriented Programming 1835
88.1 System Overview . . . 1835
88.2 Non Object-Oriented Approach . . . 1836
88.2.1 Starting point in C . . . 1836
88.2.2 Initial translation to Ada . . . 1839
88.2.3 Improved Ada implementation . . . 1843
88.3 First Object-Oriented Approach . . . 1847
88.3.1 Interfaces . . . 1847
88.3.2 Base type . . . 1847
88.3.3 Derived types . . . 1848
88.3.4 Subprograms from parent . . . 1849
88.3.5 Type AB . . . 1850
88.3.6 Updated source-code . . . 1850
88.4 Further Improvements . . . 1854
88.4.1 Dispatching calls . . . 1854
88.4.2 Dynamic allocation . . . 1855
88.4.3 Limited controlled types . . . 1856

88.4.4 Updated source-code 1857

IX SPARK Ada for the MISRA C Developer 1863

89 Preface 1867

90 Enforcing Basic Program Consistency 1869
90.1 Taming Text-Based Inclusion 1869
90.2 Hardening Link-Time Checking 1872
90.3 Going Towards Encapsulation 1874

91 Enforcing Basic Syntactic Guarantees 1877
91.1 Distinguishing Code and Comments 1877
91.2 Specially Handling Function Parameters and Result 1878
91.2.1 Handling the Result of Function Calls 1878
91.2.2 Handling Function Parameters 1879
91.3 Ensuring Control Structures Are Not Abused 1880
91.3.1 Preventing the Semicolon Mistake 1880
91.3.2 Avoiding Complex Switch Statements 1881
91.3.3 Avoiding Complex Loops 1884
91.3.4 Avoiding the Dangling Else Issue 1885

92 Enforcing Strong Typing 1889
92.1 Enforcing Strong Typing for Pointers 1889
92.1.1 Pointers Are Not Addresses 1890
92.1.2 Pointers Are Not References 1890
92.1.3 Pointers Are Not Arrays 1891
92.1.4 Pointers Should Be Typed 1895
92.2 Enforcing Strong Typing for Scalars 1897
92.2.1 Restricting Operations on Types 1897
92.2.2 Restricting Explicit Conversions 1902
92.2.3 Restricting Implicit Conversions 1902

93 Initializing Data Before Use 1907
93.1 Detecting Reads of Uninitialized Data 1907
93.2 Detecting Partial or Redundant Initialization of Arrays and Structures 1912

94 Controlling Side Effects 1917
94.1 Preventing Undefined Behavior 1917
94.2 Reducing Programmer Confusion 1917
94.3 Side Effects and SPARK 1918

95 Detecting Undefined Behavior 1923
95.1 Preventing Undefined Behavior in SPARK 1923
95.2 Proof of Absence of Run-Time Errors in SPARK 1924

96 Detecting Unreachable Code and Dead Code 1929

97 Conclusion 1933

98 References 1935
98.1 About MISRA C 1935
98.2 About SPARK 1935
98.3 About MISRA C and SPARK 1936

X Introduction to the GNAT Toolchain 1937

99 GNAT Toolchain Basics 1941

99.1 Basic commands . . . 1941
99.2 Compiler warnings . . . 1941
99.2.1 -gnatwa switch and warning suppression . . . 1941
99.2.2 Style checking . . . 1944

100 GPRbuild **1945**
100.1 Basic commands . . . 1945
100.2 Project files . . . 1945
100.2.1 Basic structure . . . 1945
100.2.2 Customization . . . 1946
100.3 Project dependencies . . . 1947
100.3.1 Simple dependency . . . 1947
100.3.2 Dependencies to dynamic libraries . . . 1948
100.4 Configuration pragma files . . . 1949
100.5 Configuration packages . . . 1949

101 GNAT Studio **1951**
101.1 Start-up . . . 1951
101.1.1 Windows . . . 1951
101.1.2 Linux . . . 1951
101.2 Creating projects . . . 1951
101.3 Building . . . 1952
101.4 Debugging . . . 1952
101.4.1 Debug information . . . 1952
101.4.2 Improving main application . . . 1953
101.4.3 Debugging the application . . . 1953
101.5 Formal verification . . . 1954

102 GNAT Tools **1957**
102.1 gnatchop . . . 1957
102.2 gnatprep . . . 1958
102.3 gnatmem . . . 1959
102.4 gnatdoc . . . 1960
102.5 gnatpp . . . 1962
102.6 gnatstub . . . 1963

XI Guidelines for Safe and Secure Ada/SPARK 1965

103 Introduction **1969**
103.1 Scope . . . 1969
103.2 Structure . . . 1969
103.3 Enforcement . . . 1969
103.4 About the Rules . . . 1970
103.4.1 Mapping to Other Standards . . . 1970

104 Definitions **1971**
104.1 Level . . . 1971
104.2 Remediation . . . 1971

105 Dynamic Storage Management (DYN) **1973**
105.1 Common High Integrity Restrictions (DYN01) . . . 1974
105.1.1 Reference . . . 1974
105.1.2 Description . . . 1974
105.1.3 Applicable Vulnerability within ISO TR 24772-2 . . . 1975
105.1.4 Applicable Common Weakness Enumeration . . . 1975
105.1.5 Noncompliant Code Example . . . 1975
105.1.6 Compliant Code Example . . . 1975
105.1.7 Notes . . . 1976

105.2 Traditional Static Allocation Policy (DYN02) . . . 1976
105.2.1 Reference . . . 1976
105.2.2 Description . . . 1976
105.2.3 Applicable Vulnerability within ISO TR 24772-2 . . . 1977
105.2.4 Applicable Common Weakness Enumeration . . . 1977
105.2.5 Noncompliant Code Example . . . 1977
105.2.6 Compliant Code Example . . . 1977
105.2.7 Notes . . . 1977
105.3 Access Types Without Allocators Policy (DYN03) . . . 1977
105.3.1 Reference . . . 1978
105.3.2 Description . . . 1978
105.3.3 Applicable Vulnerability within ISO TR 24772-2 . . . 1978
105.3.4 Applicable Common Weakness Enumeration . . . 1978
105.3.5 Noncompliant Code Example . . . 1979
105.3.6 Compliant Code Example . . . 1979
105.3.7 Notes . . . 1979
105.4 Minimal Dynamic Allocation Policy (DYN04) . . . 1979
105.4.1 Reference . . . 1979
105.4.2 Description . . . 1979
105.4.3 Applicable Vulnerability within ISO TR 24772-2 . . . 1980
105.4.4 Applicable Common Weakness Enumeration . . . 1980
105.4.5 Noncompliant Code Example . . . 1980
105.4.6 Compliant Code Example . . . 1980
105.4.7 Notes . . . 1980
105.5 User-Defined Storage Pools Policy (DYN05) . . . 1980
105.5.1 Reference . . . 1981
105.5.2 Description . . . 1981
105.5.3 Applicable Vulnerability within ISO TR 24772-2 . . . 1981
105.5.4 Applicable Common Weakness Enumeration . . . 1981
105.5.5 Noncompliant Code Example . . . 1982
105.5.6 Compliant Code Example . . . 1982
105.5.7 Notes . . . 1982
105.6 Statically Determine Maximum Stack Requirements (DYN06) . . . 1982
105.6.1 Reference . . . 1983
105.6.2 Description . . . 1983
105.6.3 Applicable Vulnerability within ISO TR 24772-2 . . . 1983
105.6.4 Applicable Common Weakness Enumeration . . . 1983
105.6.5 Noncompliant Code Example . . . 1983
105.6.6 Compliant Code Example . . . 1983
105.6.7 Notes . . . 1983

106 Safe Reclamation (RCL) 1985
106.1 No Multiple Reclamations (RCL01) . . . 1985
106.1.1 Reference . . . 1986
106.1.2 Description . . . 1986
106.1.3 Applicable Vulnerability within ISO TR 24772-2 . . . 1986
106.1.4 Applicable Common Weakness Enumeration . . . 1986
106.1.5 Noncompliant Code Example . . . 1986
106.1.6 Compliant Code Example . . . 1986
106.1.7 Notes . . . 1986
106.2 Only Reclaim Allocated Storage (RCL02) . . . 1986
106.2.1 Reference . . . 1987
106.2.2 Description . . . 1987
106.2.3 Applicable Vulnerability within ISO TR 24772-2 . . . 1987
106.2.4 Applicable Common Weakness Enumeration . . . 1987
106.2.5 Noncompliant Code Example . . . 1987
106.2.6 Compliant Code Example . . . 1987
106.2.7 Notes . . . 1987

106.3 Only Reclaim to the Same Pool (RCL03) . . . 1988
106.3.1 Reference . . . 1988
106.3.2 Description . . . 1988
106.3.3 Applicable Vulnerability within ISO TR 24772-2 . . . 1988
106.3.4 Applicable Common Weakness Enumeration . . . 1988
106.3.5 Noncompliant Code Example . . . 1988
106.3.6 Compliant Code Example . . . 1989
106.3.7 Notes . . . 1989

107 Concurrency (CON) 1991
107.1 Use the Ravenscar Profile (CON01) . . . 1992
107.1.1 Reference . . . 1992
107.1.2 Description . . . 1993
107.1.3 Applicable Vulnerability within ISO TR 24772-2 . . . 1993
107.1.4 Applicable Common Weakness Enumeration . . . 1993
107.1.5 Noncompliant Code Example . . . 1994
107.1.6 Compliant Code Example . . . 1994
107.1.7 Notes . . . 1994
107.2 Use the Jorvik Profile (CON02) . . . 1994
107.2.1 Reference . . . 1995
107.2.2 Description . . . 1995
107.2.3 Applicable Vulnerability within ISO TR 24772-2 . . . 1996
107.2.4 Applicable Common Weakness Enumeration . . . 1996
107.2.5 Noncompliant Code Example . . . 1996
107.2.6 Compliant Code Example . . . 1996
107.2.7 Notes . . . 1996
107.3 Avoid Shared Variables for Inter-task Communication (CON03) . . . 1997
107.3.1 Reference . . . 1997
107.3.2 Description . . . 1997
107.3.3 Applicable Vulnerability within ISO TR 24772-2 . . . 1997
107.3.4 Applicable Common Weakness Enumeration . . . 1997
107.3.5 Noncompliant Code Example . . . 1998
107.3.6 Compliant Code Example . . . 1998
107.3.7 Notes . . . 1998

108 Robust Programming Practice (RPP) 1999
108.1 No Use of "others" in Case Constructs (RPP01) . . . 1999
108.1.1 Reference . . . 2000
108.1.2 Description . . . 2000
108.1.3 Applicable Vulnerability within ISO TR 24772-2 . . . 2000
108.1.4 Applicable Common Weakness Enumeration . . . 2000
108.1.5 Noncompliant Code Example . . . 2000
108.1.6 Compliant Code Example . . . 2000
108.1.7 Notes . . . 2000
108.2 No Enumeration Ranges in Case Constructs (RPP02) . . . 2001
108.2.1 Reference . . . 2001
108.2.2 Description . . . 2001
108.2.3 Applicable Vulnerability within ISO TR 24772-2 . . . 2001
108.2.4 Applicable Common Weakness Enumeration . . . 2001
108.2.5 Noncompliant Code Example . . . 2001
108.2.6 Compliant Code Example . . . 2002
108.2.7 Notes . . . 2002
108.3 Limited Use of "others" in Aggregates (RPP03) . . . 2002
108.3.1 Reference . . . 2002
108.3.2 Description . . . 2002
108.3.3 Applicable Vulnerability within ISO TR 24772-2 . . . 2003
108.3.4 Applicable Common Weakness Enumeration . . . 2003
108.3.5 Noncompliant Code Example . . . 2003

108.3.6 Compliant Code Example . . . 2003
108.3.7 Notes . . . 2003
108.4 No Unassigned Mode-Out Procedure Parameters (RPP04) . . . 2003
108.4.1 Reference . . . 2004
108.4.2 Description . . . 2004
108.4.3 Applicable Vulnerability within ISO TR 24772-2 . . . 2004
108.4.4 Applicable Common Weakness Enumeration . . . 2004
108.4.5 Noncompliant Code Example . . . 2004
108.4.6 Compliant Code Example . . . 2005
108.4.7 Notes . . . 2005
108.5 No Use of "others" in Exception Handlers (RPP05) . . . 2005
108.5.1 Reference . . . 2005
108.5.2 Description . . . 2006
108.5.3 Applicable Vulnerability within ISO TR 24772-2 . . . 2006
108.5.4 Applicable Common Weakness Enumeration . . . 2006
108.5.5 Noncompliant Code Example . . . 2006
108.5.6 Compliant Code Example . . . 2006
108.5.7 Notes . . . 2006
108.6 Avoid Function Side-Effects (RPP06) . . . 2006
108.6.1 Reference . . . 2007
108.6.2 Description . . . 2007
108.6.3 Applicable Vulnerability within ISO TR 24772-2 . . . 2007
108.6.4 Applicable Common Weakness Enumeration . . . 2007
108.6.5 Noncompliant Code Example . . . 2007
108.6.6 Compliant Code Example . . . 2008
108.6.7 Notes . . . 2008
108.7 Functions Only Have Mode "in" (RPP07) . . . 2008
108.7.1 Reference . . . 2008
108.7.2 Description . . . 2008
108.7.3 Applicable Vulnerability within ISO TR 24772-2 . . . 2009
108.7.4 Applicable Common Weakness Enumeration . . . 2009
108.7.5 Noncompliant Code Example . . . 2009
108.7.6 Compliant Code Example . . . 2009
108.7.7 Notes . . . 2009
108.8 Limit Parameter Aliasing (RPP08) . . . 2009
108.8.1 Reference . . . 2010
108.8.2 Description . . . 2010
108.8.3 Applicable Vulnerability within ISO TR 24772-2 . . . 2011
108.8.4 Applicable Common Weakness Enumeration . . . 2011
108.8.5 Noncompliant Code Example . . . 2011
108.8.6 Compliant Code Example . . . 2011
108.8.7 Notes . . . 2011
108.9 Use Precondition and Postcondition Contracts (RPP09) . . . 2011
108.9.1 Reference . . . 2012
108.9.2 Description . . . 2012
108.9.3 Applicable Vulnerability within ISO TR 24772-2 . . . 2012
108.9.4 Applicable Common Weakness Enumeration . . . 2012
108.9.5 Noncompliant Code Example . . . 2012
108.9.6 Compliant Code Example . . . 2012
108.9.7 Notes . . . 2013
108.10 Do Not Re-Verify Preconditions in Subprogram Bodies (RPP10) . . . 2013
108.10.1 Reference . . . 2013
108.10.2 Description . . . 2013
108.10.3 Applicable Vulnerability within ISO TR 24772-2 . . . 2013
108.10.4 Applicable Common Weakness Enumeration . . . 2014
108.10.5 Noncompliant Code Example . . . 2014
108.10.6 Compliant Code Example . . . 2014
108.10.7 Notes . . . 2014

108.11 Always Use the Result of Function Calls (RPP11) . . . 2014
108.11.1 Reference . . . 2015
108.11.2 Description . . . 2015
108.11.3 Applicable Vulnerability within ISO TR 24772-2 . . . 2015
108.11.4 Applicable Common Weakness Enumeration . . . 2015
108.11.5 Noncompliant Code Example . . . 2015
108.11.6 Compliant Code Example . . . 2015
108.11.7 Notes . . . 2015
108.12 No Recursion (RPP12) . . . 2016
108.12.1 Reference . . . 2016
108.12.2 Description . . . 2016
108.12.3 Applicable Vulnerability within ISO TR 24772-2 . . . 2016
108.12.4 Applicable Common Weakness Enumeration . . . 2016
108.12.5 Noncompliant Code Example . . . 2016
108.12.6 Compliant Code Example . . . 2017
108.12.7 Notes . . . 2017
108.13 No Reuse of Standard Typemarks (RPP13) . . . 2017
108.13.1 Reference . . . 2017
108.13.2 Description . . . 2017
108.13.3 Applicable Vulnerability within ISO TR 24772-2 . . . 2018
108.13.4 Applicable Common Weakness Enumeration . . . 2018
108.13.5 Noncompliant Code Example . . . 2018
108.13.6 Compliant Code Example . . . 2018
108.13.7 Notes . . . 2018
108.14 Use Symbolic Constants for Literal Values (RPP14) . . . 2018
108.14.1 Reference . . . 2019
108.14.2 Description . . . 2019
108.14.3 Applicable Vulnerability within ISO TR 24772-2 . . . 2019
108.14.4 Applicable Common Weakness Enumeration . . . 2019
108.14.5 Noncompliant Code Example . . . 2019
108.14.6 Compliant Code Example . . . 2019
108.14.7 Notes . . . 2019

109 Exception Usage (EXU) 2021
109.1 Do Not Raise Language-Defined Exceptions (EXU01) . . . 2022
109.1.1 Reference . . . 2022
109.1.2 Description . . . 2022
109.1.3 Applicable Vulnerability within ISO TR 24772-2 . . . 2022
109.1.4 Applicable Common Weakness Enumeration . . . 2022
109.1.5 Noncompliant Code Example . . . 2022
109.1.6 Compliant Code Example . . . 2023
109.1.7 Notes . . . 2023
109.2 No Unhandled Application-Defined Exceptions (EXU02) . . . 2023
109.2.1 Reference . . . 2024
109.2.2 Description . . . 2024
109.2.3 Applicable Vulnerability within ISO TR 24772-2 . . . 2024
109.2.4 Applicable Common Weakness Enumeration . . . 2024
109.2.5 Noncompliant Code Example . . . 2025
109.2.6 Compliant Code Example . . . 2025
109.2.7 Notes . . . 2025
109.3 No Exception Propagation Beyond Name Visibility (EXU03) . . . 2025
109.3.1 Reference . . . 2026
109.3.2 Description . . . 2026
109.3.3 Applicable Vulnerability within ISO TR 24772-2 . . . 2026
109.3.4 Applicable Common Weakness Enumeration . . . 2026
109.3.5 Noncompliant Code Example . . . 2026
109.3.6 Compliant Code Example . . . 2026
109.3.7 Notes . . . 2027

109.4 Prove Absence of Run-time Exceptions (EXU04) . . . 2027
109.4.1 Reference . . . 2027
109.4.2 Description . . . 2027
109.4.3 Applicable Vulnerability within ISO TR 24772-2 . . . 2028
109.4.4 Applicable Common Weakness Enumeration . . . 2028
109.4.5 Noncompliant Code Example . . . 2028
109.4.6 Compliant Code Example . . . 2028
109.4.7 Notes . . . 2028

110 Object-Oriented Programming (OOP) 2029
110.1 No Class-wide Constructs Policy (OOP01) . . . 2029
110.1.1 Reference . . . 2030
110.1.2 Description . . . 2030
110.1.3 Applicable Vulnerability within ISO TR 24772-2 . . . 2030
110.1.4 Applicable Common Weakness Enumeration . . . 2030
110.1.5 Noncompliant Code Example . . . 2030
110.1.6 Compliant Code Example . . . 2030
110.1.7 Notes . . . 2030
110.2 Static Dispatching Only Policy (OOP02) . . . 2031
110.2.1 Reference . . . 2031
110.2.2 Description . . . 2031
110.2.3 Applicable Vulnerability within ISO TR 24772-2 . . . 2031
110.2.4 Applicable Common Weakness Enumeration . . . 2031
110.2.5 Noncompliant Code Example . . . 2031
110.2.6 Compliant Code Example . . . 2032
110.2.7 Notes . . . 2032
110.3 Limit Inheritance Hierarchy Depth (OOP03) . . . 2032
110.3.1 Reference . . . 2032
110.3.2 Description . . . 2032
110.3.3 Applicable Vulnerability within ISO TR 24772-2 . . . 2033
110.3.4 Applicable Common Weakness Enumeration . . . 2033
110.3.5 Noncompliant Code Example . . . 2033
110.3.6 Compliant Code Example . . . 2033
110.3.7 Notes . . . 2033
110.4 Limit Statically-Dispatched Calls to Primitive Operations (OOP04) . . . 2033
110.4.1 Reference . . . 2034
110.4.2 Description . . . 2034
110.4.3 Applicable Vulnerability within ISO TR 24772-2 . . . 2034
110.4.4 Applicable Common Weakness Enumeration . . . 2035
110.4.5 Noncompliant Code Example . . . 2035
110.4.6 Compliant Code Example . . . 2035
110.4.7 Notes . . . 2035
110.5 Use Explicit Overriding Annotations (OOP05) . . . 2035
110.5.1 Reference . . . 2036
110.5.2 Description . . . 2036
110.5.3 Applicable Vulnerability within ISO TR 24772-2 . . . 2037
110.5.4 Applicable Common Weakness Enumeration . . . 2037
110.5.5 Noncompliant Code Example . . . 2037
110.5.6 Compliant Code Example . . . 2037
110.5.7 Notes . . . 2037
110.6 Use Class-wide Pre/Post Contracts (OOP06) . . . 2037
110.6.1 Reference . . . 2038
110.6.2 Description . . . 2038
110.6.3 Applicable Vulnerability within ISO TR 24772-2 . . . 2038
110.6.4 Applicable Common Weakness Enumeration . . . 2038
110.6.5 Noncompliant Code Example . . . 2038
110.6.6 Compliant Code Example . . . 2038
110.6.7 Notes . . . 2039

110.7 Ensure Local Type Consistency (OOP07) . . . 2039
110.7.1 Reference . . . 2039
110.7.2 Description . . . 2039
110.7.3 Applicable Vulnerability within ISO TR 24772-2 . . . 2041
110.7.4 Applicable Common Weakness Enumeration . . . 2041
110.7.5 Noncompliant Code Example . . . 2041
110.7.6 Compliant Code Example . . . 2042
110.7.7 Notes . . . 2043

111 Software Engineering (SWE) 2045
111.1 Use SPARK Extensively (SWE01) . . . 2045
111.1.1 Reference . . . 2046
111.1.2 Description . . . 2046
111.1.3 Applicable Vulnerability within ISO TR 24772-2 . . . 2046
111.1.4 Applicable Common Weakness Enumeration . . . 2046
111.1.5 Noncompliant Code Example . . . 2046
111.1.6 Compliant Code Example . . . 2046
111.1.7 Notes . . . 2046
111.2 Enable Optional Warnings and Treat As Errors (SWE02) . . . 2046
111.2.1 Reference . . . 2047
111.2.2 Description . . . 2047
111.2.3 Applicable Vulnerability within ISO TR 24772-2 . . . 2047
111.2.4 Applicable Common Weakness Enumeration . . . 2047
111.2.5 Noncompliant Code Example . . . 2047
111.2.6 Compliant Code Example . . . 2048
111.2.7 Notes . . . 2048
111.3 Use a Static Analysis Tool Extensively (SWE03) . . . 2048
111.3.1 Reference . . . 2048
111.3.2 Description . . . 2049
111.3.3 Applicable Vulnerability within ISO TR 24772-2 . . . 2049
111.3.4 Applicable Common Weakness Enumeration . . . 2049
111.3.5 Noncompliant Code Example . . . 2049
111.3.6 Compliant Code Example . . . 2049
111.3.7 Notes . . . 2049
111.4 Hide Implementation Artifacts (SWE04) . . . 2049
111.4.1 Reference . . . 2050
111.4.2 Description . . . 2050
111.4.3 Applicable Vulnerability within ISO TR 24772-2 . . . 2050
111.4.4 Applicable Common Weakness Enumeration . . . 2050
111.4.5 Noncompliant Code Example . . . 2050
111.4.6 Compliant Code Example . . . 2051
111.4.7 Notes . . . 2051

112 References 2053

XII Introduction to Ada: Laboratories 2055

113 Imperative language 2059
113.1 Hello World . . . 2059
113.2 Greetings . . . 2059
113.3 Positive Or Negative . . . 2060
113.4 Numbers . . . 2061

114 Subprograms 2063
114.1 Subtract procedure . . . 2063
114.2 Subtract function . . . 2064
114.3 Equality function . . . 2065
114.4 States . . . 2066

114.5 States #2 . . . 2067
114.6 States #3 . . . 2069
114.7 States #4 . . . 2070

115 Modular Programming 2073
115.1 Months . . . 2073
115.2 Operations . . . 2074

116 Strongly typed language 2077
116.1 Colors . . . 2077
116.2 Integers . . . 2079
116.3 Temperatures . . . 2083

117 Records 2087
117.1 Directions . . . 2087
117.2 Colors . . . 2089
117.3 Inventory . . . 2093

118 Arrays 2097
118.1 Constrained Array . . . 2097
118.2 Colors: Lookup-Table . . . 2099
118.3 Unconstrained Array . . . 2102
118.4 Product info . . . 2105
118.5 String_10 . . . 2108
118.6 List of Names . . . 2110

119 More About Types 2115
119.1 Aggregate Initialization . . . 2115
119.2 Versioning . . . 2117
119.3 Simple todo list . . . 2119
119.4 Price list . . . 2121

120 Privacy 2127
120.1 Directions . . . 2127
120.2 Limited Strings . . . 2129
120.3 Bonus exercise . . . 2133
120.3.1 Colors . . . 2133
120.3.2 List of Names . . . 2134
120.3.3 Price List . . . 2134

121 Generics 2135
121.1 Display Array . . . 2135
121.2 Average of Array of Float . . . 2137
121.3 Average of Array of Any Type . . . 2139
121.4 Generic list . . . 2142

122 Exceptions 2145
122.1 Uninitialized Value . . . 2145
122.2 Numerical Exception . . . 2146
122.3 Re-raising Exceptions . . . 2148

123 Tasking 2151
123.1 Display Service . . . 2151
123.2 Event Manager . . . 2152
123.3 Generic Protected Queue . . . 2154

124 Design by contracts 2157
124.1 Price Range . . . 2157
124.2 Pythagorean Theorem: Predicate . . . 2158
124.3 Pythagorean Theorem: Precondition . . . 2160

124.4 Pythagorean Theorem: Postcondition . . . 2162
124.5 Pythagorean Theorem: Type Invariant . . . 2164
124.6 Primary Color . . . 2166

125 Object-oriented programming 2171
125.1 Simple type extension . . . 2171
125.2 Online Store . . . 2173

126 Standard library: Containers 2179
126.1 Simple todo list . . . 2179
126.2 List of unique integers . . . 2181

127 Standard library: Dates & Times 2185
127.1 Holocene calendar . . . 2185
127.2 List of events . . . 2186

128 Standard library: Strings 2191
128.1 Concatenation . . . 2191
128.2 List of events . . . 2193

129 Standard library: Numerics 2197
129.1 Decibel Factor . . . 2197
129.2 Root-Mean-Square . . . 2199
129.3 Rotation . . . 2201

130 Solutions 2207
130.1 Imperative Language . . . 2207
130.1.1 Hello World . . . 2207
130.1.2 Greetings . . . 2207
130.1.3 Positive Or Negative . . . 2207
130.1.4 Numbers . . . 2208
130.2 Subprograms . . . 2209
130.2.1 Subtract Procedure . . . 2209
130.2.2 Subtract Function . . . 2210
130.2.3 Equality function . . . 2211
130.2.4 States . . . 2212
130.2.5 States #2 . . . 2213
130.2.6 States #3 . . . 2214
130.2.7 States #4 . . . 2214
130.3 Modular Programming . . . 2215
130.3.1 Months . . . 2215
130.3.2 Operations . . . 2217
130.4 Strongly typed language . . . 2219
130.4.1 Colors . . . 2219
130.4.2 Integers . . . 2220
130.4.3 Temperatures . . . 2223
130.5 Records . . . 2226
130.5.1 Directions . . . 2226
130.5.2 Colors . . . 2227
130.5.3 Inventory . . . 2230
130.6 Arrays . . . 2232
130.6.1 Constrained Array . . . 2232
130.6.2 Colors: Lookup-Table . . . 2234
130.6.3 Unconstrained Array . . . 2236
130.6.4 Product info . . . 2238
130.6.5 String_10 . . . 2241
130.6.6 List of Names . . . 2242
130.7 More About Types . . . 2245
130.7.1 Aggregate Initialization . . . 2245

130.7.2 Versioning . . . 2247
130.7.3 Simple todo list . . . 2248
130.7.4 Price list . . . 2250
130.8 Privacy . . . 2252
130.8.1 Directions . . . 2252
130.8.2 Limited Strings . . . 2254
130.9 Generics . . . 2257
130.9.1 Display Array . . . 2257
130.9.2 Average of Array of Float . . . 2258
130.9.3 Average of Array of Any Type . . . 2260
130.9.4 Generic list . . . 2262
130.10 Exceptions . . . 2264
130.10.1 Uninitialized Value . . . 2264
130.10.2 Numerical Exception . . . 2265
130.10.3 Re-raising Exceptions . . . 2267
130.11 Tasking . . . 2269
130.11.1 Display Service . . . 2269
130.11.2 Event Manager . . . 2270
130.11.3 Generic Protected Queue . . . 2272
130.12 Design by contracts . . . 2274
130.12.1 Price Range . . . 2274
130.12.2 Pythagorean Theorem: Predicate . . . 2275
130.12.3 Pythagorean Theorem: Precondition . . . 2277
130.12.4 Pythagorean Theorem: Postcondition . . . 2279
130.12.5 Pythagorean Theorem: Type Invariant . . . 2280
130.12.6 Primary Colors . . . 2282
130.13 Object-oriented programming . . . 2284
130.13.1 Simple type extension . . . 2284
130.13.2 Online Store . . . 2286
130.14 Standard library: Containers . . . 2289
130.14.1 Simple todo list . . . 2289
130.14.2 List of unique integers . . . 2290
130.15 Standard library: Dates & Times . . . 2292
130.15.1 Holocene calendar . . . 2292
130.15.2 List of events . . . 2293
130.16 Standard library: Strings . . . 2295
130.16.1 Concatenation . . . 2295
130.16.2 List of events . . . 2297
130.17 Standard library: Numerics . . . 2300
130.17.1 Decibel Factor . . . 2300
130.17.2 Root-Mean-Square . . . 2301
130.17.3 Rotation . . . 2304

XIII Bug Free Coding with SPARK Ada 2307

131 Let's Build a Stack 2311
131.1 Background . . . 2311
131.2 Input Format . . . 2313
131.3 Constraints . . . 2314
131.4 Output Format . . . 2314
131.5 Sample Input . . . 2314
131.6 Sample Output . . . 2314

Bibliography 2317

Index 2319

Part I

Introduction to Ada

Copyright © 2018 – 2024, AdaCore

This book is published under a CC BY-SA license, which means that you can copy, redistribute, remix, transform, and build upon the content for any purpose, even commercially, as long as you give appropriate credit, provide a link to the license, and indicate if changes were made. If you remix, transform, or build upon the material, you must distribute your contributions under the same license as the original. You can find license details on this page[1]



This course will teach you the basics of the Ada programming language and is intended for those who already have a basic understanding of programming techniques. You will learn how to apply those techniques to programming in Ada.

This document was written by Raphaël Amiard and Gustavo A. Hoffmann, with review from Richard Kenner.

Note

The code examples in this course use a 50-column limit, which greatly improves the readability of the code on devices with a small screen size. This constraint, however, leads to an unusual coding style. For instance, instead of calling `Put_Line` in a single line, we have this:

```
Put_Line
  (" is in the northeast quadrant");
```

or this:

```
Put_Line ("  (X => "
          & Integer'Image (P.X)
          & ")");
```

Note that typical Ada code uses a limit of at least 79 columns. Therefore, please don't take the coding style from this course as a reference!

Note

Each code example from this book has an associated "code block metadata", which contains the name of the "project" and an MD5 hash value. This information is used to identify a single code example.

You can find all code examples in a zip file, which you can download from the learn website[2]. The directory structure in the zip file is based on the code block metadata. For example, if you're searching for a code example with this metadata:

- Project: Courses.Intro_To_Ada.Imperative_Language.Greet
- MD5: cba89a34b87c9dfa71533d982d05e6ab

you will find it in this directory:

[1] http://creativecommons.org/licenses/by-sa/4.0

```
projects/Courses/Intro_To_Ada/Imperative_Language/Greet/
cba89a34b87c9dfa71533d982d05e6ab/
```

In order to use this code example, just follow these steps:

1. Unpack the zip file;
2. Go to target directory;
3. Start GNAT Studio on this directory;
4. Build (or compile) the project;
5. Run the application (if a main procedure is available in the project).

[2] https://learn.adacore.com/zip/learning-ada_code.zip

CHAPTER

ONE

INTRODUCTION

1.1 History

In the 1970s the United States Department of Defense (DOD) suffered from an explosion of the number of programming languages, with different projects using different and non-standard dialects or language subsets / supersets. The DOD decided to solve this problem by issuing a request for proposals for a common, modern programming language. The winning proposal was one submitted by Jean Ichbiah from CII Honeywell-Bull.

The first Ada standard was issued in 1983; it was subsequently revised and enhanced in 1995, 2005 and 2012, with each revision bringing useful new features.

This tutorial will focus on Ada 2012 as a whole, rather than teaching different versions of the language.

1.2 Ada today

Today, Ada is heavily used in embedded real-time systems, many of which are safety critical. While Ada is and can be used as a general-purpose language, it will really shine in low-level applications:

- Embedded systems with low memory requirements (no garbage collector allowed).
- Direct interfacing with hardware.
- Soft or hard real-time systems.
- Low-level systems programming.

Specific domains seeing Ada usage include Aerospace & Defense, civil aviation, rail, and many others. These applications require a high degree of safety: a software defect is not just an annoyance, but may have severe consequences. Ada provides safety features that detect defects at an early stage — usually at compilation time or using static analysis tools. Ada can also be used to create applications in a variety of other areas, such as:

- Video game programming[3]
- Real-time audio[4]
- Kernel modules[5]

This is a non-comprehensive list that hopefully sheds light on which kind of programming Ada is good at.

[3] https://github.com/AdaDoom3/AdaDoom3
[4] http://www.electronicdesign.com/embedded-revolution/assessing-ada-language-audio-applications
[5] http://www.nihamkin.com/tag/kernel.html

In terms of modern languages, the closest in terms of targets and level of abstraction are probably C++[6] and Rust[7].

1.3 Philosophy

Ada's philosophy is different from most other languages. Underlying Ada's design are principles that include the following:

- Readability is more important than conciseness. Syntactically this shows through the fact that keywords are preferred to symbols, that no keyword is an abbreviation, etc.
- Very strong typing. It is very easy to introduce new types in Ada, with the benefit of preventing data usage errors.
  - It is similar to many functional languages in that regard, except that the programmer has to be much more explicit about typing in Ada, because there is almost no type inference.
- Explicit is better than implicit. Although this is a Python[8] commandment, Ada takes it way further than any language we know of:
  - There is mostly no structural typing, and most types need to be explicitly named by the programmer.
  - As previously said, there is mostly no type inference.
  - Semantics are very well defined, and undefined behavior is limited to an absolute minimum.
  - The programmer can generally give a *lot* of information about what their program means to the compiler (and other programmers). This allows the compiler to be extremely helpful (read: strict) with the programmer.

During this course, we will explain the individual language features that are building blocks for that philosophy.

1.4 SPARK

While this class is solely about the Ada language, it is worth mentioning that another language, extremely close to and interoperable with Ada, exists: the SPARK language.

SPARK is a subset of Ada, designed so that the code written in SPARK is amenable to automatic proof. This provides a level of assurance with regard to the correctness of your code that is much higher than with a regular programming language.

There is a dedicated *course for the SPARK language* (page 1243) but keep in mind that every time we speak about the specification power of Ada during this course, it is power that you can leverage in SPARK to help proving the correctness of program properties ranging from absence of run-time errors to compliance with formally specified functional requirements.

[6] https://en.wikipedia.org/wiki/C%2B%2B
[7] https://www.rust-lang.org/en-US/
[8] https://www.python.org

CHAPTER

TWO

IMPERATIVE LANGUAGE

Ada is a multi-paradigm language with support for object orientation and some elements of functional programming, but its core is a simple, coherent procedural/imperative language akin to C or Pascal.

In other languages

One important distinction between Ada and a language like C is that statements and expressions are very clearly distinguished. In Ada, if you try to use an expression where a statement is required then your program will fail to compile. This rule supports a useful stylistic principle: expressions are intended to deliver values, not to have side effects. It can also prevent some programming errors, such as mistakenly using the equality operator `=` instead of the assignment operation `:=` in an assignment statement.

2.1 Hello world

Here's a very simple imperative Ada program:

Listing 1: greet.adb

```
with Ada.Text_IO;

procedure Greet is
begin
   --  Print "Hello, World!" to the screen
   Ada.Text_IO.Put_Line ("Hello, World!");
end Greet;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Imperative_Language.Greet
MD5: cba89a34b87c9dfa71533d982d05e6ab
```

Runtime output

```
Hello, World!
```

which we'll assume is in the source file `greet.adb`.

There are several noteworthy things in the above program:

- A subprogram in Ada can be either a procedure or a function. A procedure, as illustrated above, does not return a value when called.
- **with** is used to reference external modules that are needed in the procedure. This is similar to `import` in various languages or roughly similar to *#include* in C and C++. We'll see later how they work in detail. Here, we are requesting a standard library

module, the Ada.Text_IO package, which contains a procedure to print text on the screen: Put_Line.

- Greet is a procedure, and the main entry point for our first program. Unlike in C or C++, it can be named anything you prefer. The builder will determine the entry point. In our simple example, **gprbuild**, GNAT's builder, will use the file you passed as parameter.
- Put_Line is a procedure, just like Greet, except it is declared in the Ada.Text_IO module. It is the Ada equivalent of C's printf.
- Comments start with -- and go to the end of the line. There is no multi-line comment syntax, that is, it is not possible to start a comment in one line and continue it in the next line. The only way to create multiple lines of comments in Ada is by using -- on each line. For example:

```
--  We start a comment in this line...
--  and we continue on the second line...
```

In other languages

Procedures are similar to functions in C or C++ that return **void**. We'll see later how to declare functions in Ada.

Here is a minor variant of the "Hello, World" example:

Listing 2: greet.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  procedure Greet is
4  begin
5     --  Print "Hello, World!" to the screen
6     Put_Line ("Hello, World!");
7  end Greet;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Imperative_Language.Greet_2
MD5: a58a1193207df44aa6edaa4fe1c14280
```

Runtime output

```
Hello, World!
```

This version utilizes an Ada feature known as a **use** clause, which has the form **use** *package-name*. As illustrated by the call on Put_Line, the effect is that entities from the named package can be referenced directly, without the *package-name.* prefix.

2.2 Imperative language - If/Then/Else

This section describes Ada's **if** statement and introduces several other fundamental language facilities including integer I/O, data declarations, and subprogram parameter modes.

Ada's **if** statement is pretty unsurprising in form and function:

Listing 3: check_positive.adb

```
with Ada.Text_IO;         use Ada.Text_IO;
with Ada.Integer_Text_IO; use Ada.Integer_Text_IO;

procedure Check_Positive is
   N : Integer;
begin
   --  Put a String
   Put ("Enter an integer value: ");

   --  Read in an integer value
   Get (N);

   if N > 0 then
      --  Put an Integer
      Put (N);
      Put_Line (" is a positive number");
   end if;
end Check_Positive;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Imperative_Language.Check_Positive
MD5: 2e8b4b2f3f258fd9e02c2d65846af101
```

The **if** statement minimally consists of the reserved word **if**, a condition (which must be a Boolean value), the reserved word **then** and a non-empty sequence of statements (the **then** part) which is executed if the condition evaluates to True, and a terminating **end if**.

This example declares an integer variable N, prompts the user for an integer, checks if the value is positive and, if so, displays the integer's value followed by the string " is a positive number". If the value is not positive, the procedure does not display any output.

The type Integer is a predefined signed type, and its range depends on the computer architecture. On typical current processors Integer is 32-bit signed.

The example illustrates some of the basic functionality for integer input-output. The relevant subprograms are in the predefined package `Ada.Integer_Text_IO` and include the `Get` procedure (which reads in a number from the keyboard) and the `Put` procedure (which displays an integer value).

Here's a slight variation on the example, which illustrates an **if** statement with an **else** part:

Listing 4: check_positive.adb

```
with Ada.Text_IO;         use Ada.Text_IO;
with Ada.Integer_Text_IO; use Ada.Integer_Text_IO;

procedure Check_Positive is
   N : Integer;
begin
   --  Put a String
   Put ("Enter an integer value: ");

   --  Reads in an integer value
   Get (N);

   --  Put an Integer
   Put (N);

```

(continues on next page)

(continued from previous page)

```
16    if N > 0 then
17       Put_Line (" is a positive number");
18    else
19       Put_Line (" is not a positive number");
20    end if;
21 end Check_Positive;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Imperative_Language.Check_Positive_2
MD5: 28fca0d7840d06d478e5933e8182d1db
```

In this example, if the input value is not positive then the program displays the value followed by the String " is not a positive number".

Our final variation illustrates an **if** statement with **elsif** sections:

Listing 5: check_direction.adb

```
1  with Ada.Text_IO;         use Ada.Text_IO;
2  with Ada.Integer_Text_IO; use Ada.Integer_Text_IO;
3
4  procedure Check_Direction is
5     N : Integer;
6  begin
7     Put ("Enter an integer value: ");
8     Get (N);
9     Put (N);
10
11    if N = 0 or N = 360 then
12       Put_Line (" is due north");
13    elsif N in 1 .. 89 then
14       Put_Line (" is in the northeast quadrant");
15    elsif N = 90 then
16       Put_Line (" is due east");
17    elsif N in 91 .. 179 then
18       Put_Line (" is in the southeast quadrant");
19    elsif N = 180 then
20       Put_Line (" is due south");
21    elsif N in 181 .. 269 then
22       Put_Line (" is in the southwest quadrant");
23    elsif N = 270 then
24       Put_Line (" is due west");
25    elsif N in 271 .. 359 then
26       Put_Line (" is in the northwest quadrant");
27    else
28       Put_Line (" is not in the range 0..360");
29    end if;
30 end Check_Direction;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Imperative_Language.Check_Direction
MD5: 7759d30c9bb0bfb88efdf12128f9c382
```

This example expects the user to input an integer between 0 and 360 inclusive, and displays which quadrant or axis the value corresponds to. The **in** operator in Ada tests whether a scalar value is within a specified range and returns a Boolean result. The effect of the program should be self-explanatory; later we'll see an alternative and more efficient style to accomplish the same effect, through a **case** statement.

Ada's **elsif** keyword differs from C or C++, where nested **else .. if** blocks would be

used instead. And another difference is the presence of the **end if** in Ada, which avoids the problem known as the "dangling else".

2.3 Imperative language - Loops

Ada has three ways of specifying loops. They differ from the C / Java / Javascript for-loop, however, with simpler syntax and semantics in line with Ada's philosophy.

2.3.1 For loops

The first kind of loop is the **for** loop, which allows iteration through a discrete range.

Listing 6: greet_5a.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Greet_5a is
begin
   for I in 1 .. 5 loop
      --  Put_Line is a procedure call
      Put_Line ("Hello, World!"
                  & Integer'Image (I));
      --         ^ Procedure parameter
   end loop;
end Greet_5a;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Imperative_Language.Greet_5a
MD5: 7f588b67947126f789333adfaaf1b638
```

Runtime output

```
Hello, World! 1
Hello, World! 2
Hello, World! 3
Hello, World! 4
Hello, World! 5
```

A few things to note:

- `1 .. 5` is a discrete range, from `1` to `5` inclusive.
- The loop parameter `I` (the name is arbitrary) in the body of the loop has a value within this range.
- `I` is local to the loop, so you cannot refer to `I` outside the loop.
- Although the value of `I` is incremented at each iteration, from the program's perspective it is constant. An attempt to modify its value is illegal; the compiler would reject the program.
- **Integer**'Image is a function that takes an Integer and converts it to a **String**. It is an example of a language construct known as an *attribute*, indicated by the ' syntax, which will be covered in more detail later.
- The & symbol is the concatenation operator for String values
- The **end loop** marks the end of the loop

The "step" of the loop is limited to 1 (forward direction) and -1 (backward). To iterate backwards over a range, use the **reverse** keyword:

Listing 7: greet_5a_reverse.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Greet_5a_Reverse is
begin
   for I in reverse 1 .. 5 loop
      Put_Line ("Hello, World!"
                & Integer'Image (I));
   end loop;
end Greet_5a_Reverse;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Imperative_Language.Greet_5a_Reverse
MD5: a0d5dcfc471fb1a107477c934fa527c2
```

Runtime output

```
Hello, World! 5
Hello, World! 4
Hello, World! 3
Hello, World! 2
Hello, World! 1
```

The bounds of a **for** loop may be computed at run-time; they are evaluated once, before the loop body is executed. If the value of the upper bound is less than the value of the lower bound, then the loop is not executed at all. This is the case also for **reverse** loops. Thus no output is produced in the following example:

Listing 8: greet_no_op.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Greet_No_Op is
begin
   for I in reverse 5 .. 1 loop
      Put_Line ("Hello, World!"
                & Integer'Image (I));
   end loop;
end Greet_No_Op;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Imperative_Language.Greet_No_Op
MD5: 5070693fb0324d3e4e43a8c8c4f046e1
```

Build output

```
greet_no_op.adb:5:23: warning: loop range is null, loop will not execute [enabled␣
 ↪by default]
```

The **for** loop is more general than what we illustrated here; more on that later.

2.3.2 Bare loops

The simplest loop in Ada is the bare loop, which forms the foundation of the other kinds of Ada loops.

Listing 9: greet_5b.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Greet_5b is
   --  Variable declaration:
   I : Integer := 1;
   --  ^ Type
   --              ^ Initial value
begin
   loop
      Put_Line ("Hello, World!"
                & Integer'Image (I));

      --  Exit statement:
      exit when I = 5;
      --        ^ Boolean condition

      --  Assignment:
      I := I + 1;
      --  There is no I++ short form to
      --  increment a variable
   end loop;
end Greet_5b;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Imperative_Language.Greet_5b
MD5: 5b218a64a07f64bd97774b574883c44a
```

Runtime output

```
Hello, World! 1
Hello, World! 2
Hello, World! 3
Hello, World! 4
Hello, World! 5
```

This example has the same effect as `Greet_5a` shown earlier.

It illustrates several concepts:

- We have declared a variable named `I` between the **`is`** and the **`begin`**. This constitutes a *declarative region*. Ada clearly separates the declarative region from the statement part of a subprogram. A declaration can appear in a declarative region but is not allowed as a statement.
- The bare loop statement is introduced by the keyword **`loop`** on its own and, like every kind of loop statement, is terminated by the combination of keywords **`end loop`**. On its own, it is an infinite loop. You can break out of it with an **`exit`** statement.
- The syntax for assignment is `:=`, and the one for equality is `=`. There is no way to confuse them, because as previously noted, in Ada, statements and expressions are distinct, and expressions are not valid statements.

2.3.3 While loops

The last kind of loop in Ada is the **`while`** loop.

Listing 10: greet_5c.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Greet_5c is
   I : Integer := 1;
begin
   --  Condition must be a Boolean value
   --  (no Integers).
   --  Operator "<=" returns a Boolean
   while I <= 5 loop
      Put_Line ("Hello, World!"
                & Integer'Image (I));

      I := I + 1;
   end loop;
end Greet_5c;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Imperative_Language.Greet_5c
MD5: 5d1d099477795b226db43736c2810274
```

Runtime output

```
Hello, World! 1
Hello, World! 2
Hello, World! 3
Hello, World! 4
Hello, World! 5
```

The condition is evaluated before each iteration. If the result is false, then the loop is terminated.

This program has the same effect as the previous examples.

In other languages

Note that Ada has different semantics than C-based languages with respect to the condition in a while loop. In Ada the condition has to be a Boolean value or the compiler will reject the program; the condition is not an integer that is treated as either `True` or `False` depending on whether it is non-zero or zero.

2.4 Imperative language - Case statement

Ada's `case` statement is similar to the C and C++ `switch` statement, but with some important differences.

Here's an example, a variation of a program that was shown earlier with an `if` statement:

Listing 11: check_direction.adb

```
with Ada.Text_IO;         use Ada.Text_IO;
with Ada.Integer_Text_IO; use Ada.Integer_Text_IO;

procedure Check_Direction is
   N : Integer;
begin
```

(continues on next page)

(continued from previous page)

```
   loop
      Put ("Enter an integer value: ");
      Get (N);
      Put (N);

      case N is
         when 0 | 360 =>
            Put_Line
              (" is due north");
         when 1 .. 89 =>
            Put_Line
              (" is in the northeast quadrant");
         when 90 =>
            Put_Line
              (" is due east");
         when 91 .. 179 =>
            Put_Line
              (" is in the southeast quadrant");
         when 180 =>
            Put_Line
              (" is due south");
         when 181 .. 269 =>
            Put_Line
              (" is in the southwest quadrant");
         when 270 =>
            Put_Line
              (" is due west");
         when 271 .. 359 =>
            Put_Line
              (" is in the northwest quadrant");
         when others =>
            Put_Line
              (" Au revoir");
            exit;
      end case;
   end loop;
end Check_Direction;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Imperative_Language.Check_Direction_2
MD5: 1c758b76a2c3991cb4e2a0cf5e172ac3
```

This program repeatedly prompts for an integer value and then, if the value is in the range `0 .. 360`, displays the associated quadrant or axis. If the value is an Integer outside this range, the loop (and the program) terminate after outputting a farewell message.

The effect of the case statement is similar to the if statement in an earlier example, but the case statement can be more efficient because it does not involve multiple range tests.

Notable points about Ada's case statement:

- The case expression (here the variable `N`) must be of a discrete type, i.e. either an integer type or an enumeration type. Discrete types will be covered in more detail later *discrete types* (page 47).
- Every possible value for the case expression needs to be covered by a unique branch of the case statement. This will be checked at compile time.
- A branch can specify a single value, such as `0`; a range of values, such as `1 .. 89`; or any combination of the two (separated by a |).
- As a special case, an optional final branch can specify **`others`**, which covers all values

not included in the earlier branches.

- Execution consists of the evaluation of the case expression and then a transfer of control to the statement sequence in the unique branch that covers that value.
- When execution of the statements in the selected branch has completed, control resumes after the **end case**. Unlike C, execution does not fall through to the next branch. So Ada doesn't need (and doesn't have) a **break** statement.

2.5 Imperative language - Declarative regions

As mentioned earlier, Ada draws a clear syntactic separation between declarations, which introduce names for entities that will be used in the program, and statements, which perform the processing. The areas in the program where declarations may appear are known as declarative regions.

In any subprogram, the section between the **is** and the **begin** is a declarative region. You can have variables, constants, types, inner subprograms, and other entities there.

We've briefly mentioned variable declarations in previous subsection. Let's look at a simple example, where we declare an integer variable X in the declarative region and perform an initialization and an addition on it:

Listing 12: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is
   X : Integer;
begin
   X := 0;
   Put_Line ("The initial value of X is "
             & Integer'Image (X));

   Put_Line ("Performing operation on X...");
   X := X + 1;

   Put_Line ("The value of X now is "
             & Integer'Image (X));
end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Imperative_Language.Variable_Declaration
MD5: cbb08d5e382fbfcc28e986bea80cd253
```

Runtime output

```
The initial value of X is  0
Performing operation on X...
The value of X now is  1
```

Let's look at an example of a nested procedure:

Listing 13: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is
   procedure Nested is
   begin
```

(continues on next page)

(continued from previous page)

```
      Put_Line ("Hello World");
   end Nested;
begin
   Nested;
   --  Call to Nested
end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Imperative_Language.Nested_Procedure
MD5: 2e7fb267e31232196065febd5e35e6ef
```

Runtime output

```
Hello World
```

A declaration cannot appear as a statement. If you need to declare a local variable amidst the statements, you can introduce a new declarative region with a block statement:

Listing 14: greet.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Greet is
begin
   loop
      Put_Line ("Please enter your name: ");

      declare
         Name : String := Get_Line;
         --               ^ Call to the
         --                 Get_Line function
      begin
         exit when Name = "";
         Put_Line ("Hi " & Name & "!");
      end;

      --  Name is undefined here
   end loop;

  Put_Line ("Bye!");
end Greet;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Imperative_Language.Greet_6
MD5: a9c0c14a1b3e2ebe07cd88f442787e3a
```

Attention

The `Get_Line` function allows you to receive input from the user, and get the result as a string. It is more or less equivalent to the `scanf` C function.

It returns a **`String`**, which, as we will see later, is an *Unconstrained array type* (page 78). For now we simply note that, if you wish to declare a **`String`** variable and do not know its size in advance, then you need to initialize the variable during its declaration.

2.6 Imperative language - conditional expressions

Ada 2012 introduced an expression analog for conditional statements (**if** and **case**).

2.6.1 If expressions

Here's an alternative version of an example we saw earlier; the **if** statement has been replaced by an **if** expression:

Listing 15: check_positive.adb

```
with Ada.Text_IO;         use Ada.Text_IO;
with Ada.Integer_Text_IO; use Ada.Integer_Text_IO;

procedure Check_Positive is
   N : Integer;
begin
   Put ("Enter an integer value: ");
   Get (N);
   Put (N);

   declare
      S : constant String :=
        (if N > 0
           then " is a positive number"
           else " is not a positive number");
   begin
      Put_Line (S);
   end;
end Check_Positive;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Imperative_Language.Check_Positive
MD5: 01f23463b14774f750dbb21f6c65ea09
```

The **if** expression evaluates to one of the two Strings depending on N, and assigns that value to the local variable S.

Ada's **if** expressions are similar to **if** statements. However, there are a few differences that stem from the fact that it is an expression:

- All branches' expressions must be of the same type
- It *must* be surrounded by parentheses if the surrounding expression does not already contain them
- An **else** branch is mandatory unless the expression following **then** has a Boolean value. In that case an **else** branch is optional and, if not present, defaults to **else True**.

Here's another example:

Listing 16: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is
begin
   for I in 1 .. 10 loop
      Put_Line (if I mod 2 = 0
                  then "Even"
```

(continues on next page)

(continued from previous page)

```
                  else "Odd");
   end loop;
end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Imperative_Language.Even_Odd
MD5: c89c3233ab8822c828f7a7bba8fd3f1c
```

Runtime output

```
Odd
Even
Odd
Even
Odd
Even
Odd
Even
Odd
Even
```

This program produces 10 lines of output, alternating between "Odd" and "Even".

2.6.2 Case expressions

Analogous to **if** expressions, Ada also has **case** expressions. They work just as you would expect.

Listing 17: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is
begin
   for I in 1 .. 10 loop
      Put_Line
        (case I is
         when 1 | 3 | 5 | 7 | 9  => "Odd",
         when 2 | 4 | 6 | 8 | 10 => "Even");
   end loop;
end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Imperative_Language.Case_Expression
MD5: 6ce40efc987c2665960b1f08d30d780d
```

Runtime output

```
Odd
Even
Odd
Even
Odd
Even
Odd
Even
Odd
Even
```

This program has the same effect as the preceding example.

The syntax differs from **case** statements, with branches separated by commas.

CHAPTER

THREE

SUBPROGRAMS

3.1 Subprograms

So far, we have used procedures, mostly to have a main body of code to execute. Procedures are one kind of *subprogram*.

There are two kinds of subprograms in Ada, *functions* and *procedures*. The distinction between the two is that a function returns a value, and a procedure does not.

This example shows the declaration and definition of a function:

Listing 1: increment.ads

```
function Increment (I : Integer) return Integer;
```

Listing 2: increment.adb

```
--  We declare (but don't define) a function with
--  one parameter, returning an integer value

function Increment (I : Integer) return Integer is
   --  We define the Increment function
begin
    return I + 1;
end Increment;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Subprograms.Increment
MD5: 582fe283730a130cec071c455a0ce3d4
```

Subprograms in Ada can, of course, have parameters. One syntactically important note is that a subprogram which has no parameters does not have a parameter section at all, for example:

```
procedure Proc;

function Func return Integer;
```

Here's another variation on the previous example:

Listing 3: increment_by.ads

```
function Increment_By
  (I    : Integer := 0;
   Incr : Integer := 1) return Integer;
--                ^ Default value for parameters
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Subprograms.Increment_By
MD5: 5728b915789beee0b5546ea7b36a1cc2
```

In this example, we see that parameters can have default values. When calling the subprogram, you can then omit parameters if they have a default value. Unlike C/C++, a call to a subprogram without parameters does not include parentheses.

This is the implementation of the function above:

Listing 4: increment_by.adb

```
function Increment_By
  (I    : Integer := 0;
   Incr : Integer := 1) return Integer is
begin
   return I + Incr;
end Increment_By;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Subprograms.Increment_By
MD5: 07c85e5c1272ea396bf4dbc0cefcdce7
```

In the GNAT toolchain

The Ada standard doesn't mandate in which file the specification or the implementation of a subprogram must be stored. In other words, the standard doesn't require a specific file structure or specific file name extensions. For example, we could save both the specification and the implementation of the `Increment` function above in a file called `increment.txt`. (We could even store the entire source code of a system in a single file.) From the standard's perspective, this would be completely acceptable.

The GNAT toolchain, however, requires the following file naming scheme:

- files with the *.ads* extension contain the specification, while
- files with the *.adb* extension contain the implementation.

Therefore, in the GNAT toolchain, the specification of the `Increment` function must be stored in the `increment.ads` file, while its implementation must be stored in the `increment.adb` file. This rule always applies to packages, which we discuss *later* (page 35). (Note, however, that it's possible to circumvent this rule.) For more details, you may refer to the *Introduction to GNAT Toolchain* (page 1939) course or the GPRbuild User's Guide[9].

3.1.1 Subprogram calls

We can then call our subprogram this way:

Listing 5: show_increment.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Increment_By;

procedure Show_Increment is
   A, B, C : Integer;
begin
   C := Increment_By;
```

(continues on next page)

[9] https://docs.adacore.com/gprbuild-docs/html/gprbuild_ug.html

(continued from previous page)

```
   --              ^ Parameterless call,
   --                value of I is 0
   --                and Incr is 1

   Put_Line ("Using defaults for Increment_By is "
             & Integer'Image (C));

   A := 10;
   B := 3;
   C := Increment_By (A, B);
   --                 ^ Regular parameter passing

   Put_Line ("Increment of "
             & Integer'Image (A)
             & " with "
             & Integer'Image (B)
             & " is "
             & Integer'Image (C));

   A := 20;
   B := 5;
   C := Increment_By (I    => A,
                      Incr => B);
    --                ^ Named parameter passing

   Put_Line ("Increment of "
             & Integer'Image (A)
             & " with "
             & Integer'Image (B)
             & " is "
             & Integer'Image (C));
end Show_Increment;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Subprograms.Increment_By
MD5: dcb501c8c6815b03c6841fc8b80d6911
```

Runtime output

```
Using defaults for Increment_By is  1
Increment of  10 with  3 is  13
Increment of  20 with  5 is  25
```

Ada allows you to name the parameters when you pass them, whether they have a default or not. There are some rules:

- Positional parameters come first.
- A positional parameter cannot follow a named parameter.

As a convention, people usually name parameters at the call site if the function's corresponding parameters has a default value. However, it is also perfectly acceptable to name every parameter if it makes the code clearer.

3.1.2 Nested subprograms

As briefly mentioned earlier, Ada allows you to declare one subprogram inside another.

This is useful for two reasons:

- It lets you organize your programs in a cleaner fashion. If you need a subprogram only as a "helper" for another subprogram, then the principle of localization indicates that the helper subprogram should be declared nested.
- It allows you to share state easily in a controlled fashion, because the nested subprograms have access to the parameters, as well as any local variables, declared in the outer scope.

For the previous example, we can move the duplicated code (call to `Put_Line`) to a separate procedure. This is a shortened version with the nested `Display_Result` procedure.

Listing 6: show_increment.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Increment_By;

procedure Show_Increment is
   A, B, C : Integer;

   procedure Display_Result is
   begin
      Put_Line ("Increment of "
                & Integer'Image (A)
                & " with "
                & Integer'Image (B)
                & " is "
                & Integer'Image (C));
   end Display_Result;

begin
   A := 10;
   B := 3;
   C := Increment_By (A, B);
   Display_Result;
   A := 20;
   B := 5;
   C := Increment_By (A, B);
   Display_Result;
end Show_Increment;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Subprograms.Increment_By
MD5: 23ec8ae3080c042123a9e82ee6b3d9e3
```

Runtime output

```
Increment of  10 with  3 is  13
Increment of  20 with  5 is  25
```

3.1.3 Function calls

An important feature of function calls in Ada is that the return value at a call cannot be ignored; that is, a function call cannot be used as a statement.

If you want to call a function and do not need its result, you will still need to explicitly store it in a local variable.

Listing 7: quadruple.ads

```
function Quadruple (I : Integer)
                    return Integer;
```

Listing 8: quadruple.adb

```
function Quadruple (I : Integer)
                    return Integer is

   function Double (I : Integer)
                    return Integer is
   begin
      return I * 2;
   end Double;

   Res : Integer;
begin
   Double (Double (I));
   --  ERROR: cannot use call to function
   --         "Double" as a statement

   Res := Double (Double (I));
   --  OK: return value of Double is
   --      assigned to Res

   return Res;
end Quadruple;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Subprograms.Quadruple
MD5: fd525bde1a883d4a3794730695af6469
```

Build output

```
quadruple.adb:12:04: error: cannot use call to function "Double" as a statement
quadruple.adb:12:04: error: return value of a function call cannot be ignored
gprbuild: *** compilation phase failed
```

A statement such as `Double (Double (I));` is wrong because we're not assigning the return value to a variable — we can correct this statement by writing `Res := Double (Double (I));`.

In the GNAT toolchain

In GNAT, with all warnings activated, it becomes even harder to ignore the result of a function, because unused variables will be flagged. For example, this code would not be valid:

```
function Read_Int
   (Stream :     Network_Stream;
    Result : out Integer) return Boolean;

procedure Main is
    Stream : Network_Stream := Get_Stream;
    My_Int : Integer;

    -- Warning: in the line below, B is
    --          never read.
    B : Boolean := Read_Int (Stream, My_Int);
begin
   null;
end Main;
```

You then have two solutions to silence this warning:

- Either annotate the variable with **pragma** *Unreferenced* , e.g.:

```
B : Boolean := Read_Int (Stream, My_Int);
pragma Unreferenced (B);
```

- Or give the variable a name that contains any of the strings `discard` `dummy` `ignore` `junk` `unused` (case insensitive)

3.2 Parameter modes

So far we have seen that Ada is a safety-focused language. There are many ways this is realized, but two important points are:

- Ada makes the user specify as much as possible about the behavior expected for the program, so that the compiler can warn or reject if there is an inconsistency.
- Ada provides a variety of techniques for achieving the generality and flexibility of pointers and dynamic memory management, but without the latter's drawbacks (such as memory leakage and dangling references).

Parameter modes are a feature that helps achieve the two design goals above. A subprogram parameter can be specified with a mode, which is one of the following:

in	Parameter can only be read, not written
out	Parameter can be written to, then read
in out	Parameter can be both read and written

The default mode for parameters is **in**; so far, most of the examples have been using **in** parameters.

Historically

Functions and procedures were originally more different in philosophy. Before Ada 2012, functions could only take **in** parameters.

3.3 Subprogram calls

3.3.1 In parameters

The first mode for parameters is the one we have been implicitly using so far. Parameters passed using this mode cannot be modified, so that the following program will cause an error:

Listing 9: swap.adb

```
1  procedure Swap (A, B : Integer) is
2     Tmp : Integer;
3  begin
4     Tmp := A;
5
6     --  Error: assignment to "in" mode
7     --         parameter not allowed
8     A := B;
9
10    --  Error: assignment to "in" mode
```

(continues on next page)

(continued from previous page)

```
   --          parameter not allowed
   B := Tmp;
end Swap;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Subprograms.Swap
MD5: 478ac23f878934aae820e4b9c056d939
```

Build output

```
swap.adb:8:04: error: assignment to "in" mode parameter not allowed
swap.adb:12:04: error: assignment to "in" mode parameter not allowed
gprbuild: *** compilation phase failed
```

The fact that **in** is the default mode is very important. It means that a parameter will not be modified unless you explicitly specify a mode in which modification is allowed.

3.3.2 In out parameters

To correct our code above, we can use an **in out** parameter.

Listing 10: in_out_params.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure In_Out_Params is
   procedure Swap (A, B : in out Integer) is
      Tmp : Integer;
   begin
      Tmp := A;
      A   := B;
      B   := Tmp;
   end Swap;

   A : Integer := 12;
   B : Integer := 44;
begin
    Swap (A, B);

    --  Prints 44
    Put_Line (Integer'Image (A));
end In_Out_Params;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Subprograms.In_Out_Params
MD5: 319358e479449c115cf2b3cbb4ff3a6b
```

Runtime output

```
 44
```

An **in out** parameter will allow read and write access to the object passed as parameter, so in the example above, we can see that A is modified after the call to Swap.

Attention

While **in out** parameters look a bit like references in C++, or regular parameters in Java that are passed by-reference, the Ada language standard does not mandate "by reference" passing for in out parameters except for certain categories of types as will be explained later.

In general, it is better to think of modes as higher level than by-value versus by-reference semantics. For the compiler, it means that an array passed as an **in** parameter might be passed by reference, because it is more efficient (which does not change anything for the user since the parameter is not assignable). However, a parameter of a discrete type will always be passed by copy, regardless of its mode (which is more efficient on most architectures).

3.3.3 Out parameters

The **out** mode applies when the subprogram needs to write to a parameter that might be uninitialized at the point of call. Reading the value of an **out** parameter is permitted, but it should only be done after the subprogram has assigned a value to the parameter. Out parameters behave a bit like return values for functions. When the subprogram returns, the actual parameter (a variable) will have the value of the out parameter at the point of return.

In other languages

Ada doesn't have a tuple construct and does not allow returning multiple values from a subprogram (except by declaring a full-fledged record type). Hence, a way to return multiple values from a subprogram is to use **out** parameters.

For example, a procedure reading integers from the network could have one of the following specifications:

```
procedure Read_Int
   (Stream  :     Network_Stream;
    Success : out Boolean;
    Result  : out Integer);

function Read_Int
   (Stream :     Network_Stream;
    Result : out Integer) return Boolean;
```

While reading an out variable before writing to it should, ideally, trigger an error, imposing that as a rule would cause either inefficient run-time checks or complex compile-time rules. So from the user's perspective an out parameter acts like an uninitialized variable when the subprogram is invoked.

In the GNAT toolchain

GNAT will detect simple cases of incorrect use of out parameters. For example, the compiler will emit a warning for the following program:

Listing 11: outp.adb

```
1  procedure Outp is
2     procedure Foo (A : out Integer) is
3        B : Integer := A;
4        --             ^ Warning on reference
5        --               to uninitialized A
6     begin
```

```
      A := B;
   end Foo;
begin
   null;
end Outp;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Subprograms.Out_Params
MD5: 36bdb4e541297d7fb0b075816cb6e73a
```

Build output

```
outp.adb:3:22: warning: "A" may be referenced before it has a value [enabled by␣
↪default]
```

3.3.4 Forward declaration of subprograms

As we saw earlier, a subprogram can be declared without being fully defined, This is possible in general, and can be useful if you need subprograms to be mutually recursive, as in the example below:

Listing 12: mutually_recursive_subprograms.adb

```
procedure Mutually_Recursive_Subprograms is
    procedure Compute_A (V : Natural);
    --  Forward declaration of Compute_A

    procedure Compute_B (V : Natural) is
    begin
       if V > 5 then
          Compute_A (V - 1);
          --  Call to Compute_A
       end if;
    end Compute_B;

    procedure Compute_A (V : Natural) is
    begin
       if V > 2 then
          Compute_B (V - 1);
          --  Call to Compute_B
       end if;
    end Compute_A;
begin
   Compute_A (15);
end Mutually_Recursive_Subprograms;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Subprograms.Mutually_Recursive_Subprograms
MD5: 5ee030cdecc6c4aea8916cbb763e8526
```

3.4 Renaming

Subprograms can be renamed by using the **renames** keyword and declaring a new name for a subprogram:

```
procedure New_Proc renames Original_Proc;
```

This can be useful, for example, to improve the readability of your application when you're using code from external sources that cannot be changed in your system. Let's look at an example:

Listing 13: a_procedure_with_very_long_name_that_cannot_be_changed.ads

```
procedure A_Procedure_With_Very_Long_Name_That_Cannot_Be_Changed
   (A_Message : String);
```

Listing 14: a_procedure_with_very_long_name_that_cannot_be_changed.adb

```
with Ada.Text_IO; use Ada.Text_IO;

 procedure A_Procedure_With_Very_Long_Name_That_Cannot_Be_Changed
   (A_Message : String) is
 begin
    Put_Line (A_Message);
 end A_Procedure_With_Very_Long_Name_That_Cannot_Be_Changed;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Subprograms.Proc_Renaming
MD5: 6d4952e9dee8ef69a9e3c3e185c635f1
```

As the wording in the name of procedure above implies, we cannot change its name. We can, however, rename it to something like Show in our test application and use this shorter name. Note that we also have to declare all parameters of the original subprogram — we may rename them, too, in the declaration. For example:

Listing 15: show_renaming.adb

```
with A_Procedure_With_Very_Long_Name_That_Cannot_Be_Changed;

 procedure Show_Renaming is

    procedure Show (S : String) renames
      A_Procedure_With_Very_Long_Name_That_Cannot_Be_Changed;

 begin
    Show ("Hello World!");
 end Show_Renaming;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Subprograms.Proc_Renaming
MD5: 5b3b550f8a1cbeb7d9cfd3673f6d42b3
```

Runtime output

```
Hello World!
```

Note that the original name (`A_Procedure_With_Very_Long_Name_That_Cannot_Be_Changed`) is still visible after the declaration of the Show procedure.

We may also rename subprograms from the standard library. For example, we may rename `Integer'Image` to `Img`:

Listing 16: show_image_renaming.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Image_Renaming is
```

(continues on next page)

(continued from previous page)

```
4
5     function Img (I : Integer) return String
6       renames Integer'Image;
7
8  begin
9     Put_Line (Img (2));
10    Put_Line (Img (3));
11 end Show_Image_Renaming;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Subprograms.Integer_Image_Renaming
MD5: 9843b9d5967679c4fe8bd83a5213829f
```

Runtime output

```
 2
 3
```

Renaming also allows us to introduce default expressions that were not available in the original declaration. For example, we may specify `"Hello World!"` as the default for the `String` parameter of the Show procedure:

```
with A_Procedure_With_Very_Long_Name_That_Cannot_Be_Changed;

procedure Show_Renaming_Defaults is

   procedure Show (S : String := "Hello World!")
     renames
       A_Procedure_With_Very_Long_Name_That_Cannot_Be_Changed;

begin
   Show;
end Show_Renaming_Defaults;
```

CHAPTER

FOUR

MODULAR PROGRAMMING

So far, our examples have been simple standalone subprograms. Ada is helpful in that regard, since it allows arbitrary declarations in a declarative part. We were thus able to declare our types and variables in the bodies of main procedures.

However, it is easy to see that this is not going to scale up for real-world applications. We need a better way to structure our programs into modular and distinct units.

Ada encourages the separation of programs into multiple packages and sub-packages, providing many tools to a programmer on a quest for a perfectly organized code-base.

4.1 Packages

Here is an example of a package declaration in Ada:

Listing 1: week.ads

```
package Week is

   Mon : constant String := "Monday";
   Tue : constant String := "Tuesday";
   Wed : constant String := "Wednesday";
   Thu : constant String := "Thursday";
   Fri : constant String := "Friday";
   Sat : constant String := "Saturday";
   Sun : constant String := "Sunday";

end Week;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Modular_Programming.Week
MD5: 0fa033dc8fe2b9741483de273354e7ee
```

And here is how you use it:

Listing 2: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Week;
--  References the Week package, and
--  adds a dependency from Main to Week

procedure Main is
begin
   Put_Line ("First day of the week is "
             & Week.Mon);
end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Modular_Programming.Week
MD5: 03e17a75620de6a397b1d3c5a3e22f6a
```

Runtime output

```
First day of the week is Monday
```

Packages let you make your code modular, separating your programs into semantically significant units. Additionally the separation of a package's specification from its body (which we will see below) can reduce compilation time.

While the **with** clause indicates a dependency, you can see in the example above that you still need to prefix the referencing of entities from the Week package by the name of the package. (If we had included a **use** Week clause, then such a prefix would not have been necessary.)

Accessing entities from a package uses the dot notation, `A.B`, which is the same notation as the one used to access record fields.

A **with** clause can *only* appear in the prelude of a compilation unit (i.e., before the reserved word, such as **procedure**, that marks the beginning of the unit). It is not allowed anywhere else. This rule is only needed for methodological reasons: the person reading your code should be able to see immediately which units the code depends on.

In other languages

Packages look similar to, but are semantically very different from, header files in C/C++.

- The first and most important distinction is that packages are a language-level mechanism. This is in contrast to a *#include*'d header file, which is a functionality of the C preprocessor.
- An immediate consequence is that the **with** construct is a semantic inclusion mechanism, not a text inclusion mechanism. Hence, when you **with** a package, you are saying to the compiler "I'm depending on this semantic unit", and not "include this bunch of text in place here".
- The effect of a package thus does not vary depending on where it has been **with**ed from. Contrast this with C/C++, where the meaning of the included text depends on the context in which the *#include* appears.

  This allows compilation/recompilation to be more efficient. It also allows tools like IDEs to have correct information about the semantics of a program. In turn, this allows better tooling in general, and code that is more analyzable, even by humans.

An important benefit of Ada **with** clauses when compared to *#include* is that it is stateless. The order of **with** and **use** clauses does not matter, and can be changed without side effects.

In the GNAT toolchain

The Ada language standard does not mandate any particular relationship between source files and packages; for example, in theory you can put all your code in one file, or use your own file naming conventions. In practice, however, an implementation will have specific rules. With GNAT, each top-level compilation unit needs to go into a separate file. In the example above, the `Week` package will be in an `.ads` file (for Ada specification), and the `Main` procedure will be in an `.adb` file (for Ada body).

4.2 Using a package

As we have seen above, the **with** clause indicates a dependency on another package. However, every reference to an entity coming from the Week package had to be prefixed by the full name of the package. It is possible to make every entity of a package visible directly in the current scope, using the **use** clause.

In fact, we have been using the **use** clause since almost the beginning of this tutorial.

Listing 3: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;
--                ^ Make every entity of the
--                  Ada.Text_IO package
--                  directly visible.
with Week;

procedure Main is
   use Week;
   --  Make every entity of the Week
   --  package directly visible.
begin
   Put_Line ("First day of the week is " & Mon);
end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Modular_Programming.Week
MD5: ea54077d4ae165b28ae8facfe8ba2db7
```

Runtime output

```
First day of the week is Monday
```

As you can see in the example above:

- Put_Line is a subprogram that comes from the Ada.Text_IO package. We can reference it directly because we have **use**d the package at the top of the Main unit.
- Unlike **with** clauses, a **use** clause can be placed either in the prelude, or in any declarative region. In the latter case the **use** clause will have an effect in its containing lexical scope.

4.3 Package body

In the simple example above, the Week package only has declarations and no body. That's not a mistake: in a package specification, which is what is illustrated above, you cannot declare bodies. Those have to be in the package body.

Listing 4: operations.ads

```
package Operations is

   --  Declaration
   function Increment_By
     (I    : Integer;
      Incr : Integer := 0) return Integer;

   function Get_Increment_Value return Integer;

end Operations;
```

Listing 5: operations.adb

```
package body Operations is

   Last_Increment : Integer := 1;

   function Increment_By
     (I    : Integer;
      Incr : Integer := 0) return Integer is
   begin
      if Incr /= 0 then
         Last_Increment := Incr;
      end if;

      return I + Last_Increment;
   end Increment_By;

   function Get_Increment_Value return Integer is
   begin
      return Last_Increment;
   end Get_Increment_Value;

end Operations;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Modular_Programming.Operations
MD5: 2adfb64e825605c74fecf6c9d45c8437
```

Here we can see that the body of the `Increment_By` function has to be declared in the body. Coincidentally, introducing a body allows us to put the `Last_Increment` variable in the body, and make them inaccessible to the user of the `Operations` package, providing a first form of encapsulation.

This works because entities declared in the body are *only* visible in the body.

This example shows how `Last_Increment` is used indirectly:

Listing 6: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Operations;

procedure Main is
   use Operations;

   I : Integer := 0;
   R : Integer;

   procedure Display_Update_Values is
      Incr : constant Integer :=
               Get_Increment_Value;
   begin
      Put_Line (Integer'Image (I)
                & " incremented by "
                & Integer'Image (Incr)
                & " is "
                & Integer'Image (R));
      I := R;
   end Display_Update_Values;
begin
   R := Increment_By (I);
```

(continues on next page)

(continued from previous page)

```
   Display_Update_Values;
   R := Increment_By (I);
   Display_Update_Values;

   R := Increment_By (I, 5);
   Display_Update_Values;
   R := Increment_By (I);
   Display_Update_Values;

   R := Increment_By (I, 10);
   Display_Update_Values;
   R := Increment_By (I);
   Display_Update_Values;
end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Modular_Programming.Operations
MD5: 76190b1261a9652cfb7986ecec191e37
```

Runtime output

```
 0 incremented by  1 is  1
 1 incremented by  1 is  2
 2 incremented by  5 is  7
 7 incremented by  5 is  12
 12 incremented by  10 is  22
 22 incremented by  10 is  32
```

4.4 Child packages

Packages can be used to create hierarchies. We achieve this by using child packages, which extend the functionality of their parent package. One example of a child package that we've been using so far is the `Ada.Text_IO` package. Here, the parent package is called `Ada`, while the child package is called `Text_IO`. In the previous examples, we've been using the `Put_Line` procedure from the `Text_IO` child package.

Important

Ada also supports nested packages. However, since they can be more complicated to use, the recommendation is to use child packages instead. Nested packages will be covered in the advanced course.

Let's begin our discussion on child packages by taking our previous `Week` package:

Listing 7: week.ads

```
package Week is

   Mon : constant String := "Monday";
   Tue : constant String := "Tuesday";
   Wed : constant String := "Wednesday";
   Thu : constant String := "Thursday";
   Fri : constant String := "Friday";
   Sat : constant String := "Saturday";
   Sun : constant String := "Sunday";
```

(continues on next page)

(continued from previous page)

```
10
11 end Week;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Modular_Programming.Child_Packages
MD5: 0fa033dc8fe2b9741483de273354e7ee
```

If we want to create a child package for `Week`, we may write:

Listing 8: week-child.ads

```
1 package Week.Child is
2
3    function Get_First_Of_Week return String;
4
5 end Week.Child;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Modular_Programming.Child_Packages
MD5: a7db38e772cf6153b5eb95069517e833
```

Here, `Week` is the parent package and `Child` is the child package. This is the corresponding package body of `Week.Child`:

Listing 9: week-child.adb

```
1 package body Week.Child is
2
3    function Get_First_Of_Week return String is
4    begin
5       return Mon;
6    end Get_First_Of_Week;
7
8 end Week.Child;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Modular_Programming.Child_Packages
MD5: 04dad82685ad9f0231c3084266b0af83
```

In the implementation of the `Get_First_Of_Week` function, we can use the `Mon` string directly, even though it was declared in the parent package `Week`. We don't write `with Week` here because all elements from the specification of the `Week` package — such as `Mon`, `Tue` and so on — are visible in the child package `Week.Child`.

Now that we've completed the implementation of the `Week.Child` package, we can use elements from this child package in a subprogram by simply writing `with Week.Child`. Similarly, if we want to use these elements directly, we write `use Week.Child` in addition. For example:

Listing 10: main.adb

```
1 with Ada.Text_IO; use Ada.Text_IO;
2 with Week.Child;  use Week.Child;
3
4 procedure Main is
5 begin
6    Put_Line ("First day of the week is "
```

(continues on next page)

(continued from previous page)

```
            & Get_First_Of_Week);
end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Modular_Programming.Child_Packages
MD5: e2f5c6ad3a92da4cb04ee7ec12293df4
```

Runtime output

```
First day of the week is Monday
```

4.4.1 Child of a child package

So far, we've seen a two-level package hierarchy. But the hierarchy that we can potentially create isn't limited to that. For instance, we could extend the hierarchy of the previous source code example by declaring a `Week.Child.Grandchild` package. In this case, `Week.Child` would be the parent of the `Grandchild` package. Let's consider this implementation:

Listing 11: week-child-grandchild.ads

```
package Week.Child.Grandchild is

   function Get_Second_Of_Week return String;

end Week.Child.Grandchild;
```

Listing 12: week-child-grandchild.adb

```
package body Week.Child.Grandchild is

   function Get_Second_Of_Week return String is
   begin
      return Tue;
   end Get_Second_Of_Week;

end Week.Child.Grandchild;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Modular_Programming.Child_Packages
MD5: 03ee5932a68212b2e501370212508ab1
```

We can use this new `Grandchild` package in our test application in the same way as before: we can reuse the previous test application and adapt the **`with`** and **`use`**, and the function call. This is the updated code:

Listing 13: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Week.Child.Grandchild;
use  Week.Child.Grandchild;

procedure Main is
begin
   Put_Line ("Second day of the week is "
             & Get_Second_Of_Week);
end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Modular_Programming.Child_Packages
MD5: 29ee409c8131bd9529c6bf6e366bb390
```

Runtime output

```
Second day of the week is Tuesday
```

Again, this isn't the limit for the package hierarchy. We could continue to extend the hierarchy of the previous example by implementing a `Week.Child.Grandchild.Grand_grandchild` package.

4.4.2 Multiple children

So far, we've seen a single child package of a parent package. However, a parent package can also have multiple children. We could extend the example above and implement a `Week.Child_2` package. For example:

Listing 14: week-child_2.ads

```
1  package Week.Child_2 is
2
3     function Get_Last_Of_Week return String;
4
5  end Week.Child_2;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Modular_Programming.Child_Packages
MD5: bd3f63cacd142d9885600f4000b4573b
```

Here, `Week` is still the parent package of the `Child` package, but it's also the parent of the `Child_2` package. In the same way, `Child_2` is obviously one of the child packages of `Week`.

This is the corresponding package body of `Week.Child_2`:

Listing 15: week-child_2.adb

```
1  package body Week.Child_2 is
2
3     function Get_Last_Of_Week return String is
4     begin
5        return Sun;
6     end Get_Last_Of_Week;
7
8  end Week.Child_2;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Modular_Programming.Child_Packages
MD5: c2c03e4cb1daff02dd6076c2956ef2aa
```

We can now reference both children in our test application:

Listing 16: main.adb

```
1  with Ada.Text_IO;  use Ada.Text_IO;
2  with Week.Child;   use Week.Child;
3  with Week.Child_2; use Week.Child_2;
4
5  procedure Main is
```

(continues on next page)

(continued from previous page)

```
6  begin
7     Put_Line ("First day of the week is "
8               & Get_First_Of_Week);
9     Put_Line ("Last day of the week is "
10              & Get_Last_Of_Week);
11 end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Modular_Programming.Child_Packages
MD5: 6a91f239fb2a2d8c702409c22467a424
```

Runtime output

```
First day of the week is Monday
Last day of the week is Sunday
```

4.4.3 Visibility

In the previous section, we've seen that elements declared in a parent package specification are visible in the child package. This is, however, not the case for elements declared in the package body of a parent package.

Let's consider the package Book and its child `Additional_Operations`:

Listing 17: book.ads

```
1  package Book is
2
3     Title : constant String :=
4       "Visible for my children";
5
6     function Get_Title return String;
7
8     function Get_Author return String;
9
10 end Book;
```

Listing 18: book-additional_operations.ads

```
1  package Book.Additional_Operations is
2
3     function Get_Extended_Title return String;
4
5     function Get_Extended_Author return String;
6
7  end Book.Additional_Operations;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Modular_Programming.Visibility
MD5: a0d67cff9aeff288709391d16306df00
```

This is the body of both packages:

Listing 19: book.adb

```
1  package body Book is
2
3     Author : constant String :=
```

(continues on next page)

(continued from previous page)

```
     "Author not visible for my children";

   function Get_Title return String is
   begin
      return Title;
   end Get_Title;

   function Get_Author return String is
   begin
      return Author;
   end Get_Author;

end Book;
```

Listing 20: book-additional_operations.adb

```
package body Book.Additional_Operations is

   function Get_Extended_Title return String is
   begin
      return "Book Title: " & Title;
   end Get_Extended_Title;

   function Get_Extended_Author return String is
   begin
      --  "Author" string declared in the body
      --  of the Book package is not visible
      --  here. Therefore, we cannot write:
      --
      --  return "Book Author: " & Author;

      return "Book Author: Unknown";
   end Get_Extended_Author;

end Book.Additional_Operations;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Modular_Programming.Visibility
MD5: 68b7490da12bafae0aa6fe0ab76c6b1c
```

In the implementation of the `Get_Extended_Title`, we're using the `Title` constant from the parent package `Book`. However, as indicated in the comments of the `Get_Extended_Author` function, the `Author` string — which we declared in the body of the `Book` package — isn't visible in the `Book.Additional_Operations` package. Therefore, we cannot use it to implement the `Get_Extended_Author` function.

We can, however, use the `Get_Author` function from `Book` in the implementation of the `Get_Extended_Author` function to retrieve this string. Likewise, we can use this strategy to implement the `Get_Extended_Title` function. This is the adapted code:

Listing 21: book-additional_operations.adb

```
package body Book.Additional_Operations is

   function Get_Extended_Title return String is
   begin
      return "Book Title: " & Get_Title;
   end Get_Extended_Title;

```

(continues on next page)

(continued from previous page)

```
8     function Get_Extended_Author return String is
9     begin
10       return "Book Author: " & Get_Author;
11    end Get_Extended_Author;
12
13 end Book.Additional_Operations;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Modular_Programming.Visibility
MD5: b00c187cb54d3fcb9574726028c1efc6
```

This is a simple test application for the packages above:

Listing 22: main.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  with Book.Additional_Operations;
4  use  Book.Additional_Operations;
5
6  procedure Main is
7  begin
8     Put_Line (Get_Extended_Title);
9     Put_Line (Get_Extended_Author);
10 end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Modular_Programming.Visibility
MD5: bdc75987fe61e9401b400f8704890ebe
```

Runtime output

```
Book Title: Visible for my children
Book Author: Author not visible for my children
```

By declaring elements in the body of a package, we can implement encapsulation in Ada. Those elements will only be visible in the package body, but nowhere else. This isn't, however, the only way to achieve encapsulation in Ada: we'll discuss other approaches in the *Privacy* (page 113) chapter.

4.5 Renaming

Previously, we've mentioned that *subprograms can be renamed* (page 31). We can rename packages, too. Again, we use the **renames** keyword for that. The following example renames the Ada.Text_IO package as TIO:

Listing 23: main.adb

```
1  with Ada.Text_IO;
2
3  procedure Main is
4     package TIO renames Ada.Text_IO;
5  begin
6     TIO.Put_Line ("Hello");
7  end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Modular_Programming.Rename_Text_IO
MD5: 33652dd004ef33d95c168ab8893cd412
```

Runtime output

```
Hello
```

We can use renaming to improve the readability of our code by using shorter package names. In the example above, we write `TIO.Put_Line` instead of the longer version (`Ada.Text_IO.Put_Line`). This approach is especially useful when we don't **use** packages and want to avoid that the code becomes too verbose.

Note we can also rename subprograms and objects inside packages. For instance, we could have just renamed the `Put_Line` procedure in the source code example above:

Listing 24: main.adb

```
1 with Ada.Text_IO;
2
3 procedure Main is
4    procedure Say (Something : String)
5      renames Ada.Text_IO.Put_Line;
6 begin
7    Say ("Hello");
8 end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Modular_Programming.Rename_Put_Line
MD5: f30174ff29eb01f33bc95f1787f9f1dc
```

Runtime output

```
Hello
```

In this example, we rename the `Put_Line` procedure to `Say`.

CHAPTER

FIVE

STRONGLY TYPED LANGUAGE

Ada is a strongly typed language. It is interestingly modern in that respect: strong static typing has been increasing in popularity in programming language design, owing to factors such as the growth of statically typed functional programming, a big push from the research community in the typing domain, and many practical languages with strong type systems.

5.1 What is a type?

In statically typed languages, a type is mainly (but not only) a *compile time* construct. It is a construct to enforce invariants about the behavior of a program. Invariants are unchangeable properties that hold for all variables of a given type. Enforcing them ensures, for example, that variables of a data type never have invalid values.

A type is used to reason about the *objects* a program manipulates (an object is a variable or a constant). The aim is to classify objects by what you can accomplish with them (i.e., the operations that are permitted), and this way you can reason about the correctness of the objects' values.

5.2 Integers

A nice feature of Ada is that you can define your own integer types, based on the requirements of your program (i.e., the range of values that makes sense). In fact, the definitional mechanism that Ada provides forms the semantic basis for the predefined integer types. There is no "magical" built-in type in that regard, which is unlike most languages, and arguably very elegant.

Listing 1: integer_type_example.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  procedure Integer_Type_Example is
4     --  Declare a signed integer type,
5     --  and give the bounds
6     type My_Int is range -1 .. 20;
7     --                       ^ High bound
8     --                   ^ Low bound
9
10    --  Like variables, type declarations can
11    --  only appear in declarative regions.
12 begin
13    for I in My_Int loop
14       Put_Line (My_Int'Image (I));
15       --               ^ 'Image attribute
16       --                 converts a value
17       --                 to a String.
```

(continues on next page)

(continued from previous page)

```
18    end loop;
19 end Integer_Type_Example;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Strongly_Typed_Language.Integer_Type_Example
MD5: 1d82fa54b604944fdd8652cbf84f4ff2
```

Runtime output

```
-1
 0
 1
 2
 3
 4
 5
 6
 7
 8
 9
 10
 11
 12
 13
 14
 15
 16
 17
 18
 19
 20
```

This example illustrates the declaration of a signed integer type, and several things we can do with them.

Every type declaration in Ada starts with the **type** keyword (except for *task types* (page 160)). After the type, we can see a range that looks a lot like the ranges that we use in **for** loops, that defines the low and high bound of the type. Every integer in the inclusive range of the bounds is a valid value for the type.

Ada integer types

In Ada, an integer type is not specified in terms of its machine representation, but rather by its range. The compiler will then choose the most appropriate representation.

Another point to note in the above example is the `My_Int'Image (I)` expression. The `Name'Attribute (optional params)` notation is used for what is called an attribute in Ada. An attribute is a built-in operation on a type, a value, or some other program entity. It is accessed by using a ' symbol (the ASCII apostrophe).

Ada has several types available as "built-ins"; **Integer** is one of them. Here is how **Integer** might be defined for a typical processor:

```
type Integer is
  range -(2 ** 31) .. +(2 ** 31 - 1);
```

** is the exponent operator, which means that the first valid value for **Integer** is -2^{31}, and the last valid value is $2^{31} - 1$.

Ada does not mandate the range of the built-in type **Integer**. An implementation for a 16-bit target would likely choose the range -2^{15} through 2^{15} - 1.

5.2.1 Operational semantics

Unlike some other languages, Ada requires that operations on integers should be checked for overflow.

Listing 2: main.adb

```
procedure Main is
   A : Integer := Integer'Last;
   B : Integer;
begin
   B := A + 5;
   --  This operation will overflow, eg. it
   --  will raise an exception at run time.
end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Strongly_Typed_Language.Overflow_Check
MD5: bddd15b394f043442024899d12b982fb
```

Build output

```
main.adb:5:11: warning: value not in range of type "Standard.Integer" [enabled by␣
 ↪default]
main.adb:5:11: warning: Constraint_Error will be raised at run time [enabled by␣
 ↪default]
```

Runtime output

```

raised CONSTRAINT_ERROR : main.adb:5 overflow check failed
```

There are two types of overflow checks:

- Machine-level overflow, when the result of an operation exceeds the maximum value (or is less than the minimum value) that can be represented in the storage reserved for an object of the type, and
- Type-level overflow, when the result of an operation is outside the range defined for the type.

Mainly for efficiency reasons, while machine-level overflow always results in an exception, type-level overflows will only be checked at specific boundaries, like assignment:

Listing 3: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is
   type My_Int is range 1 .. 20;
   A : My_Int := 12;
   B : My_Int := 15;
   M : My_Int := (A + B) / 2;
   --  No overflow here, overflow checks
   --  are done at specific boundaries.
begin
   for I in 1 .. M loop
      Put_Line ("Hello, World!");
```

(continues on next page)

(continued from previous page)

```
13    end loop;
14    --  Loop body executed 13 times
15 end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Strongly_Typed_Language.Overflow_Check_2
MD5: d24283cbb42c0be5b5fa215eb16ad2e7
```

Runtime output

```
Hello, World!
Hello, World!
Hello, World!
Hello, World!
Hello, World!
Hello, World!
Hello, World!
Hello, World!
Hello, World!
Hello, World!
Hello, World!
Hello, World!
Hello, World!
```

Type-level overflow will only be checked at specific points in the execution. The result, as we see above, is that you might have an operation that overflows in an intermediate computation, but no exception will be raised because the final result does not overflow.

5.3 Unsigned types

Ada also features unsigned Integer types. They're called *modular* types in Ada parlance. The reason for this designation is due to their behavior in case of overflow: They simply "wrap around", as if a modulo operation was applied.

For machine sized modular types, for example a modulus of 2^{32}, this mimics the most common implementation behavior of unsigned types. However, an advantage of Ada is that the modulus is more general:

Listing 4: main.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  procedure Main is
4     type Mod_Int is mod 2 ** 5;
5     --              ^ Range is 0 .. 31
6
7     A : constant Mod_Int := 20;
8     B : constant Mod_Int := 15;
9
10    M : constant Mod_Int := A + B;
11    --  No overflow here,
12    --  M = (20 + 15) mod 32 = 3
13 begin
14    for I in 1 .. M loop
15       Put_Line ("Hello, World!");
16    end loop;
17 end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Strongly_Typed_Language.Unsigned_Types
MD5: df4efee4eb29e7ea15a0cf961b600dd5
```

Runtime output

```
Hello, World!
Hello, World!
Hello, World!
```

Unlike in C/C++, since this wraparound behavior is guaranteed by the Ada specification, you can rely on it to implement portable code. Also, being able to leverage the wrapping on arbitrary bounds is very useful — the modulus does not need to be a power of 2 — to implement certain algorithms and data structures, such as ring buffers[10].

5.4 Enumerations

Enumeration types are another nicety of Ada's type system. Unlike C's enums, they are *not* integers, and each new enumeration type is incompatible with other enumeration types. Enumeration types are part of the bigger family of discrete types, which makes them usable in certain situations that we will describe later but one context that we have already seen is a case statement.

Listing 5: enumeration_example.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  procedure Enumeration_Example is
4     type Days is (Monday, Tuesday, Wednesday,
5                   Thursday, Friday,
6                   Saturday, Sunday);
7     --  An enumeration type
8  begin
9     for I in Days loop
10       case I is
11          when Saturday .. Sunday =>
12             Put_Line ("Week end!");
13
14          when Monday .. Friday =>
15             Put_Line ("Hello on "
16                       & Days'Image (I));
17             --  'Image attribute, works on
18             --  enums too
19       end case;
20    end loop;
21 end Enumeration_Example;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Strongly_Typed_Language.Enumeration_Example
MD5: 45d6c83992af4fb6d5015d5f22cb7113
```

Runtime output

```
Hello on MONDAY
Hello on TUESDAY
Hello on WEDNESDAY
Hello on THURSDAY
Hello on FRIDAY
```

(continues on next page)

[10] https://en.wikipedia.org/wiki/Circular_buffer

(continued from previous page)

```
Week end!
Week end!
```

Enumeration types are powerful enough that, unlike in most languages, they're used to define the standard Boolean type:

```
type Boolean is (False, True);
```

As mentioned previously, every "built-in" type in Ada is defined with facilities generally available to the user.

5.5 Floating-point types

5.5.1 Basic properties

Like most languages, Ada supports floating-point types. The most commonly used floating-point type is **Float**:

Listing 6: floating_point_demo.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Floating_Point_Demo is
   A : constant Float := 2.5;
begin
   Put_Line ("The value of A is "
             & Float'Image (A));
end Floating_Point_Demo;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Strongly_Typed_Language.Floating_Point_Demo
MD5: 06998775497b68b742700138faecbb6a
```

Runtime output

```
The value of A is  2.50000E+00
```

The application will display 2.5 as the value of A.

The Ada language does not specify the precision (number of decimal digits in the mantissa) for Float; on a typical 32-bit machine the precision will be 6.

All common operations that could be expected for floating-point types are available, including absolute value and exponentiation. For example:

Listing 7: floating_point_operations.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Floating_Point_Operations is
   A : Float := 2.5;
begin
   A := abs (A - 4.5);
   Put_Line ("The value of A is "
             & Float'Image (A));

   A := A ** 2 + 1.0;
   Put_Line ("The value of A is "
```

(continues on next page)

(continued from previous page)

```
12             & Float'Image (A));
13 end Floating_Point_Operations;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Strongly_Typed_Language.Floating_Point_Operations
MD5: c280e0f23e020aaee1a8777e7fb4c242
```

Runtime output

```
The value of A is  2.00000E+00
The value of A is  5.00000E+00
```

The value of A is `2.0` after the first operation and `5.0` after the second operation.

In addition to **`Float`**, an Ada implementation may offer data types with higher precision such as **`Long_Float`** and **`Long_Long_Float`**. Like **`Float`**, the standard does not indicate the exact precision of these types: it only guarantees that the type **`Long_Float`**, for example, has at least the precision of **`Float`**. In order to guarantee that a certain precision requirement is met, we can define custom floating-point types, as we will see in the next section.

5.5.2 Precision of floating-point types

Ada allows the user to specify the precision for a floating-point type, expressed in terms of decimal digits. Operations on these custom types will then have at least the specified precision. The syntax for a simple floating-point type declaration is:

```
type T is digits <number_of_decimal_digits>;
```

The compiler will choose a floating-point representation that supports the required precision. For example:

Listing 8: custom_floating_types.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  procedure Custom_Floating_Types is
4     type T3  is digits 3;
5     type T15 is digits 15;
6     type T18 is digits 18;
7  begin
8     Put_Line ("T3  requires "
9               & Integer'Image (T3'Size)
10              & " bits");
11    Put_Line ("T15 requires "
12              & Integer'Image (T15'Size)
13              & " bits");
14    Put_Line ("T18 requires "
15              & Integer'Image (T18'Size)
16              & " bits");
17 end Custom_Floating_Types;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Strongly_Typed_Language.Custom_Floating_Types
MD5: 3c23738f13e081038996c533da8fb723
```

Runtime output

```
T3  requires  32 bits
T15 requires  64 bits
T18 requires  128 bits
```

In this example, the attribute 'Size is used to retrieve the number of bits used for the specified data type. As we can see by running this example, the compiler allocates 32 bits for T3, 64 bits for T15 and 128 bits for T18. This includes both the mantissa and the exponent.

The number of digits specified in the data type is also used in the format when displaying floating-point variables. For example:

Listing 9: display_custom_floating_types.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Display_Custom_Floating_Types is
   type T3  is digits 3;
   type T18 is digits 18;

   C1 : constant := 1.0e-4;

   A : constant T3  := 1.0 + C1;
   B : constant T18 := 1.0 + C1;
begin
   Put_Line ("The value of A is "
             & T3'Image (A));
   Put_Line ("The value of B is "
             & T18'Image (B));
end Display_Custom_Floating_Types;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Strongly_Typed_Language.Display_Custom_Floating_Types
MD5: 58ec2660388a7f05e139f73e94303cf1
```

Runtime output

```
The value of A is  1.00E+00
The value of B is  1.00010000000000000E+00
```

As expected, the application will display the variables according to specified precision (1.00E+00 and 1.00010000000000000E+00).

5.5.3 Range of floating-point types

In addition to the precision, a range can also be specified for a floating-point type. The syntax is similar to the one used for integer data types — using the **range** keyword. This simple example creates a new floating-point type based on the type **Float**, for a normalized range between -1.0 and 1.0:

Listing 10: floating_point_range.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Floating_Point_Range is
   type T_Norm  is new Float range -1.0 .. 1.0;
   A  : T_Norm;
begin
   A := 1.0;
   Put_Line ("The value of A is "
```

(continues on next page)

(continued from previous page)

```
9              & T_Norm'Image (A));
10 end Floating_Point_Range;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Strongly_Typed_Language.Floating_Point_Range
MD5: b43d596682aa0fa11124a3a3d0596abc
```

Runtime output

```
The value of A is  1.00000E+00
```

The application is responsible for ensuring that variables of this type stay within this range; otherwise an exception is raised. In this example, the exception `Constraint_Error` is raised when assigning `2.0` to the variable `A`:

Listing 11: floating_point_range_exception.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  procedure Floating_Point_Range_Exception is
4     type T_Norm  is new Float range -1.0 .. 1.0;
5     A  : T_Norm;
6  begin
7     A := 2.0;
8     Put_Line ("The value of A is "
9               & T_Norm'Image (A));
10 end Floating_Point_Range_Exception;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Strongly_Typed_Language.Floating_Point_Range_
 ↪Exception
MD5: ecda66589ba28e453956dca159ea5f0d
```

Build output

```
floating_point_range_exception.adb:7:09: warning: value not in range of type "T_
 ↪Norm" defined at line 4 [enabled by default]
floating_point_range_exception.adb:7:09: warning: Constraint_Error will be raised␣
 ↪at run time [enabled by default]
```

Runtime output

```

raised CONSTRAINT_ERROR : floating_point_range_exception.adb:7 range check failed
```

Ranges can also be specified for custom floating-point types. For example:

Listing 12: custom_range_types.adb

```
1  with Ada.Text_IO;  use Ada.Text_IO;
2  with Ada.Numerics; use Ada.Numerics;
3
4  procedure Custom_Range_Types is
5     type T6_Inv_Trig  is
6       digits 6 range -Pi / 2.0 .. Pi / 2.0;
7  begin
8     null;
9  end Custom_Range_Types;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Strongly_Typed_Language.Custom_Range_Types
MD5: 7b62abc869290a30e351163f670059e0
```

In this example, we are defining a type called T6_Inv_Trig, which has a range from -π / 2 to π / 2 with a minimum precision of 6 digits. (Pi is defined in the predefined package Ada.Numerics.)

5.6 Strong typing

As noted earlier, Ada is strongly typed. As a result, different types of the same family are incompatible with each other; a value of one type cannot be assigned to a variable from the other type. For example:

Listing 13: illegal_example.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Illegal_Example is
   --  Declare two different floating point types
   type Meters is new Float;
   type Miles  is new Float;

   Dist_Imperial : Miles;

   --  Declare a constant
   Dist_Metric : constant Meters := 1000.0;
begin
   --  Not correct: types mismatch
   Dist_Imperial := Dist_Metric * 621.371e-6;
   Put_Line (Miles'Image (Dist_Imperial));
end Illegal_Example;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Strongly_Typed_Language.Imperial_Metric_Error
MD5: e28e341c5eda9b3b4cef691fa24b7f7e
```

Build output

```
illegal_example.adb:14:33: error: expected type "Miles" defined at line 6
illegal_example.adb:14:33: error: found type "Meters" defined at line 5
gprbuild: *** compilation phase failed
```

A consequence of these rules is that, in the general case, a "mixed mode" expression like `2 * 3.0` will trigger a compilation error. In a language like C or Python, such expressions are made valid by implicit conversions. In Ada, such conversions must be made explicit:

Listing 14: conv.adb

```
with Ada.Text_IO; use Ada.Text_IO;
procedure Conv is
   type Meters is new Float;
   type Miles is new Float;
   Dist_Imperial : Miles;
   Dist_Metric : constant Meters := 1000.0;
begin
   Dist_Imperial :=
     Miles (Dist_Metric) * 621.371e-6;
   --  ^^^^^^^^^^^^^^^^^
```

(continues on next page)

(continued from previous page)

```
   --    Type conversion, from Meters to Miles
   --    Now the code is correct

   Put_Line (Miles'Image (Dist_Imperial));
end Conv;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Strongly_Typed_Language.Imperial_Metric
MD5: e455641e86227e80e5f920b5af6315d4
```

Runtime output

```
 6.21371E-01
```

Of course, we probably do not want to write the conversion code every time we convert from meters to miles. The idiomatic Ada way in that case would be to introduce conversion functions along with the types.

Listing 15: conv.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Conv is
   type Meters is new Float;
   type Miles  is new Float;

   --  Function declaration, like procedure
   --  but returns a value.
   function To_Miles (M : Meters) return Miles is
   --                             ^ Return type
   begin
      return Miles (M) * 621.371e-6;
   end To_Miles;

   Dist_Imperial : Miles;
   Dist_Metric   : constant Meters := 1000.0;
begin
   Dist_Imperial := To_Miles (Dist_Metric);
   Put_Line (Miles'Image (Dist_Imperial));
end Conv;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Strongly_Typed_Language.Imperial_Metric_Func
MD5: 661737fa9f130ac3070210bbf6f08214
```

Runtime output

```
 6.21371E-01
```

If you write a lot of numeric code, having to explicitly provide such conversions might seem painful at first. However, this approach brings some advantages. Notably, you can rely on the absence of implicit conversions, which will in turn prevent some subtle errors.

In other languages

In C, for example, the rules for implicit conversions may not always be completely obvious. In Ada, however, the code will always do exactly what it seems to do. For example:

```
int a = 3, b = 2;
float f = a / b;
```

This code will compile fine, but the result of f will be 1.0 instead of 1.5, because the compiler will generate an integer division (three divided by two) that results in one. The software developer must be aware of data conversion issues and use an appropriate casting:

```
int a = 3, b = 2;
float f = (float)a / b;
```

In the corrected example, the compiler will convert both variables to their corresponding floating-point representation before performing the division. This will produce the expected result.

This example is very simple, and experienced C developers will probably notice and correct it before it creates bigger problems. However, in more complex applications where the type declaration is not always visible — e.g. when referring to elements of a **struct** — this situation might not always be evident and quickly lead to software defects that can be harder to find.

The Ada compiler, in contrast, will always reject code that mixes floating-point and integer variables without explicit conversion. The following Ada code, based on the erroneous example in C, will not compile:

Listing 16: main.adb

```
1 procedure Main is
2    A : Integer := 3;
3    B : Integer := 2;
4    F : Float;
5 begin
6    F := A / B;
7 end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Strongly_Typed_Language.Implicit_Cast
MD5: 38a8fcc6608c22e22940052ab8dd62f4
```

Build output

```
main.adb:6:11: error: expected type "Standard.Float"
main.adb:6:11: error: found type "Standard.Integer"
gprbuild: *** compilation phase failed
```

The offending line must be changed to `F := Float (A) / Float (B);` in order to be accepted by the compiler.

You can use Ada's strong typing to help enforce invariants in your code, as in the example above: Since Miles and Meters are two different types, you cannot mistakenly convert an instance of one to an instance of the other.

5.7 Derived types

In Ada you can create new types based on existing ones. This is very useful: you get a type that has the same properties as some existing type but is treated as a distinct type in the interest of strong typing.

Listing 17: main.adb

```
procedure Main is
   --  ID card number type,
   --  incompatible with Integer.
   type Social_Security_Number is new Integer
     range 0 .. 999_99_9999;
   --       ^ Since a SSN has 9 digits
   --         max., and cannot be
   --         negative, we enforce
   --         a validity constraint.

   SSN : Social_Security_Number :=
     555_55_5555;
   --    ^ You can put underscores as
   --      formatting in any number.

   I   : Integer;

   --  The value -1 below will cause a
   --  runtime error and a compile time
   --  warning with GNAT.
   Invalid : Social_Security_Number := -1;
begin
   --  Illegal, they have different types:
   I := SSN;

   --  Likewise illegal:
   SSN := I;

   --  OK with explicit conversion:
   I := Integer (SSN);

   --  Likewise OK:
   SSN := Social_Security_Number (I);
end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Strongly_Typed_Language.Derived_Types
MD5: 63445601ddb5e52dceab095d3305623a
```

Build output

```
main.adb:21:40: warning: value not in range of type "Social_Security_Number"␣
 ↪defined at line 4 [enabled by default]
main.adb:21:40: warning: Constraint_Error will be raised at run time [enabled by␣
 ↪default]
main.adb:24:09: error: expected type "Standard.Integer"
main.adb:24:09: error: found type "Social_Security_Number" defined at line 4
main.adb:27:11: error: expected type "Social_Security_Number" defined at line 4
main.adb:27:11: error: found type "Standard.Integer"
gprbuild: *** compilation phase failed
```

The type Social_Security is said to be a *derived type*; its *parent type* is **Integer**.

As illustrated in this example, you can refine the valid range when defining a derived scalar type (such as integer, floating-point and enumeration).

The syntax for enumerations uses the **range** <**range**> syntax:

Listing 18: greet.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Greet is
   type Days is (Monday, Tuesday, Wednesday,
                 Thursday, Friday,
                 Saturday, Sunday);

   type Weekend_Days is new
     Days range Saturday .. Sunday;
   --  New type, where only Saturday and Sunday
   --  are valid literals.
begin
   null;
end Greet;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Strongly_Typed_Language.Days
MD5: 853b5c1576961c7c20d4306275122364
```

5.8 Subtypes

As we are starting to see, types may be used in Ada to enforce constraints on the valid range of values. However, we sometimes want to enforce constraints on some values while staying within a single type. This is where subtypes come into play. A subtype does not introduce a new type.

Listing 19: greet.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Greet is
   type Days is (Monday, Tuesday, Wednesday,
                 Thursday, Friday,
                 Saturday, Sunday);

   --  Declaration of a subtype
   subtype Weekend_Days is
     Days range Saturday .. Sunday;
   --      ^ Constraint of the subtype

   M : Days := Sunday;

   S : Weekend_Days := M;
   --  No error here, Days and Weekend_Days
   --  are of the same type.
begin
   for I in Days loop
      case I is
         --  Just like a type, a subtype can
         --  be used as a range
         when Weekend_Days =>
            Put_Line ("Week end!");
         when others =>
            Put_Line ("Hello on "
                      & Days'Image (I));
      end case;
```

(continues on next page)

(continued from previous page)

```
29    end loop;
30 end Greet;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Strongly_Typed_Language.Days_Subtype
MD5: 8ee7127d152a8b2c9d0ac74d05fc2fc2
```

Runtime output

```
Hello on MONDAY
Hello on TUESDAY
Hello on WEDNESDAY
Hello on THURSDAY
Hello on FRIDAY
Week end!
Week end!
```

Several subtypes are predefined in the standard package in Ada, and are automatically available to you:

```
subtype Natural  is Integer range 0 .. Integer'Last;
subtype Positive is Integer range 1 .. Integer'Last;
```

While subtypes of a type are statically compatible with each other, constraints are enforced at run time: if you violate a subtype constraint, an exception will be raised.

Listing 20: greet.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  procedure Greet is
4     type Days is (Monday, Tuesday, Wednesday,
5                   Thursday, Friday,
6                   Saturday, Sunday);
7
8     subtype Weekend_Days is
9       Days range Saturday .. Sunday;
10
11    Day     : Days := Saturday;
12    Weekend : Weekend_Days;
13 begin
14    Weekend := Day;
15    --         ^ Correct: Same type, subtype
16    --           constraints are respected
17    Weekend := Monday;
18    --         ^ Wrong value for the subtype
19    --           Compiles, but exception at runtime
20 end Greet;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Strongly_Typed_Language.Days_Subtype_Error
MD5: 84d42d276d26544f35edab5870459378
```

Build output

```
greet.adb:17:15: warning: value not in range of type "Weekend_Days" defined at␣
 ↪line 8 [enabled by default]
greet.adb:17:15: warning: Constraint_Error will be raised at run time [enabled by␣
 ↪default]
```

Runtime output

```
raised CONSTRAINT_ERROR : greet.adb:17 range check failed
```

5.8.1 Subtypes as type aliases

Previously, we've seen that we can create new types by declaring e.g. `type Miles is new Float`. We could also create type aliases, which generate alternative names — *aliases* — for known types. Note that type aliases are sometimes called *type synonyms*.

We achieve this in Ada by using subtypes without new constraints. In this case, however, we don't get all of the benefits of Ada's strong type checking. Let's rewrite an example using type aliases:

Listing 21: undetected_imperial_metric_error.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Undetected_Imperial_Metric_Error is
   --  Declare two type aliases
   subtype Meters is Float;
   subtype Miles is Float;

   Dist_Imperial : Miles;

   --  Declare a constant
   Dist_Metric : constant Meters := 100.0;
begin
   --  No conversion to Miles type required:
   Dist_Imperial := (Dist_Metric * 1609.0)
                     / 1000.0;

   --  Not correct, but undetected:
   Dist_Imperial := Dist_Metric;

   Put_Line (Miles'Image (Dist_Imperial));
end Undetected_Imperial_Metric_Error;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Strongly_Typed_Language.Undetected_Imperial_Metric_
 ↪Error
MD5: cdb8f949c69f3c480502b859dac298ee
```

Runtime output

```
 1.00000E+02
```

In the example above, the fact that both `Meters` and `Miles` are subtypes of `Float` allows us to mix variables of both types without type conversion. This, however, can lead to all sorts of programming mistakes that we'd like to avoid, as we can see in the undetected error highlighted in the code above. In that example, the error in the assignment of a value in meters to a variable meant to store values in miles remains undetected because both `Meters` and `Miles` are subtypes of `Float`. Therefore, the recommendation is to use strong typing — via `type X is new Y` — for cases such as the one above.

There are, however, many situations where type aliases are useful. For example, in an application that uses floating-point types in multiple contexts, we could use type aliases to indicate additional meaning to the types or to avoid long variable names. For example, instead of writing:

```
Paid_Amount, Due_Amount : Float;
```

We could write:

```
subtype Amount is Float;

Paid, Due : Amount;
```

In other languages

In C, for example, we can use a **typedef** declaration to create a type alias. For example:

```
typedef float meters;
```

This corresponds to the declaration that we've seen above using subtypes. Other programming languages include this concept in similar ways. For example:

- C++: `using meters = float;`
- Swift: `typealias Meters = Double`
- Kotlin: `typealias Meters = Double`
- Haskell: `type Meters = Float`

Note, however, that subtypes in Ada correspond to type aliases if, and only if, they don't have new constraints. Thus, if we add a new constraint to a subtype declaration, we don't have a type alias anymore. For example, the following declaration *can't* be considered a type alias of **Float**:

```
subtype Meters is Float range 0.0 .. 1_000_000.0;
```

Let's look at another example:

```
subtype Degree_Celsius is Float;

subtype Liquid_Water_Temperature is
  Degree_Celsius range 0.0 .. 100.0;

subtype Running_Water_Temperature is
  Liquid_Water_Temperature;
```

In this example, `Liquid_Water_Temperature` isn't an alias of `Degree_Celsius`, since it adds a new constraint that wasn't part of the declaration of the `Degree_Celsius`. However, we do have two type aliases here:

- `Degree_Celsius` is an alias of **Float**;
- `Running_Water_Temperature` is an alias of `Liquid_Water_Temperature`, even if `Liquid_Water_Temperature` itself has a constrained range.

CHAPTER

SIX

RECORDS

So far, all the types we have encountered have values that are not decomposable: each instance represents a single piece of data. Now we are going to see our first class of composite types: records.

Records allow composing a value out of instances of other types. Each of those instances will be given a name. The pair consisting of a name and an instance of a specific type is called a field, or a component.

6.1 Record type declaration

Here is an example of a simple record declaration:

```
type Date is record
   --  The following declarations are
   --  components of the record
   Day   : Integer range 1 .. 31;
   Month : Months;
   --  You can add custom constraints
   --  on fields
   Year  : Integer range 1 .. 3000;
end record;
```

Fields look a lot like variable declarations, except that they are inside of a record definition. And as with variable declarations, you can specify additional constraints when supplying the subtype of the field.

```
type Date is record
   Day   : Integer range 1 .. 31;
   Month : Months := January;
   --  This component has a default value
   Year  : Integer range 1 .. 3000 := 2012;
   --                                 ^^^^
   --                               Default value
end record;
```

Record components can have default values. When a variable having the record type is declared, a field with a default initialization will be automatically set to this value. The value can be any expression of the component type, and may be run-time computable.

In the remaining sections of this chapter, we see how to use record types. In addition to that, we discuss more about records in *another chapter* (page 101).

6.2 Aggregates

```
--  Positional components
Ada_Birthday    : Date := (10, December, 1815);

--  Named components
Leap_Day_2020   : Date := (Day   => 29,
                           Month => February,
                           Year  => 2020);
--                         ^ By name
```

Records have a convenient notation for expressing values, illustrated above. This notation is called aggregate notation, and the literals are called aggregates. They can be used in a variety of contexts that we will see throughout the course, one of which is to initialize records.

An aggregate is a list of values separated by commas and enclosed in parentheses. It is allowed in any context where a value of the record is expected.

Values for the components can be specified positionally, as in `Ada_Birthday` example, or by name, as in `Leap_Day_2020`. A mixture of positional and named values is permitted, but you cannot use a positional notation after a named one.

6.3 Component selection

To access components of a record instance, you use an operation that is called component selection. This is achieved by using the dot notation. For example, if we declare a variable `Some_Day` of the `Date` record type mentioned above, we can access the `Year` component by writing `Some_Day.Year`.

Let's look at an example:

Listing 1: record_selection.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  procedure Record_Selection is
4
5     type Months is
6       (January, February, March, April,
7        May, June, July, August, September,
8        October, November, December);
9
10    type Date is record
11       Day   : Integer range 1 .. 31;
12       Month : Months;
13       Year  : Integer range 1 .. 3000 := 2032;
14    end record;
15
16    procedure Display_Date (D : Date) is
17    begin
18       Put_Line ("Day:" & Integer'Image (D.Day)
19                 & ", Month: "
20                 & Months'Image (D.Month)
21                 & ", Year:"
22                 & Integer'Image (D.Year));
23    end Display_Date;
24
25    Some_Day : Date := (1, January, 2000);
26
```

(continues on next page)

(continued from previous page)

```
begin
   Display_Date (Some_Day);

   Put_Line ("Changing year...");
   Some_Day.Year := 2001;

   Display_Date (Some_Day);
end Record_Selection;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Records.Record_Selection
MD5: 79602cf4d011ba7423d07772b13e2b5a
```

Runtime output

```
Day: 1, Month: JANUARY, Year: 2000
Changing year...
Day: 1, Month: JANUARY, Year: 2001
```

As you can see in this example, we can use the dot notation in the expression `D.Year` or `Some_Day.Year` to access the information stored in that component, as well as to modify this information in assignments. To be more specific, when we use `D.Year` in the call to `Put_Line`, we're retrieving the information stored in that component. When we write `Some_Day.Year := 2001`, we're overwriting the information that was previously stored in the `Year` component of `Some_Day`.

6.4 Renaming

In previous chapters, we've discussed *subprogram* (page 31) and *package* (page 45) renaming. We can rename record components as well. Instead of writing the full component selection using the dot notation, we can declare an alias that allows us to access the same component. This is useful to simplify the implementation of a subprogram, for example.

We can rename record components by using the **renames** keyword in a variable declaration. For example:

```
Some_Day : Date;
Y        : Integer renames Some_Day.Year;
```

Here, `Y` is an alias, so that every time we using `Y`, we are really using the `Year` component of `Some_Day`.

Let's look at a complete example:

Listing 2: dates.ads

```
package Dates is

   type Months is
     (January, February, March, April,
      May, June, July, August, September,
      October, November, December);

   type Date is record
      Day   : Integer range 1 .. 31;
      Month : Months;
      Year  : Integer range 1 .. 3000 := 2032;
   end record;
```

(continues on next page)

(continued from previous page)

```
13
14    procedure Increase_Month
15     (Some_Day : in out Date);
16
17    procedure Display_Month
18      (Some_Day : Date);
19
20 end Dates;
```

Listing 3: dates.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  package body Dates is
4
5     procedure Increase_Month
6       (Some_Day : in out Date)
7     is
8        --  Renaming components from
9        --  the Date record
10       M : Months  renames Some_Day.Month;
11       Y : Integer renames Some_Day.Year;
12
13       --  Renaming function (for Months
14       --  enumeration)
15       function Next (M : Months)
16                      return Months
17         renames Months'Succ;
18    begin
19       if M = December then
20          M := January;
21          Y := Y + 1;
22       else
23          M := Next (M);
24       end if;
25    end Increase_Month;
26
27    procedure Display_Month
28      (Some_Day : Date)
29    is
30       --  Renaming components from
31       --  the Date record
32       M : Months  renames Some_Day.Month;
33       Y : Integer renames Some_Day.Year;
34    begin
35       Put_Line ("Month: "
36                 & Months'Image (M)
37                 & ", Year:"
38                 & Integer'Image (Y));
39    end Display_Month;
40
41 end Dates;
```

Listing 4: main.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2  with Dates;       use Dates;
3
4  procedure Main is
5     D : Date := (1, January, 2000);
```

(continues on next page)

(continued from previous page)

```
6  begin
7     Display_Month (D);
8
9     Put_Line ("Increasing month...");
10    Increase_Month (D);
11
12    Display_Month (D);
13 end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Arrays.Record_Component_Renaming
MD5: 905390bd02b84170390522l8800975a3
```

Runtime output

```
Month: JANUARY, Year: 2000
Increasing month...
Month: FEBRUARY, Year: 2000
```

We apply renaming to two components of the `Date` record in the implementation of the `Increase_Month` procedure. Then, instead of directly using `Some_Day.Month` and `Some_Day.Year` in the next operations, we simply use the renamed versions `M` and `Y`.

Note that, in the example above, we also rename `Months'Succ` — which is the function that gives us the next month — to `Next`.

CHAPTER

SEVEN

ARRAYS

Arrays provide another fundamental family of composite types in Ada.

7.1 Array type declaration

Arrays in Ada are used to define contiguous collections of elements that can be selected by indexing. Here's a simple example:

Listing 1: greet.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Greet is
   type My_Int is range 0 .. 1000;
   type Index is range 1 .. 5;

   type My_Int_Array is
     array (Index) of My_Int;
   --                  ^ Type of elements
   --       ^ Bounds of the array
   Arr : My_Int_Array := (2, 3, 5, 7, 11);
   --                     ^ Array literal
   --                       (aggregate)

   V : My_Int;
begin
   for I in Index loop
      V := Arr (I);
      --        ^ Take the Ith element
      Put (My_Int'Image (V));
   end loop;
   New_Line;
end Greet;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Arrays.Greet
MD5: ffdd2ba2322b0946dfcac3a55bce5270
```

Runtime output

```
 2 3 5 7 11
```

The first point to note is that we specify the index type for the array, rather than its size. Here we declared an integer type named Index ranging from 1 to 5, so each array instance will have 5 elements, with the initial element at index 1 and the last element at index 5.

Although this example used an integer type for the index, Ada is more general: any discrete type is permitted to index an array, including *Enum types* (page 51). We will soon see what that means.

Another point to note is that querying an element of the array at a given index uses the same syntax as for function calls: that is, the array object followed by the index in parentheses.

Thus when you see an expression such as `A (B)`, whether it is a function call or an array subscript depends on what `A` refers to.

Finally, notice how we initialize the array with the `(2, 3, 5, 7, 11)` expression. This is another kind of aggregate in Ada, and is in a sense a literal expression for an array, in the same way that `3` is a literal expression for an integer. The notation is very powerful, with a number of properties that we will introduce later. A detailed overview appears in the notation of *aggregate types* (page 89).

Unrelated to arrays, the example also illustrated two procedures from `Ada.Text_IO`:

- `Put`, which displays a string without a terminating end of line
- `New_Line`, which outputs an end of line

Let's now delve into what it means to be able to use any discrete type to index into the array.

In other languages

Semantically, an array object in Ada is the entire data structure, and not simply a handle or pointer. Unlike C and C++, there is no implicit equivalence between an array and a pointer to its initial element.

Listing 2: array_bounds_example.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Array_Bounds_Example is
   type My_Int is range 0 .. 1000;

   type Index is range 11 .. 15;
   --                  ^ Low bound can
   --                    be any value

   type My_Int_Array is
     array (Index) of My_Int;

   Tab : constant My_Int_Array :=
           (2, 3, 5, 7, 11);
begin
   for I in Index loop
      Put (My_Int'Image (Tab (I)));
   end loop;
   New_Line;
end Array_Bounds_Example;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Arrays.Array_Bounds_Example
MD5: e5fe9e7b83055f3ae23dd890e29c22de
```

Runtime output

```
 2 3 5 7 11
```

One effect is that the bounds of an array can be any values. In the first example we constructed an array type whose first index is 1, but in the example above we declare an array type whose first index is 11.

That's perfectly fine in Ada, and moreover since we use the index type as a range to iterate over the array indices, the code using the array does not need to change.

That leads us to an important consequence with regard to code dealing with arrays. Since the bounds can vary, you should not assume / hard-code specific bounds when iterating / using arrays. That means the code above is good, because it uses the index type, but a for loop as shown below is bad practice even though it works correctly:

```
for I in 11 .. 15 loop
   Tab (I) := Tab (I) * 2;
end loop;
```

Since you can use any discrete type to index an array, enumeration types are permitted.

Listing 3: month_example.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Month_Example is
   type Month_Duration is range 1 .. 31;
   type Month is (Jan, Feb, Mar, Apr,
                  May, Jun, Jul, Aug,
                  Sep, Oct, Nov, Dec);

   type My_Int_Array is
     array (Month) of Month_Duration;
   --       ^ Can use an enumeration type
   --         as the index

   Tab : constant My_Int_Array :=
   --    ^ constant is like a variable but
   --      cannot be modified
     (31, 28, 31, 30, 31, 30,
      31, 31, 30, 31, 30, 31);
   --  Maps months to number of days
   --  (ignoring leap years)

   Feb_Days : Month_Duration := Tab (Feb);
   --  Number of days in February
begin
   for M in Month loop
      Put_Line
        (Month'Image (M) & " has "
         & Month_Duration'Image (Tab (M))
         & " days.");
   --    ^ Concatenation operator
   end loop;
end Month_Example;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Arrays.Month_Example
MD5: 420bb8faa36d0efd3d071c76c2033d21
```

Runtime output

```
JAN has  31 days.
FEB has  28 days.
MAR has  31 days.
```

(continues on next page)

(continued from previous page)

```
APR has  30 days.
MAY has  31 days.
JUN has  30 days.
JUL has  31 days.
AUG has  31 days.
SEP has  30 days.
OCT has  31 days.
NOV has  30 days.
DEC has  31 days.
```

In the example above, we are:

- Creating an array type mapping months to month durations in days.
- Creating an array, and instantiating it with an aggregate mapping months to their actual durations in days.
- Iterating over the array, printing out the months, and the number of days for each.

Being able to use enumeration values as indices is very helpful in creating mappings such as shown above one, and is an often used feature in Ada.

7.2 Indexing

We have already seen the syntax for selecting elements of an array. There are however a few more points to note.

First, as is true in general in Ada, the indexing operation is strongly typed. If you use a value of the wrong type to index the array, you will get a compile-time error.

Listing 4: greet.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Greet is
   type My_Int is range 0 .. 1000;

   type My_Index   is range 1 .. 5;
   type Your_Index is range 1 .. 5;

   type My_Int_Array is
     array (My_Index) of My_Int;

   Tab : My_Int_Array := (2, 3, 5, 7, 11);
begin
   for I in Your_Index loop
      Put (My_Int'Image (Tab (I)));
   --                          ^ Compile time error
   end loop;
   New_Line;
end Greet;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Arrays.Greet_2
MD5: 54543017e4ec69d24bf9e43d507b50e6
```

Build output

```
greet.adb:15:31: error: expected type "My_Index" defined at line 6
greet.adb:15:31: error: found type "Your_Index" defined at line 7
gprbuild: *** compilation phase failed
```

Second, arrays in Ada are bounds checked. This means that if you try to access an element outside of the bounds of the array, you will get a run-time error instead of accessing random memory as in unsafe languages.

Listing 5: greet.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  procedure Greet is
4     type My_Int is range 0 .. 1000;
5     type Index  is range 1 .. 5;
6
7     type My_Int_Array is
8       array (Index) of My_Int;
9
10    Tab : My_Int_Array := (2, 3, 5, 7, 11);
11 begin
12    for I in Index range 2 .. 6 loop
13       Put (My_Int'Image (Tab (I)));
14       --                       ^ Will raise an
15       --                         exception when
16       --                         I = 6
17    end loop;
18    New_Line;
19 end Greet;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Arrays.Greet_3
MD5: 0102674d089be838f1dfbf0791d99fce
```

Build output

```
greet.adb:12:30: warning: static value out of range of type "Index" defined at␣
 ↪line 5 [enabled by default]
greet.adb:12:30: warning: Constraint_Error will be raised at run time [enabled by␣
 ↪default]
greet.adb:12:30: warning: suspicious loop bound out of range of loop subtype␣
 ↪[enabled by default]
greet.adb:12:30: warning: loop executes zero times or raises Constraint_Error␣
 ↪[enabled by default]
```

Runtime output

```

raised CONSTRAINT_ERROR : greet.adb:12 range check failed
```

7.3 Simpler array declarations

In the previous examples, we have always explicitly created an index type for the array. While this can be useful for typing and readability purposes, sometimes you simply want to express a range of values. Ada allows you to do that, too.

Listing 6: simple_array_bounds.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Simple_Array_Bounds is
   type My_Int is range 0 .. 1000;

   type My_Int_Array is
     array (1 .. 5) of My_Int;
   --       ^ Subtype of Integer

   Tab : constant My_Int_Array :=
           (2, 3, 5, 7, 11);
begin
   for I in 1 .. 5 loop
   --       ^ Subtype of Integer
      Put (My_Int'Image (Tab (I)));
   end loop;
   New_Line;
end Simple_Array_Bounds;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Arrays.Simple_Array_Bounds
MD5: c337a7fe0dacccc5f60f7b234aa96d39
```

Runtime output

```
 2 3 5 7 11
```

This example defines the range of the array via the range syntax, which specifies an anonymous subtype of Integer and uses it to index the array.

This means that the type of the index is **Integer**. Similarly, when you use an anonymous range in a for loop as in the example above, the type of the iteration variable is also **Integer**, so you can use I to index Tab.

You can also use a named subtype for the bounds for an array.

7.4 Range attribute

We noted earlier that hard coding bounds when iterating over an array is a bad idea, and showed how to use the array's index type/subtype to iterate over its range in a **for** loop. That raises the question of how to write an iteration when the array has an anonymous range for its bounds, since there is no name to refer to the range. Ada solves that via several attributes of array objects:

Listing 7: range_example.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Range_Example is
   type My_Int is range 0 .. 1000;

   type My_Int_Array is
     array (1 .. 5) of My_Int;

   Tab : constant My_Int_Array :=
           (2, 3, 5, 7, 11);
begin
```

(continues on next page)

(continued from previous page)

```
   for I in Tab'Range loop
   --          ^ Gets the range of Tab
      Put (My_Int'Image (Tab (I)));
   end loop;
   New_Line;
end Range_Example;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Arrays.Range_Example
MD5: 8b0d7bf346cb59999dfd12dbaaf3e2a6
```

Runtime output

```
 2 3 5 7 11
```

If you want more fine grained control, you can use the separate attributes `'First` and `'Last`.

Listing 8: array_attributes_example.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Array_Attributes_Example is
   type My_Int is range 0 .. 1000;

   type My_Int_Array is
     array (1 .. 5) of My_Int;

   Tab : My_Int_Array :=
           (2, 3, 5, 7, 11);
begin
   for I in Tab'First .. Tab'Last - 1 loop
   --          ^ Iterate on every index
   --            except the last
      Put (My_Int'Image (Tab (I)));
   end loop;
   New_Line;
end Array_Attributes_Example;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Arrays.Array_Attributes_Example
MD5: 95cc407c8aadd936e050fe3505e8fb46
```

Runtime output

```
 2 3 5 7
```

The `'Range`, `'First` and `'Last` attributes in these examples could also have been applied to the array type name, and not just the array instances.

Although not illustrated in the above examples, another useful attribute for an array instance A is `A'Length`, which is the number of elements that A contains.

It is legal and sometimes useful to have a "null array", which contains no elements. To get this effect, define an index range whose upper bound is less than the lower bound.

7.5 Unconstrained arrays

Let's now consider one of the most powerful aspects of Ada's array facility.

Every array type we have defined so far has a fixed size: every instance of this type will have the same bounds and therefore the same number of elements and the same size.

However, Ada also allows you to declare array types whose bounds are not fixed: in that case, the bounds will need to be provided when creating instances of the type.

Listing 9: unconstrained_array_example.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Unconstrained_Array_Example is
   type Days is (Monday, Tuesday, Wednesday,
                 Thursday, Friday,
                 Saturday, Sunday);

   type Workload_Type is
     array (Days range <>) of Natural;
   --  Indefinite array type
   --       ^ Bounds are of type Days,
   --         but not known

   Workload : constant
     Workload_Type (Monday .. Friday) :=
   --               ^ Specify the bounds
   --                 when declaring
      (Friday => 7, others => 8);
   --               ^ Default value
   --  ^ Specify element by name of index
begin
   for I in Workload'Range loop
      Put_Line (Integer'Image (Workload (I)));
   end loop;
end Unconstrained_Array_Example;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Arrays.Unconstrained_Array_Example
MD5: c84910e9b424cfabbbbe018ba0a6de59
```

Runtime output

```
 8
 8
 8
 8
 7
```

The fact that the bounds of the array are not known is indicated by the `Days range <>` syntax. Given a discrete type `Discrete_Type`, if we use `Discrete_Type` for the index in an array type then `Discrete_Type` serves as the type of the index and comprises the range of index values for each array instance.

If we define the index as `Discrete_Type range <>` then `Discrete_Type` serves as the type of the index, but different array instances may have different bounds from this type.

An array type that is defined with the `Discrete_Type range <>` syntax for its index is referred to as an unconstrained array type, and, as illustrated above, the bounds need to be provided when an instance is created.

The above example also shows other forms of the aggregate syntax. You can specify associations by name, by giving the value of the index on the left side of an arrow association. `1 => 2` thus means "assign value 2 to the element at index 1 in my array". `others => 8` means "assign value 8 to every element that wasn't previously assigned in this aggregate".

Attention

The so-called "box" notation (<>) is commonly used as a wildcard or placeholder in Ada. You will often see it when the meaning is "what is expected here can be anything".

In other languages

While unconstrained arrays in Ada might seem similar to variable length arrays in C, they are in reality much more powerful, because they're truly first-class values in the language. You can pass them as parameters to subprograms or return them from functions, and they implicitly contain their bounds as part of their value. This means that it is useless to pass the bounds or length of an array explicitly along with the array, because they are accessible via the `'First`, `'Last`, `'Range` and `'Length` attributes explained earlier.

Although different instances of the same unconstrained array type can have different bounds, a specific instance has the same bounds throughout its lifetime. This allows Ada to implement unconstrained arrays efficiently; instances can be stored on the stack and do not require heap allocation as in languages like Java.

7.6 Predefined array type: String

A recurring theme in our introduction to Ada types has been the way important built-in types like `Boolean` or `Integer` are defined through the same facilities that are available to the user. This is also true for strings: The `String` type in Ada is a simple array.

Here is how the string type is defined in Ada:

```
type String is
  array (Positive range <>) of Character;
```

The only built-in feature Ada adds to make strings more ergonomic is custom literals, as we can see in the example below.

Hint

String literals are a syntactic sugar for aggregates, so that in the following example, `A` and `B` have the same value.

Listing 10: string_literals.ads

```
1 package String_Literals is
2     --  Those two declarations are equivalent
3     A : String (1 .. 11) := "Hello World";
4     B : String (1 .. 11) :=
5         ('H', 'e', 'l', 'l', 'o', ' ',
6          'W', 'o', 'r', 'l', 'd');
7 end String_Literals;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Arrays.String_Literals
MD5: 8e5871c8ead4ff8da643539857e23b30
```

Listing 11: greet.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Greet is
   Message : String (1 .. 11) := "dlroW olleH";
   --        ^ Pre-defined array type.
   --          Component type is Character
begin
   for I in reverse Message'Range loop
      --    ^ Iterate in reverse order
      Put (Message (I));
   end loop;
   New_Line;
end Greet;
```

However, specifying the bounds of the object explicitly is a bit of a hassle; you have to manually count the number of characters in the literal. Fortunately, Ada gives you an easier way.

You can omit the bounds when creating an instance of an unconstrained array type if you supply an initialization, since the bounds can be deduced from the initialization expression.

Listing 12: greet.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Greet is
   Message : constant String := "dlroW olleH";
   --                ^ Bounds are automatically
   --                  computed from
   --                  initialization value
begin
   for I in reverse Message'Range loop
      Put (Message (I));
   end loop;
   New_Line;
end Greet;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Arrays.Greet_5
MD5: 21448a1007a07ec9d434880628625c3f
```

Runtime output

```
Hello World
```

Listing 13: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is
   type Integer_Array is
     array (Natural range <>) of Integer;

   My_Array : constant Integer_Array :=
```

(continues on next page)

(continued from previous page)

```
8                (1, 2, 3, 4);
9     --         ^^^^^^^^^^^^^^^^^^^^
10    --          Bounds are automatically
11    --          computed from
12    --          initialization value
13 begin
14     null;
15 end Main;
```

Attention

As you can see above, the standard `String` type in Ada is an array. As such, it shares the advantages and drawbacks of arrays: a `String` value is stack allocated, it is accessed efficiently, and its bounds are immutable.

If you want something akin to C++'s `std::string`, you can use *Unbounded Strings* (page 247) from Ada's standard library. This type is more like a mutable, automatically managed string buffer to which you can add content.

7.7 Restrictions

A very important point about arrays: bounds *have* to be known when instances are created. It is for example illegal to do the following.

```
declare
   A : String;
begin
   A := "World";
end;
```

Also, while you of course can change the values of elements in an array, you cannot change the array's bounds (and therefore its size) after it has been initialized. So this is also illegal:

```
declare
   A : String := "Hello";
begin
   A := "World";       --  OK: Same size
   A := "Hello World"; --  Not OK: Different size
end;
```

Also, while you can expect a warning for this kind of error in very simple cases like this one, it is impossible for a compiler to know in the general case if you are assigning a value of the correct length, so this violation will generally result in a run-time error.

Attention

While we will learn more about this later, it is important to know that arrays are not the only types whose instances might be of unknown size at compile-time.

Such objects are said to be of an *indefinite subtype*, which means that the subtype size is not known at compile time, but is dynamically computed (at run time).

Listing 14: indefinite_subtypes.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Indefinite_Subtypes is
    function Get_Number return Integer is
    begin
        return Integer'Value (Get_Line);
    end Get_Number;

   A : String := "Hello";
   --  Indefinite subtype

   B : String (1 .. 5) := "Hello";
   --  Definite subtype

   C : String (1 .. Get_Number);
   --  Indefinite subtype
   --  (Get_Number's value is computed at
   --  run-time)
begin
   null;
end Indefinite_Subtypes;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Arrays.Indefinite_Subtypes
MD5: a24235838511a94879f74757421a28f0
```

Here, the `'Value` attribute converts the string to an integer.

7.8 Returning unconstrained arrays

The return type of a function can be any type; a function can return a value whose size is unknown at compile time. Likewise, the parameters can be of any type.

For example, this is a function that returns an unconstrained `String`:

Listing 15: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is

   type Days is (Monday, Tuesday, Wednesday,
                 Thursday, Friday,
                 Saturday, Sunday);

   function Get_Day_Name (Day : Days := Monday)
                          return String is
   begin
      return
        (case Day is
         when Monday    => "Monday",
         when Tuesday   => "Tuesday",
         when Wednesday => "Wednesday",
         when Thursday  => "Thursday",
         when Friday    => "Friday",
         when Saturday  => "Saturday",
         when Sunday    => "Sunday");
   end Get_Day_Name;
```

(continues on next page)

(continued from previous page)

```
22
23 begin
24    Put_Line ("First day is "
25              & Get_Day_Name (Days'First));
26 end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Arrays.Day_Name_1
MD5: 0b7c567c723ded52d8e95c4ef46bcecc
```

Runtime output

```
First day is Monday
```

(This example is for illustrative purposes only. There is a built-in mechanism, the `'Image` attribute for scalar types, that returns the name (as a **`String`**) of any element of an enumeration type. For example `Days'Image(Monday)` is `"MONDAY"`.)

In other languages

Returning variable size objects in languages lacking a garbage collector is a bit complicated implementation-wise, which is why C and C++ don't allow it, preferring to depend on explicit dynamic allocation / free from the user.

The problem is that explicit storage management is unsafe as soon as you want to collect unused memory. Ada's ability to return variable size objects will remove one use case for dynamic allocation, and hence, remove one potential source of bugs from your programs.

Rust follows the C/C++ model, but with safe pointer semantics. However, dynamic allocation is still used. Ada can benefit from a possible performance edge because it can use any model.

7.9 Declaring arrays (2)

While we can have array types whose size and bounds are determined at run time, the array's component type needs to be of a definite and constrained type.

Thus, if you need to declare, for example, an array of strings, the **`String`** subtype used as component will need to have a fixed size.

Listing 16: show_days.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  procedure Show_Days is
4     type Days is (Monday, Tuesday, Wednesday,
5                   Thursday, Friday,
6                   Saturday, Sunday);
7
8     subtype Day_Name is String (1 .. 2);
9     --  Subtype of string with known size
10
11    type Days_Name_Type is
12      array (Days) of Day_Name;
13    --       ^ Type of the index
14    --                  ^ Type of the element.
15    --                    Must be definite
```

(continues on next page)

(continued from previous page)

```
16
17    Names : constant Days_Name_Type :=
18      ("Mo", "Tu", "We", "Th", "Fr", "Sa", "Su");
19    --  Initial value given by aggregate
20 begin
21    for I in Names'Range loop
22       Put_Line (Names (I));
23    end loop;
24 end Show_Days;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Arrays.Day_Name_2
MD5: bc66303091c084f66abde72ae59f55a9
```

Runtime output

```
Mo
Tu
We
Th
Fr
Sa
Su
```

7.10 Array slices

One last feature of Ada arrays that we're going to cover is array slices. It is possible to take and use a slice of an array (a contiguous sequence of elements) as a name or a value.

Listing 17: main.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  procedure Main is
4      Buf : String := "Hello ...";
5
6      Full_Name : String := "John Smith";
7  begin
8      Buf (7 .. 9) := "Bob";
9      --  Careful! This works because the string
10     --  on the right side is the same length as
11     --  the replaced slice!
12
13     --  Prints "Hello Bob"
14     Put_Line (Buf);
15
16      --  Prints "Hi John"
17     Put_Line ("Hi " & Full_Name (1 .. 4));
18 end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Arrays.Slices
MD5: cdf582c6c9089658236f5c79b7be4c3f
```

Runtime output

```
Hello Bob
Hi John
```

As we can see above, you can use a slice on the left side of an assignment, to replace only part of an array.

A slice of an array is of the same type as the array, but has a different subtype, constrained by the bounds of the slice.

Attention

Ada has multidimensional arrays[11], which are not covered in this course. Slices will only work on one dimensional arrays.

7.11 Renaming

So far, we've seen that the following elements can be renamed: *subprograms* (page 31), *packages* (page 45), and *record components* (page 67). We can also rename objects by using the **renames** keyword. This allows for creating alternative names for these objects. Let's look at an example:

Listing 18: measurements.ads

```
1  package Measurements is
2
3     subtype Degree_Celsius is Float;
4
5     Current_Temperature : Degree_Celsius;
6
7  end Measurements;
```

Listing 19: main.adb

```
1  with Ada.Text_IO;  use Ada.Text_IO;
2  with Measurements;
3
4  procedure Main is
5     subtype Degrees is
6       Measurements.Degree_Celsius;
7
8     T : Degrees
9           renames Measurements.Current_Temperature;
10 begin
11     T := 5.0;
12
13     Put_Line (Degrees'Image (T));
14     Put_Line (Degrees'Image
15       (Measurements.Current_Temperature));
16
17     T := T + 2.5;
18
19     Put_Line (Degrees'Image (T));
20     Put_Line (Degrees'Image
21       (Measurements.Current_Temperature));
22 end Main;
```

Code block metadata

[11] http://www.ada-auth.org/standards/12rm/html/RM-3-6.html

```
Project: Courses.Intro_To_Ada.Arrays.Variable_Renaming
MD5: 4426aeaa364cb5cf10ff40e1bccb9757
```

Runtime output

```
 5.00000E+00
 5.00000E+00
 7.50000E+00
 7.50000E+00
```

In the example above, we declare a variable T by renaming the `Current_Temperature` object from the `Measurements` package. As you can see by running this example, both `Current_Temperature` and its alternative name T have the same values:

- first, they show the value 5.0
- after the addition, they show the value 7.5.

This is because they are essentially referring to the same object, but with two different names.

Note that, in the example above, we're using `Degrees` as an alias of `Degree_Celsius`. We discussed this method *earlier in the course* (page 62).

Renaming can be useful for improving the readability of more complicated array indexing. Instead of explicitly using indices every time we're accessing certain positions of the array, we can create shorter names for these positions by renaming them. Let's look at the following example:

Listing 20: colors.ads

```
1  package Colors is
2
3     type Color is (Black,
4                    Red,
5                    Green,
6                    Blue,
7                    White);
8
9     type Color_Array is
10      array (Positive range <>) of Color;
11
12    procedure Reverse_It (X : in out Color_Array);
13
14 end Colors;
```

Listing 21: colors.adb

```
1  package body Colors is
2
3     procedure Reverse_It (X : in out Color_Array)
4     is
5     begin
6        for I in X'First ..
7                 (X'Last + X'First) / 2
8        loop
9           declare
10             Tmp     : Color;
11             X_Left  : Color
12               renames X (I);
13             X_Right : Color
14               renames X (X'Last + X'First - I);
15          begin
```

(continues on next page)

(continued from previous page)

```
            Tmp     := X_Left;
            X_Left  := X_Right;
            X_Right := Tmp;
         end;
      end loop;
   end Reverse_It;

end Colors;
```

Listing 22: test_reverse_colors.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Colors; use Colors;

procedure Test_Reverse_Colors is

   My_Colors : Color_Array (1 .. 5) :=
     (Black, Red, Green, Blue, White);

begin
   for C of My_Colors loop
      Put_Line ("My_Color: "
                & Color'Image (C));
   end loop;

   New_Line;
   Put_Line ("Reversing My_Color...");
   New_Line;
   Reverse_It (My_Colors);

   for C of My_Colors loop
      Put_Line ("My_Color: "
                & Color'Image (C));
   end loop;

end Test_Reverse_Colors;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Arrays.Reverse_Colors
MD5: cd9fd7f64d1ec8967e340d57fd7afc0a
```

Runtime output

```
My_Color: BLACK
My_Color: RED
My_Color: GREEN
My_Color: BLUE
My_Color: WHITE

Reversing My_Color...

My_Color: WHITE
My_Color: BLUE
My_Color: GREEN
My_Color: RED
My_Color: BLACK
```

In the example above, package `Colors` implements the procedure `Reverse_It` by declaring new names for two positions of the array. The actual implementation becomes easy to read:

```
begin
   Tmp     := X_Left;
   X_Left  := X_Right;
   X_Right := Tmp;
end;
```

Compare this to the alternative version without renaming:

```
begin
   Tmp                      := X (I);
   X (I)                    := X (X'Last +
                               X'First - I);
   X (X'Last + X'First - I) := Tmp;
end;
```

CHAPTER

EIGHT

MORE ABOUT TYPES

8.1 Aggregates: A primer

So far, we have talked about aggregates quite a bit and have seen a number of examples. Now we will revisit this feature in some more detail.

An Ada aggregate is, in effect, a literal value for a composite type. It's a very powerful notation that helps you to avoid writing procedural code for the initialization of your data structures in many cases.

A basic rule when writing aggregates is that *every component* of the array or record has to be specified, even components that have a default value.

This means that the following code is incorrect:

Listing 1: incorrect.ads

```
package Incorrect is
   type Point is record
      X, Y : Integer := 0;
   end record;

   Origin : Point := (X => 0);
end Incorrect;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.More_About_Types.Incorrect_Aggregate
MD5: 80a3475dece1c42cfb67b1d57b5bd464
```

Build output

```
incorrect.ads:6:22: error: no value supplied for component "Y"
gprbuild: *** compilation phase failed
```

There are a few shortcuts that you can use to make the notation more convenient:

- To specify the default value for a component, you can use the <> notation.
- You can use the | symbol to give several components the same value.
- You can use the **others** choice to refer to every component that has not yet been specified, provided all those fields have the same type.
- You can use the range notation `..` to refer to specify a contiguous sequence of indices in an array.

However, note that as soon as you used a named association, all subsequent components likewise need to be specified with named associations.

Listing 2: points.ads

```
package Points is
   type Point is record
      X, Y : Integer := 0;
   end record;

   type Point_Array is
     array (Positive range <>) of Point;

   --  use the default values
   Origin   : Point := (X | Y => <>);

   --  likewise, use the defaults
   Origin_2 : Point := (others => <>);

   Points_1 : Point_Array := ((1, 2), (3, 4));
   Points_2 : Point_Array := (1       => (1, 2),
                              2       => (3, 4),
                              3 .. 20 => <>);
end Points;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.More_About_Types.Points
MD5: 48ea183a42f203325ed6190fbd8493d9
```

8.2 Overloading and qualified expressions

Ada has a general concept of name overloading, which we saw earlier in the section on *enumeration types* (page 51).

Let's take a simple example: it is possible in Ada to have functions that have the same name, but different types for their parameters.

Listing 3: pkg.ads

```
package Pkg is
   function F (A : Integer) return Integer;
   function F (A : Character) return Integer;
end Pkg;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.More_About_Types.Overloading
MD5: defae85228ee183b536af395d077e71e
```

This is a common concept in programming languages, called overloading[12], or name overloading.

One of the novel aspects of Ada's overloading facility is the ability to resolve overloading based on the return type of a function.

Listing 4: pkg.ads

```
package Pkg is
   type SSID is new Integer;

```

(continues on next page)

[12] https://en.wikipedia.org/wiki/Function_overloading

(continued from previous page)

```
   function Convert (Self : SSID)
                     return Integer;
   function Convert (Self : SSID)
                     return String;
end Pkg;
```

Listing 5: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Pkg;         use Pkg;

procedure Main is
   S : String := Convert (123_145_299);
   --            ^ Valid, will choose the
   --              proper Convert
begin
   Put_Line (S);
end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.More_About_Types.Overloading
MD5: aa556b55ee89f9c5f8f7e138d84c27b8
```

> **Attention**
>
> Note that overload resolution based on the type is allowed for both functions and enumeration literals in Ada - which is why you can have multiple enumeration literals with the same name. Semantically, an enumeration literal is treated like a function that has no parameters.

However, sometimes an ambiguity makes it impossible to resolve which declaration of an overloaded name a given occurrence of the name refers to. This is where a qualified expression becomes useful.

Listing 6: pkg.ads

```
package Pkg is
   type SSID is new Integer;

   function Convert (Self : SSID)
                     return Integer;
   function Convert (Self : SSID)
                     return String;
   function Convert (Self : Integer)
                     return String;
end Pkg;
```

Listing 7: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Pkg;         use Pkg;

procedure Main is
   S : String := Convert (123_145_299);
   --            ^ Invalid, which convert
   --              should we call?

```

(continues on next page)

(continued from previous page)

```
   S2 : String := Convert (SSID'(123_145_299));
   --                     ^ We specify that the
   --                       type of the
   --                       expression is SSID.

   --  We could also have declared a temporary

   I : SSID := 123_145_299;

   S3 : String := Convert (I);
begin
   Put_Line (S);
end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.More_About_Types.Overloading_Error
MD5: 722660d8b692cde65a1c2b7800dd78c4
```

Syntactically the target of a qualified expression can be either any expression in parentheses, or an aggregate:

Listing 8: qual_expr.ads

```
package Qual_Expr is
   type Point is record
      A, B : Integer;
   end record;

   P : Point := Point'(12, 15);

   A : Integer := Integer'(12);
end Qual_Expr;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.More_About_Types.Qual_Expr
MD5: e71523eb441a28a4f6549d5f0418620a
```

This illustrates that qualified expressions are a convenient (and sometimes necessary) way for the programmer to make the type of an expression explicit, for the compiler of course, but also for other programmers.

Attention

While they look and feel similar, type conversions and qualified expressions are *not* the same.

A qualified expression specifies the exact type that the target expression will be resolved to, whereas a type conversion will try to convert the target and issue a run-time error if the target value cannot be so converted.

Note that you can use a qualified expression to convert from one subtype to another, with an exception raised if a constraint is violated.

```
X : Integer := Natural'(1);
```

8.3 Character types

As noted earlier, each enumeration type is distinct and incompatible with every other enumeration type. However, what we did not mention previously is that character literals are permitted as enumeration literals. This means that in addition to the language's strongly typed character types, user-defined character types are also permitted:

Listing 9: character_example.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Character_Example is
   type My_Char is ('a', 'b', 'c');
   --  Our custom character type, an
   --  enumeration type with 3 valid values.

   C : Character;
   --  ^ Built-in character type
   --    (it's an enumeration type)

   M : My_Char;
begin
   C := '?';
   --   ^ Character literal
   --     (enumeration literal)

   M := 'a';

   C := 65;
   --   ^ Invalid: 65 is not a
   --     Character value

   C := Character'Val (65);
   --  Assign the character at
   --  position 65 in the
   --  enumeration (which is 'A')

   M := C;
   --   ^ Invalid: C is of type Character,
   --     and M is a My_Char

   M := 'd';
   --   ^ Invalid: 'd' is not a valid
   --     literal for type My_Char
end Character_Example;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.More_About_Types.Character_Example
MD5: e4c5a07dbe8745749056f8c110d69fa3
```

Build output

```
character_example.adb:20:09: error: expected type "Standard.Character"
character_example.adb:20:09: error: found type universal integer
character_example.adb:29:09: error: expected type "My_Char" defined at line 4
character_example.adb:29:09: error: found type "Standard.Character"
character_example.adb:33:09: error: character not defined for type "My_Char"␣
 ↪defined at line 4
gprbuild: *** compilation phase failed
```

In this example, we're using characters in the definition of `My_Char`.

CHAPTER

NINE

ACCESS TYPES (POINTERS)

9.1 Overview

Pointers are a potentially dangerous construct, which conflicts with Ada's underlying philosophy.

There are two ways in which Ada helps shield programmers from the dangers of pointers:

1. One approach, which we have already seen, is to provide alternative features so that the programmer does not need to use pointers. Parameter modes, arrays, and varying size types are all constructs that can replace typical pointer usages in C.
2. Second, Ada has made pointers as safe and restricted as possible, but allows "escape hatches" when the programmer explicitly requests them and presumably will be exercising such features with appropriate care.

Here is how you declare a simple pointer type, or access type, in Ada:

Listing 1: dates.ads

```
package Dates is
   type Months is
     (January, February, March, April,
      May, June, July, August, September,
      October, November, December);

   type Date is record
      Day   : Integer range 1 .. 31;
      Month : Months;
      Year  : Integer;
   end record;
end Dates;
```

Listing 2: access_types.ads

```
with Dates; use Dates;

package Access_Types is
    --  Declare an access type
    type Date_Acc is access Date;
    --                      ^ "Designated type"
    --                      ^ Date_Acc values
    --                        point to Date
    --                        objects

    D : Date_Acc := null;
    --              ^ Literal for
    --                "access to nothing"
```

(continues on next page)

(continued from previous page)

```
14     --  ^ Access to date
15 end Access_Types;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Access_Types.Access_Types
MD5: d3421918c48c221836bdf03b9e68bfb5
```

This illustrates how to:

- Declare an access type whose values point to ("designate") objects from a specific type
- Declare a variable (access value) from this access type
- Give it a value of **null**

In line with Ada's strong typing philosophy, if you declare a second access type whose designated type is Date, the two access types will be incompatible with each other:

Listing 3: access_types.ads

```
1  with Dates; use Dates;
2
3  package Access_Types is
4      --  Declare an access type
5      type Date_Acc   is access Date;
6      type Date_Acc_2 is access Date;
7
8      D  : Date_Acc   := null;
9      D2 : Date_Acc_2 := D;
10     --                 ^ Invalid! Different types
11 end Access_Types;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Access_Types.Access_Types
MD5: af0dff5a26cb16f0fe15c84286557a44
```

Build output

```
access_types.ads:9:24: error: expected type "Date_Acc_2" defined at line 6
access_types.ads:9:24: error: found type "Date_Acc" defined at line 5
gprbuild: *** compilation phase failed
```

In other languages

In most other languages, pointer types are structurally, not nominally typed, like they are in Ada, which means that two pointer types will be the same as long as they share the same target type and accessibility rules.

Not so in Ada, which takes some time getting used to. A seemingly simple problem is, if you want to have a canonical access to a type, where should it be declared? A commonly used pattern is that if you need an access type to a specific type you "own", you will declare it along with the type:

```
package Access_Types is
   type Point is record
      X, Y : Natural;
   end record;

   type Point_Access is access Point;
end Access_Types;
```

9.2 Allocation (by type)

Once we have declared an access type, we need a way to give variables of the types a meaningful value! You can allocate a value of an access type with the **new** keyword in Ada.

Listing 4: access_types.ads

```
with Dates; use Dates;

package Access_Types is
    type Date_Acc is access Date;

    D : Date_Acc := new Date;
    --              ^ Allocate a new Date record
end Access_Types;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Access_Types.Access_Types
MD5: e0be95b966e4aebaaf25db646d60c35c
```

If the type you want to allocate needs constraints, you can put them in the subtype indication, just as you would do in a variable declaration:

Listing 5: access_types.ads

```
with Dates; use Dates;

package Access_Types is
   type String_Acc is access String;
   --                        ^
   --  Access to unconstrained array type
   Msg : String_Acc;
   --    ^ Default value is null

   Buffer : String_Acc :=
     new String (1 .. 10);
   --            ^ Constraint required
end Access_Types;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Access_Types.Access_Types
MD5: 83cf7a1074ff1b739658508098aa8208
```

In some cases, though, allocating just by specifying the type is not ideal, so Ada also allows you to initialize along with the allocation. This is done via the qualified expression syntax:

Listing 6: access_types.ads

```
with Dates; use Dates;

package Access_Types is
   type Date_Acc is access Date;
   type String_Acc is access String;

   D   : Date_Acc   :=
           new Date'(30, November, 2011);
```

(continues on next page)

(continued from previous page)

```
   Msg : String_Acc := new String'("Hello");
end Access_Types;
```

9.3 Dereferencing

The last important piece of Ada's access type facility is how to get from an access value to the object that is pointed to, that is, how to dereference the pointer. Dereferencing a pointer uses the `.all` syntax in Ada, but is often not needed — in many cases, the access value will be implicitly dereferenced for you:

Listing 7: access_types.ads

```
with Dates; use Dates;

package Access_Types is
   type Date_Acc is access Date;

   D     : Date_Acc :=
             new Date'(30, November, 2011);

   Today : Date := D.all;
   --              ^ Access value dereference
   J     : Integer := D.Day;
   --                 ^ Implicit dereference
   --                   for record and array
   --                   components
   --                   Equivalent to D.all.day
end Access_Types;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Access_Types.Access_Types
MD5: 5cd1c259da04010b0dc1b43e9bd93b55
```

9.4 Other features

As you might know if you have used pointers in C or C++, we are still missing features that are considered fundamental to the use of pointers, such as:

- Pointer arithmetic (being able to increment or decrement a pointer in order to point to the next or previous object)
- Manual deallocation - what is called `free` or `delete` in C. This is a potentially unsafe operation. To keep within the realm of safe Ada, you need to never deallocate manually.

Those features exist in Ada, but are only available through specific standard library APIs.

Attention

The guideline in Ada is that most of the time you can avoid manual allocation, and you should.

There are many ways to avoid manual allocation, some of which have been covered (such as parameter modes). The language also provides library abstractions to avoid pointers:

1. One is the use of *containers* (page 203). Containers help users avoid pointers, because container memory is automatically managed.
2. A container to note in this context is the Indefinite holder[13]. This container allows you to store a value of an indefinite type such as String.
3. GNATCOLL has a library for smart pointers, called Refcount[14] Those pointers' memory is automatically managed, so that when an allocated object has no more references to it, the memory is automatically deallocated.

9.5 Mutually recursive types

The linked list is a common idiom in data structures; in Ada this would be most naturally defined through two types, a record type and an access type, that are mutually dependent. To declare mutually dependent types, you can use an incomplete type declaration:

Listing 8: simple_list.ads

```
1  package Simple_List is
2     type Node;
3     --  This is an incomplete type declaration,
4     --  which is completed in the same
5     --  declarative region.
6
7     type Node_Acc is access Node;
8
9     type Node is record
10       Content    : Natural;
11       Prev, Next : Node_Acc;
12    end record;
13 end Simple_List;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Access_Types.Simple_List
MD5: 4929b89c1fc913da635fa02e48248271
```

In this example, the Node and Node_Acc types are mutually dependent.

[13] http://www.ada-auth.org/standards/12rat/html/Rat12-8-5.html
[14] https://github.com/AdaCore/gnatcoll-core/blob/master/src/gnatcoll-refcount.ads

CHAPTER

TEN

MORE ABOUT RECORDS

10.1 Dynamically sized record types

We have previously seen *some simple examples of record types* (page 65). Let's now look at some of the more advanced properties of this fundamental language feature.

One point to note is that object size for a record type does not need to be known at compile time. This is illustrated in the example below:

Listing 1: runtime_length.ads

```
package Runtime_Length is
   function Compute_Max_Len return Natural;
end Runtime_Length;
```

Listing 2: var_size_record.ads

```
with Runtime_Length; use Runtime_Length;

package Var_Size_Record is
    Max_Len : constant Natural :=
                Compute_Max_Len;
    --          ^ Not known at compile time

    type Items_Array is
      array (Positive range <>) of Integer;

    type Growable_Stack is record
       Items : Items_Array (1 .. Max_Len);
       Len   : Natural;
    end record;
    --  Growable_Stack is a definite type, but
    --  size is not known at compile time.

    G : Growable_Stack;
end Var_Size_Record;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.More_About_Records.Var_Size_Record
MD5: 6fb0b3f2b685a72ec694640ce378f77c
```

It is completely fine to determine the size of your records at run time, but note that all objects of this type will have the same size.

10.2 Records with discriminant

In the example above, the size of the Items field is determined once, at run-time, but every `Growable_Stack` instance will be exactly the same size. But maybe that's not what you want to do. We saw that arrays in general offer this flexibility: for an unconstrained array type, different objects can have different sizes.

You can get analogous functionality for records, too, using a special kind of field that is called a discriminant:

Listing 3: var_size_record_2.ads

```
package Var_Size_Record_2 is
    type Items_Array is
      array (Positive range <>) of Integer;

    type Growable_Stack (Max_Len : Natural) is
    record
    --                    ^ Discriminant. Cannot be
    --                      modified once
    --                      initialized.
       Items : Items_Array (1 .. Max_Len);
       Len   : Natural := 0;
    end record;
    --  Growable_Stack is an indefinite type
    --  (like an array)
end Var_Size_Record_2;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.More_About_Records.Var_Size_Record_2
MD5: 0c2ffe41b7553984e1ef48a50386559f
```

Discriminants, in their simple forms, are constant: You cannot modify them once you have initialized the object. This intuitively makes sense since they determine the size of the object.

Also, they make a type indefinite: Whether or not the discriminant is used to specify the size of an object, a type with a discriminant will be indefinite if the discriminant is not declared with an initialization:

Listing 4: test_discriminants.ads

```
package Test_Discriminants is
   type Point (X, Y : Natural) is record
      null;
   end record;

   P : Point;
   --  ERROR: Point is indefinite, so you
   --  need to specify the discriminants
   --  or give a default value

   P2 : Point (1, 2);
   P3 : Point := (1, 2);
   --  Those two declarations are equivalent.

end Test_Discriminants;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.More_About_Records.Test_Discriminants
MD5: c3ec81ccae0d4144fe952ad99482be81
```

Build output

```
test_discriminants.ads:6:08: error: unconstrained subtype not allowed (need␣
 ↪initialization)
test_discriminants.ads:6:08: error: provide initial value or explicit discriminant␣
 ↪values
test_discriminants.ads:6:08: error: or give default discriminant values for type
 ↪"Point"
gprbuild: *** compilation phase failed
```

This also means that, in the example above, you cannot declare an array of Point values, because the size of a Point is not known.

As mentioned in the example above, we could provide a default value for the discriminants, so that we could legally declare `Point` values without specifying the discriminants. For the example above, this is how it would look:

Listing 5: test_discriminants.ads

```
1  package Test_Discriminants is
2     type Point (X, Y : Natural := 0) is record
3        null;
4     end record;
5
6     P : Point;
7     --  We can now simply declare a "Point"
8     --  without further ado. In this case,
9     --  we're using the default values (0)
10    --  for X and Y.
11
12    P2 : Point (1, 2);
13    P3 : Point := (1, 2);
14    --  We can still specify discriminants.
15
16 end Test_Discriminants;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.More_About_Records.Test_Discriminants
MD5: 259f6cdf7fa857cc006dac6d1daedd73
```

Also note that, even though the `Point` type now has default discriminants, we can still specify discriminants, as we're doing in the declarations of P2 and P3.

In most other respects discriminants behave like regular fields: You have to specify their values in aggregates, as seen above, and you can access their values via the dot notation.

Listing 6: main.adb

```
1  with Ada.Text_IO;       use Ada.Text_IO;
2
3  with Var_Size_Record_2; use Var_Size_Record_2;
4
5  procedure Main is
6     procedure Print_Stack (G : Growable_Stack) is
7     begin
8        Put ("<Stack, items: [");
9        for I in G.Items'Range loop
10          exit when I > G.Len;
```

(continues on next page)

(continued from previous page)

```
         Put (" " & Integer'Image (G.Items (I)));
      end loop;
      Put_Line ("]>");
   end Print_Stack;

   S : Growable_Stack :=
     (Max_Len => 128,
      Items   => (1, 2, 3, 4, others => <>),
      Len     => 4);
begin
   Print_Stack (S);
end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.More_About_Records.Var_Size_Record_2
MD5: 4e8c102cd93dc5d8aa1b402589c5239b
```

Runtime output

```
<Stack, items: [  1  2  3  4]>
```

Note

In the examples above, we used a discriminant to determine the size of an array, but it is not limited to that, and could be used, for example, to determine the size of a nested discriminated record.

10.3 Variant records

The examples of discriminants thus far have illustrated the declaration of records of varying size, by having components whose size depends on the discriminant.

However, discriminants can also be used to obtain the functionality of what are sometimes called "variant records": records that can contain different sets of fields.

Listing 7: variant_record.ads

```
package Variant_Record is
   --  Forward declaration of Expr
   type Expr;

   --  Access to a Expr
   type Expr_Access is access Expr;

   type Expr_Kind_Type is (Bin_Op_Plus,
                           Bin_Op_Minus,
                           Num);
   --  A regular enumeration type

   type Expr (Kind : Expr_Kind_Type) is record
      --       ^ The discriminant is an
      --         enumeration value
      case Kind is
         when Bin_Op_Plus | Bin_Op_Minus =>
            Left, Right : Expr_Access;
         when Num =>
```

(continues on next page)

(continued from previous page)

```
            Val : Integer;
      end case;
      --  Variant part. Only one, at the end of
      --  the record definition, but can be
      --  nested
   end record;
end Variant_Record;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.More_About_Records.Variant_Record
MD5: af9c1edca3ed6b2d938249c7258806b1
```

The fields that are in a **when** branch will be only available when the value of the discriminant is covered by the branch. In the example above, you will only be able to access the fields `Left` and `Right` when the `Kind` is `Bin_Op_Plus` or `Bin_Op_Minus`.

If you try to access a field that is not valid for your record, a `Constraint_Error` will be raised.

Listing 8: main.adb

```
with Variant_Record; use Variant_Record;

procedure Main is
   E : Expr := (Num, 12);
begin
   E.Left := new Expr'(Num, 15);
   --  Will compile but fail at runtime
end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.More_About_Records.Variant_Record
MD5: d157d5f96db0825b9376ba7fca9613ed
```

Build output

```
main.adb:6:05: warning: component not present in subtype of "Expr" defined at line␣
↪4 [enabled by default]
main.adb:6:05: warning: Constraint_Error will be raised at run time [enabled by␣
↪default]
```

Runtime output

```

raised CONSTRAINT_ERROR : main.adb:6 discriminant check failed
```

Here is how you could write an evaluator for expressions:

Listing 9: main.adb

```
with Ada.Text_IO;    use Ada.Text_IO;

with Variant_Record; use Variant_Record;

procedure Main is
   function Eval_Expr (E : Expr) return Integer is
     (case E.Kind is
      when Bin_Op_Plus  =>
             Eval_Expr (E.Left.all)
```

(continues on next page)

(continued from previous page)

```
            + Eval_Expr (E.Right.all),
      when Bin_Op_Minus =>
            Eval_Expr (E.Left.all)
            - Eval_Expr (E.Right.all),
      when Num => E.Val);

   E : Expr := (Bin_Op_Plus,
                new Expr'(Bin_Op_Minus,
                          new Expr'(Num, 12),
                          new Expr'(Num, 15)),
                new Expr'(Num, 3));
begin
   Put_Line (Integer'Image (Eval_Expr (E)));
end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.More_About_Records.Variant_Record
MD5: 807dbb921b44b3eaeaf1baf6ffe1afaa
```

Runtime output

```
 0
```

In other languages

Ada's variant records are very similar to Sum types in functional languages such as OCaml or Haskell. A major difference is that the discriminant is a separate field in Ada, whereas the 'tag' of a Sum type is kind of built in, and only accessible with pattern matching.

There are other differences (you can have several discriminants in a variant record in Ada). Nevertheless, they allow the same kind of type modeling as sum types in functional languages.

Compared to C/C++ unions, Ada variant records are more powerful in what they allow, and are also checked at run time, which makes them safer.

CHAPTER

ELEVEN

FIXED-POINT TYPES

11.1 Decimal fixed-point types

We have already seen how to specify floating-point types. However, in some applications floating-point is not appropriate since, for example, the roundoff error from binary arithmetic may be unacceptable or perhaps the hardware does not support floating-point instructions. Ada provides a category of types, the decimal fixed-point types, that allows the programmer to specify the required decimal precision (number of digits) as well as the scaling factor (a power of ten) and, optionally, a range. In effect the values will be represented as integers implicitly scaled by the specified power of 10. This is useful, for example, for financial applications.

The syntax for a simple decimal fixed-point type is

```
type <type-name> is delta <delta-value> digits <digits-value>;
```

In this case, the **delta** and the **digits** will be used by the compiler to derive a range.

Several attributes are useful for dealing with decimal types:

Attribute Name	Meaning
First	The first value of the type
Last	The last value of the type
Delta	The delta value of the type

In the example below, we declare two data types: T3_D3 and T6_D3. For both types, the delta value is the same: 0.001.

Listing 1: decimal_fixed_point_types.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  procedure Decimal_Fixed_Point_Types is
4     type T3_D3 is delta 10.0 ** (-3) digits 3;
5     type T6_D3 is delta 10.0 ** (-3) digits 6;
6  begin
7     Put_Line ("The delta    value of T3_D3 is "
8               & T3_D3'Image (T3_D3'Delta));
9     Put_Line ("The minimum  value of T3_D3 is "
10              & T3_D3'Image (T3_D3'First));
11    Put_Line ("The maximum  value of T3_D3 is "
12              & T3_D3'Image (T3_D3'Last));
13    New_Line;
14
15    Put_Line ("The delta    value of T6_D3 is "
16              & T6_D3'Image (T6_D3'Delta));
```

(continues on next page)

(continued from previous page)

```
   Put_Line ("The minimum  value of T6_D3 is "
             & T6_D3'Image (T6_D3'First));
   Put_Line ("The maximum  value of T6_D3 is "
             & T6_D3'Image (T6_D3'Last));
end Decimal_Fixed_Point_Types;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Fixed_Point_Types.Decimal_Fixed_Point_Types
MD5: 6b1f6bfa555031b831aa872187c8bee9
```

Runtime output

```
The delta    value of T3_D3 is  0.001
The minimum  value of T3_D3 is -0.999
The maximum  value of T3_D3 is  0.999

The delta    value of T6_D3 is  0.001
The minimum  value of T6_D3 is -999.999
The maximum  value of T6_D3 is  999.999
```

When running the application, we see that the delta value of both types is indeed the same: 0.001. However, because T3_D3 is restricted to 3 digits, its range is -0.999 to 0.999. For the T6_D3, we have defined a precision of 6 digits, so the range is -999.999 to 999.999.

Similar to the type definition using the **range** syntax, because we have an implicit range, the compiled code will check that the variables contain values that are not out-of-range. Also, if the result of a multiplication or division on decimal fixed-point types is smaller than the delta value required for the context, the actual result will be zero. For example:

Listing 2: decimal_fixed_point_smaller.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Decimal_Fixed_Point_Smaller is
   type T3_D3 is delta 10.0 ** (-3) digits 3;
   type T6_D6 is delta 10.0 ** (-6) digits 6;
   A : T3_D3 := T3_D3'Delta;
   B : T3_D3 := 0.5;
   C : T6_D6;
begin
   Put_Line ("The value of A     is "
             & T3_D3'Image (A));

   A := A * B;
   Put_Line ("The value of A * B is "
             & T3_D3'Image (A));

   A := T3_D3'Delta;
   C := A * B;
   Put_Line ("The value of A * B is "
             & T6_D6'Image (C));
end Decimal_Fixed_Point_Smaller;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Fixed_Point_Types.Decimal_Fixed_Point_Smaller
MD5: 6b0242caa4a79f9b3447a304002e6a3b
```

Runtime output

```
The value of A     is  0.001
The value of A * B is  0.000
The value of A * B is  0.000500
```

In this example, the result of the operation 0.001 * 0.5 is 0.0005. Since this value is not representable for the T3_D3 type because the delta value is 0.001, the actual value stored in variable A is zero. However, accuracy is preserved during the arithmetic operations if the target has sufficient precision, and the value displayed for C is 0.000500.

11.2 Ordinary fixed-point types

Ordinary fixed-point types are similar to decimal fixed-point types in that the values are, in effect, scaled integers. The difference between them is in the scale factor: for a decimal fixed-point type, the scaling, given explicitly by the type's **delta**, is always a power of ten.

In contrast, for an ordinary fixed-point type, the scaling is defined by the type's `small`, which is derived from the specified **delta** and, by default, is a power of two. Therefore, ordinary fixed-point types are sometimes called binary fixed-point types.

> **Note**
>
> Ordinary fixed-point types can be thought of being closer to the actual representation on the machine, since hardware support for decimal fixed-point arithmetic is not widespread (rescalings by a power of ten), while ordinary fixed-point types make use of the available integer shift instructions.

The syntax for an ordinary fixed-point type is

```
type <type-name> is
  delta <delta-value>
  range <lower-bound> .. <upper-bound>;
```

By default the compiler will choose a scale factor, or `small`, that is a power of 2 no greater than <delta-value>.

For example, we may define a normalized range between -1.0 and 1.0 as following:

Listing 3: normalized_fixed_point_type.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  procedure Normalized_Fixed_Point_Type is
4     D : constant := 2.0 ** (-31);
5     type TQ31 is delta D range -1.0 .. 1.0 - D;
6  begin
7     Put_Line ("TQ31 requires "
8               & Integer'Image (TQ31'Size)
9               & " bits");
10    Put_Line ("The delta    value of TQ31 is "
11              & TQ31'Image (TQ31'Delta));
12    Put_Line ("The minimum  value of TQ31 is "
13              & TQ31'Image (TQ31'First));
14    Put_Line ("The maximum  value of TQ31 is "
15              & TQ31'Image (TQ31'Last));
16 end Normalized_Fixed_Point_Type;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Fixed_Point_Types.Normalized_Fixed_Point_Type
MD5: 778dde401c7ff3dd42938dccfe6cf9d3
```

Runtime output

```
TQ31 requires  32 bits
The delta    value of TQ31 is  0.0000000005
The minimum  value of TQ31 is -1.0000000000
The maximum  value of TQ31 is  0.9999999995
```

In this example, we are defining a 32-bit fixed-point data type for our normalized range. When running the application, we notice that the upper bound is close to one, but not exact one. This is a typical effect of fixed-point data types — you can find more details in this discussion about the Q format[15].

We may also rewrite this code with an exact type definition:

Listing 4: normalized_adapted_fixed_point_type.adb

```
procedure Normalized_Adapted_Fixed_Point_Type is
   type TQ31 is
     delta 2.0 ** (-31)
     range -1.0 .. 1.0 - 2.0 ** (-31);
begin
   null;
end Normalized_Adapted_Fixed_Point_Type;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Fixed_Point_Types.Normalized_Adapted_Fixed_Point_Type
MD5: 3421800bb47b282d601a51d276944f62
```

We may also use any other range. For example:

Listing 5: custom_fixed_point_range.adb

```
with Ada.Text_IO;  use Ada.Text_IO;
with Ada.Numerics; use Ada.Numerics;

procedure Custom_Fixed_Point_Range is
   type T_Inv_Trig is
     delta 2.0 ** (-15) * Pi
     range -Pi / 2.0 .. Pi / 2.0;
begin
   Put_Line ("T_Inv_Trig requires "
             & Integer'Image (T_Inv_Trig'Size)
             & " bits");
   Put_Line ("Delta    value of T_Inv_Trig: "
             & T_Inv_Trig'Image
                 (T_Inv_Trig'Delta));
   Put_Line ("Minimum  value of T_Inv_Trig: "
             & T_Inv_Trig'Image
                 (T_Inv_Trig'First));
   Put_Line ("Maximum  value of T_Inv_Trig: "
             & T_Inv_Trig'Image
                 (T_Inv_Trig'Last));
end Custom_Fixed_Point_Range;
```

Code block metadata

[15] https://en.wikipedia.org/wiki/Q_(number_format)

```
Project: Courses.Intro_To_Ada.Fixed_Point_Types.Custom_Fixed_Point_Range
MD5: a3e6c549cb1070aa285857ae8813de27
```

Runtime output

```
T_Inv_Trig requires  16 bits
Delta    value of T_Inv_Trig:  0.00006
Minimum  value of T_Inv_Trig: -1.57080
Maximum  value of T_Inv_Trig:  1.57080
```

In this example, we are defining a 16-bit type called `T_Inv_Trig`, which has a range from -π/2 to π/2.

All standard operations are available for fixed-point types. For example:

Listing 6: fixed_point_op.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Fixed_Point_Op is
   type TQ31 is
     delta 2.0 ** (-31)
     range -1.0 .. 1.0 - 2.0 ** (-31);

   A, B, R : TQ31;
begin
   A := 0.25;
   B := 0.50;
   R := A + B;
   Put_Line ("R is " & TQ31'Image (R));
end Fixed_Point_Op;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Fixed_Point_Types.Fixed_Point_Op
MD5: cad218b70b7fb0621468027a807431b1
```

Runtime output

```
R is  0.7500000000
```

As expected, R contains 0.75 after the addition of A and B.

In fact the language is more general than these examples imply, since in practice it is typical to need to multiply or divide values from different fixed-point types, and obtain a result that may be of a third fixed-point type. The details are outside the scope of this introductory course.

It is also worth noting, although again the details are outside the scope of this course, that you can explicitly specify a value for an ordinary fixed-point type's `small`. This allows non-binary scaling, for example:

```
type Angle is
  delta 1.0/3600.0
  range 0.0 .. 360.0 - 1.0 / 3600.0;
for Angle'Small use Angle'Delta;
```

CHAPTER

TWELVE

PRIVACY

One of the main principles of modular programming, as well as object oriented programming, is encapsulation[16].

Encapsulation, briefly, is the concept that the implementer of a piece of software will distinguish between the code's public interface and its private implementation.

This is not only applicable to software libraries but wherever abstraction is used.

In Ada, the granularity of encapsulation is a bit different from most object-oriented languages, because privacy is generally specified at the package level.

12.1 Basic encapsulation

Listing 1: encapsulate.ads

```
1  package Encapsulate is
2     procedure Hello;
3
4  private
5
6     procedure Hello2;
7     --  Not visible from external units
8  end Encapsulate;
```

Listing 2: encapsulate.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  package body Encapsulate is
4
5     procedure Hello is
6     begin
7        Put_Line ("Hello");
8     end Hello;
9
10    procedure Hello2 is
11    begin
12       Put_Line ("Hello #2");
13    end Hello2;
14
15 end Encapsulate;
```

[16] https://en.wikipedia.org/wiki/Encapsulation_(computer_programming)

Listing 3: main.adb

```
with Encapsulate;

procedure Main is
begin
   Encapsulate.Hello;
   Encapsulate.Hello2;
   --  Invalid: Hello2 is not visible
end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Privacy.Encapsulate
MD5: cf56ee89481962d1e0a6d1e9ad888362
```

Build output

```
main.adb:6:15: error: "Hello2" is not a visible entity of "Encapsulate"
gprbuild: *** compilation phase failed
```

12.2 Abstract data types

With this high-level granularity, it might not seem obvious how to hide the implementation details of a type. Here is how it can be done in Ada:

Listing 4: stacks.ads

```
package Stacks is
   type Stack is private;
   --  Declare a private type: You cannot depend
   --  on its implementation. You can only assign
   --  and test for equality.

   procedure Push (S   : in out Stack;
                   Val :        Integer);
   procedure Pop (S   : in out Stack;
                  Val :    out Integer);
private

   subtype Stack_Index is
     Natural range 1 .. 10;

   type Content_Type is
     array (Stack_Index) of Natural;

   type Stack is record
      Top     : Stack_Index;
      Content : Content_Type;
   end record;
end Stacks;
```

Listing 5: stacks.adb

```
package body Stacks is

   procedure Push (S   : in out Stack;
                   Val :        Integer) is
   begin
```

(continues on next page)

(continued from previous page)

```
      --  Missing implementation!
      null;
   end Push;

   procedure Pop (S   : in out Stack;
                  Val :    out Integer) is
   begin
      --  Dummy implementation!
      Val := 0;
   end Pop;

end Stacks;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Privacy.Stacks
MD5: 364df7c6806af4a1bc957c2c2d53b2cc
```

In the above example, we define a stack type in the public part (known as the *visible part* of the package spec in Ada), but the exact representation of that type is private.

Then, in the private part, we define the representation of that type. We can also declare other types that will be used as *helpers* for our main public type. This is useful since declaring helper types is common in Ada.

A few words about terminology:

- The `Stack` type as viewed from the public part is called the partial view of the type. This is what clients have access to.
- The `Stack` type as viewed from the private part or the body of the package is called the full view of the type. This is what implementers have access to.

From the point of view of the client (the *with*'ing unit), only the public (visible) part is important, and the private part could as well not exist. It makes it very easy to read linearly the part of the package that is important for you.

```
--  No need to read the private part to use the package
package Stacks is
   type Stack is private;

   procedure Push (S   : in out Stack;
                   Val :        Integer);
   procedure Pop (S   : in out Stack;
                  Val :    out Integer);
private
   ...
end Stacks;
```

Here is how the `Stacks` package would be used:

```
--  Example of use
with Stacks; use Stacks;

procedure Test_Stack is
   S : Stack;
   Res : Integer;
begin
   Push (S, 5);
   Push (S, 7);
   Pop (S, Res);
end Test_Stack;
```

12.3 Limited types

Ada's *limited type* facility allows you to declare a type for which assignment and comparison operations are not automatically provided.

Listing 6: stacks.ads

```
package Stacks is
   type Stack is limited private;
   --  Limited type. Cannot assign nor compare.

   procedure Push (S   : in out Stack;
                   Val :        Integer);
   procedure Pop (S   : in out Stack;
                  Val :    out Integer);
private
   subtype Stack_Index is
     Natural range 1 .. 10;

   type Content_Type is
     array (Stack_Index) of Natural;

   type Stack is limited record
      Top     : Stack_Index;
      Content : Content_Type;
   end record;
end Stacks;
```

Listing 7: stacks.adb

```
package body Stacks is

   procedure Push (S   : in out Stack;
                   Val :        Integer) is
   begin
      --  Missing implementation!
      null;
   end Push;

   procedure Pop (S   : in out Stack;
                  Val :    out Integer) is
   begin
      --  Dummy implementation!
      Val := 0;
   end Pop;

end Stacks;
```

Listing 8: main.adb

```
with Stacks; use Stacks;

procedure Main is
   S, S2 : Stack;
begin
   S := S2;
   --  Illegal: S is limited.
end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Privacy.Limited_Stacks
MD5: 811343b46f20ac6af5e1bf26561f8d8d
```

Build output

```
main.adb:6:04: error: left hand of assignment must not be limited type
gprbuild: *** compilation phase failed
```

This is useful because, for example, for some data types the built-in assignment operation might be incorrect (for example when a deep copy is required).

Ada does allow you to overload the comparison operators = and /= for limited types (and to override the built-in declarations for non-limited types).

Ada also allows you to implement special semantics for assignment via controlled types[17]. However, in some cases assignment is simply inappropriate; one example is the **File_Type** from the Ada.Text_IO package, which is declared as a limited type and thus attempts to assign one file to another would be detected as illegal.

12.4 Child packages & privacy

We've seen previously (in the *child packages section* (page 39)) that packages can have child packages. Privacy plays an important role in child packages. This section discusses some of the privacy rules that apply to child packages.

Although the private part of a package P is meant to encapsulate information, certain parts of a child package P.C can have access to this private part of P. In those cases, information from the private part of P can then be used as if it were declared in the public part of its specification. To be more specific, the body of P.C and the private part of the specification of P.C have access to the private part of P. However, the public part of the specification of P.C only has access to the public part of P's specification. The following table summarizes this:

Part of a child package	Access to the private part of its parent's specification
Specification: public part	
Specification: private part	✓
Body	✓

The rest of this section shows examples of how this access to private information actually works for child packages.

Let's first look at an example where the body of a child package P.C has access to the private part of the specification of its parent P. We've seen, in a previous source-code example,

[17] http://www.ada-auth.org/standards/12rm/html/RM-7-6.html

that the Hello2 procedure declared in the private part of the Encapsulate package cannot be used in the Main procedure, since it's not visible there. This limitation doesn't apply, however, for parts of the child packages of the Encapsulate package. In fact, the body of its child package Encapsulate.Child has access to the Hello2 procedure and can call it there, as you can see in the implementation of the Hello3 procedure of the Child package:

Listing 9: encapsulate.ads

```
package Encapsulate is
   procedure Hello;

private

   procedure Hello2;
   --  Not visible from external units
   --  But visible in child packages
end Encapsulate;
```

Listing 10: encapsulate.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Encapsulate is

   procedure Hello is
   begin
      Put_Line ("Hello");
   end Hello;

   procedure Hello2 is
   begin
      Put_Line ("Hello #2");
   end Hello2;

end Encapsulate;
```

Listing 11: encapsulate-child.ads

```
package Encapsulate.Child is

   procedure Hello3;

end Encapsulate.Child;
```

Listing 12: encapsulate-child.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Encapsulate.Child is

   procedure Hello3 is
   begin
      --  Using private procedure Hello2
      --  from the parent package
      Hello2;
      Put_Line ("Hello #3");
   end Hello3;

end Encapsulate.Child;
```

Listing 13: main.adb

```
with Encapsulate.Child;

procedure Main is
begin
   Encapsulate.Child.Hello3;
end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Privacy.Encapsulate_Child
MD5: 1533f43eee8f8b4d14c9b2101f42f13a
```

Runtime output

```
Hello #2
Hello #3
```

The same mechanism applies to types declared in the private part of a parent package. For instance, the body of a child package can access components of a record declared in the private part of its parent package. Let's look at an example:

Listing 14: my_types.ads

```
package My_Types is

   type Priv_Rec is private;

private

   type Priv_Rec is record
      Number : Integer := 42;
   end record;

end My_Types;
```

Listing 15: my_types-ops.ads

```
package My_Types.Ops is

   procedure Display (E : Priv_Rec);

end My_Types.Ops;
```

Listing 16: my_types-ops.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body My_Types.Ops is

   procedure Display (E : Priv_Rec) is
   begin
      Put_Line ("Priv_Rec.Number: "
                & Integer'Image (E.Number));
   end Display;

end My_Types.Ops;
```

Listing 17: main.adb

```
with Ada.Text_IO;  use Ada.Text_IO;

with My_Types;     use My_Types;
with My_Types.Ops; use My_Types.Ops;

procedure Main is
   E : Priv_Rec;
begin
   Put_Line ("Presenting information:");

   --  The following code would trigger a
   --  compilation error here:
   --
   --  Put_Line ("Priv_Rec.Number: "
   --            & Integer'Image (E.Number));

   Display (E);
end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Privacy.Private_Type_Child
MD5: 9960611460bc1190b30949eca08fc02b
```

Runtime output

```
Presenting information:
Priv_Rec.Number:  42
```

In this example, we don't have access to the `Number` component of the record type `Priv_Rec` in the `Main` procedure. You can see this in the call to `Put_Line` that has been commented-out in the implementation of `Main`. Trying to access the `Number` component there would trigger a compilation error. But we do have access to this component in the body of the `My_Types.Ops` package, since it's a child package of the `My_Types` package. Therefore, `Ops`'s body has access to the declaration of the `Priv_Rec` type — which is in the private part of its parent, the `My_Types` package. For this reason, the same call to `Put_Line` that would trigger a compilation error in the `Main` procedure works fine in the `Display` procedure of the `My_Types.Ops` package.

This kind of privacy rules for child packages allows for extending the functionality of a parent package and, at the same time, retain its encapsulation.

As we mentioned previously, in addition to the package body, the private part of the specification of a child package `P.C` also has access to the private part of the specification of its parent `P`. Let's look at an example where we declare an object of private type `Priv_Rec` in the private part of the child package `My_Types.Child` *and* initialize the `Number` component of the `Priv_Rec` record directly:

```
package My_Types.Child is

private

   E : Priv_Rec := (Number => 99);

end My_Types.Ops;
```

As expected, we wouldn't be able to initialize this component if we moved this declaration to the public (visible) part of the same child package:

```
package My_Types.Child is

   E : Priv_Rec := (Number => 99);

end My_Types.Ops;
```

The declaration above triggers a compilation error, since type `Priv_Rec` is private. Because the public part of `My_Types.Child` is also visible outside the child package, Ada cannot allow accessing private information in this part of the specification.

CHAPTER

THIRTEEN

GENERICS

13.1 Introduction

Generics are used for metaprogramming in Ada. They are useful for abstract algorithms that share common properties with each other.

Either a subprogram or a package can be generic. A generic is declared by using the keyword **generic**. For example:

Listing 1: operator.ads

```
generic
   type T is private;
   --  Declaration of formal types and objects
--  Below, we could use one of the following:
--  <procedure | function | package>
procedure Operator (Dummy : in out T);
```

Listing 2: operator.adb

```
procedure Operator (Dummy : in out T) is
begin
   null;
end Operator;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Generics.Show_Simple_Generic
MD5: 1321d437043dafdb725fad416e654318
```

13.2 Formal type declaration

Formal types are abstractions of a specific type. For example, we may want to create an algorithm that works on any integer type, or even on any type at all, whether a numeric type or not. The following example declares a formal type T for the Set procedure.

Listing 3: set.ads

```
generic
   type T is private;
   --  T is a formal type that indicates that
   --  any type can be used, possibly a numeric
   --  type or possibly even a record type.
procedure Set (Dummy : T);
```

Listing 4: set.adb

```
procedure Set (Dummy : T) is
begin
   null;
end Set;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Generics.Show_Formal_Type_Declaration
MD5: 668156f66b2479c4932d18b5ad35deba
```

The declaration of T as **private** indicates that you can map any definite type to it. But you can also restrict the declaration to allow only some types to be mapped to that formal type. Here are some examples:

Formal Type	Format
Any type	`type T is private;`
Any discrete type	`type T is (<>);`
Any floating-point type	`type T is digits <>;`

13.3 Formal object declaration

Formal objects are similar to subprogram parameters. They can reference formal types declared in the formal specification. For example:

Listing 5: set.ads

```
generic
   type T is private;
   X : in out T;
   --  X can be used in the Set procedure
procedure Set (E : T);
```

Listing 6: set.adb

```
procedure Set (E : T) is
   pragma Unreferenced (E, X);
begin
   null;
end Set;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Generics.Show_Formal_Object_Declaration
MD5: 1b88bc0e5b8f48a35394966e6af07ac0
```

Formal objects can be either input parameters or specified using the **in out** mode.

13.4 Generic body definition

We don't repeat the **generic** keyword for the body declaration of a generic subprogram or package. Instead, we start with the actual declaration and use the generic types and objects we declared. For example:

Listing 7: set.ads

```
generic
   type T is private;
   X : in out T;
procedure Set (E : T);
```

Listing 8: set.adb

```
procedure Set (E : T) is
--  Body definition: "generic" keyword
--  is not used
begin
   X := E;
end Set;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Generics.Show_Generic_Body_Definition
MD5: de611ef77b528543fd6bad82c53857f7
```

13.5 Generic instantiation

Generic subprograms or packages can't be used directly. Instead, they need to be instantiated, which we do using the **new** keyword, as shown in the following example:

Listing 9: set.ads

```
generic
   type T is private;
   X : in out T;
   --  X can be used in the Set procedure
procedure Set (E : T);
```

Listing 10: set.adb

```
procedure Set (E : T) is
begin
   X := E;
end Set;
```

Listing 11: show_generic_instantiation.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Set;

procedure Show_Generic_Instantiation is

   Main    : Integer := 0;
   Current : Integer;

   procedure Set_Main is new Set (T => Integer,
                                  X => Main);
   --  Here, we map the formal parameters to
   --  actual types and objects.
   --
   --  The same approach can be used to
   --  instantiate functions or packages, e.g.:
```

(continues on next page)

(continued from previous page)

```
   --
   --  function Get_Main is new ...
   --  package Integer_Queue is new ...

begin
   Current := 10;

   Set_Main (Current);
   Put_Line ("Value of Main is "
             & Integer'Image (Main));
end Show_Generic_Instantiation;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Generics.Show_Generic_Instantiation
MD5: 13dc0692252496d954240952561e1c05
```

Runtime output

```
Value of Main is  10
```

In the example above, we instantiate the procedure Set by mapping the formal parameters T and X to actual existing elements, in this case the **Integer** type and the Main variable.

13.6 Generic packages

The previous examples focused on generic subprograms. In this section, we look at generic packages. The syntax is similar to that used for generic subprograms: we start with the **generic** keyword and continue with formal declarations. The only difference is that **package** is specified instead of a subprogram keyword.

Here's an example:

Listing 12: element.ads

```
generic
   type T is private;
package Element is

   procedure Set (E : T);
   procedure Reset;
   function Get return T;
   function Is_Valid return Boolean;

   Invalid_Element : exception;

private
   Value : T;
   Valid : Boolean := False;
end Element;
```

Listing 13: element.adb

```
package body Element is

   procedure Set (E : T) is
   begin
      Value := E;
      Valid := True;
```

(continues on next page)

(continued from previous page)

```
   end Set;

   procedure Reset is
   begin
      Valid := False;
   end Reset;

   function Get return T is
   begin
      if not Valid then
         raise Invalid_Element;
      end if;
      return Value;
   end Get;

   function Is_Valid return Boolean is (Valid);
end Element;
```

Listing 14: show_generic_package.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Element;

procedure Show_Generic_Package is

   package I is new Element (T => Integer);

   procedure Display_Initialized is
   begin
      if I.Is_Valid then
         Put_Line ("Value is initialized");
      else
         Put_Line ("Value is not initialized");
      end if;
   end Display_Initialized;

begin
   Display_Initialized;

   Put_Line ("Initializing...");
   I.Set (5);
   Display_Initialized;
   Put_Line ("Value is now set to "
             & Integer'Image (I.Get));

   Put_Line ("Resetting...");
   I.Reset;
   Display_Initialized;

end Show_Generic_Package;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Generics.Show_Generic_Package
MD5: c5278a06c6d06f1f37353ee0ca6686ec
```

Runtime output

```
Value is not initialized
Initializing...
Value is initialized
```

(continues on next page)

(continued from previous page)

```
Value is now set to  5
Resetting...
Value is not initialized
```

In the example above, we created a simple container named `Element`, with just one single element. This container tracks whether the element has been initialized or not.

After writing the package definition, we create the instance `I` of the `Element`. We use the instance by calling the package subprograms (`Set`, `Reset`, and `Get`).

13.7 Formal subprograms

In addition to formal types and objects, we can also declare formal subprograms or packages. This course only describes formal subprograms; formal packages are discussed in the advanced course.

We use the **`with`** keyword to declare a formal subprogram. In the example below, we declare a formal function (`Comparison`) to be used by the generic procedure `Check`.

Listing 15: check.ads

```
generic
   Description : String;
   type T is private;
   with function Comparison (X, Y : T)
                             return Boolean;
procedure Check (X, Y : T);
```

Listing 16: check.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Check (X, Y : T) is
   Result : Boolean;
begin
   Result := Comparison (X, Y);
   if Result then
      Put_Line
        ("Comparison ("
         & Description
         & ") between arguments is OK!");
   else
      Put_Line
        ("Comparison ("
         & Description
         & ") between arguments is not OK!");
   end if;
end Check;
```

Listing 17: show_formal_subprogram.adb

```
with Check;

procedure Show_Formal_Subprogram is

   A, B : Integer;

   procedure Check_Is_Equal is new
     Check (Description => "equality",
```

(continues on next page)

(continued from previous page)

```
            T           => Integer,
            Comparison  => Standard."=");
   --  Here, we are mapping the standard
   --  equality operator for Integer types to
   --  the Comparison formal function
begin
   A := 0;
   B := 1;
   Check_Is_Equal (A, B);
end Show_Formal_Subprogram;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Generics.Show_Formal_Subprogram
MD5: 1c463a47e9ce56b5afbca1da6acd116d
```

Runtime output

```
Comparison (equality) between arguments is not OK!
```

13.8 Example: I/O instances

Ada offers generic I/O packages that can be instantiated for standard and derived types. One example is the generic `Float_IO` package, which provides procedures such as `Put` and `Get`. In fact, `Float_Text_IO` — available from the standard library — is an instance of the `Float_IO` package, and it's defined as:

```
with Ada.Text_IO;

package Ada.Float_Text_IO is new Ada.Text_IO.Float_IO (Float);
```

You can use it directly with any object of floating-point type. For example:

Listing 18: show_float_text_io.adb

```
with Ada.Float_Text_IO;

procedure Show_Float_Text_IO is
   X : constant Float := 2.5;

   use Ada.Float_Text_IO;
begin
   Put (X);
end Show_Float_Text_IO;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Generics.Show_Float_Text_IO
MD5: 7cc9b547ef301a2071e9fb65caa4631b
```

Runtime output

```
 2.50000E+00
```

Instantiating generic I/O packages can be useful for derived types. For example, let's create a new type `Price` that must be displayed with two decimal digits after the point, and no exponent.

Listing 19: show_float_io_inst.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Float_IO_Inst is

   type Price is digits 3;

   package Price_IO is new
     Ada.Text_IO.Float_IO (Price);

   P : Price;
begin
   --  Set to zero => don't display exponent
   Price_IO.Default_Exp  := 0;

   P := 2.5;
   Price_IO.Put (P);
   New_Line;

   P := 5.75;
   Price_IO.Put (P);
   New_Line;
end Show_Float_IO_Inst;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Generics.Show_Float_IO_Inst
MD5: 583c761421d7fdb812dd2a183b676bae
```

Runtime output

```
 2.50
 5.75
```

By adjusting `Default_Exp` from the `Price_IO` instance to *remove* the exponent, we can control how variables of `Price` type are displayed. Just as a side note, we could also have written:

```
-- [...]

   type Price is new Float;

   package Price_IO is new
     Ada.Text_IO.Float_IO (Price);

begin
   Price_IO.Default_Aft  := 2;
   Price_IO.Default_Exp  := 0;
```

In this case, we're ajusting `Default_Aft`, too, to get two decimal digits after the point when calling `Put`.

In addition to the generic `Float_IO` package, the following generic packages are available from `Ada.Text_IO`:

- `Enumeration_IO` for enumeration types;
- `Integer_IO` for integer types;
- `Modular_IO` for modular types;
- `Fixed_IO` for fixed-point types;

- `Decimal_IO` for decimal types.

In fact, we could rewrite the example above using decimal types:

Listing 20: show_decimal_io_inst.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Decimal_IO_Inst is

   type Price is delta 10.0 ** (-2) digits 12;

   package Price_IO is new
     Ada.Text_IO.Decimal_IO (Price);

   P : Price;
begin
   Price_IO.Default_Exp  := 0;

   P := 2.5;
   Price_IO.Put (P);
   New_Line;

   P := 5.75;
   Price_IO.Put (P);
   New_Line;
end Show_Decimal_IO_Inst;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Generics.Show_Decimal_IO_Inst
MD5: f413570759dcb32cc166078b3cee1a16
```

Runtime output

```
          2.50
          5.75
```

13.9 Example: ADTs

An important application of generics is to model abstract data types (ADTs). In fact, Ada includes a library with numerous ADTs using generics: `Ada.Containers` (described in the *containers section* (page 203)).

A typical example of an ADT is a stack:

Listing 21: stacks.ads

```
generic
   Max : Positive;
   type T is private;
package Stacks is

   type Stack is limited private;

   Stack_Underflow, Stack_Overflow : exception;

   function Is_Empty (S : Stack) return Boolean;

   function Pop (S : in out Stack) return T;

```

(continues on next page)

(continued from previous page)

```
   procedure Push (S : in out Stack;
                   V :        T);

private

   type Stack_Array is
     array (Natural range <>) of T;

   Min : constant := 1;

   type Stack is record
      Container : Stack_Array (Min .. Max);
      Top       : Natural := Min - 1;
   end record;

end Stacks;
```

Listing 22: stacks.adb

```
package body Stacks is

   function Is_Empty (S : Stack) return Boolean is
     (S.Top < S.Container'First);

   function Is_Full (S : Stack) return Boolean is
     (S.Top >= S.Container'Last);

   function Pop (S : in out Stack) return T is
   begin
      if Is_Empty (S) then
         raise Stack_Underflow;
      else
         return X : T do
            X     := S.Container (S.Top);
            S.Top := S.Top - 1;
         end return;
      end if;
   end Pop;

   procedure Push (S : in out Stack;
                   V :        T) is
   begin
      if Is_Full (S) then
         raise Stack_Overflow;
      else
         S.Top               := S.Top + 1;
         S.Container (S.Top) := V;
      end if;
   end Push;

end Stacks;
```

Listing 23: show_stack.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Stacks;

procedure Show_Stack is

   package Integer_Stacks is new
```

(continues on next page)

(continued from previous page)

```
     Stacks (Max => 10,
             T   => Integer);
   use Integer_Stacks;

   Values : Integer_Stacks.Stack;

begin
   Push (Values, 10);
   Push (Values, 20);

   Put_Line ("Last value was "
             & Integer'Image (Pop (Values)));
end Show_Stack;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Generics.Show_Stack
MD5: ee112d395552c1a02d211b9e5425dc71
```

Runtime output

```
Last value was  20
```

In this example, we first create a generic stack package (`Stacks`) and then instantiate it to create a stack of up to 10 integer values.

13.10 Example: Swap

Let's look at a simple procedure that swaps variables of type `Color`:

Listing 24: colors.ads

```
package Colors is
   type Color is (Black, Red, Green,
                  Blue, White);

   procedure Swap_Colors (X, Y : in out Color);
end Colors;
```

Listing 25: colors.adb

```
package body Colors is

   procedure Swap_Colors (X, Y : in out Color) is
      Tmp : constant Color := X;
   begin
      X := Y;
      Y := Tmp;
   end Swap_Colors;

end Colors;
```

Listing 26: test_non_generic_swap_colors.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Colors;      use Colors;

procedure Test_Non_Generic_Swap_Colors is
```

(continues on next page)

(continued from previous page)

```
   A, B, C : Color;
begin
   A := Blue;
   B := White;
   C := Red;

   Put_Line ("Value of A is "
             & Color'Image (A));
   Put_Line ("Value of B is "
             & Color'Image (B));
   Put_Line ("Value of C is "
             & Color'Image (C));

   New_Line;
   Put_Line ("Swapping A and C...");
   New_Line;
   Swap_Colors (A, C);

   Put_Line ("Value of A is "
             & Color'Image (A));
   Put_Line ("Value of B is "
             & Color'Image (B));
   Put_Line ("Value of C is "
             & Color'Image (C));
end Test_Non_Generic_Swap_Colors;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Generics.Test_Non_Generic_Swap_Colors
MD5: 4d1cf826a1676c3750a8aabd484ac71f
```

Runtime output

```
Value of A is BLUE
Value of B is WHITE
Value of C is RED

Swapping A and C...

Value of A is RED
Value of B is WHITE
Value of C is BLUE
```

In this example, `Swap_Colors` can only be used for the `Color` type. However, this algorithm can theoretically be used for any type, whether an enumeration type or a complex record type with many elements. The algorithm itself is the same: it's only the type that differs. If, for example, we want to swap variables of **`Integer`** type, we don't want to duplicate the implementation. Therefore, such an algorithm is a perfect candidate for abstraction using generics.

In the example below, we create a generic version of `Swap_Colors` and name it **`Generic`**`_Swap`. This generic version can operate on any type due to the declaration of formal type T.

Listing 27: generic_swap.ads

```
generic
   type T is private;
procedure Generic_Swap (X, Y : in out T);
```

Listing 28: generic_swap.adb

```
procedure Generic_Swap (X, Y : in out T) is
   Tmp : constant T := X;
begin
   X := Y;
   Y := Tmp;
end Generic_Swap;
```

Listing 29: colors.ads

```
with Generic_Swap;

package Colors is

   type Color is (Black, Red, Green,
                  Blue, White);

   procedure Swap_Colors is new
     Generic_Swap (T => Color);

end Colors;
```

Listing 30: test_swap_colors.adb

```
with Ada.Text_IO;  use Ada.Text_IO;
with Colors;       use Colors;

procedure Test_Swap_Colors is
   A, B, C : Color;
begin
   A := Blue;
   B := White;
   C := Red;

   Put_Line ("Value of A is "
             & Color'Image (A));
   Put_Line ("Value of B is "
             & Color'Image (B));
   Put_Line ("Value of C is "
             & Color'Image (C));

   New_Line;
   Put_Line ("Swapping A and C...");
   New_Line;
   Swap_Colors (A, C);

   Put_Line ("Value of A is "
             & Color'Image (A));
   Put_Line ("Value of B is "
             & Color'Image (B));
   Put_Line ("Value of C is "
             & Color'Image (C));
end Test_Swap_Colors;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Generics.Test_Swap_Colors
MD5: a5d94a40bd9d1c6736cc873f8b58e867
```

Runtime output

```
Value of A is BLUE
Value of B is WHITE
Value of C is RED

Swapping A and C...

Value of A is RED
Value of B is WHITE
Value of C is BLUE
```

As we can see in the example, we can create the same `Swap_Colors` procedure as we had in the non-generic version of the algorithm by declaring it as an instance of the generic **`Generic_`**Swap procedure. We specify that the generic T type will be mapped to the `Color` type by passing it as an argument to the **`Generic_`**Swap instantiation.

13.11 Example: Reversing

The previous example, with an algorithm to swap two values, is one of the simplest examples of using generics. Next we study an algorithm for reversing elements of an array. First, let's start with a non-generic version of the algorithm, one that works specifically for the `Color` type:

Listing 31: colors.ads

```
1  package Colors is
2
3     type Color is (Black, Red, Green,
4                    Blue, White);
5
6     type Color_Array is
7       array (Integer range <>) of Color;
8
9     procedure Reverse_It (X : in out Color_Array);
10
11 end Colors;
```

Listing 32: colors.adb

```
1  package body Colors is
2
3     procedure Reverse_It (X : in out Color_Array)
4     is
5     begin
6        for I in X'First ..
7                 (X'Last + X'First) / 2 loop
8           declare
9              Tmp     : Color;
10             X_Left  : Color
11               renames X (I);
12             X_Right : Color
13               renames X (X'Last + X'First - I);
14          begin
15             Tmp     := X_Left;
16             X_Left  := X_Right;
17             X_Right := Tmp;
18          end;
19       end loop;
20    end Reverse_It;
21
22 end Colors;
```

Listing 33: test_non_generic_reverse_colors.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Colors;      use Colors;

procedure Test_Non_Generic_Reverse_Colors is

   My_Colors : Color_Array (1 .. 5) :=
     (Black, Red, Green, Blue, White);

begin
   for C of My_Colors loop
      Put_Line ("My_Color: " & Color'Image (C));
   end loop;

   New_Line;
   Put_Line ("Reversing My_Color...");
   New_Line;
   Reverse_It (My_Colors);

   for C of My_Colors loop
      Put_Line ("My_Color: " & Color'Image (C));
   end loop;

end Test_Non_Generic_Reverse_Colors;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Generics.Test_Non_Generic_Reverse_Colors
MD5: 9b3a489d0bc0ecd79de6ba99fd7cd44f
```

Runtime output

```
My_Color: BLACK
My_Color: RED
My_Color: GREEN
My_Color: BLUE
My_Color: WHITE

Reversing My_Color...

My_Color: WHITE
My_Color: BLUE
My_Color: GREEN
My_Color: RED
My_Color: BLACK
```

The procedure `Reverse_It` takes an array of colors, starts by swapping the first and last elements of the array, and continues doing that with successive elements until it reaches the middle of array. At that point, the entire array has been reversed, as we see from the output of the test program.

To abstract this procedure, we declare formal types for three components of the algorithm:

- the elements of the array (`Color` type in the example)
- the range used for the array (**`Integer`** range in the example)
- the actual array type (`Color_Array` type in the example)

This is a generic version of the algorithm:

Listing 34: generic_reverse.ads

```
generic
   type T is private;
   type Index is range <>;
   type Array_T is
     array (Index range <>) of T;
procedure Generic_Reverse (X : in out Array_T);
```

Listing 35: generic_reverse.adb

```
procedure Generic_Reverse (X : in out Array_T) is
begin
   for I in X'First ..
            (X'Last + X'First) / 2 loop
      declare
         Tmp     : T;
         X_Left  : T
           renames X (I);
         X_Right : T
           renames X (X'Last + X'First - I);
      begin
         Tmp     := X_Left;
         X_Left  := X_Right;
         X_Right := Tmp;
      end;
   end loop;
end Generic_Reverse;
```

Listing 36: colors.ads

```
with Generic_Reverse;

package Colors is

   type Color is (Black, Red, Green,
                  Blue, White);

   type Color_Array is
     array (Integer range <>) of Color;

   procedure Reverse_It is new
     Generic_Reverse (T       => Color,
                      Index   => Integer,
                      Array_T => Color_Array);

end Colors;
```

Listing 37: test_reverse_colors.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Colors;      use Colors;

procedure Test_Reverse_Colors is

   My_Colors : Color_Array (1 .. 5) :=
     (Black, Red, Green, Blue, White);

begin
   for C of My_Colors loop
```

(continues on next page)

(continued from previous page)

```
11          Put_Line ("My_Color: "
12                    & Color'Image (C));
13       end loop;
14
15       New_Line;
16       Put_Line ("Reversing My_Color...");
17       New_Line;
18       Reverse_It (My_Colors);
19
20       for C of My_Colors loop
21          Put_Line ("My_Color: "
22                    & Color'Image (C));
23       end loop;
24
25    end Test_Reverse_Colors;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Generics.Test_Reverse_Colors
MD5: 9ef175c517d7574b4b65b24ba0027f1f
```

Runtime output

```
My_Color: BLACK
My_Color: RED
My_Color: GREEN
My_Color: BLUE
My_Color: WHITE

Reversing My_Color...

My_Color: WHITE
My_Color: BLUE
My_Color: GREEN
My_Color: RED
My_Color: BLACK
```

As mentioned above, we're abstracting three components of the algorithm:

- the T type abstracts the elements of the array
- the Index type abstracts the range used for the array
- the Array_T type abstracts the array type and uses the formal declarations of the T and Index types.

13.12 Example: Test application

In the previous example we've focused only on abstracting the reversing algorithm itself. However, we could have decided to also abstract our small test application. This could be useful if we, for example, decide to test other procedures that change elements of an array.

In order to do this, we again have to choose the elements to abstract. We therefore declare the following formal parameters:

- S: the string containing the array name
- a function Image that converts an element of type T to a string
- a procedure Test that performs some operation on the array

Note that Image and Test are examples of formal subprograms and S is an example of a formal object.

Here is a version of the test application making use of the generic `Perform_Test` procedure:

Listing 38: generic_reverse.ads

```
generic
   type T is private;
   type Index is range <>;
   type Array_T is
     array (Index range <>) of T;
procedure Generic_Reverse (X : in out Array_T);
```

Listing 39: generic_reverse.adb

```
procedure Generic_Reverse (X : in out Array_T) is
begin
   for I in X'First ..
            (X'Last + X'First) / 2 loop
      declare
         Tmp     : T;
         X_Left  : T
           renames X (I);
         X_Right : T
           renames X (X'Last + X'First - I);
      begin
         Tmp     := X_Left;
         X_Left  := X_Right;
         X_Right := Tmp;
      end;
   end loop;
end Generic_Reverse;
```

Listing 40: perform_test.ads

```
generic
   type T is private;
   type Index is range <>;
   type Array_T is
     array (Index range <>) of T;
   S : String;
   with function Image (E : T)
                        return String is <>;
   with procedure Test (X : in out Array_T);
procedure Perform_Test (X : in out Array_T);
```

Listing 41: perform_test.adb

```
with Ada.Text_IO;  use Ada.Text_IO;

procedure Perform_Test (X : in out Array_T) is
begin
   for C of X loop
      Put_Line (S & ": " & Image (C));
   end loop;

   New_Line;
   Put_Line ("Testing " & S & "...");
   New_Line;
   Test (X);

   for C of X loop
      Put_Line (S & ": " & Image (C));
```

(continues on next page)

(continued from previous page)

```
16    end loop;
17 end Perform_Test;
```

Listing 42: colors.ads

```
1  with Generic_Reverse;
2
3  package Colors is
4
5     type Color is (Black, Red, Green,
6                    Blue, White);
7
8     type Color_Array is
9       array (Integer range <>) of Color;
10
11    procedure Reverse_It is new
12      Generic_Reverse (T       => Color,
13                       Index   => Integer,
14                       Array_T => Color_Array);
15
16 end Colors;
```

Listing 43: test_reverse_colors.adb

```
1  with Colors;       use Colors;
2  with Perform_Test;
3
4  procedure Test_Reverse_Colors is
5
6     procedure Perform_Test_Reverse_It is new
7       Perform_Test (T       => Color,
8                     Index   => Integer,
9                     Array_T => Color_Array,
10                    S       => "My_Color",
11                    Image   => Color'Image,
12                    Test    => Reverse_It);
13
14    My_Colors : Color_Array (1 .. 5) :=
15      (Black, Red, Green, Blue, White);
16
17 begin
18    Perform_Test_Reverse_It (My_Colors);
19 end Test_Reverse_Colors;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Generics.Test_Reverse_Colors_2
MD5: 04640309f4f7e9f8bcff137d1a6f8733
```

Runtime output

```
My_Color: BLACK
My_Color: RED
My_Color: GREEN
My_Color: BLUE
My_Color: WHITE

Testing My_Color...

My_Color: WHITE
```

(continues on next page)

(continued from previous page)

```
My_Color: BLUE
My_Color: GREEN
My_Color: RED
My_Color: BLACK
```

In this example, we create the procedure `Perform_Test_Reverse_It` as an instance of the generic procedure (`Perform_Test`). Note that:

- For the formal `Image` function, we use the `'Image` attribute of the `Color` type
- For the formal `Test` procedure, we reference the `Reverse_Array` procedure from the package.

CHAPTER

FOURTEEN

EXCEPTIONS

Ada uses exceptions for error handling. Unlike many other languages, Ada speaks about *raising*, not *throwing*, an exception and *handling*, not *catching*, an exception.

14.1 Exception declaration

Ada exceptions are not types, but instead objects, which may be peculiar to you if you're used to the way Java or Python support exceptions. Here's how you declare an exception:

Listing 1: exceptions.ads

```
package Exceptions is
    My_Except : exception;
    --  Like an object. *NOT* a type !
end Exceptions;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Exceptions.Show_Exception
MD5: 6201faeca9b029c790023856d2c8c419
```

Even though they're objects, you're going to use each declared exception object as a "kind" or "family" of exceptions. Ada does not require that a subprogram declare every exception it can potentially raise.

14.2 Raising an exception

To raise an exception of our newly declared exception kind, do the following:

Listing 2: main.adb

```
with Exceptions; use Exceptions;

procedure Main is
begin
   raise My_Except;
   --  Execution of current control flow
   --  abandoned; an exception of kind
   --  "My_Except" will bubble up until it
   --  is caught.
end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Exceptions.Show_Exception
MD5: 24b40ae1509722adf51c3dd0d3ea4fbe
```

Runtime output

```
raised EXCEPTIONS.MY_EXCEPT : main.adb:5
```

Here, the My_Except exception is raised. We can also specify a message:

Listing 3: main.adb

```
with Exceptions; use Exceptions;

procedure Main is
begin
   raise My_Except with "My exception message";
   --  Execution of current control flow
   --  abandoned; an exception of kind
   --  "My_Except" with associated string will
   --  bubble up until it is caught.
end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Exceptions.Show_Exception
MD5: 279299c9703c3ed4e51fdd7c3a5e1392
```

Runtime output

```
raised EXCEPTIONS.MY_EXCEPT : My exception message
```

In this case, we see an additional message when the exception is displayed.

14.3 Handling an exception

Next, we address how to handle exceptions that were raised by us or libraries that we call. The neat thing in Ada is that you can add an exception handler to any statement block as follows:

Listing 4: open_file.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Ada.Exceptions;  use Ada.Exceptions;

procedure Open_File is
   File : File_Type;
begin
   --  Block (sequence of statements)
   begin
      Open (File, In_File, "input.txt");
   exception
      when E : Name_Error =>
      --       ^ Exception to be handled
         Put ("Cannot open input file : ");
         Put_Line (Exception_Message (E));
         raise;
         --  Reraise current occurence
   end;
end Open_File;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Exceptions.Show_Exception_Handling
MD5: 4ea1d5da684a6d7d7ee32908810e9c8f
```

Runtime output

```
Cannot open input file : input.txt: No such file or directory

raised ADA.IO_EXCEPTIONS.NAME_ERROR : input.txt: No such file or directory
```

In the example above, we're using the Exception_Message function from the Ada.Exceptions package. This function returns the message associated with the exception as a string.

You don't need to introduce a block just to handle an exception: you can add it to the statements block of your current subprogram:

Listing 5: open_file.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2  with Ada.Exceptions;  use Ada.Exceptions;
3
4  procedure Open_File is
5     File : File_Type;
6  begin
7     Open (File, In_File, "input.txt");
8  --  Exception block can be added to any block
9  exception
10    when Name_Error =>
11       Put ("Cannot open input file");
12 end Open_File;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Exceptions.Show_Exception_Message
MD5: 838e87ae416b3a717901cdc00eb71b40
```

Runtime output

```
Cannot open input file
```

Attention

Exception handlers have an important restriction that you need to be careful about: Exceptions raised in the declarative section are not caught by the handlers of that block. So for example, in the following code, the exception will not be caught.

Listing 6: be_careful.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2  with Ada.Exceptions;  use Ada.Exceptions;
3
4  procedure Be_Careful is
5     function Dangerous return Integer is
6     begin
7        raise Constraint_Error;
8        return 42;
9     end Dangerous;
10
11 begin
12    declare
13       A : Integer := Dangerous;
```

```
14    begin
15       Put_Line (Integer'Image (A));
16    exception
17       when Constraint_Error =>
18          Put_Line ("error!");
19    end;
20 end Be_Careful;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Exceptions.Be_Careful
MD5: 6ea8a214bbbaca09d7444136d069e782
```

Runtime output

```

raised CONSTRAINT_ERROR : be_careful.adb:7 explicit raise
```

This is also the case for the top-level exception block that is part of the current subprogram.

14.4 Predefined exceptions

Ada has a very small number of predefined exceptions:

- `Constraint_Error` is the main one you might see. It's raised:
  - When bounds don't match or, in general, any violation of constraints.
  - In case of overflow
  - In case of null dereferences
  - In case of division by 0
- `Program_Error` might appear, but probably less often. It's raised in more arcane situations, such as for order of elaboration issues and some cases of detectable erroneous execution.
- `Storage_Error` will happen because of memory issues, such as:
  - Not enough memory (allocator)
  - Not enough stack
- `Tasking_Error` will happen with task related errors, such as any error happening during task activation.

You should not reuse predefined exceptions. If you do then, it won't be obvious when one is raised that it is because something went wrong in a built-in language operation.

CHAPTER

FIFTEEN

TASKING

Tasks and protected objects allow the implementation of concurrency in Ada. The following sections explain these concepts in more detail.

15.1 Tasks

A task can be thought as an application that runs *concurrently* with the main application. In other programming languages, a task might be called a thread[18], and tasking might be called multithreading[19].

Tasks may synchronize with the main application but may also process information completely independently from the main application. Here we show how this is accomplished.

15.1.1 Simple task

Tasks are declared using the keyword **task**. The task implementation is specified in a **task body** block. For example:

Listing 1: show_simple_task.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Simple_Task is
   task T;

   task body T is
   begin
      Put_Line ("In task T");
   end T;
begin
   Put_Line ("In main");
end Show_Simple_Task;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Tasking.Show_Simple_Task
MD5: b17d9b35b4b2b53bc59776749e1be219
```

Runtime output

```
In task T
In main
```

[18] https://en.wikipedia.org/wiki/Thread_(computing)
[19] https://en.wikipedia.org/wiki/Thread_(computing)#Multithreading

Here, we're declaring and implementing the task T. As soon as the main application starts, task T starts automatically — it's not necessary to manually start this task. By running the application above, we can see that both calls to `Put_Line` are performed.

Note that:

- The main application is itself a task (the main or “environment” task).
  - In this example, the subprogram `Show_Simple_Task` is the main task of the application.
- Task T is a subtask.
  - Each subtask has a master, which represents the program construct in which the subtask is declared. In this case, the main subprogram `Show_Simple_Task` is T 's master.
  - The master construct is executed by some enclosing task, which we will refer to as the "master task" of the subtask.
- The number of tasks is not limited to one: we could include a task T2 in the example above.
  - This task also starts automatically and runs *concurrently* with both task T and the main task. For example:

Listing 2: show_simple_tasks.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Simple_Tasks is
   task T;
   task T2;

   task body T is
   begin
      Put_Line ("In task T");
   end T;

   task body T2 is
   begin
      Put_Line ("In task T2");
   end T2;

begin
   Put_Line ("In main");
end Show_Simple_Tasks;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Tasking.Multiple_Simple_Task
MD5: 5e24b797e742bec306ad498f4f40d2b4
```

Runtime output

```
In task T
In main
In task T2
```

15.1.2 Simple synchronization

As we've just seen, as soon as the master construct reaches its “begin”, its subtasks also start automatically. The master continues its processing until it has nothing more to do. At that point, however, it will not terminate. Instead, the master waits until its subtasks have

finished before it allows itself to complete. In other words, this waiting process provides synchronization between the master task and its subtasks. After this synchronization, the master construct will complete. For example:

Listing 3: show_simple_sync.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Simple_Sync is
   task T;
   task body T is
   begin
      for I in 1 .. 10 loop
         Put_Line ("hello");
      end loop;
   end T;
begin
   null;
   --  Will wait here until all tasks
   --  have terminated
end Show_Simple_Sync;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Tasking.Show_Simple_Sync
MD5: 84afce465854f99f8cbe0b57714d8a5f
```

Runtime output

```
hello
hello
hello
hello
hello
hello
hello
hello
hello
hello
```

The same mechanism is used for other subprograms that contain subtasks: the subprogram execution will wait for its subtasks to finish. So this mechanism is not limited to the main subprogram and also applies to any subprogram called by the main subprogram, directly or indirectly.

Synchronization also occurs if we move the task to a separate package. In the example below, we declare a task T in the package `Simple_Sync_Pkg`.

Listing 4: simple_sync_pkg.ads

```
package Simple_Sync_Pkg is
   task T;
end Simple_Sync_Pkg;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Tasking.Simple_Sync_Pkg
MD5: 2f9be044d04994240970f150e2293d5e
```

This is the corresponding package body:

Listing 5: simple_sync_pkg.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Simple_Sync_Pkg is
   task body T is
   begin
      for I in 1 .. 10 loop
         Put_Line ("hello");
      end loop;
   end T;
end Simple_Sync_Pkg;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Tasking.Simple_Sync_Pkg
MD5: b668451e4fb10e802f619889bcd743ff
```

Because the package is **with**'ed by the main procedure, the task T defined in the package will become a subtask of the main task. For example:

Listing 6: test_simple_sync_pkg.adb

```
with Simple_Sync_Pkg;

procedure Test_Simple_Sync_Pkg is
begin
   null;
   --  Will wait here until all tasks
   --  have terminated
end Test_Simple_Sync_Pkg;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Tasking.Simple_Sync_Pkg
MD5: e51565b91767ce198496ef3e9c582ac8
```

Runtime output

```
hello
hello
hello
hello
hello
hello
hello
hello
hello
hello
```

As soon as the main subprogram returns, the main task synchronizes with any subtasks spawned by packages T from `Simple_Sync_Pkg` before finally terminating.

15.1.3 Delay

We can introduce a delay by using the keyword **delay**. This puts the current task to sleep for the length of time (in seconds) specified in the delay statement. For example:

Listing 7: show_delay.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Delay is

   task T;

   task body T is
   begin
      for I in 1 .. 5 loop
         Put_Line ("hello from task T");
         delay 1.0;
         --    ^ Wait 1.0 seconds
      end loop;
   end T;
begin
   delay 1.5;
   Put_Line ("hello from main");
end Show_Delay;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Tasking.Show_Delay
MD5: 4a6e8039744301a128e8fb2dd27902a5
```

Runtime output

```
hello from task T
hello from task T
hello from main
hello from task T
hello from task T
hello from task T
```

In this example, we're making the task T wait one second after each time it displays the "hello" message. In addition, the main task is waiting 1.5 seconds before displaying its own "hello" message

15.1.4 Synchronization: rendezvous

The only type of synchronization we've seen so far is the one that happens automatically at the end of a master construct with a subtask. You can also define custom synchronization points using the keyword **entry**. An *entry* can be viewed as a special kind of subprogram, which is called by another task using a similar syntax, as we will see later.

In the task body definition, you define which part of the task will accept the entries by using the keyword **accept**. A task proceeds until it reaches an **accept** statement and then waits for some other task to synchronize with it. Specifically,

- The task with the entry waits at that point (in the **accept** statement), ready to accept a call to the corresponding entry from the master task.
- The other task calls the task entry, in a manner similar to a procedure call, to synchronize with the entry.

This synchronization between tasks is called a *rendezvous*. Let's see an example:

Listing 8: show_rendezvous.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Rendezvous is

   task T is
      entry Start;
   end T;

   task body T is
   begin
      accept Start;
      --     ^ Waiting for somebody
      --       to call the entry

      Put_Line ("In T");
   end T;

begin
   Put_Line ("In Main");

   --  Calling T's entry:
   T.Start;
end Show_Rendezvous;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Tasking.Show_Rendezvous
MD5: 479eea7adc876ac359ad20ac6e3acf66
```

Runtime output

```
In Main
In T
```

In this example, we declare an entry `Start` for task T. In the task body, we implement this entry using **`accept`** `Start`. When task T reaches this point, it waits for some other task to call its entry. This synchronization occurs in the `T.Start` statement. After the rendezvous completes, the main task and task T again run concurrently until they synchronize one final time when the main subprogram Show_Rendezvous finishes.

An entry may be used to perform more than a simple task synchronization: it also may perform multiple statements during the time both tasks are synchronized. We do this with a **`do ... end`** block. For the previous example, we would simply write **`accept`** `Start` **`do`** `<statements>;` **`end`**;. We use this kind of block in the next example.

15.1.5 Select loop

There's no limit to the number of times an entry can be accepted. We could even create an infinite loop in the task and accept calls to the same entry over and over again. An infinite loop, however, prevents the subtask from finishing, so it blocks its master task when it reaches the end of its processing. Therefore, a loop containing **`accept`** statements in a task body can be used in conjunction with a **`select ... or terminate`** statement. In simple terms, this statement allows its master task to automatically terminate the subtask when the master construct reaches its end. For example:

Listing 9: show_rendezvous_loop.adb

```
with Ada.Text_IO; use Ada.Text_IO;

```

(continues on next page)

(continued from previous page)

```
procedure Show_Rendezvous_Loop is

   task T is
      entry Reset;
      entry Increment;
   end T;

   task body T is
      Cnt : Integer := 0;
   begin
      loop
         select
            accept Reset do
               Cnt := 0;
            end Reset;
            Put_Line ("Reset");
         or
            accept Increment do
               Cnt := Cnt + 1;
            end Increment;
            Put_Line ("In T's loop ("
                      & Integer'Image (Cnt)
                      & ")");
         or
            terminate;
         end select;
      end loop;
   end T;

begin
   Put_Line ("In Main");

   for I in 1 .. 4 loop
      --  Calling T's entry multiple times
      T.Increment;
   end loop;

   T.Reset;
   for I in 1 .. 4 loop
      --  Calling T's entry multiple times
      T.Increment;
   end loop;

end Show_Rendezvous_Loop;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Tasking.Show_Rendezvous_Loop
MD5: 0542dbc029cffb9f794d761bab9f3a9d
```

Runtime output

```
In Main
In T's loop ( 1)
In T's loop ( 2)
In T's loop ( 3)
In T's loop ( 4)
Reset
In T's loop ( 1)
In T's loop ( 2)
In T's loop ( 3)
```

(continues on next page)

(continued from previous page)

```
In T's loop ( 4)
```

In this example, the task body implements an infinite loop that accepts calls to the Reset and Increment entry. We make the following observations:

- The **accept** E **do** ... **end** block is used to increment a counter.
  - As long as task T is performing the **do** ... **end** block, the main task waits for the block to complete.
- The main task is calling the Increment entry multiple times in the loop from 1 .. 4. It is also calling the Reset entry before the second loop.
  - Because task T contains an infinite loop, it always accepts calls to the Reset and Increment entries.
  - When the master construct of the subtask (the Show_Rendezvous_Loop subprogram) completes, it checks the status of the T task. Even though task T could accept new calls to the Reset or Increment entries, the master construct is allowed to terminate task T due to the **or terminate** part of the **select** statement.

15.1.6 Cycling tasks

In a previous example, we saw how to delay a task a specified time by using the **delay** keyword. However, using delay statements in a loop is not enough to guarantee regular intervals between those delay statements. For example, we may have a call to a computationally intensive procedure between executions of successive delay statements:

```
while True loop
   delay 1.0;
   --    ^ Wait 1.0 seconds
   Computational_Intensive_App;
end loop;
```

In this case, we can't guarantee that exactly 10 seconds have elapsed after 10 calls to the delay statement because a time drift may be introduced by the Computational_Intensive_App procedure. In many cases, this time drift is not relevant, so using the **delay** keyword is good enough.

However, there are situations where a time drift isn't acceptable. In those cases, we need to use the **delay until** statement, which accepts a precise time for the end of the delay, allowing us to define a regular interval. This is useful, for example, in real-time applications.

We will soon see an example of how this time drift may be introduced and how the **delay until** statement circumvents the problem. But before we do that, we look at a package containing a procedure allowing us to measure the elapsed time (Show_Elapsed_Time) and a dummy Computational_Intensive_App procedure which is simulated by using a simple delay. This is the complete package:

Listing 10: delay_aux_pkg.ads

```
1  with Ada.Real_Time; use Ada.Real_Time;
2
3  package Delay_Aux_Pkg is
4
5     function Get_Start_Time return Time
6       with Inline;
7
8     procedure Show_Elapsed_Time
9       with Inline;
10
```

(continues on next page)

(continued from previous page)

```
   procedure Computational_Intensive_App;
private
   Start_Time   : Time := Clock;

   function Get_Start_Time return Time is
     (Start_Time);

end Delay_Aux_Pkg;
```

Listing 11: delay_aux_pkg.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Delay_Aux_Pkg is

   procedure Show_Elapsed_Time is
      Now_Time     : Time;
      Elapsed_Time : Time_Span;
   begin
      Now_Time     := Clock;
      Elapsed_Time := Now_Time - Start_Time;
      Put_Line ("Elapsed time "
                & Duration'Image
                    (To_Duration (Elapsed_Time))
                & " seconds");
   end Show_Elapsed_Time;

   procedure Computational_Intensive_App is
   begin
      delay 0.5;
   end Computational_Intensive_App;

end Delay_Aux_Pkg;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Tasking.Show_Time
MD5: 422a38c1afa0bbd659ec81de88479e0a
```

Using this auxiliary package, we're now ready to write our time-drifting application:

Listing 12: show_time_task.adb

```
with Ada.Text_IO;   use Ada.Text_IO;
with Ada.Real_Time; use Ada.Real_Time;

with Delay_Aux_Pkg;

procedure Show_Time_Task is
   package Aux renames Delay_Aux_Pkg;

   task T;

   task body T is
      Cnt   : Integer := 1;
   begin
      for I in 1 .. 5 loop
         delay 1.0;

         Aux.Show_Elapsed_Time;
         Aux.Computational_Intensive_App;
```

(continues on next page)

(continued from previous page)

```
19
20          Put_Line ("Cycle # "
21                    & Integer'Image (Cnt));
22          Cnt  := Cnt + 1;
23       end loop;
24       Put_Line ("Finished time-drifting loop");
25    end T;
26
27 begin
28    null;
29 end Show_Time_Task;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Tasking.Show_Time
MD5: fe17c902fc127c0132677ea4005ff3f1
```

Runtime output

```
Elapsed time  1.001005436 seconds
Cycle #  1
Elapsed time  2.504564583 seconds
Cycle #  2
Elapsed time  4.007378561 seconds
Cycle #  3
Elapsed time  5.508794351 seconds
Cycle #  4
Elapsed time  7.010960172 seconds
Cycle #  5
Finished time-drifting loop
```

We can see by running the application that we already have a time difference of about four seconds after three iterations of the loop due to the drift introduced by `Computational_Intensive_App`. Using the **`delay until`** statement, however, we're able to avoid this time drift and have a regular interval of exactly one second:

Listing 13: show_time_task.adb

```
1  with Ada.Text_IO;   use Ada.Text_IO;
2  with Ada.Real_Time; use Ada.Real_Time;
3
4  with Delay_Aux_Pkg;
5
6  procedure Show_Time_Task is
7     package Aux renames Delay_Aux_Pkg;
8
9     task T;
10
11    task body T is
12       Cycle : constant Time_Span :=
13         Milliseconds (1000);
14       Next  : Time := Aux.Get_Start_Time
15                       + Cycle;
16
17       Cnt   : Integer := 1;
18    begin
19       for I in 1 .. 5 loop
20          delay until Next;
21
22          Aux.Show_Elapsed_Time;
23          Aux.Computational_Intensive_App;
```

(continues on next page)

(continued from previous page)

```
24
25          --  Calculate next execution time
26          --  using a cycle of one second
27          Next := Next + Cycle;
28
29          Put_Line ("Cycle # "
30                    & Integer'Image (Cnt));
31          Cnt  := Cnt + 1;
32       end loop;
33       Put_Line ("Finished cycling");
34    end T;
35
36 begin
37    null;
38 end Show_Time_Task;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Tasking.Show_Time
MD5: 1456c0feee6def8b370d994c0ab75a15
```

Runtime output

```
Elapsed time  1.000987991 seconds
Cycle #  1
Elapsed time  2.000560766 seconds
Cycle #  2
Elapsed time  3.001079737 seconds
Cycle #  3
Elapsed time  4.001664924 seconds
Cycle #  4
Elapsed time  5.001562627 seconds
Cycle #  5
Finished cycling
```

Now, as we can see by running the application, the **`delay until`** statement ensures that the `Computational_Intensive_App` doesn't disturb the regular interval of one second between iterations.

15.2 Protected objects

When multiple tasks are accessing shared data, corruption of that data may occur. For example, data may be inconsistent if one task overwrites parts of the information that's being read by another task at the same time. In order to avoid these kinds of problems and ensure information is accessed in a coordinated way, we use *protected objects*.

Protected objects encapsulate data and provide access to that data by means of *protected operations*, which may be subprograms or protected entries. Using protected objects ensures that data is not corrupted by race conditions or other concurrent access.

Important

Objects can be protected from concurrent access using Ada tasks. In fact, this was the *only* way of protecting objects from concurrent access in Ada 83 (the first version of the Ada language). However, the use of protected objects is much simpler than using similar mechanisms implemented using only tasks. Therefore, you should use protected objects when your main goal is only to protect data.

15.2.1 Simple object

You declare a protected object with the **protected** keyword. The syntax is similar to that used for packages: you can declare operations (e.g., procedures and functions) in the public part and data in the private part. The corresponding implementation of the operations is included in the **protected body** of the object. For example:

Listing 14: show_protected_objects.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Protected_Objects is

   protected Obj is
      --  Operations go here (only subprograms)
      procedure Set (V : Integer);
      function Get return Integer;
   private
      --  Data goes here
      Local : Integer := 0;
   end Obj;

   protected body Obj is
      --  procedures can modify the data
      procedure Set (V : Integer) is
      begin
         Local := V;
      end Set;

      --  functions cannot modify the data
      function Get return Integer is
      begin
         return Local;
      end Get;
   end Obj;

begin
   Obj.Set (5);
   Put_Line ("Number is: "
             & Integer'Image (Obj.Get));
end Show_Protected_Objects;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Tasking.Show_Protected_Objects
MD5: dd97dd584ba2f13def3c04725d4e48a7
```

Runtime output

```
Number is:  5
```

In this example, we define two operations for `Obj`: `Set` and `Get`. The implementation of these operations is in the `Obj` body. The syntax used for writing these operations is the same as that for normal procedures and functions. The implementation of protected objects is straightforward — we simply access and update `Local` in these subprograms. To call these operations in the main application, we use prefixed notation, e.g., `Obj.Get`.

15.2.2 Entries

In addition to protected procedures and functions, you can also define protected entry points. Do this using the **entry** keyword. Protected entry points allow you to define barriers using the **when** keyword. Barriers are conditions that must be fulfilled before the entry can start performing its actual processing — we speak of *releasing* the barrier when the condition is fulfilled.

The previous example used procedures and functions to define operations on the protected objects. However, doing so permits reading protected information (via `Obj.Get`) before it's set (via `Obj.Set`). To allow that to be a defined operation, we specified a default value (0). Instead, by rewriting `Obj.Get` using an *entry* instead of a function, we implement a barrier, ensuring no task can read the information before it's been set.

The following example implements the barrier for the `Obj.Get` operation. It also contains two concurrent subprograms (main task and task T) that try to access the protected object.

Listing 15: show_protected_objects_entries.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Protected_Objects_Entries is

   protected Obj is
      procedure Set (V : Integer);
      entry Get (V : out Integer);
   private
      Local  : Integer;
      Is_Set : Boolean := False;
   end Obj;

   protected body Obj is
      procedure Set (V : Integer) is
      begin
         Local := V;
         Is_Set := True;
      end Set;

      entry Get (V : out Integer)
        when Is_Set is
         --  Entry is blocked until the
         --  condition is true. The barrier
         --  is evaluated at call of entries
         --  and at exits of procedures and
         --  entries. The calling task sleeps
         --  until the barrier is released.
      begin
         V := Local;
         Is_Set := False;
      end Get;
   end Obj;

   N : Integer := 0;

   task T;

   task body T is
   begin
      Put_Line
        ("Task T will delay for 4 seconds...");
      delay 4.0;

      Put_Line
```

(continues on next page)

(continued from previous page)

```
45          ("Task T will set Obj...");
46       Obj.Set (5);
47
48       Put_Line
49         ("Task T has just set Obj...");
50    end T;
51 begin
52    Put_Line
53      ("Main application will get Obj...");
54    Obj.Get (N);
55
56    Put_Line
57      ("Main application has retrieved Obj...");
58    Put_Line
59      ("Number is: " & Integer'Image (N));
60
61 end Show_Protected_Objects_Entries;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Tasking.Show_Protected_Objects_Entries
MD5: c1134445a96700b871fb76c4d6342359
```

Runtime output

```
Task T will delay for 4 seconds...
Main application will get Obj...
Task T will set Obj...
Task T has just set Obj...
Main application has retrieved Obj...
Number is:  5
```

As we see by running it, the main application waits until the protected object is set (by the call to `Obj.Set` in task T) before it reads the information (via `Obj.Get`). Because a 4-second delay has been added in task T, the main application is also delayed by 4 seconds. Only after this delay does task T set the object and release the barrier in `Obj.Get` so that the main application can then resume processing (after the information is retrieved from the protected object).

15.3 Task and protected types

In the previous examples, we defined single tasks and protected objects. We can, however, generalize tasks and protected objects using type definitions. This allows us, for example, to create multiple tasks based on just a single task type.

15.3.1 Task types

A task type is a generalization of a task. The declaration is similar to simple tasks: you replace **`task`** with **`task type`**. The difference between simple tasks and task types is that task types don't create actual tasks that automatically start. Instead, a task object declaration is needed. This is exactly the way normal variables and types work: objects are only created by variable definitions, not type definitions.

To illustrate this, we repeat our first example:

Listing 16: show_simple_task.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Simple_Task is
   task T;

   task body T is
   begin
      Put_Line ("In task T");
   end T;
begin
   Put_Line ("In main");
end Show_Simple_Task;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Tasking.Show_Simple_Task
MD5: b17d9b35b4b2b53bc59776749e1be219
```

Runtime output

```
In task T
In main
```

We now rewrite it by replacing `task T` with `task type TT`. We declare a task (A_Task) based on the task type TT after its definition:

Listing 17: show_simple_task_type.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Simple_Task_Type is
   task type TT;

   task body TT is
   begin
      Put_Line ("In task type TT");
   end TT;

   A_Task : TT;
begin
   Put_Line ("In main");
end Show_Simple_Task_Type;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Tasking.Show_Simple_Task_Type
MD5: 24c26dcbba6f5c54f0a7d47c3c0da728
```

Runtime output

```
In task type TT
In main
```

We can extend this example and create an array of tasks. Since we're using the same syntax as for variable declarations, we use a similar syntax for task types: `array (<>) of Task_Type`. Also, we can pass information to the individual tasks by defining a `Start` entry. Here's the updated example:

Listing 18: show_task_type_array.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Task_Type_Array is
   task type TT is
      entry Start (N : Integer);
   end TT;

   task body TT is
      Task_N : Integer;
   begin
      accept Start (N : Integer) do
         Task_N := N;
      end Start;
      Put_Line ("In task T: "
                & Integer'Image (Task_N));
   end TT;

   My_Tasks : array (1 .. 5) of TT;
begin
   Put_Line ("In main");

   for I in My_Tasks'Range loop
      My_Tasks (I).Start (I);
   end loop;
end Show_Task_Type_Array;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Tasking.Show_Task_Type_Array
MD5: bba072dfc52fb2bfbef6e7b9f8191464
```

Runtime output

```
In main
In task T:  1
In task T:  2
In task T:  3
In task T:  4
In task T:  5
```

In this example, we're declaring five tasks in the array `My_Tasks`. We pass the array index to the individual tasks in the entry point (`Start`). After the synchronization between the individual subtasks and the main task, each subtask calls `Put_Line` concurrently.

15.3.2 Protected types

A protected type is a generalization of a protected object. The declaration is similar to that for protected objects: you replace **`protected`** with **`protected type`**. Like task types, protected types require an object declaration to create actual objects. Again, this is similar to variable declarations and allows for creating arrays (or other composite objects) of protected objects.

We can reuse a previous example and rewrite it to use a protected type:

Listing 19: show_protected_object_type.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Protected_Object_Type is
```

(continues on next page)

(continued from previous page)

```
4
5     protected type P_Obj_Type is
6        procedure Set (V : Integer);
7        function Get return Integer;
8     private
9        Local : Integer := 0;
10    end P_Obj_Type;
11
12    protected body P_Obj_Type is
13       procedure Set (V : Integer) is
14       begin
15          Local := V;
16       end Set;
17
18       function Get return Integer is
19       begin
20          return Local;
21       end Get;
22    end P_Obj_Type;
23
24    Obj : P_Obj_Type;
25 begin
26    Obj.Set (5);
27    Put_Line ("Number is: "
28              & Integer'Image (Obj.Get));
29 end Show_Protected_Object_Type;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Tasking.Show_Protected_Object_Type
MD5: c50321e55afef0d72f263fee0669e55f
```

Runtime output

```
Number is:  5
```

In this example, instead of directly defining the protected object `Obj`, we first define a protected type `P_Obj_Type` and then declare `Obj` as an object of that protected type. Note that the main application hasn't changed: we still use `Obj.Set` and `Obj.Get` to access the protected object, just like in the original example.

CHAPTER

SIXTEEN

DESIGN BY CONTRACTS

Contracts are used in programming to codify expectations. Parameter modes of a subprogram can be viewed as a simple form of contracts. When the specification of subprogram 0p declares a parameter using **in** mode, the caller of 0p knows that the **in** argument won't be changed by 0p. In other words, the caller expects that 0p doesn't modify the argument it's providing, but just reads the information stored in the argument. Constraints and subtypes are other examples of contracts. In general, these specifications improve the consistency of the application.

Design-by-contract programming refers to techniques that include pre- and postconditions, subtype predicates, and type invariants. We study those topics in this chapter.

16.1 Pre- and postconditions

Pre- and postconditions provide expectations regarding input and output parameters of subprograms and return value of functions. If we say that certain requirements must be met before calling a subprogram 0p, those are preconditions. Similarly, if certain requirements must be met after a call to the subprogram 0p, those are postconditions. We can think of preconditions and postconditions as promises between the subprogram caller and the callee: a precondition is a promise from the caller to the callee, and a postcondition is a promise in the other direction.

Pre- and postconditions are specified using an aspect clause in the subprogram declaration. A **with** `Pre =>` `<condition>` clause specifies a precondition and a **with** `Post =>` `<condition>` clause specifies a postcondition.

The following code shows an example of preconditions:

Listing 1: show_simple_precondition.adb

```
procedure Show_Simple_Precondition is

   procedure DB_Entry (Name : String;
                       Age  : Natural)
     with Pre => Name'Length > 0
   is
   begin
      --  Missing implementation
      null;
   end DB_Entry;
begin
   DB_Entry ("John", 30);

   --  Precondition will fail!
   DB_Entry ("",     21);
end Show_Simple_Precondition;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Contracts.Show_Simple_Precondition
MD5: 87b6e080555603111801a0fcd2469acd
```

Runtime output

```
raised ADA.ASSERTIONS.ASSERTION_ERROR : failed precondition from show_simple_
↪precondition.adb:5
```

In this example, we want to prevent the name field in our database from containing an empty string. We implement this requirement by using a precondition requiring that the length of the string used for the `Name` parameter of the `DB_Entry` procedure is greater than zero. If the `DB_Entry` procedure is called with an empty string for the `Name` parameter, the call will fail because the precondition is not met.

In the GNAT toolchain

GNAT handles pre- and postconditions by generating runtime assertions for them. By default, however, assertions aren't enabled. Therefore, in order to check pre- and post-conditions at runtime, you need to enable assertions by using the *-gnata* switch.

Before we get to our next example, let's briefly discuss quantified expressions, which are quite useful in concisely writing pre- and postconditions. Quantified expressions return a Boolean value indicating whether elements of an array or container match the expected condition. They have the form: `(for all I in A'Range => <condition on A(I)>`, where `A` is an array and `I` is an index. Quantified expressions using `for all` check whether the condition is true for every element. For example:

```
(for all I in A'Range => A (I) = 0)
```

This quantified expression is only true when all elements of the array `A` have a value of zero.

Another kind of quantified expressions uses `for some`. The form looks similar: `(for some I in A'Range => <condition on A(I)>`. However, in this case the qualified expression tests whether the condition is true only on *some* elements (hence the name) instead of all elements.

We illustrate postconditions using the following example:

Listing 2: show_simple_postcondition.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  procedure Show_Simple_Postcondition is
4
5     type Int_8 is range -2 ** 7 .. 2 ** 7 - 1;
6
7     type Int_8_Array is
8       array (Integer range <>) of Int_8;
9
10    function Square (A : Int_8) return Int_8 is
11      (A * A)
12        with Post => (if abs A in 0 | 1
13                      then Square'Result = abs A
14                      else Square'Result > A);
15
16    procedure Square (A : in out Int_8_Array)
17      with Post => (for all I in A'Range =>
18                      A (I) = A'Old (I) *
19                              A'Old (I))
```

(continues on next page)

(continued from previous page)

```
   is
   begin
      for V of A loop
         V := Square (V);
      end loop;
   end Square;

   V : Int_8_Array := (-2, -1, 0, 1, 10, 11);
begin
   for E of V loop
      Put_Line ("Original: "
                & Int_8'Image (E));
   end loop;
   New_Line;

   Square (V);
   for E of V loop
      Put_Line ("Square:   "
                & Int_8'Image (E));
   end loop;
end Show_Simple_Postcondition;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Contracts.Show_Simple_Postcondition
MD5: b9bae9fe09cefcbe6769ad9cd6739e2a
```

Runtime output

```
Original: -2
Original: -1
Original:  0
Original:  1
Original:  10
Original:  11

Square:    4
Square:    1
Square:    0
Square:    1
Square:    100
Square:    121
```

We declare a signed 8-bit type `Int_8` and an array of that type (`Int_8_Array`). We want to ensure each element of the array is squared after calling the procedure `Square` for an object of the `Int_8_Array` type. We do this with a postcondition using a **`for all`** expression. This postcondition also uses the `'Old` attribute to refer to the original value of the parameter (before the call).

We also want to ensure that the result of calls to the `Square` function for the `Int_8` type are greater than the input to that call. To do that, we write a postcondition using the `'Result` attribute of the function and comparing it to the input value.

We can use both pre- and postconditions in the declaration of a single subprogram. For example:

Listing 3: show_simple_contract.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Simple_Contract is
```

(continues on next page)

(continued from previous page)

```
4
5     type Int_8 is range -2 ** 7 .. 2 ** 7 - 1;
6
7     function Square (A : Int_8) return Int_8 is
8       (A * A)
9         with
10          Pre  => (Integer'Size >= Int_8'Size * 2
11                   and Integer (A) *
12                         Integer (A) <=
13                       Integer (Int_8'Last)),
14          Post => (if abs A in 0 | 1
15                   then Square'Result = abs A
16                   else Square'Result > A);
17
18    V : Int_8;
19 begin
20    V := Square (11);
21    Put_Line ("Square of 11 is "
22              & Int_8'Image (V));
23
24    --  Precondition will fail...
25    V := Square (12);
26    Put_Line ("Square of 12 is "
27              & Int_8'Image (V));
28 end Show_Simple_Contract;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Contracts.Show_Simple_Contract
MD5: 1d928dd100704907c858562155f90ee2
```

Runtime output

```
Square of 11 is  121

raised ADA.ASSERTIONS.ASSERTION_ERROR : failed precondition from show_simple_
↪contract.adb:10
```

In this example, we want to ensure that the input value of calls to the `Square` function for the `Int_8` type won't cause overflow in that function. We do this by converting the input value to the **`Integer`** type, which is used for the temporary calculation, and check if the result is in the appropriate range for the `Int_8` type. We have the same postcondition in this example as in the previous one.

16.2 Predicates

Predicates specify expectations regarding types. They're similar to pre- and postconditions, but apply to types instead of subprograms. Their conditions are checked for each object of a given type, which allows verifying that an object of type T is conformant to the requirements of its type.

There are two kinds of predicates: static and dynamic. In simple terms, static predicates are used to check objects at compile-time, while dynamic predicates are used for checks at run time. Normally, static predicates are used for scalar types and dynamic predicates for the more complex types.

Static and dynamic predicates are specified using the following clauses, respectively:

- **`with`** `Static_Predicate =>` `<property>`
- **`with`** `Dynamic_Predicate =>` `<property>`

Let's use the following example to illustrate dynamic predicates:

Listing 4: show_dynamic_predicate_courses.adb

```
with Ada.Calendar; use Ada.Calendar;

with Ada.Containers.Vectors;

with Ada.Strings.Unbounded;
use  Ada.Strings.Unbounded;

procedure Show_Dynamic_Predicate_Courses is

   package Courses is
      type Course_Container is private;

      type Course is record
         Name       : Unbounded_String;
         Start_Date : Time;
         End_Date   : Time;
      end record
        with Dynamic_Predicate =>
          Course.Start_Date <= Course.End_Date;

      procedure Add (CC : in out Course_Container;
                     C  :        Course);
   private
      package Course_Vectors is new
        Ada.Containers.Vectors
          (Index_Type   => Natural,
           Element_Type => Course);

      type Course_Container is record
         V : Course_Vectors.Vector;
      end record;
   end Courses;

   package body Courses is
      procedure Add (CC : in out Course_Container;
                     C  :        Course) is
      begin
         CC.V.Append (C);
      end Add;
   end Courses;

   use Courses;

   CC : Course_Container;
begin
   Add (CC,
        Course'(
          Name       =>
            To_Unbounded_String
              ("Intro to Photography"),
          Start_Date =>
            Time_Of (2018, 5, 1),
          End_Date   =>
            Time_Of (2018, 5, 10)));

   --  This should trigger an error in the
   --  dynamic predicate check
   Add (CC,
        Course'(
```

(continues on next page)

(continued from previous page)

```
60            Name       =>
61              To_Unbounded_String
62                ("Intro to Video Recording"),
63            Start_Date =>
64              Time_Of (2019, 5, 1),
65            End_Date   =>
66              Time_Of (2018, 5, 10)));
67
68  end Show_Dynamic_Predicate_Courses;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Contracts.Show_Dynamic_Predicate_Courses
MD5: 8bd6539e72995fececfcdf9666ffd04f
```

Runtime output

```
raised ADA.ASSERTIONS.ASSERTION_ERROR : Dynamic_Predicate failed at show_dynamic_
 ↪predicate_courses.adb:59
```

In this example, the package `Courses` defines a type `Course` and a type `Course_Container`, an object of which contains all courses. We want to ensure that the dates of each course are consistent, specifically that the start date is no later than the end date. To enforce this rule, we declare a dynamic predicate for the `Course` type that performs the check for each object. The predicate uses the type name where a variable of that type would normally be used: this is a reference to the instance of the object being tested.

Note that the example above makes use of unbounded strings and dates. Both types are available in Ada's standard library. Please refer to the following sections for more information about:

- the unbounded string type (`Unbounded_String`): *Unbounded Strings* (page 247) section;
- dates and times: *Dates & Times* (page 231) section.

Static predicates, as mentioned above, are mostly used for scalar types and checked during compilation. They're particularly useful for representing non-contiguous elements of an enumeration. A classic example is a list of week days:

```
type Week is (Mon, Tue, Wed, Thu, Fri, Sat, Sun);
```

We can easily create a sub-list of work days in the week by specifying a **subtype** with a range based on `Week`. For example:

```
subtype Work_Week is Week range Mon .. Fri;
```

Ranges in Ada can only be specified as contiguous lists: they don't allow us to pick specific days. However, we may want to create a list containing just the first, middle and last day of the work week. To do that, we use a static predicate:

```
subtype Check_Days is Work_Week
  with Static_Predicate =>
         Check_Days in Mon | Wed | Fri;
```

Let's look at a complete example:

Listing 5: show_predicates.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Predicates is

   type Week is (Mon, Tue, Wed, Thu,
                 Fri, Sat, Sun);

   subtype Work_Week is Week range Mon .. Fri;

   subtype Test_Days is Work_Week
     with Static_Predicate =>
       Test_Days in Mon | Wed | Fri;

   type Tests_Week is array (Week) of Natural
     with Dynamic_Predicate =>
       (for all I in Tests_Week'Range =>
          (case I is
               when Test_Days =>
                  Tests_Week (I) > 0,
               when others    =>
                  Tests_Week (I) = 0));

   Num_Tests : Tests_Week :=
                 (Mon => 3, Tue => 0,
                  Wed => 4, Thu => 0,
                  Fri => 2, Sat => 0,
                  Sun => 0);

   procedure Display_Tests (N : Tests_Week) is
   begin
      for I in Test_Days loop
         Put_Line ("# tests on "
                   & Test_Days'Image (I)
                   & " => "
                   & Integer'Image (N (I)));
      end loop;
   end Display_Tests;

begin
   Display_Tests (Num_Tests);

   --  Assigning non-conformant values to
   --  individual elements of the Tests_Week
   --  type does not trigger a predicate
   --  check:
   Num_Tests (Tue) := 2;

   --  However, assignments with the "complete"
   --  Tests_Week type trigger a predicate
   --  check. For example:
   --
   --  Num_Tests := (others => 0);

   --  Also, calling any subprogram with
   --  parameters of Tests_Week type
   --  triggers a predicate check. Therefore,
   --  the following line will fail:
   Display_Tests (Num_Tests);
end Show_Predicates;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Contracts.Show_Predicates
MD5: 126c47033fc67fc8b6d7f6479205e752
```

Runtime output

```
# tests on MON =>  3
# tests on WED =>  4
# tests on FRI =>  2

raised ADA.ASSERTIONS.ASSERTION_ERROR : Dynamic_Predicate failed at show_
 ↪predicates.adb:58
```

Here we have an application that wants to perform tests only on three days of the work week. These days are specified in the `Test_Days` subtype. We want to track the number of tests that occur each day. We declare the type `Tests_Week` as an array, an object of which will contain the number of tests done each day. According to our requirements, these tests should happen only in the aforementioned three days; on other days, no tests should be performed. This requirement is implemented with a dynamic predicate of the type `Tests_Week`. Finally, the actual information about these tests is stored in the array `Num_Tests`, which is an instance of the `Tests_Week` type.

The dynamic predicate of the `Tests_Week` type is verified during the initialization of `Num_Tests`. If we have a non-conformant value there, the check will fail. However, as we can see in our example, individual assignments to elements of the array do not trigger a check. We can't check for consistency at this point because the initialization of the a complex data structure (such as arrays or records) may not be performed with a single assignment. However, as soon as the object is passed as an argument to a subprogram, the dynamic predicate is checked because the subprogram requires the object to be consistent. This happens in the last call to `Display_Tests` in our example. Here, the predicate check fails because the previous assignment has a non-conformant value.

16.3 Type invariants

Type invariants are another way of specifying expectations regarding types. While predicates are used for *non-private* types, type invariants are used exclusively to define expectations about private types. If a type T from a package P has a type invariant, the results of operations on objects of type T are always consistent with that invariant.

Type invariants are specified with a **`with`** `Type_Invariant => <property>` clause. Like predicates, the *property* defines a condition that allows us to check if an object of type T is conformant to its requirements. In this sense, type invariants can be viewed as a sort of predicate for private types. However, there are some differences in terms of checks. The following table summarizes the differences:

Element	Subprogram parameter checks	Assignment checks
Predicates	On all **`in`** and **`out`** parameters	On assignments and explicit initializations
Type invariants	On **`out`** parameters returned from subprograms declared in the same public scope	On all initializations

We could rewrite our previous example and replace dynamic predicates by type invariants. It would look like this:

Listing 6: show_type_invariant.adb

```
with Ada.Text_IO;  use Ada.Text_IO;
with Ada.Calendar; use Ada.Calendar;

with Ada.Containers.Vectors;

with Ada.Strings.Unbounded;
use  Ada.Strings.Unbounded;

procedure Show_Type_Invariant is

   package Courses is
      type Course is private
        with Type_Invariant => Check (Course);

      type Course_Container is private;

      procedure Add (CC : in out Course_Container;
                     C  :        Course);

      function Init
        (Name                 : String;
         Start_Date, End_Date : Time)
         return Course;

      function Check (C : Course)
                      return Boolean;

   private
      type Course is record
         Name       : Unbounded_String;
         Start_Date : Time;
         End_Date   : Time;
      end record;

      function Check (C : Course)
                      return Boolean is
        (C.Start_Date <= C.End_Date);

      package Course_Vectors is new
        Ada.Containers.Vectors
          (Index_Type   => Natural,
           Element_Type => Course);

      type Course_Container is record
         V : Course_Vectors.Vector;
      end record;
   end Courses;

   package body Courses is
      procedure Add (CC : in out Course_Container;
                     C  :        Course) is
      begin
         CC.V.Append (C);
      end Add;

      function Init
        (Name                 : String;
         Start_Date, End_Date : Time)
         return Course is
      begin
         return
```

(continues on next page)

(continued from previous page)

```
62            Course'(Name       =>
63                      To_Unbounded_String (Name),
64                    Start_Date => Start_Date,
65                    End_Date   => End_Date);
66       end Init;
67    end Courses;
68
69    use Courses;
70
71    CC : Course_Container;
72 begin
73    Add (CC,
74         Init (Name       =>
75                 "Intro to Photography",
76               Start_Date =>
77                 Time_Of (2018, 5, 1),
78               End_Date   =>
79                 Time_Of (2018, 5, 10)));
80
81    --  This should trigger an error in the
82    --  type-invariant check
83    Add (CC,
84         Init (Name       =>
85                 "Intro to Video Recording",
86               Start_Date =>
87                 Time_Of (2019, 5, 1),
88               End_Date   =>
89                 Time_Of (2018, 5, 10)));
90 end Show_Type_Invariant;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Contracts.Show_Type_Invariant
MD5: c6ef863da94285f927dd106645af8650
```

Runtime output

```
raised ADA.ASSERTIONS.ASSERTION_ERROR : failed invariant from show_type_invariant.
↪adb:13
```

The major difference is that the Course type was a visible (public) type of the Courses package in the previous example, but in this example is a private type.

CHAPTER

SEVENTEEN

INTERFACING WITH C

Ada allows us to interface with code in many languages, including C and C++. This section discusses how to interface with C.

17.1 Multi-language project

By default, when using **gprbuild** we only compile Ada source files. To compile C files as well, we need to modify the project file used by **gprbuild**. We use the Languages entry, as in the following example:

```
project Multilang is

   for Languages use ("ada", "c");

   for Source_Dirs use ("src");
   for Main use ("main.adb");
   for Object_Dir use "obj";

end Multilang;
```

17.2 Type convention

To interface with data types declared in a C application, you specify the `Convention` aspect on the corresponding Ada type declaration. In the following example, we interface with the `C_Enum` enumeration declared in a C source file:

Listing 1: show_c_enum.adb

```
1  procedure Show_C_Enum is
2
3     type C_Enum is (A, B, C)
4       with Convention => C;
5     --  Use C convention for C_Enum
6  begin
7     null;
8  end Show_C_Enum;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Interfacing_With_C.Ada_C_Enum
MD5: a14d7d981fd7d6d806cf3c55f35e19c8
```

To interface with C's built-in types, we use the `Interfaces.C` package, which contains most of the type definitions we need. For example:

Listing 2: show_c_struct.adb

```
with Interfaces.C; use Interfaces.C;

procedure Show_C_Struct is

   type c_struct is record
      a : int;
      b : long;
      c : unsigned;
      d : double;
   end record
     with Convention => C;

begin
   null;
end Show_C_Struct;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Interfacing_With_C.Ada_C_Struct
MD5: dda4d3f8e4ddf5c5138a990a9a8ac427
```

Here, we're interfacing with a C struct (`C_Struct`) and using the corresponding data types in C (**`int`**, **`long`**, **`unsigned`** and **`double`**). This is the declaration in C:

Listing 3: c_struct.h

```
struct c_struct
{
    int         a;
    long        b;
    unsigned    c;
    double      d;
};
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Interfacing_With_C.Ada_C_Struct
MD5: 58709b6a9eea2606d7ec0aaca0a749ff
```

17.3 Foreign subprograms

17.3.1 Calling C subprograms in Ada

We use a similar approach when interfacing with subprograms written in C. Consider the following declaration in the C header file:

Listing 4: my_func.h

```
int my_func (int a);
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Interfacing_With_C.Ada_C_Func
MD5: 37b9d7ba668f7ec83c2b27ee33637937
```

Here's the corresponding C definition:

Listing 5: my_func.c

```c
#include "my_func.h"

int my_func (int a)
{
    return a * 2;
}
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Interfacing_With_C.Ada_C_Func
MD5: 284b1639cb393fc14ed196d78429f3ba
```

We can interface this code in Ada using the `Import` aspect. For example:

Listing 6: show_c_func.adb

```
with Interfaces.C; use Interfaces.C;
with Ada.Text_IO;  use Ada.Text_IO;

procedure Show_C_Func is

   function my_func (a : int) return int
     with
       Import        => True,
       Convention    => C;

   --  Imports function 'my_func' from C.
   --  You can now call it from Ada.

   V : int;
begin
   V := my_func (2);
   Put_Line ("Result is " & int'Image (V));
end Show_C_Func;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Interfacing_With_C.Ada_C_Func
MD5: 6c5d85c1debdeaa642946eacf413dfd2
```

If you want, you can use a different subprogram name in the Ada code. For example, we could call the C function `Get_Value`:

Listing 7: show_c_func.adb

```
with Interfaces.C; use Interfaces.C;
with Ada.Text_IO;  use Ada.Text_IO;

procedure Show_C_Func is

   function Get_Value (a : int) return int
     with
       Import        => True,
       Convention    => C,
       External_Name => "my_func";

   --  Imports function 'my_func' from C and
   --  renames it to 'Get_Value'

```

(continues on next page)

(continued from previous page)

```
   V : int;
begin
   V := Get_Value (2);
   Put_Line ("Result is " & int'Image (V));
end Show_C_Func;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Interfacing_With_C.Ada_C_Func
MD5: 856b4d99dfaa6946fb4597f254fd2f97
```

17.3.2 Calling Ada subprograms in C

You can also call Ada subprograms from C applications. You do this with the `Export` aspect. For example:

Listing 8: c_api.ads

```
with Interfaces.C; use Interfaces.C;

package C_API is

   function My_Func (a : int) return int
     with
       Export        => True,
       Convention    => C,
       External_Name => "my_func";

end C_API;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Interfacing_With_C.C_Ada_Func
MD5: 00aa4ec29fc551e710900e2ee7d96bc9
```

This is the corresponding body that implements that function:

Listing 9: c_api.adb

```
package body C_API is

   function My_Func (a : int) return int is
   begin
      return a * 2;
   end My_Func;

end C_API;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Interfacing_With_C.C_Ada_Func
MD5: 2b999ab431bbc1ee223a654ad84b8248
```

On the C side, we do the same as we would if the function were written in C: simply declare it using the **`extern`** keyword. For example:

Listing 10: main.c

```
#include <stdio.h>

```

(continues on next page)

(continued from previous page)

```
extern int my_func (int a);

int main (int argc, char **argv) {

  int v = my_func(2);

  printf("Result is %d\n", v);

  return 0;
}
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Interfacing_With_C.C_Ada_Func
MD5: 69301036be9be16ed45895c2a86bc352
```

17.4 Foreign variables

17.4.1 Using C global variables in Ada

To use global variables from C code, we use the same method as subprograms: we specify the `Import` and `Convention` aspects for each variable we want to import.

Let's reuse an example from the previous section. We'll add a global variable (`func_cnt`) to count the number of times the function (`my_func`) is called:

Listing 11: test.h

```
extern int func_cnt;

int my_func (int a);
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Interfacing_With_C.Ada_C_Vars
MD5: 11ba8f7a72ce7058571994870a02b052
```

The variable is declared in the C file and incremented in `my_func`:

Listing 12: test.c

```
#include "test.h"

int func_cnt = 0;

int my_func (int a)
{
  func_cnt++;

  return a * 2;
}
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Interfacing_With_C.Ada_C_Vars
MD5: 23631537cb877a03d1243c94cb7b48e8
```

In the Ada application, we just reference the foreign variable:

Listing 13: show_c_func.adb

```
with Interfaces.C; use Interfaces.C;
with Ada.Text_IO;  use Ada.Text_IO;

procedure Show_C_Func is

   function my_func (a : int) return int
     with
       Import     => True,
       Convention => C;

   V : int;

   func_cnt : int
     with
       Import        => True,
       Convention    => C;
   --  We can access the func_cnt variable
   --  from test.c

begin
   V := my_func (1);
   V := my_func (2);
   V := my_func (3);

   Put_Line ("Result is "
             & int'Image (V));

   Put_Line ("Function was called "
             & int'Image (func_cnt)
             & " times");
end Show_C_Func;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Interfacing_With_C.Ada_C_Vars
MD5: cf64a9dfbc6be853ba19729fe55f0ba4
```

As we see by running the application, the value of the counter is the number of times `my_func` was called.

We can use the `External_Name` aspect to give a different name for the variable in the Ada application in the same way we do for subprograms.

17.4.2 Using Ada variables in C

You can also use variables declared in Ada files in C applications. In the same way as we did for subprograms, you do this with the `Export` aspect.

Let's reuse a past example and add a counter, as in the previous example, but this time have the counter incremented in Ada code:

Listing 14: c_api.ads

```
with Interfaces.C; use Interfaces.C;

package C_API is

   func_cnt : int := 0
     with
```

(continues on next page)

(continued from previous page)

```
      Export     => True,
      Convention => C;

   function My_Func (a : int) return int
     with
       Export        => True,
       Convention    => C,
       External_Name => "my_func";

end C_API;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Interfacing_With_C.C_Ada_Vars
MD5: fc118cddd797b669d2c68e57f90f69b2
```

The variable is then incremented in My_Func:

Listing 15: c_api.adb

```
package body C_API is

   function My_Func (a : int) return int is
   begin
      func_cnt := func_cnt + 1;
      return a * 2;
   end My_Func;

end C_API;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Interfacing_With_C.C_Ada_Vars
MD5: adff5f3088da8b0dd853f1fb8b1e204f
```

In the C application, we just need to declare the variable and use it:

Listing 16: main.c

```
#include <stdio.h>

extern int my_func (int a);

extern int func_cnt;

int main (int argc, char **argv) {

  int v;

  v = my_func(1);
  v = my_func(2);
  v = my_func(3);

  printf("Result is %d\n", v);

  printf("Function was called %d times\n",
         func_cnt);

  return 0;
}
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Interfacing_With_C.C_Ada_Vars
MD5: 07fb3fbadb8ed4c0543fbfd7b5ef5c57
```

Again, by running the application, we see that the value from the counter is the number of times that `my_func` was called.

17.5 Generating bindings

In the examples above, we manually added aspects to our Ada code to correspond to the C source-code we're interfacing with. This is called creating a *binding*. We can automate this process by using the *Ada spec dump* compiler option: `-fdump-ada-spec`. We illustrate this by revisiting our previous example.

This was our C header file:

Listing 17: test.h

```
1 extern int func_cnt;
2
3 int my_func (int a);
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Interfacing_With_C.C_Binds
MD5: 11ba8f7a72ce7058571994870a02b052
```

To create Ada bindings, we'll call the compiler like this:

```
gcc -c -fdump-ada-spec -C ./test.h
```

The result is an Ada spec file called `test_h.ads`:

Listing 18: test_h.ads

```
1  pragma Ada_2005;
2  pragma Style_Checks (Off);
3
4  with Interfaces.C; use Interfaces.C;
5
6  package test_h is
7
8     func_cnt : aliased int;  -- ./test.h:3
9     pragma Import (C, func_cnt, "func_cnt");
10
11    function my_func (arg1 : int) return int;  -- ./test.h:5
12    pragma Import (C, my_func, "my_func");
13
14 end test_h;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Interfacing_With_C.C_Binds
MD5: 8d18aeae72dba3a9ab4f9f3943fab839
```

Now we simply refer to this `test_h` package in our Ada application:

Listing 19: show_c_func.adb

```
1 with Interfaces.C; use Interfaces.C;
2 with Ada.Text_IO;  use Ada.Text_IO;
```

(continues on next page)

(continued from previous page)

```
with test_h;       use test_h;

procedure Show_C_Func is
   V : int;
begin
   V := my_func (1);
   V := my_func (2);
   V := my_func (3);

   Put_Line ("Result is "
             & int'Image (V));

   Put_Line ("Function was called "
             & int'Image (func_cnt)
             & " times");
end Show_C_Func;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Interfacing_With_C.C_Binds
MD5: 8a07aae87b9f36c3fce84b75e8388933
```

You can specify the name of the parent unit for the bindings you're creating as the operand to `fdump-ada-spec`:

```
gcc -c -fdump-ada-spec -fada-spec-parent=Ext_C_Code -C ./test.h
```

This creates the file `ext_c_code-test_h.ads`:

Listing 20: ext_c_code-test_h.ads

```
package Ext_C_Code.test_h is

   --  automatic generated bindings...

end Ext_C_Code.test_h;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Interfacing_With_C.C_Binds_2
MD5: 3bd4087edff145a70d2a6db8543859ad
```

17.5.1 Adapting bindings

The compiler does the best it can when creating bindings for a C header file. However, sometimes it has to guess about the translation and the generated bindings don't always match our expectations. For example, this can happen when creating bindings for functions that have pointers as arguments. In this case, the compiler may use `System.Address` as the type of one or more pointers. Although this approach works fine (as we'll see later), this is usually not how a human would interpret the C header file. The following example illustrates this issue.

Let's start with this C header file:

Listing 21: test.h

```
struct test;

struct test * test_create(void);

```

(continues on next page)

(continued from previous page)

```
void test_destroy(struct test *t);

void test_reset(struct test *t);

void test_set_name(struct test *t,
                   char        *name);

void test_set_address(struct test *t,
                      char        *address);

void test_display(const struct test *t);
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Interfacing_With_C.C_Binds_3
MD5: af642d9ea995bf01f13f8ff41bb0f4f6
```

And the corresponding C implementation:

Listing 22: test.c

```
#include <stdlib.h>
#include <string.h>
#include <stdio.h>

#include "test.h"

struct test {
  char name[80];
  char address[120];
};

static size_t
strlcpy_stat(char       *dst,
             const char *src,
             size_t      dstsize)
{
  size_t len = strlen(src);
  if (dstsize) {
    size_t bl = (len < dstsize-1 ?
                 len : dstsize-1);
    ((char*)memcpy(dst, src, bl))[bl] = 0;
  }
  return len;
}

struct test * test_create(void)
{
  return malloc (sizeof (struct test));
}

void test_destroy(struct test *t)
{
  if (t != NULL) {
    free(t);
  }
}

void test_reset(struct test *t)
{
  t->name[0]    = '\0';
```

(continues on next page)

(continued from previous page)

```
  t->address[0] = '\0';
}

void test_set_name(struct test *t,
                   char        *name)
{
  strlcpy_stat(t->name,
               name,
               sizeof(t->name));
}

void test_set_address(struct test *t,
                      char        *address)
{
  strlcpy_stat(t->address,
               address,
               sizeof(t->address));
}

void test_display(const struct test *t)
{
  printf("Name:    %s\n", t->name);
  printf("Address: %s\n", t->address);
}
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Interfacing_With_C.C_Binds_3
MD5: 32652eb76ad92212609680d64e5687d3
```

Next, we'll create our bindings:

```
gcc -c -fdump-ada-spec -C ./test.h
```

This creates the following specification in `test_h.ads`:

Listing 23: test_h.ads

```
pragma Ada_2005;
pragma Style_Checks (Off);

with Interfaces.C; use Interfaces.C;
with System;
with Interfaces.C.Strings;

package test_h is

   --  skipped empty struct test

   function test_create return System.Address;  -- ./test.h:5
   pragma Import (C, test_create, "test_create");

   procedure test_destroy (arg1 : System.Address);  -- ./test.h:7
   pragma Import (C, test_destroy, "test_destroy");

   procedure test_reset (arg1 : System.Address);  -- ./test.h:9
   pragma Import (C, test_reset, "test_reset");

   procedure test_set_name (arg1 : System.Address; arg2 : Interfaces.C.Strings.
↪chars_ptr);  -- ./test.h:11
   pragma Import (C, test_set_name, "test_set_name");
```

(continues on next page)

(continued from previous page)

```
23
24    procedure test_set_address (arg1 : System.Address; arg2 : Interfaces.C.Strings.
      ↪chars_ptr);  -- ./test.h:13
25    pragma Import (C, test_set_address, "test_set_address");
26
27    procedure test_display (arg1 : System.Address);  -- ./test.h:15
28    pragma Import (C, test_display, "test_display");
29
30 end test_h;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Interfacing_With_C.C_Binds_3
MD5: 3bf8f01b94fd28594e4121a6a36afdf7
```

As we can see, the binding generator completely ignores the declaration `struct test` and all references to the `test` struct are replaced by addresses (`System.Address`). Nevertheless, these bindings are good enough to allow us to create a test application in Ada:

Listing 24: show_automatic_c_struct_bindings.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  with Interfaces.C;
4  use  Interfaces.C;
5
6  with Interfaces.C.Strings;
7  use  Interfaces.C.Strings;
8
9  with test_h; use test_h;
10
11 with System;
12
13 procedure Show_Automatic_C_Struct_Bindings is
14
15    Name    : constant chars_ptr :=
16      New_String ("John Doe");
17    Address : constant chars_ptr :=
18      New_String ("Small Town");
19
20    T : System.Address := test_create;
21
22 begin
23    test_reset (T);
24    test_set_name (T, Name);
25    test_set_address (T, Address);
26
27    test_display (T);
28    test_destroy (T);
29 end Show_Automatic_C_Struct_Bindings;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Interfacing_With_C.C_Binds_3
MD5: 99d64fb14d9c869d140dd2fb7d3888d7
```

We can successfully bind our C code with Ada using the automatically-generated bindings, but they aren't ideal. Instead, we would prefer Ada bindings that match our (human) interpretation of the C header file. This requires manual analysis of the header file. The good news is that we can use the automatic generated bindings as a starting point and adapt them to our needs. For example, we can:

1. Define a Test type based on System.Address and use it in all relevant functions.
2. Remove the test_ prefix in all operations on the Test type.

This is the resulting specification:

Listing 25: adapted_test_h.ads

```
with System;

with Interfaces.C; use Interfaces.C;
with Interfaces.C.Strings;

package adapted_test_h is

   type Test is new System.Address;

   function Create return Test;
   pragma Import (C, Create, "test_create");

   procedure Destroy (T : Test);
   pragma Import (C, Destroy, "test_destroy");

   procedure Reset (T : Test);
   pragma Import (C, Reset, "test_reset");

   procedure Set_Name (T    : Test;
                       Name : Interfaces.C.Strings.chars_ptr);  -- ./test.h:11
   pragma Import (C, Set_Name, "test_set_name");

   procedure Set_Address (T       : Test;
                          Address : Interfaces.C.Strings.chars_ptr);
   pragma Import (C, Set_Address, "test_set_address");

   procedure Display (T : Test);  -- ./test.h:15
   pragma Import (C, Display, "test_display");

end adapted_test_h;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Interfacing_With_C.C_Binds_3
MD5: 5cc875e1b01af839141e5e623f6c5b7a
```

And this is the corresponding Ada body:

Listing 26: show_adapted_c_struct_bindings.adb

```
with Interfaces.C;
use  Interfaces.C;

with Interfaces.C.Strings;
use  Interfaces.C.Strings;

with adapted_test_h; use  adapted_test_h;

with System;

procedure Show_Adapted_C_Struct_Bindings is

   Name    : constant chars_ptr :=
     New_String ("John Doe");
   Address : constant chars_ptr :=
```

(continues on next page)

(continued from previous page)

```
16       New_String ("Small Town");
17
18    T : Test := Create;
19
20 begin
21    Reset (T);
22    Set_Name (T, Name);
23    Set_Address (T, Address);
24
25    Display (T);
26    Destroy (T);
27 end Show_Adapted_C_Struct_Bindings;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Interfacing_With_C.C_Binds_3
MD5: 626d07b080fbbd2bf1d5f9140b64955c
```

Now we can use the Test type and its operations in a clean, readable way.

CHAPTER

EIGHTEEN

OBJECT-ORIENTED PROGRAMMING

Object-oriented programming (OOP) is a large and ill-defined concept in programming languages and one that tends to encompass many different meanings because different languages often implement their own vision of it, with similarities and differences from the implementations in other languages.

However, one model mostly "won" the battle of what object-oriented means, if only by sheer popularity. It's the model used in the Java programming language, which is very similar to the one used by C++. Here are some defining characteristics:

- Type derivation and extension: Most object oriented languages allow the user to add fields to derived types.
- Subtyping: Objects of a type derived from a base type can, in some instances, be substituted for objects of the base type.
- Runtime polymorphism: Calling a subprogram, usually called a *method*, attached to an object type can dispatch at runtime depending on the exact type of the object.
- Encapsulation: Objects can hide some of their data.
- Extensibility: People from the "outside" of your package, or even your whole library, can derive from your object types and define their own behaviors.

Ada dates from before object-oriented programming was as popular as it is today. Some of the mechanisms and concepts from the above list were in the earliest version of Ada even before what we would call OOP was added:

- As we saw, encapsulation is not implemented at the type level in Ada, but instead at the package level.
- Subtyping can be implemented using, well, subtypes, which have a full and permissive static substitutability model. The substitution will fail at runtime if the dynamic constraints of the subtype are not fulfilled.
- Runtime polymorphism can be implemented using variant records.

However, this lists leaves out type extensions, if you don't consider variant records, and extensibility.

The 1995 revision of Ada added a feature filling the gaps, which allowed people to program following the object-oriented paradigm in an easier fashion. This feature is called *tagged types*.

> **Note**
>
> It's possible to program in Ada without ever creating tagged types. If that's your prefered style of programming or you have no specific use for tagged types, feel free to not use them, as is the case for many features of Ada.
>
> However, they can be the best way to express solutions to certain problems and they may be the best way to solve your problem. If that's the case, read on!

18.1 Derived types

Before presenting tagged types, we should discuss a topic we have brushed on, but not really covered, up to now:

You can create one or more new types from every type in Ada. Type derivation is built into the language.

Listing 1: newtypes.ads

```
1  package Newtypes is
2     type Point is record
3        X, Y : Integer;
4     end record;
5
6     type New_Point is new Point;
7  end Newtypes;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Object_Oriented_Programming.Newtypes
MD5: 0d45096755b4bfb08ba8db19ecba3f57
```

Type derivation is useful to enforce strong typing because the type system treats the two types as incompatible.

But the benefits are not limited to that: you can inherit things from the type you derive from. You not only inherit the representation of the data, but you can also inherit behavior.

When you inherit a type you also inherit what are called *primitive operations*. A primitive operation (or just a *primitive*) is a subprogram attached to a type. Ada defines primitives as subprograms defined in the same scope as the type.

> **Attention**
>
> A subprogram will only become a primitive of the type if:
>
> 1. The subprogram is declared in the same scope as the type and
> 2. The type and the subprogram are declared in a package

Listing 2: primitives.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  procedure Primitives is
4     package Week is
5        type Days is (Monday, Tuesday, Wednesday,
6                      Thursday, Friday,
```

(continues on next page)

(continued from previous page)

```
                    Saturday, Sunday);

      --  Print_Day is a primitive
      --  of the type Days
     procedure Print_Day (D : Days);
   end Week;

   package body Week is
      procedure Print_Day (D : Days) is
      begin
         Put_Line (Days'Image (D));
      end Print_Day;
   end Week;

   use Week;
   type Weekend_Days is new
     Days range Saturday .. Sunday;

   --  A procedure Print_Day is automatically
   --  inherited here. It is as if the procedure
   --
   --  procedure Print_Day (D : Weekend_Days);
   --
   --  has been declared with the same body

   Sat : Weekend_Days := Saturday;
begin
   Print_Day (Sat);
end Primitives;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Object_Oriented_Programming.Primitives
MD5: eb1b0eb66f03a4a17bd9686ec4e12e2e
```

Runtime output

```
SATURDAY
```

This kind of inheritance can be very useful, and is not limited to record types (you can use it on discrete types, as in the example above), but it's only superficially similar to object-oriented inheritance:

- Records can't be extended using this mechanism alone. You also can't specify a new representation for the new type: it will **always** have the same representation as the base type.
- There's no facility for dynamic dispatch or polymorphism. Objects are of a fixed, static type.

There are other differences, but it's not useful to list them all here. Just remember that this is a kind of inheritance you can use if you only want to statically inherit behavior without duplicating code or using composition, but a kind you can't use if you want any dynamic features that are usually associated with OOP.

18.2 Tagged types

The 1995 revision of the Ada language introduced tagged types to fullfil the need for an unified solution that allows programming in an object-oriented style similar to the one described at the beginning of this chapter.

Tagged types are very similar to normal records except that some functionality is added:

- Types have a *tag*, stored inside each object, that identifies the runtime type[20] of that object.
- Primitives can dispatch. A primitive on a tagged type is what you would call a *method* in Java or C++. If you derive a base type and override a primitive of it, you can often call it on an object with the result that which primitive is called depends on the exact runtime type of the object.
- Subtyping rules are introduced allowing a tagged type derived from a base type to be statically compatible with the base type.

Let's see our first tagged type declarations:

Listing 3: p.ads

```
package P is
   type My_Class is tagged null record;
   --  Just like a regular record, but
   --  with tagged qualifier

   --  Methods are outside of the type
   --  definition:

   procedure Foo (Self : in out My_Class);
   --  If you define a procedure taking a
   --  My_Class argument in the same package,
   --  it will be a method.

   --  Here's how you derive a tagged type:

   type Derived is new My_Class with record
      A : Integer;
      --  You can add fields in derived types.
   end record;

   overriding
   procedure Foo (Self : in out Derived);
   --  The "overriding" qualifier is optional,
   --  but if it is present, it must be valid.
end P;
```

Listing 4: p.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body P is
   procedure Foo (Self : in out My_Class) is
   begin
      Put_Line ("In My_Class.Foo");
   end Foo;

   procedure Foo (Self : in out Derived) is
   begin
      Put_Line ("In Derived.Foo, A = "
                & Integer'Image (Self.A));
   end Foo;
end P;
```

Code block metadata

[20] https://en.wikipedia.org/wiki/Run-time_type_information

```
Project: Courses.Intro_To_Ada.Object_Oriented_Programming.Tagged_Types
MD5: 45baaad66a1047358addb574d0fa00bc
```

18.3 Classwide types

To remain consistent with the rest of the language, a new notation needed to be introduced to say "This object is of this type or any descendant derives tagged type".

In Ada, we call this the *classwide type*. It's used in OOP as soon as you need polymorphism. For example, you can't do the following:

Listing 5: main.adb

```
with P; use P;

procedure Main is

   O1 : My_Class;
   --  Declaring an object of type My_Class

   O2 : Derived := (A => 12);
   --  Declaring an object of type Derived

   O3 : My_Class := O2;
   --  INVALID: Trying to assign a value
   --  of type derived to a variable of
   --  type My_Class.
begin
   null;
end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Object_Oriented_Programming.Tagged_Types
MD5: c87ad8bb686cb1763740750846258357
```

Build output

```
main.adb:11:21: error: expected type "My_Class" defined at p.ads:2
main.adb:11:21: error: found type "Derived" defined at p.ads:16
gprbuild: *** compilation phase failed
```

This is because an object of a type T is exactly of the type T, whether T is tagged or not. What you want to say as a programmer is "I want O3 to be able to hold an object of type `My_Class` or any type descending from `My_Class`". Here's how you do that:

Listing 6: main.adb

```
with P; use P;

procedure Main is
   O1 : My_Class;
   --  Declare an object of type My_Class

   O2 : Derived := (A => 12);
   --  Declare an object of type Derived

   O3 : My_Class'Class := O2;
   --  Now valid: My_Class'Class designates
   --  the classwide type for My_Class,
```

(continues on next page)

(continued from previous page)

```
   --  which is the set of all types
   --  descending from My_Class (including
   --  My_Class).
begin
   null;
end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Object_Oriented_Programming.Tagged_Types
MD5: 35412176a248015a26e507164ce526af
```

Attention

Because an object of a classwide type can be the size of any descendant of its base type, it has an unknown size. It's therefore an indefinite type, with the expected restrictions:

- It can't be stored as a field/component of a record
- An object of a classwide type needs to be initialized immediately (you can't specify the constraints of such a type in any way other than by initializing it).

18.4 Dispatching operations

We saw that you can override operations in types derived from another tagged type. The eventual goal of OOP is to make a dispatching call: a call to a primitive (method) that depends on the exact type of the object.

But, if you think carefully about it, a variable of type `My_Class` always contains an object of exactly that type. If you want to have a variable that can contain a `My_Class` or any derived type, it has to be of type `My_Class'Class`.

In other words, to make a dispatching call, you must first have an object that can be either of a type or any type derived from this type, namely an object of a classwide type.

Listing 7: main.adb

```
with P; use P;

procedure Main is
   O1 : My_Class;
   --  Declare an object of type My_Class

   O2 : Derived := (A => 12);
   --  Declare an object of type Derived

   O3 : My_Class'Class := O2;

   O4 : My_Class'Class := O1;
begin
   Foo (O1);
   --  Non dispatching: Calls My_Class.Foo
   Foo (O2);
   --  Non dispatching: Calls Derived.Foo
   Foo (O3);
   --  Dispatching: Calls Derived.Foo
   Foo (O4);
```

(continues on next page)

(continued from previous page)

```
21    --  Dispatching: Calls My_Class.Foo
22 end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Object_Oriented_Programming.Tagged_Types
MD5: 7631f823b0dd9e5474f6bb2dc35af2a2
```

Runtime output

```
In My_Class.Foo
In Derived.Foo, A =  12
In Derived.Foo, A =  12
In My_Class.Foo
```

Attention

You can convert an object of type `Derived` to an object of type `My_Class`. This is called a *view conversion* in Ada parlance and is useful, for example, if you want to call a parent method.

In that case, the object really is converted to a `My_Class` object, which means its tag is changed. Since tagged objects are always passed by reference, you can use this kind of conversion to modify the state of an object: changes to converted object will affect the original one.

Listing 8: main.adb

```
1  with P; use P;
2
3  procedure Main is
4     O1 : Derived := (A => 12);
5     --  Declare an object of type Derived
6
7     O2 : My_Class := My_Class (O1);
8
9     O3 : My_Class'Class := O2;
10 begin
11    Foo (O1);
12    --  Non dispatching: Calls Derived.Foo
13    Foo (O2);
14    --  Non dispatching: Calls My_Class.Foo
15
16    Foo (O3);
17    --  Dispatching: Calls My_Class.Foo
18 end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Object_Oriented_Programming.Tagged_Types
MD5: b92112b05201ff14789baca258fa0cbc
```

Runtime output

```
In Derived.Foo, A =  12
In My_Class.Foo
In My_Class.Foo
```

18.5 Dot notation

You can also call primitives of tagged types with a notation that's more familiar to object oriented programmers. Given the Foo primitive above, you can also write the above program this way:

Listing 9: main.adb

```
with P; use P;

procedure Main is
   O1 : My_Class;
   --  Declare an object of type My_Class

   O2 : Derived := (A => 12);
   --  Declare an object of type Derived

   O3 : My_Class'Class := O2;

   O4 : My_Class'Class := O1;
begin
   O1.Foo;
   --  Non dispatching: Calls My_Class.Foo
   O2.Foo;
   --  Non dispatching: Calls Derived.Foo
   O3.Foo;
   --  Dispatching: Calls Derived.Foo
   O4.Foo;
   --  Dispatching: Calls My_Class.Foo
end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Object_Oriented_Programming.Tagged_Types
MD5: 9c6ebdfec9ceeb986d92eb90ec9ff59b
```

Runtime output

```
In My_Class.Foo
In Derived.Foo, A =  12
In Derived.Foo, A =  12
In My_Class.Foo
```

If the dispatching parameter of a primitive is the first parameter, which is the case in our examples, you can call the primitive using the dot notation. Any remaining parameter are passed normally:

Listing 10: main.adb

```
with P; use P;

procedure Main is
   package Extend is
      type D2 is new Derived with null record;

      procedure Bar (Self : in out D2;
                     Val  :        Integer);
   end Extend;

   package body Extend is
      procedure Bar (Self : in out D2;
```

(continues on next page)

(continued from previous page)

```
                     Val  :        Integer) is
      begin
         Self.A := Self.A + Val;
      end Bar;
   end Extend;

   use Extend;

   Obj : D2 := (A => 15);
begin
   Obj.Bar (2);
   Obj.Foo;
end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Object_Oriented_Programming.Tagged_Types
MD5: fec4f5cc4213cc111708dcc276e870c2
```

Runtime output

```
In Derived.Foo, A =  17
```

18.6 Private & Limited

We've seen previously (in the *Privacy* (page 113) chapter) that types can be declared limited or private. These encapsulation techniques can also be applied to tagged types, as we'll see in this section.

This is an example of a tagged private type:

Listing 11: p.ads

```
package P is
   type T is tagged private;
private
   type T is tagged record
      E : Integer;
   end record;
end P;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Object_Oriented_Programming.Tagged_Private_Types
MD5: 4cd4bcd1a54d5f6407a500558b5da417
```

This is an example of a tagged limited type:

Listing 12: p.ads

```
package P is
   type T is tagged limited record
      E : Integer;
   end record;
end P;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Object_Oriented_Programming.Tagged_Limited_Types
MD5: 13228777133aa6db97da1c29f732459c
```

Naturally, you can combine both *limited* and *private* types and declare a tagged limited private type:

Listing 13: p.ads

```
package P is
   type T is tagged limited private;

   procedure Init (A : in out T);
private
   type T is tagged limited record
      E : Integer;
   end record;
end P;
```

Listing 14: p.adb

```
package body P is

   procedure Init (A : in out T) is
   begin
      A.E := 0;
   end Init;

end P;
```

Listing 15: main.adb

```
with P; use P;

procedure Main is
   T1, T2 : T;
begin
   T1.Init;
   T2.Init;

   --  The following line doesn't work
   --  because type T is private:
   --
   --  T1.E := 0;

   --  The following line doesn't work
   --  because type T is limited:
   --
   --  T2 := T1;
end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Object_Oriented_Programming.Tagged_Limited_Private_
 ↪Types
MD5: 68240374505bcaf7aad4ebaed3b9127b
```

Note that the code in the `Main` procedure above presents two assignments that trigger compilation errors because type T is limited private. In fact, you cannot:

- assign to `T1.E` directly because type T is private;
- assign T1 to T2 because type T is limited.

In this case, there's no distinction between tagged and non-tagged types: these compilation errors would also occur for non-tagged types.

18.7 Classwide access types

In this section, we'll discuss an useful pattern for object-oriented programming in Ada: classwide access type. Let's start with an example where we declare a tagged type T and a derived type T_New:

Listing 16: p.ads

```
package P is
   type T is tagged null record;

   procedure Show (Dummy : T);

   type T_New is new T with null record;

   procedure Show (Dummy : T_New);
end P;
```

Listing 17: p.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body P is

   procedure Show (Dummy : T) is
   begin
      Put_Line ("Using type "
                & T'External_Tag);
   end Show;

   procedure Show (Dummy : T_New) is
   begin
      Put_Line ("Using type "
                & T_New'External_Tag);
   end Show;

end P;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Object_Oriented_Programming.Classwide_Error
MD5: fd5cb99925d3c88536546aa0be8104b7
```

Note that we're using null records for both types T and T_New. Although these types don't actually have any component, we can still use them to demonstrate dispatching. Also note that the example above makes use of the `'External_Tag` attribute in the implementation of the Show procedure to get a string for the corresponding tagged type.

As we've seen before, we must use a classwide type to create objects that can make dispatching calls. In other words, objects of type `T'Class` will dispatch. For example:

Listing 18: dispatching_example.adb

```
with P; use P;

procedure Dispatching_Example is
   T2         :          T_New;
   T_Dispatch : constant T'Class := T2;
begin
   T_Dispatch.Show;
end Dispatching_Example;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Object_Oriented_Programming.Classwide_Error
MD5: f8957b31c9c62db23759baad7b867a57
```

Runtime output

```
Using type P.T_NEW
```

A more useful application is to declare an array of objects that can dispatch. For example, we'd like to declare an array T_Arr, loop over this array and dispatch according to the actual type of each individual element:

```
for I in T_Arr'Range loop
   T_Arr (I).Show;
   --  Call Show procedure according
   --  to actual type of T_Arr (I)
end loop;
```

However, it's not possible to declare an array of type T'Class directly:

Listing 19: classwide_compilation_error.adb

```
1  with P; use P;
2
3  procedure Classwide_Compilation_Error is
4     T_Arr  : array (1 .. 2) of T'Class;
5     --                         ^
6     --               Compilation Error!
7  begin
8     for I in T_Arr'Range loop
9        T_Arr (I).Show;
10    end loop;
11 end Classwide_Compilation_Error;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Object_Oriented_Programming.Classwide_Error
MD5: e86f6c6ee35dced8f330bf6177d178fd
```

Build output

```
classwide_compilation_error.adb:4:32: error: unconstrained element type in array␣
 ↪declaration
gprbuild: *** compilation phase failed
```

In fact, it's impossible for the compiler to know which type would actually be used for each element of the array. However, if we use dynamic allocation via access types, we can allocate objects of different types for the individual elements of an array T_Arr. We do this by using classwide access types, which have the following format:

```
type T_Class is access T'Class;
```

We can rewrite the previous example using the T_Class type. In this case, dynamically allocated objects of this type will dispatch according to the actual type used during the allocation. Also, let's introduce an Init procedure that won't be overridden for the derived T_New type. This is the adapted code:

Listing 20: p.ads

```
1  package P is
2     type T is tagged record
```

(continues on next page)

(continued from previous page)

```
      E : Integer;
   end record;

   type T_Class is access T'Class;

   procedure Init (A : in out T);

   procedure Show (Dummy : T);

   type T_New is new T with null record;

   procedure Show (Dummy : T_New);

end P;
```

Listing 21: p.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body P is

   procedure Init (A : in out T) is
   begin
      Put_Line ("Initializing type T...");
      A.E := 0;
   end Init;

   procedure Show (Dummy : T) is
   begin
      Put_Line ("Using type "
                & T'External_Tag);
   end Show;

   procedure Show (Dummy : T_New) is
   begin
      Put_Line ("Using type "
                & T_New'External_Tag);
   end Show;

end P;
```

Listing 22: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with P;           use P;

procedure Main is
   T_Arr  : array (1 .. 2) of T_Class;
begin
   T_Arr (1) := new T;
   T_Arr (2) := new T_New;

   for I in T_Arr'Range loop
      Put_Line ("Element # "
                & Integer'Image (I));

      T_Arr (I).Init;
      T_Arr (I).Show;

      Put_Line ("-----------");
```

(continues on next page)

(continued from previous page)

```
18    end loop;
19 end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Object_Oriented_Programming.Classwide_Access
MD5: 97c05a8f911d0a0e39c0cc90fae184a7
```

Runtime output

```
Element #  1
Initializing type T...
Using type P.T
-----------
Element #  2
Initializing type T...
Using type P.T_NEW
-----------
```

In this example, the first element (`T_Arr (1)`) is of type `T`, while the second element is of type `T_New`. When running the example, the `Init` procedure of type `T` is called for both elements of the `T_Arr` array, while the call to the `Show` procedure selects the corresponding procedure according to the type of each element of `T_Arr`.

CHAPTER

NINETEEN

STANDARD LIBRARY: CONTAINERS

In previous chapters, we've used arrays as the standard way to group multiple objects of a specific data type. In many cases, arrays are good enough for manipulating those objects. However, there are situations that require more flexibility and more advanced operations. For those cases, Ada provides support for containers — such as vectors and sets — in its standard library.

We present an introduction to containers here. For a list of all containers available in Ada, see *Appendix B* (page 271).

19.1 Vectors

In the following sections, we present a general overview of vectors, including instantiation, initialization, and operations on vector elements and vectors.

19.1.1 Instantiation

Here's an example showing the instantiation and declaration of a vector V:

Listing 1: show_vector_inst.adb

```
with Ada.Containers.Vectors;

procedure Show_Vector_Inst is

   package Integer_Vectors is new
     Ada.Containers.Vectors
       (Index_Type   => Natural,
        Element_Type => Integer);

   V : Integer_Vectors.Vector;
begin
   null;
end Show_Vector_Inst;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Vector_Inst
MD5: 8b737842d2784f25502990f21e1cf6de
```

Containers are based on generic packages, so we can't simply declare a vector as we would declare an array of a specific type:

```
A : array (1 .. 10) of Integer;
```

Instead, we first need to instantiate one of those packages. We `with` the container package (`Ada.Containers.Vectors` in this case) and instantiate it to create an instance of the

generic package for the desired type. Only then can we declare the vector using the type from the instantiated package. This instantiation needs to be done for any container type from the standard library.

In the instantiation of `Integer_Vectors`, we indicate that the vector contains elements of **`Integer`** type by specifying it as the `Element_Type`. By setting `Index_Type` to **`Natural`**, we specify that the allowed range includes all natural numbers. We could have used a more restrictive range if desired.

19.1.2 Initialization

One way to initialize a vector is from a concatenation of elements. We use the `&` operator, as shown in the following example:

Listing 2: show_vector_init.adb

```
with Ada.Containers; use Ada.Containers;
with Ada.Containers.Vectors;

with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Vector_Init is

   package Integer_Vectors is new
     Ada.Containers.Vectors
       (Index_Type   => Natural,
        Element_Type => Integer);

   use Integer_Vectors;

   V : Vector := 20 & 10 & 0 & 13;
begin
   Put_Line ("Vector has "
             & Count_Type'Image (V.Length)
             & " elements");
end Show_Vector_Init;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Vector_Init
MD5: 0087b0a15e0c88b27ac36c3b27159a17
```

Runtime output

```
Vector has  4 elements
```

We specify **`use`** `Integer_Vectors`, so we have direct access to the types and operations from the instantiated package. Also, the example introduces another operation on the vector: `Length`, which retrieves the number of elements in the vector. We can use the dot notation because `Vector` is a tagged type, allowing us to write either `V.Length` or `Length (V)`.

19.1.3 Appending and prepending elements

You add elements to a vector using the `Prepend` and `Append` operations. As the names suggest, these operations add elements to the beginning or end of a vector, respectively. For example:

Listing 3: show_vector_append.adb

```
with Ada.Containers; use Ada.Containers;
with Ada.Containers.Vectors;

with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Vector_Append is

   package Integer_Vectors is new
     Ada.Containers.Vectors
       (Index_Type   => Natural,
        Element_Type => Integer);

   use Integer_Vectors;

   V : Vector;
begin
   Put_Line ("Appending some elements "
             & "to the vector...");
   V.Append (20);
   V.Append (10);
   V.Append (0);
   V.Append (13);
   Put_Line ("Finished appending.");

   Put_Line ("Prepending some elements"
             & "to the vector...");
   V.Prepend (30);
   V.Prepend (40);
   V.Prepend (100);
   Put_Line ("Finished prepending.");

   Put_Line ("Vector has "
             & Count_Type'Image (V.Length)
             & " elements");
end Show_Vector_Append;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Vector_Append
MD5: f88d393ba96a7950f58d9f1c0c74a021
```

Runtime output

```
Appending some elements to the vector...
Finished appending.
Prepending some elementsto the vector...
Finished prepending.
Vector has  7 elements
```

This example puts elements into the vector in the following sequence: (100, 40, 30, 20, 10, 0, 13).

The Reference Manual specifies that the worst-case complexity must be:

- O(log N) for the Append operation, and
- O(N log N) for the Prepend operation.

19.1.4 Accessing first and last elements

We access the first and last elements of a vector using the `First_Element` and `Last_Element` functions. For example:

Listing 4: show_vector_first_last_element.adb

```
with Ada.Containers; use Ada.Containers;
with Ada.Containers.Vectors;

with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Vector_First_Last_Element is

   package Integer_Vectors is new
     Ada.Containers.Vectors
       (Index_Type   => Natural,
        Element_Type => Integer);

   use Integer_Vectors;

   function Img (I : Integer)    return String
     renames Integer'Image;
   function Img (I : Count_Type) return String
     renames Count_Type'Image;

   V : Vector := 20 & 10 & 0 & 13;
begin
   Put_Line ("Vector has "
             & Img (V.Length)
             & " elements");

   --  Using V.First_Element to
   --  retrieve first element
   Put_Line ("First element is "
             & Img (V.First_Element));

   --  Using V.Last_Element to
   --  retrieve last element
   Put_Line ("Last element is "
             & Img (V.Last_Element));
end Show_Vector_First_Last_Element;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Vector_First_Last_Element
MD5: 602255760d0017ced6b4115c845cd48d
```

Runtime output

```
Vector has  4 elements
First element is  20
Last element is  13
```

You can swap elements by calling the procedure Swap and retrieving a reference (a *cursor*) to the first and last elements of the vector by calling `First` and `Last`. A cursor allows us to iterate over a container and process individual elements from it.

With these operations, we're able to write code to swap the first and last elements of a vector:

Listing 5: show_vector_first_last_element.adb

```
with Ada.Containers; use Ada.Containers;
with Ada.Containers.Vectors;

with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Vector_First_Last_Element is

   package Integer_Vectors is new
     Ada.Containers.Vectors
       (Index_Type   => Natural,
        Element_Type => Integer);

   use Integer_Vectors;

   function Img (I : Integer) return String
     renames Integer'Image;

   V : Vector := 20 & 10 & 0 & 13;
begin
   --  We use V.First and V.Last to retrieve
   --  cursor for first and last elements.
   --  We use V.Swap to swap elements.
   V.Swap (V.First, V.Last);

   Put_Line ("First element is now "
             & Img (V.First_Element));
   Put_Line ("Last element is now "
             & Img (V.Last_Element));
end Show_Vector_First_Last_Element;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Vector_First_Last_Element
MD5: 1a0c0bf28bb661b3f328473ac3c2eb54
```

Runtime output

```
First element is now  13
Last element is now  20
```

19.1.5 Iterating

The easiest way to iterate over a container is to use a `for E of Our_Container` loop. This gives us a reference (E) to the element at the current position. We can then use E directly. For example:

Listing 6: show_vector_iteration.adb

```
with Ada.Containers.Vectors;

with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Vector_Iteration is

   package Integer_Vectors is new
     Ada.Containers.Vectors
       (Index_Type   => Natural,
        Element_Type => Integer);
```

(continues on next page)

(continued from previous page)

```
11
12    use Integer_Vectors;
13
14    function Img (I : Integer) return String
15      renames Integer'Image;
16
17    V : Vector := 20 & 10 & 0 & 13;
18 begin
19    Put_Line ("Vector elements are: ");
20
21    --
22    --  Using for ... of loop to iterate:
23    --
24    for E of V loop
25       Put_Line ("- " & Img (E));
26    end loop;
27
28 end Show_Vector_Iteration;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Vector_Iteration
MD5: 4fc9a939aa822097d3a937646d3e2910
```

Runtime output

```
Vector elements are:
-  20
-  10
-  0
-  13
```

This code displays each element from the vector `V`.

Because we're given a reference, we can display not only the value of an element but also modify it. For example, we could easily write a loop to add one to each element of vector `V`:

```
for E of V loop
   E := E + 1;
end loop;
```

We can also use indices to access vector elements. The format is similar to a loop over array elements: we use a `for I in <range>` loop. The range is provided by `V.First_Index` and `V.Last_Index`. We can access the current element by using it as an array index: `V (I)`. For example:

Listing 7: show_vector_index_iteration.adb

```
1  with Ada.Containers.Vectors;
2
3  with Ada.Text_IO; use Ada.Text_IO;
4
5  procedure Show_Vector_Index_Iteration is
6
7     package Integer_Vectors is new
8       Ada.Containers.Vectors
9         (Index_Type   => Natural,
10         Element_Type => Integer);
11
12    use Integer_Vectors;
```

(continues on next page)

(continued from previous page)

```
13
14    V : Vector := 20 & 10 & 0 & 13;
15 begin
16    Put_Line ("Vector elements are: ");
17
18    --
19    --  Using indices in a "for I in ..." loop
20    --  to iterate:
21    --
22    for I in V.First_Index .. V.Last_Index loop
23       --  Displaying current index I
24       Put ("- ["
25            & Extended_Index'Image (I)
26            & "] ");
27
28       Put (Integer'Image (V (I)));
29
30       --  We could also use the V.Element (I)
31       --  function to retrieve the element at
32       --  the current index I
33
34       New_Line;
35    end loop;
36
37 end Show_Vector_Index_Iteration;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Vector_Index_Iteration
MD5: f5600bbcc53d6d6887a771b1505676e9
```

Runtime output

```
Vector elements are:
- [ 0]  20
- [ 1]  10
- [ 2]  0
- [ 3]  13
```

Here, in addition to displaying the vector elements, we're also displaying each index, `I`, just like what we can do for array indices. Also, we can access the element by using either the short form `V (I)` or the longer form `V.Element (I)` but not `V.I`.

As mentioned in the previous section, you can use cursors to iterate over containers. For this, use the function `Iterate`, which retrieves a cursor for each position in the vector. The corresponding loop has the format `for C in V.Iterate loop`. Like the previous example using indices, you can again access the current element by using the cursor as an array index: `V (C)`. For example:

Listing 8: show_vector_cursor_iteration.adb

```
1  with Ada.Containers.Vectors;
2
3  with Ada.Text_IO; use Ada.Text_IO;
4
5  procedure Show_Vector_Cursor_Iteration is
6
7     package Integer_Vectors is new
8       Ada.Containers.Vectors
9         (Index_Type   => Natural,
10         Element_Type => Integer);
```

(continues on next page)

(continued from previous page)

```
11
12    use Integer_Vectors;
13
14    V : Vector := 20 & 10 & 0 & 13;
15 begin
16    Put_Line ("Vector elements are: ");
17
18    --
19    --  Use a cursor to iterate in a loop:
20    --
21    for C in V.Iterate loop
22       --  Using To_Index function to retrieve
23       --  the index for the cursor position
24       Put ("- ["
25            & Extended_Index'Image (To_Index (C))
26            & "] ");
27
28       Put (Integer'Image (V (C)));
29
30       --  We could use Element (C) to retrieve
31       --  the vector element for the cursor
32       --  position
33
34       New_Line;
35    end loop;
36
37    --  Alternatively, we could iterate with a
38    --  while-loop:
39    --
40    --  declare
41    --     C : Cursor := V.First;
42    --  begin
43    --     while C /= No_Element loop
44    --        some processing here...
45    --
46    --        C := Next (C);
47    --     end loop;
48    --  end;
49
50 end Show_Vector_Cursor_Iteration;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Vector_Cursor_Iteration
MD5: de789bbd2e1814aae3fb5213c99ac25c
```

Runtime output

```
Vector elements are:
- [ 0]  20
- [ 1]  10
- [ 2]  0
- [ 3]  13
```

Instead of accessing an element in the loop using `V (C)`, we could also have used the longer form `Element (C)`. In this example, we're using the function `To_Index` to retrieve the index corresponding to the current cursor.

As shown in the comments after the loop, we could also use a **`while ... loop`** to iterate over the vector. In this case, we would start with a cursor for the first element (retrieved by calling `V.First`) and then call `Next (C)` to retrieve a cursor for subsequent elements. `Next (C)` returns `No_Element` when the cursor reaches the end of the vector.

You can directly modify the elements using a reference. This is what it looks like when using both indices and cursors:

```
--  Modify vector elements using index
for I in V.First_Index .. V.Last_Index loop
   V (I) := V (I) + 1;
end loop;

--  Modify vector elements using cursor
for C in V.Iterate loop
   V (C) := V (C) + 1;
end loop;
```

The Reference Manual requires that the worst-case complexity for accessing an element be O(log N).

Another way of modifying elements of a vector is using a *process procedure*, which takes an individual element and does some processing on it. You can call `Update_Element` and pass both a cursor and an access to the process procedure. For example:

Listing 9: show_vector_update.adb

```
with Ada.Containers.Vectors;

with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Vector_Update is

   package Integer_Vectors is new
     Ada.Containers.Vectors
       (Index_Type   => Natural,
        Element_Type => Integer);

   use Integer_Vectors;

   procedure Add_One (I : in out Integer) is
   begin
      I := I + 1;
   end Add_One;

   V : Vector := 20 & 10 & 12;
begin
   --
   --  Use V.Update_Element to process elements
   --
   for C in V.Iterate loop
      V.Update_Element (C, Add_One'Access);
   end loop;

end Show_Vector_Update;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Vector_Update
MD5: 5dcc3dd8020632a8ea2ce975ecd8f4da
```

19.1.6 Finding and changing elements

You can locate a specific element in a vector by retrieving its index. `Find_Index` retrieves the index of the first element matching the value you're looking for. Alternatively, you can use `Find` to retrieve a cursor referencing that element. For example:

Listing 10: show_find_vector_element.adb

```
with Ada.Containers.Vectors;

with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Find_Vector_Element is

   package Integer_Vectors is new
     Ada.Containers.Vectors
       (Index_Type   => Natural,
        Element_Type => Integer);

   use Integer_Vectors;

   V : Vector := 20 & 10 & 0 & 13;
   Idx : Extended_Index;
   C   : Cursor;
begin
   --  Using Find_Index to retrieve the index
   --  of element with value 10
   Idx := V.Find_Index (10);
   Put_Line ("Index of element with value 10 is "
             & Extended_Index'Image (Idx));

   --  Using Find to retrieve the cursor for
   --  the element with value 13
   C   := V.Find (13);
   Idx := To_Index (C);
   Put_Line ("Index of element with value 13 is "
             & Extended_Index'Image (Idx));
end Show_Find_Vector_Element;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Find_Vector_Element
MD5: c3da01cd66c8705a7cbccae8390d5f81
```

Runtime output

```
Index of element with value 10 is  1
Index of element with value 13 is  3
```

As we saw in the previous section, we can directly access vector elements by using either an index or cursor. However, an exception is raised if we try to access an element with an invalid index or cursor, so we must check whether the index or cursor is valid before using it to access an element. In our example, `Find_Index` or `Find` might not have found the element in the vector. We check for this possibility by comparing the index to `No_Index` or the cursor to `No_Element`. For example:

```
--  Modify vector element using index
if Idx /= No_Index then
   V (Idx) := 11;
end if;

--  Modify vector element using cursor
if C /= No_Element then
   V (C) := 14;
end if;
```

Instead of writing `V (C) := 14`, we could use the longer form `V.Replace_Element (C, 14)`.

19.1.7 Inserting elements

In the previous sections, we've seen examples of how to add elements to a vector:

- using the concatenation operator (&) at the vector declaration, or
- calling the Prepend and Append procedures.

You may want to insert an element at a specific position, e.g. before a certain element in the vector. You do this by calling `Insert`. For example:

Listing 11: show_vector_insert.adb

```
with Ada.Containers; use Ada.Containers;
with Ada.Containers.Vectors;

with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Vector_Insert is

   package Integer_Vectors is new
     Ada.Containers.Vectors
       (Index_Type   => Natural,
        Element_Type => Integer);

   use Integer_Vectors;

   procedure Show_Elements (V : Vector) is
   begin
      New_Line;
      Put_Line ("Vector has "
                & Count_Type'Image (V.Length)
                & " elements");

      if not V.Is_Empty then
         Put_Line ("Vector elements are: ");
         for E of V loop
            Put_Line ("- " & Integer'Image (E));
         end loop;
      end if;
   end Show_Elements;

   V : Vector := 20 & 10 & 12;
   C : Cursor;
begin
   Show_Elements (V);

   New_Line;
   Put_Line ("Adding element with value 9");
   Put_Line ("  (before 10)...");

   --
   --  Using V.Insert to insert the element
   --  into the vector
   --
   C := V.Find (10);
   if C /= No_Element then
      V.Insert (C, 9);
   end if;

   Show_Elements (V);

end Show_Vector_Insert;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Vector_Insert
MD5: af49f390388896c51ab97541036fbcaf
```

Runtime output

```
Vector has  3 elements
Vector elements are:
-  20
-  10
-  12

Adding element with value 9
  (before 10)...

Vector has  4 elements
Vector elements are:
-  20
-  9
-  10
-  12
```

In this example, we're looking for an element with the value of 10. If we find it, we insert an element with the value of 9 before it.

19.1.8 Removing elements

You can remove elements from a vector by passing either a valid index or cursor to the `Delete` procedure. If we combine this with the functions `Find_Index` and `Find` from the previous section, we can write a program that searches for a specific element and deletes it, if found:

Listing 12: show_remove_vector_element.adb

```
with Ada.Containers.Vectors;

with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Remove_Vector_Element is
   package Integer_Vectors is new
     Ada.Containers.Vectors
       (Index_Type   => Natural,
        Element_Type => Integer);

   use Integer_Vectors;

   V : Vector := 20 & 10 & 0 & 13 & 10 & 13;
   Idx : Extended_Index;
   C   : Cursor;
begin
   --  Use Find_Index to retrieve index of
   --  the element with value 10
   Idx := V.Find_Index (10);

   --  Checking whether index is valid
   if Idx /= No_Index then
      --  Removing element using V.Delete
      V.Delete (Idx);
   end if;
```

(continues on next page)

(continued from previous page)

```
26
27    --  Use Find to retrieve cursor for
28    --  the element with value 13
29    C := V.Find (13);
30
31    --  Check whether index is valid
32    if C /= No_Element then
33       --  Remove element using V.Delete
34       V.Delete (C);
35    end if;
36
37 end Show_Remove_Vector_Element;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Remove_Vector_Element
MD5: 540d0dc5715e58926e9dc4600bd6ad5d
```

We can extend this approach to delete all elements matching a certain value. We just need to keep searching for the element in a loop until we get an invalid index or cursor. For example:

Listing 13: show_remove_vector_elements.adb

```
1  with Ada.Containers; use Ada.Containers;
2  with Ada.Containers.Vectors;
3
4  with Ada.Text_IO; use Ada.Text_IO;
5
6  procedure Show_Remove_Vector_Elements is
7
8     package Integer_Vectors is new
9       Ada.Containers.Vectors
10       (Index_Type   => Natural,
11        Element_Type => Integer);
12
13    use Integer_Vectors;
14
15    procedure Show_Elements (V : Vector) is
16    begin
17       New_Line;
18       Put_Line ("Vector has "
19                 & Count_Type'Image (V.Length)
20                 & " elements");
21
22       if not V.Is_Empty then
23          Put_Line ("Vector elements are: ");
24          for E of V loop
25             Put_Line ("- " & Integer'Image (E));
26          end loop;
27       end if;
28    end Show_Elements;
29
30    V : Vector := 20 & 10 & 0 & 13 & 10 & 14 & 13;
31 begin
32    Show_Elements (V);
33
34    --
35    --  Remove elements using an index
36    --
37    declare
```

(continues on next page)

(continued from previous page)

```
      E : constant Integer := 10;
      I : Extended_Index;
   begin
      New_Line;
      Put_Line
        ("Removing all elements with value of "
         & Integer'Image (E) & "...");
      loop
         I := V.Find_Index (E);
         exit when I = No_Index;
         V.Delete (I);
      end loop;
   end;

   --
   --  Remove elements using a cursor
   --
   declare
      E : constant Integer := 13;
      C : Cursor;
   begin
      New_Line;
      Put_Line
        ("Removing all elements with value of "
         & Integer'Image (E) & "...");
      loop
         C := V.Find (E);
         exit when C = No_Element;
         V.Delete (C);
      end loop;
   end;

   Show_Elements (V);
end Show_Remove_Vector_Elements;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Remove_Vector_Elements
MD5: 6e364843b9638224bd9a36eb9d45e446
```

Runtime output

```

Vector has  7 elements
Vector elements are:
-  20
-  10
-  0
-  13
-  10
-  14
-  13

Removing all elements with value of  10...

Removing all elements with value of  13...

Vector has  3 elements
Vector elements are:
-  20
-  0
```

(continues on next page)

(continued from previous page)

```
-  14
```

In this example, we remove all elements with the value 10 from the vector by retrieving their index. Likewise, we remove all elements with the value 13 by retrieving their cursor.

19.1.9 Other Operations

We've seen some operations on vector elements. Here, we'll see operations on the vector as a whole. The most prominent is the concatenation of multiple vectors, but we'll also see operations on vectors, such as sorting and sorted merging operations, that view the vector as a sequence of elements and operate on the vector considering the element's relations to each other.

We do vector concatenation using the `&` operator on vectors. Let's consider two vectors `V1` and `V2`. We can concatenate them by doing `V := V1 & V2`. `V` contains the resulting vector.

The generic package **`Generic_`**`Sorting` is a child package of `Ada.Containers.Vectors`. It contains sorting and merging operations. Because it's a generic package, you can't use it directly, but have to instantiate it. In order to use these operations on a vector of integer values (`Integer_Vectors`, in our example), you need to instantiate it directly as a child of `Integer_Vectors`. The next example makes it clear how to do this.

After instantiating **`Generic_`**`Sorting`, we make all the operations available to us with the **`use`** statement. We can then call `Sort` to sort the vector and `Merge` to merge one vector into another.

The following example presents code that manipulates three vectors (`V1`, `V2`, `V3`) using the concatenation, sorting and merging operations:

Listing 14: show_vector_ops.adb

```
with Ada.Containers; use Ada.Containers;
with Ada.Containers.Vectors;

with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Vector_Ops is

   package Integer_Vectors is new
     Ada.Containers.Vectors
       (Index_Type   => Natural,
        Element_Type => Integer);

   package Integer_Vectors_Sorting is
     new Integer_Vectors.Generic_Sorting;

   use Integer_Vectors;
   use Integer_Vectors_Sorting;

   procedure Show_Elements (V : Vector) is
   begin
      New_Line;
      Put_Line ("Vector has "
                & Count_Type'Image (V.Length)
                & " elements");

      if not V.Is_Empty then
         Put_Line ("Vector elements are: ");
         for E of V loop
            Put_Line ("- " & Integer'Image (E));
         end loop;
```

(continues on next page)

(continued from previous page)

```
      end if;
   end Show_Elements;

   V, V1, V2, V3 : Vector;
begin
   V1 := 10 & 12 & 18;
   V2 := 11 & 13 & 19;
   V3 := 15 & 19;

   New_Line;
   Put_Line ("---- V1 ----");
   Show_Elements (V1);

   New_Line;
   Put_Line ("---- V2 ----");
   Show_Elements (V2);

   New_Line;
   Put_Line ("---- V3 ----");
   Show_Elements (V3);

   New_Line;
   Put_Line
     ("Concatenating V1, V2 and V3 into V:");

   V := V1 & V2 & V3;

   Show_Elements (V);

   New_Line;
   Put_Line ("Sorting V:");

   Sort (V);

   Show_Elements (V);

   New_Line;
   Put_Line ("Merging V2 into V1:");

   Merge (V1, V2);

   Show_Elements (V1);

end Show_Vector_Ops;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Vector_Ops
MD5: 3301513e4e7fd2f28488966e5b24e448
```

Runtime output

```

---- V1 ----

Vector has  3 elements
Vector elements are:
-  10
-  12
-  18
```

(continues on next page)

(continued from previous page)

```
---- V2 ----

Vector has  3 elements
Vector elements are:
-  11
-  13
-  19

---- V3 ----

Vector has  2 elements
Vector elements are:
-  15
-  19

Concatenating V1, V2 and V3 into V:

Vector has  8 elements
Vector elements are:
-  10
-  12
-  18
-  11
-  13
-  19
-  15
-  19

Sorting V:

Vector has  8 elements
Vector elements are:
-  10
-  11
-  12
-  13
-  15
-  18
-  19
-  19

Merging V2 into V1:

Vector has  6 elements
Vector elements are:
-  10
-  11
-  12
-  13
-  18
-  19
```

The Reference Manual requires that the worst-case complexity of a call to `Sort` be $O(N^2)$ and the average complexity be better than $O(N^2)$.

19.2 Sets

Sets are another class of containers. While vectors allow duplicated elements to be inserted, sets ensure that no duplicated elements exist.

In the following sections, we'll see operations you can perform on sets. However, since many of the operations on vectors are similar to the ones used for sets, we'll cover them more quickly here. Please refer back to the section on vectors for a more detailed discussion.

19.2.1 Initialization and iteration

To initialize a set, you can call the `Insert` procedure. However, if you do, you need to ensure no duplicate elements are being inserted: if you try to insert a duplicate, you'll get an exception. If you have less control over the elements to be inserted so that there may be duplicates, you can use another option instead:

- a version of `Insert` that returns a Boolean value indicating whether the insertion was successful;
- the `Include` procedure, which silently ignores any attempt to insert a duplicated element.

To iterate over a set, you can use a `for E of S` loop, as you saw for vectors. This gives you a reference to each element in the set.

Let's see an example:

Listing 15: show_set_init.adb

```
with Ada.Containers; use Ada.Containers;
with Ada.Containers.Ordered_Sets;

with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Set_Init is

   package Integer_Sets is new
     Ada.Containers.Ordered_Sets
       (Element_Type => Integer);

   use Integer_Sets;

   S : Set;
   --  Same as:  S : Integer_Sets.Set;
   C : Cursor;
   Ins : Boolean;
begin
   S.Insert (20);
   S.Insert (10);
   S.Insert (0);
   S.Insert (13);

   --  Calling S.Insert(0) now would raise
   --  Constraint_Error because this element
   --  is already in the set. We instead call a
   --  version of Insert that doesn't raise an
   --  exception but instead returns a Boolean
   --  indicating the status

   S.Insert (0, C, Ins);
   if not Ins then
      Put_Line
        ("Error while inserting 0 into set");
   end if;

   --  We can also call S.Include instead
```

(continues on next page)

(continued from previous page)

```
38    --  If the element is already present,
39    --  the set remains unchanged
40    S.Include (0);
41    S.Include (13);
42    S.Include (14);
43
44    Put_Line ("Set has "
45              & Count_Type'Image (S.Length)
46              & " elements");
47
48    --
49    --  Iterate over set using for .. of loop
50    --
51    Put_Line ("Elements:");
52    for E of S loop
53        Put_Line ("- " & Integer'Image (E));
54    end loop;
55 end Show_Set_Init;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Set_Init
MD5: b87f6729fea278396347248b95a30cb6
```

Runtime output

```
Error while inserting 0 into set
Set has  5 elements
Elements:
-  0
-  10
-  13
-  14
-  20
```

19.2.2 Operations on elements

In this section, we briefly explore the following operations on sets:

- `Delete` and `Exclude` to remove elements;
- `Contains` and `Find` to verify the existence of elements.

To delete elements, you call the procedure `Delete`. However, analogously to the `Insert` procedure above, `Delete` raises an exception if the element to be deleted isn't present in the set. If you want to permit the case where an element might not exist, you can call `Exclude`, which silently ignores any attempt to delete a non-existent element.

`Contains` returns a Boolean value indicating whether a value is contained in the set. `Find` also looks for an element in a set, but returns a cursor to the element or `No_Element` if the element doesn't exist. You can use either function to search for elements in a set.

Let's look at an example that makes use of these operations:

Listing 16: show_set_element_ops.adb

```
1  with Ada.Containers; use Ada.Containers;
2  with Ada.Containers.Ordered_Sets;
3
4  with Ada.Text_IO; use Ada.Text_IO;
5
```

(continues on next page)

(continued from previous page)

```
procedure Show_Set_Element_Ops is

   package Integer_Sets is new
     Ada.Containers.Ordered_Sets
       (Element_Type => Integer);

   use Integer_Sets;

   procedure Show_Elements (S : Set) is
   begin
      New_Line;
      Put_Line ("Set has "
                & Count_Type'Image (S.Length)
                & " elements");
      Put_Line ("Elements:");
      for E of S loop
         Put_Line ("- " & Integer'Image (E));
      end loop;
   end Show_Elements;

   S : Set;
begin
   S.Insert (20);
   S.Insert (10);
   S.Insert (0);
   S.Insert (13);

   S.Delete (13);

   --  Calling S.Delete (13) again raises
   --  Constraint_Error because the element
   --  is no longer present in the set, so
   --  it can't be deleted. We can call
   --  V.Exclude instead:
   S.Exclude (13);

   if S.Contains (20) then
      Put_Line ("Found element 20 in set");
   end if;

   --  Alternatively, we could use S.Find
   --  instead of S.Contains
   if S.Find (0) /= No_Element then
      Put_Line ("Found element 0 in set");
   end if;

   Show_Elements (S);
end Show_Set_Element_Ops;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Set_Element_Ops
MD5: 77fb2aaba4221e337b0f90dd1a49c556
```

Runtime output

```
Found element 20 in set
Found element 0 in set

Set has  3 elements
Elements:
```

(continues on next page)

(continued from previous page)

```
-  0
-  10
-  20
```

In addition to ordered sets used in the examples above, the standard library also offers hashed sets. The Reference Manual requires the following average complexity of each operation:

Operations	Ordered_Sets	Hashed_Sets
• Insert • Include • Replace • Delete • Exclude • Find	O((log N)^2) or better	O(log N)
Subprogram using cursor	O(1)	O(1)

19.2.3 Other Operations

The previous sections mostly dealt with operations on individual elements of a set. But Ada also provides typical set operations: union, intersection, difference and symmetric difference. In contrast to some vector operations we've seen before (e.g. `Merge`), here you can use built-in operators, such as `-`. The following table lists the operations and its associated operator:

Set Operation	Operator
Union	`or`
Intersection	`and`
Difference	`-`
Symmetric difference	`xor`

The following example makes use of these operators:

Listing 17: show_set_ops.adb

```
1  with Ada.Containers; use Ada.Containers;
2  with Ada.Containers.Ordered_Sets;
3
4  with Ada.Text_IO; use Ada.Text_IO;
5
6  procedure Show_Set_Ops is
7
8     package Integer_Sets is new
9       Ada.Containers.Ordered_Sets
10        (Element_Type => Integer);
11
12    use Integer_Sets;
13
14    procedure Show_Elements (S : Set) is
15    begin
16       Put_Line ("Elements:");
17       for E of S loop
18          Put_Line ("- " & Integer'Image (E));
```

(continues on next page)

(continued from previous page)

```
      end loop;
   end Show_Elements;

   procedure Show_Op (S       : Set;
                      Op_Name : String) is
   begin
      New_Line;
      Put_Line (Op_Name
                & "(set #1, set #2) has "
                & Count_Type'Image (S.Length)
                & " elements");
   end Show_Op;

   S1, S2, S3 : Set;
begin
   S1.Insert (0);
   S1.Insert (10);
   S1.Insert (13);

   S2.Insert (0);
   S2.Insert (10);
   S2.Insert (14);

   S3.Insert (0);
   S3.Insert (10);

   New_Line;
   Put_Line ("---- Set #1 ----");
   Show_Elements (S1);

   New_Line;
   Put_Line ("---- Set #2 ----");
   Show_Elements (S2);

   New_Line;
   Put_Line ("---- Set #3 ----");
   Show_Elements (S3);

   New_Line;
   if S3.Is_Subset (S1) then
      Put_Line ("S3 is a subset of S1");
   else
      Put_Line ("S3 is not a subset of S1");
   end if;

   S3 := S1 and S2;
   Show_Op (S3, "Intersection");
   Show_Elements (S3);

   S3 := S1 or S2;
   Show_Op (S3, "Union");
   Show_Elements (S3);

   S3 := S1 - S2;
   Show_Op (S3, "Difference");
   Show_Elements (S3);

   S3 := S1 xor S2;
   Show_Op (S3, "Symmetric difference");
   Show_Elements (S3);

```

(continues on next page)

(continued from previous page)

```
80 end Show_Set_Ops;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Set_Ops
MD5: be9086591fc643e53facaf2ffea6c26d
```

Runtime output

```
---- Set #1 ----
Elements:
-  0
-  10
-  13

---- Set #2 ----
Elements:
-  0
-  10
-  14

---- Set #3 ----
Elements:
-  0
-  10

S3 is a subset of S1

Intersection(set #1, set #2) has  2 elements
Elements:
-  0
-  10

Union(set #1, set #2) has  4 elements
Elements:
-  0
-  10
-  13
-  14

Difference(set #1, set #2) has  1 elements
Elements:
-  13

Symmetric difference(set #1, set #2) has  2 elements
Elements:
-  13
-  14
```

19.3 Indefinite maps

The previous sections presented containers for elements of definite types. Although most examples in those sections presented **Integer** types as element type of the containers, containers can also be used with indefinite types, an example of which is the **String** type. However, indefinite types require a different kind of containers designed specially for them.

We'll also be exploring a different class of containers: maps. They associate a key with a specific value. An example of a map is the one-to-one association between a person and their age. If we consider a person's name to be the key, the value is the person's age.

19.3.1 Hashed maps

Hashed maps are maps that make use of a hash as a key. The hash itself is calculated by a function you provide.

In other languages

Hashed maps are similar to dictionaries in Python and hashes in Perl. One of the main differences is that these scripting languages allow using different types for the values contained in a single map, while in Ada, both the type of key and value are specified in the package instantiation and remains constant for that specific map. You can't have a map where two elements are of different types or two keys are of different types. If you want to use multiple types, you must create a different map for each and use only one type in each map.

When instantiating a hashed map from `Ada.Containers.Indefinite_Hashed_Maps`, we specify following elements:

- `Key_Type`: type of the key
- `Element_Type`: type of the element
- `Hash`: hash function for the Key_Type
- `Equivalent_Keys`: an equality operator (e.g. `=`) that indicates whether two keys are to be considered equal.
  - If the type specified in Key_Type has a standard operator, you can use it, which you do by specifying that operator as the value of `Equivalent_Keys`.

In the next example, we'll use a string as a key type. We'll use the Hash function provided by the standard library for strings (in the `Ada.Strings` package) and the standard equality operator.

You add elements to a hashed map by calling `Insert`. If an element is already contained in a map `M`, you can access it directly by using its key. For example, you can change the value of an element by calling `M ("My_Key") := 10`. If the key is not found, an exception is raised. To verify if a key is available, use the function `Contains` (as we've seen above in the section on sets).

Let's see an example:

Listing 18: show_hashed_map.adb

```
with Ada.Containers.Indefinite_Hashed_Maps;
with Ada.Strings.Hash;

with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Hashed_Map is

   package Integer_Hashed_Maps is new
     Ada.Containers.Indefinite_Hashed_Maps
       (Key_Type        => String,
        Element_Type    => Integer,
        Hash            => Ada.Strings.Hash,
        Equivalent_Keys => "=");

   use Integer_Hashed_Maps;

   M : Map;
   --  Same as:
```

(continues on next page)

(continued from previous page)

```
   --
   --  M : Integer_Hashed_Maps.Map;
begin
   M.Include ("Alice", 24);
   M.Include ("John",  40);
   M.Include ("Bob",   28);

   if M.Contains ("Alice") then
      Put_Line ("Alice's age is "
                & Integer'Image (M ("Alice")));
   end if;

   --  Update Alice's age
   --  Key must already exist in M.
   --  Otherwise an exception is raised.
   M ("Alice") := 25;

   New_Line; Put_Line ("Name & Age:");
   for C in M.Iterate loop
      Put_Line (Key (C) & ": "
                & Integer'Image (M (C)));
   end loop;

end Show_Hashed_Map;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Hashed_Map
MD5: 6117775bd9ce2b1466f448b100117ded
```

Runtime output

```
Alice's age is  24

Name & Age:
John:  40
Bob:  28
Alice:  25
```

19.3.2 Ordered maps

Ordered maps share many features with hashed maps. The main differences are:

- A hash function isn't needed. Instead, you must provide an ordering function (< operator), which the ordered map will use to order elements and allow fast access, O(log N), using a binary search.
  - If the type specified in Key_Type has a standard < operator, you can use it in a similar way as we did for Equivalent_Keys above for hashed maps.

Let's see an example:

Listing 19: show_ordered_map.adb

```
with Ada.Containers.Indefinite_Ordered_Maps;

with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Ordered_Map is

   package Integer_Ordered_Maps is new
```

(continues on next page)

(continued from previous page)

```
    Ada.Containers.Indefinite_Ordered_Maps
      (Key_Type        => String,
       Element_Type    => Integer);

   use Integer_Ordered_Maps;

   M : Map;
begin
   M.Include ("Alice", 24);
   M.Include ("John",  40);
   M.Include ("Bob",   28);

   if M.Contains ("Alice") then
      Put_Line ("Alice's age is "
                & Integer'Image (M ("Alice")));
   end if;

   --  Update Alice's age
   --  Key must already exist in M
   M ("Alice") := 25;

   New_Line; Put_Line ("Name & Age:");
   for C in M.Iterate loop
      Put_Line (Key (C) & ": "
                & Integer'Image (M (C)));
   end loop;

end Show_Ordered_Map;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Ordered_Map
MD5: 3deb3c685e767cee271b06e87727b086
```

Runtime output

```
Alice's age is  24

Name & Age:
Alice:  25
Bob:  28
John:  40
```

You can see a great similarity between the examples above and from the previous section. In fact, since both kinds of maps share many operations, we didn't need to make extensive modifications when we changed our example to use ordered maps instead of hashed maps. The main difference is seen when we run the examples: the output of a hashed map is usually unordered, but the output of a ordered map is always ordered, as implied by its name.

19.3.3 Complexity

Hashed maps are generally the fastest data structure available to you in Ada if you need to associate heterogeneous keys to values and search for them quickly. In most cases, they are slightly faster than ordered maps. So if you don't need ordering, use hashed maps.

The Reference Manual requires the following average complexity of operations:

Operations	`Ordered_Maps`	`Hashed_Maps`
• Insert • Include • Replace • Delete • Exclude • Find	O((log N)^2) or better	O(log N)
Subprogram using cursor	O(1)	O(1)

CHAPTER

TWENTY

STANDARD LIBRARY: DATES & TIMES

The standard library supports processing of dates and times using two approaches:

- *Calendar* approach, which is suitable for handling dates and times in general;
- *Real-time* approach, which is better suited for real-time applications that require enhanced precision — for example, by having access to an absolute clock and handling time spans. Note that this approach only supports times, not dates.

The following sections present these two approaches.

20.1 Date and time handling

The `Ada.Calendar` package supports handling of dates and times. Let's look at a simple example:

Listing 1: display_current_time.adb

```
with Ada.Text_IO;  use Ada.Text_IO;
with Ada.Calendar; use Ada.Calendar;

with Ada.Calendar.Formatting;
use  Ada.Calendar.Formatting;

procedure Display_Current_Time is
   Now : Time := Clock;
begin
   Put_Line ("Current time: " & Image (Now));
end Display_Current_Time;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Display_Current_Time
MD5: 4a88069b33ecf80314b0164a472ff606
```

Runtime output

```
Current time: 2025-06-27 00:07:30
```

This example displays the current date and time, which is retrieved by a call to the `Clock` function. We call the function `Image` from the `Ada.Calendar.Formatting` package to get a `String` for the current date and time. We could instead retrieve each component using the `Split` function. For example:

Listing 2: display_current_year.adb

```
with Ada.Text_IO;  use Ada.Text_IO;
with Ada.Calendar; use Ada.Calendar;
```

(continues on next page)

(continued from previous page)

```
3
4  procedure Display_Current_Year is
5     Now         : Time := Clock;
6
7     Now_Year    : Year_Number;
8     Now_Month   : Month_Number;
9     Now_Day     : Day_Number;
10    Now_Seconds : Day_Duration;
11 begin
12    Split (Now,
13           Now_Year,
14           Now_Month,
15           Now_Day,
16           Now_Seconds);
17
18    Put_Line ("Current year  is: "
19              & Year_Number'Image (Now_Year));
20    Put_Line ("Current month is: "
21              & Month_Number'Image (Now_Month));
22    Put_Line ("Current day   is: "
23              & Day_Number'Image (Now_Day));
24 end Display_Current_Year;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Display_Current_Year
MD5: fdf298ee97f225261ce3839ebd833bbe
```

Runtime output

```
Current year  is:  2025
Current month is:  6
Current day   is:  27
```

Here, we're retrieving each element and displaying it separately.

20.1.1 Delaying using date

You can delay an application so that it restarts at a specific date and time. We saw something similar in the chapter on tasking. You do this using a **delay until** statement. For example:

Listing 3: display_delay_next_specific_time.adb

```
1  with Ada.Text_IO;  use Ada.Text_IO;
2  with Ada.Calendar; use Ada.Calendar;
3
4  with Ada.Calendar.Formatting;
5  use  Ada.Calendar.Formatting;
6
7  with Ada.Calendar.Time_Zones;
8  use  Ada.Calendar.Time_Zones;
9
10 procedure Display_Delay_Next_Specific_Time is
11    TZ   : Time_Offset := UTC_Time_Offset;
12    Next : Time        :=
13      Ada.Calendar.Formatting.Time_Of
14        (Year        => 2018,
15         Month       => 5,
16         Day         => 1,
```

(continues on next page)

(continued from previous page)

```
        Hour        => 15,
        Minute      => 0,
        Second      => 0,
        Sub_Second  => 0.0,
        Leap_Second => False,
        Time_Zone   => TZ);

   --  Next = 2018-05-01 15:00:00.00
   --         (local time-zone)
begin
   Put_Line ("Let's wait until...");
   Put_Line (Image (Next, True, TZ));

   delay until Next;

   Put_Line ("Enough waiting!");
end Display_Delay_Next_Specific_Time;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Display_Delay_Next_Specific_Time
MD5: 36ec2bdce7c1e8d107fae54ef9852d3f
```

Runtime output

```
Let's wait until...
2018-05-01 15:00:00.00
Enough waiting!
```

In this example, we specify the date and time by initializing `Next` using a call to `Time_Of`, a function taking the various components of a date (year, month, etc) and returning an element of the `Time` type. Because the date specified is in the past, the **`delay until`** statement won't produce any noticeable effect. However, if we passed a date in the future, the program would wait until that specific date and time arrived.

Here we're converting the time to the local timezone. If we don't specify a timezone, *Coordinated Universal Time* (abbreviated to UTC) is used by default. By retrieving the time offset to UTC with a call to `UTC_Time_Offset` from the `Ada.Calendar.Time_Zones` package, we can initialize `TZ` and use it in the call to `Time_Of`. This is all we need do to make the information provided to `Time_Of` relative to the local time zone.

We could achieve a similar result by initializing `Next` with a **`String`**. We can do this with a call to `Value` from the `Ada.Calendar.Formatting` package. This is the modified code:

Listing 4: display_delay_next_specific_time.adb

```
with Ada.Text_IO;  use Ada.Text_IO;
with Ada.Calendar; use Ada.Calendar;

with Ada.Calendar.Formatting;
use  Ada.Calendar.Formatting;

with Ada.Calendar.Time_Zones;
use  Ada.Calendar.Time_Zones;

procedure Display_Delay_Next_Specific_Time is
   TZ   : Time_Offset := UTC_Time_Offset;
   Next : Time        :=
     Ada.Calendar.Formatting.Value
       ("2018-05-01 15:00:00.00", TZ);

```

(continues on next page)

(continued from previous page)

```
   --  Next = 2018-05-01 15:00:00.00
   --         (local time-zone)
begin
   Put_Line ("Let's wait until...");
   Put_Line (Image (Next, True, TZ));

   delay until Next;

   Put_Line ("Enough waiting!");
end Display_Delay_Next_Specific_Time;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Display_Delay_Next_Specific_Time
MD5: fdf6ad7fca303d4d7bd444c23e11c7bd
```

Runtime output

```
Let's wait until...
2018-05-01 15:00:00.00
Enough waiting!
```

In this example, we're again using TZ in the call to Value to adjust the input time to the current time zone.

In the examples above, we were delaying to a specific date and time. Just like we saw in the tasking chapter, we could instead specify the delay relative to the current time. For example, we could delay by 5 seconds, using the current time:

Listing 5: display_delay_next.adb

```
with Ada.Calendar; use Ada.Calendar;
with Ada.Text_IO;  use Ada.Text_IO;

procedure Display_Delay_Next is
   D    : Duration := 5.0;
   --                 ^ seconds
   Now  : Time     := Clock;
   Next : Time     := Now + D;
   --                       ^ use duration to
   --                         specify next
   --                         point in time
begin
   Put_Line ("Let's wait "
             & Duration'Image (D)
             & " seconds...");
   delay until Next;
   Put_Line ("Enough waiting!");
end Display_Delay_Next;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Display_Delay_Next
MD5: 58360d93388c3fe027c3d9d67389efc7
```

Runtime output

```
Let's wait  5.000000000 seconds...
Enough waiting!
```

Here, we're specifying a duration of 5 seconds in D, adding it to the current time from Now, and storing the sum in Next. We then use it in the **delay until** statement.

20.2 Real-time

In addition to `Ada.Calendar`, the standard library also supports time operations for real-time applications. These are included in the `Ada.Real_Time` package. This package also include a `Time` type. However, in the `Ada.Real_Time` package, the `Time` type is used to represent an absolute clock and handle a time span. This contrasts with the `Ada.Calendar`, which uses the `Time` type to represent dates and times.

In the previous section, we used the `Time` type from the `Ada.Calendar` and the **`delay until`** statement to delay an application by 5 seconds. We could have used the `Ada.Real_Time` package instead. Let's modify that example:

Listing 6: display_delay_next_real_time.adb

```
with Ada.Text_IO;   use Ada.Text_IO;
with Ada.Real_Time; use Ada.Real_Time;

procedure Display_Delay_Next_Real_Time is
   D     : Time_Span := Seconds (5);
   Next  : Time      := Clock + D;
begin
   Put_Line ("Let's wait "
             & Duration'Image (To_Duration (D))
             & " seconds...");
   delay until Next;
   Put_Line ("Enough waiting!");
end Display_Delay_Next_Real_Time;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Display_Delay_Next_Real_Time
MD5: a80e96c4ac7bd3ba7813f983b10cb038
```

Runtime output

```
Let's wait  5.000000000 seconds...
Enough waiting!
```

The main difference is that `D` is now a variable of type `Time_Span`, defined in the `Ada.Real_Time` package. We call the function `Seconds` to initialize `D`, but could have gotten a finer granularity by calling `Nanoseconds` instead. Also, we need to first convert `D` to the **`Duration`** type using `To_Duration` before we can display it.

20.2.1 Benchmarking

One interesting application using the `Ada.Real_Time` package is benchmarking. We've used that package before in a previous section when discussing tasking. Let's look at an example of benchmarking:

Listing 7: display_benchmarking.adb

```
with Ada.Text_IO;   use Ada.Text_IO;
with Ada.Real_Time; use Ada.Real_Time;

procedure Display_Benchmarking is

   procedure Computational_Intensive_App is
   begin
      delay 5.0;
   end Computational_Intensive_App;
```

(continues on next page)

(continued from previous page)

```
10
11    Start_Time, Stop_Time : Time;
12    Elapsed_Time          : Time_Span;
13
14 begin
15    Start_Time := Clock;
16
17    Computational_Intensive_App;
18
19    Stop_Time    := Clock;
20    Elapsed_Time := Stop_Time - Start_Time;
21
22    Put_Line ("Elapsed time: "
23              & Duration'Image
24                  (To_Duration (Elapsed_Time))
25              & " seconds");
26 end Display_Benchmarking;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Display_Benchmarking
MD5: 4b20940cb613d3f634be5224f409efeb
```

Runtime output

```
Elapsed time:  5.000218847 seconds
```

This example defines a dummy `Computational_Intensive_App` implemented using a simple **`delay`** statement. We initialize `Start_Time` and `Stop_Time` from the then-current clock and calculate the elapsed time. By running this program, we see that the time is roughly 5 seconds, which is expected due to the **`delay`** statement.

A similar application is benchmarking of CPU time. We can implement this using the `Execution_Time` package. Let's modify the previous example to measure CPU time:

Listing 8: display_benchmarking_cpu_time.adb

```
1  with Ada.Text_IO;        use Ada.Text_IO;
2  with Ada.Real_Time;      use Ada.Real_Time;
3  with Ada.Execution_Time; use Ada.Execution_Time;
4
5  procedure Display_Benchmarking_CPU_Time is
6
7     procedure Computational_Intensive_App is
8     begin
9        delay 5.0;
10    end Computational_Intensive_App;
11
12    Start_Time, Stop_Time : CPU_Time;
13    Elapsed_Time          : Time_Span;
14
15 begin
16    Start_Time := Clock;
17
18    Computational_Intensive_App;
19
20    Stop_Time    := Clock;
21    Elapsed_Time := Stop_Time - Start_Time;
22
23    Put_Line ("CPU time: "
24              & Duration'Image
```

(continues on next page)

(continued from previous page)

```
                (To_Duration (Elapsed_Time))
            & " seconds");
end Display_Benchmarking_CPU_Time;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Display_Benchmarking_CPU_Time
MD5: ba83ddbd05db523479be5692c4134901
```

Runtime output

```
CPU time:  0.000125571 seconds
```

In this example, Start_Time and Stop_Time are of type CPU_Time instead of Time. However, we still call the Clock function to initialize both variables and calculate the elapsed time in the same way as before. By running this program, we see that the CPU time is significantly lower than the 5 seconds we've seen before. This is because the **delay** statement doesn't require much CPU time. The results will be different if we change the implementation of Computational_Intensive_App to use a mathematical function in a long loop. For example:

Listing 9: display_benchmarking_math.adb

```
with Ada.Text_IO;         use Ada.Text_IO;
with Ada.Real_Time;       use Ada.Real_Time;
with Ada.Execution_Time; use Ada.Execution_Time;

with Ada.Numerics.Generic_Elementary_Functions;

procedure Display_Benchmarking_Math is

   procedure Computational_Intensive_App is
      package Funcs is new
        Ada.Numerics.Generic_Elementary_Functions
          (Float_Type => Long_Long_Float);
      use Funcs;

      X : Long_Long_Float;
   begin
      for I in 0 .. 1_000_000 loop
         X := Tan (Arctan
                (Tan (Arctan
                  (Tan (Arctan
                    (Tan (Arctan
                      (Tan (Arctan
                        (Tan (Arctan
                          (0.577))))))))))));
      end loop;
   end Computational_Intensive_App;

   procedure Benchm_Elapsed_Time is
      Start_Time, Stop_Time : Time;
      Elapsed_Time          : Time_Span;

   begin
      Start_Time := Clock;

      Computational_Intensive_App;

      Stop_Time    := Clock;
      Elapsed_Time := Stop_Time - Start_Time;
```

(continues on next page)

(continued from previous page)

```
39
40          Put_Line ("Elapsed time: "
41                    & Duration'Image
42                        (To_Duration (Elapsed_Time))
43                    & " seconds");
44       end Benchm_Elapsed_Time;
45
46       procedure Benchm_CPU_Time is
47          Start_Time, Stop_Time : CPU_Time;
48          Elapsed_Time          : Time_Span;
49
50       begin
51          Start_Time := Clock;
52
53          Computational_Intensive_App;
54
55          Stop_Time    := Clock;
56          Elapsed_Time := Stop_Time - Start_Time;
57
58          Put_Line ("CPU time: "
59                    & Duration'Image
60                        (To_Duration (Elapsed_Time))
61                    & " seconds");
62       end Benchm_CPU_Time;
63    begin
64       Benchm_Elapsed_Time;
65       Benchm_CPU_Time;
66    end Display_Benchmarking_Math;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Display_Benchmarking_Math
MD5: 06fe96bf03321c248dd1ed843648cf0b
```

Runtime output

```
Elapsed time:  0.983590274 seconds
CPU time:  0.973403139 seconds
```

Now that our dummy `Computational_Intensive_App` involves mathematical operations requiring significant CPU time, the measured elapsed and CPU time are much closer to each other than before.

CHAPTER

TWENTYONE

STANDARD LIBRARY: STRINGS

In previous chapters, we've seen source-code examples using the `String` type, which is a fixed-length string type — essentialy, it's an array of characters. In many cases, this data type is good enough to deal with textual information. However, there are situations that require more advanced text processing. Ada offers alternative approaches for these cases:

- *Bounded strings*: similar to fixed-length strings, bounded strings have a maximum length, which is set at its instantiation. However, bounded strings are not arrays of characters. At any time, they can contain a string of varied length — provided this length is below or equal to the maximum length.
- *Unbounded strings*: similar to bounded strings, unbounded strings can contain strings of varied length. However, in addition to that, they don't require a maximum length to be specified at the declaration of a string. In this sense, they are very flexible.

For further reading...

Although we don't specify a maximum length for unbounded strings, the limit is defined by the Reference Manual[21]:

> An object of type Unbounded_String represents a `String` whose low bound is 1 and whose length can vary conceptually between 0 and `Natural'Last`.

Therefore, the implicit maximum length is `Natural'Last`. In contrast, bounded strings have an explicit maximum length that is specified when the `Generic_Bounded_Length` package is instantiated (as we'll see *later on* (page 244)).

Another difference between bounded and unbounded strings is the strategy that is used by the compiler to allocate memory for those strings. When using GNAT, bounded strings are allocated on the stack, while unbounded strings are allocated on the heap.

The following sections present an overview of the different string types and common operations for string types.

21.1 String operations

Operations on standard (fixed-length) strings are available in the `Ada.Strings.Fixed` package. As mentioned previously, standard strings are arrays of elements of `Character` type with *a fixed-length*. That's why this child package is called `Fixed`.

One of the simplest operations provided is counting the number of substrings available in a string (`Count`) and finding their corresponding indices (`Index`). Let's look at an example:

[21] http://www.ada-auth.org/standards/12rm/html/RM-A-4-5.html

Listing 1: show_find_substring.adb

```
with Ada.Strings.Fixed; use Ada.Strings.Fixed;
with Ada.Text_IO;       use Ada.Text_IO;

procedure Show_Find_Substring is

   S   : String := "Hello" & 3 * " World";
   P   : constant String := "World";
   Idx : Natural;
   Cnt : Natural;
begin
   Cnt := Ada.Strings.Fixed.Count
     (Source  => S,
      Pattern => P);

   Put_Line ("String: " & S);
   Put_Line ("Count for '" & P & "': "
             & Natural'Image (Cnt));

   Idx := 0;
   for I in 1 .. Cnt loop
      Idx := Index
        (Source  => S,
         Pattern => P,
         From    => Idx + 1);

      Put_Line ("Found instance of '"
                & P & "' at position: "
                & Natural'Image (Idx));
   end loop;

end Show_Find_Substring;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Find_Substring
MD5: faa8373bf9aec9f9f5507cf55590b0c0
```

Runtime output

```
String: Hello World World World
Count for 'World':  3
Found instance of 'World' at position:  7
Found instance of 'World' at position:  13
Found instance of 'World' at position:  19
```

We initialize the string S using a multiplication. Writing `"Hello" & 3 * " World"` creates the string `Hello World World World`. We then call the function `Count` to get the number of instances of the word `World` in S. Next we call the function `Index` in a loop to find the index of each instance of `World` in S.

That example looked for instances of a specific substring. In the next example, we retrieve all the words in the string. We do this using `Find_Token` and specifying whitespaces as separators. For example:

Listing 2: show_find_words.adb

```
with Ada.Strings;       use Ada.Strings;
with Ada.Strings.Fixed; use Ada.Strings.Fixed;
with Ada.Strings.Maps;  use Ada.Strings.Maps;
with Ada.Text_IO;       use Ada.Text_IO;
```

(continues on next page)

(continued from previous page)

```
5
6  procedure Show_Find_Words is
7
8     S   : String := "Hello" & 3 * " World";
9     F   : Positive;
10    L   : Natural;
11    I   : Natural := 1;
12
13    Whitespace : constant Character_Set :=
14      To_Set (' ');
15 begin
16    Put_Line ("String: " & S);
17    Put_Line ("String length: "
18              & Integer'Image (S'Length));
19
20    while I in S'Range loop
21       Find_Token
22         (Source  => S,
23          Set     => Whitespace,
24          From    => I,
25          Test    => Outside,
26          First   => F,
27          Last    => L);
28
29       exit when L = 0;
30
31       Put_Line ("Found word instance at position "
32                 & Natural'Image (F)
33                 & ": '" & S (F .. L) & "'");
34       --   & "-" & F'Img & "-" & L'Img
35
36       I := L + 1;
37    end loop;
38 end Show_Find_Words;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Find_Words
MD5: e622f489af5901e5d31f314efc3324d2
```

Runtime output

```
String: Hello World World World
String length:  23
Found word instance at position  1: 'Hello'
Found word instance at position  7: 'World'
Found word instance at position  13: 'World'
Found word instance at position  19: 'World'
```

We pass a set of characters to be used as delimitators to the procedure `Find_Token`. This set is a member of the `Character_Set` type from the `Ada.Strings.Maps` package. We call the `To_Set` function (from the same package) to initialize the set to `Whitespace` and then call `Find_Token` to loop over each valid index and find the starting index of each word. We pass `Outside` to the `Test` parameter of the `Find_Token` procedure to indicate that we're looking for indices that are outside the `Whitespace` set, i.e. actual words. The `First` and `Last` parameters of `Find_Token` are output parameters that indicate the valid range of the substring. We use this information to display the string (`S (F .. L)`).

The operations we've looked at so far read strings, but don't modify them. We next discuss operations that change the content of strings:

Operation	Description
Insert	Insert substring in a string
Overwrite	Overwrite a string with a substring
Delete	Delete a substring
Trim	Remove whitespaces from a string

All these operations are available both as functions or procedures. Functions create a new string but procedures perform the operations in place. The procedure will raise an exception if the constraints of the string are not satisfied. For example, if we have a string S containing 10 characters, inserting a string with two characters (e.g. `"!!"`) into it produces a string containing 12 characters. Since it has a fixed length, we can't increase its size. One possible solution in this case is to specify that truncation should be applied while inserting the substring. This keeps the length of S fixed. Let's see an example that makes use of both function and procedure versions of `Insert`, `Overwrite`, and `Delete`:

Listing 3: show_adapted_strings.adb

```
with Ada.Strings;       use Ada.Strings;
with Ada.Strings.Fixed; use Ada.Strings.Fixed;
with Ada.Text_IO;       use Ada.Text_IO;

procedure Show_Adapted_Strings is

   S   : String := "Hello World";
   P   : constant String := "World";
   N   : constant String := "Beautiful";

   procedure Display_Adapted_String
     (Source   : String;
      Before   : Positive;
      New_Item : String;
      Pattern  : String)
   is
      S_Ins_In : String := Source;
      S_Ovr_In : String := Source;
      S_Del_In : String := Source;

      S_Ins : String :=
        Insert (Source,
                Before,
                New_Item & " ");
      S_Ovr : String :=
        Overwrite (Source,
                   Before,
                   New_Item);
      S_Del : String :=
        Trim (Delete (Source,
                      Before,
                      Before +
                        Pattern'Length - 1),
              Ada.Strings.Right);
   begin
      Insert (S_Ins_In,
              Before,
              New_Item,
              Right);

      Overwrite (S_Ovr_In,
                 Before,
```

(continues on next page)

(continued from previous page)

```
                 New_Item,
                 Right);

      Delete (S_Del_In,
              Before,
              Before + Pattern'Length - 1);

      Put_Line ("Original:  '"
                & Source & "'");

      Put_Line ("Insert:    '"
                & S_Ins  & "'");
      Put_Line ("Overwrite: '"
                & S_Ovr  & "'");
      Put_Line ("Delete:    '"
                & S_Del  & "'");

      Put_Line ("Insert    (in-place): '"
                & S_Ins_In & "'");
      Put_Line ("Overwrite (in-place): '"
                & S_Ovr_In & "'");
      Put_Line ("Delete    (in-place): '"
                & S_Del_In & "'");
   end Display_Adapted_String;

   Idx : Natural;
begin
   Idx := Index
     (Source  => S,
      Pattern => P);

   if Idx > 0 then
      Display_Adapted_String (S, Idx, N, P);
   end if;
end Show_Adapted_Strings;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Adapted_Strings
MD5: b31b6bc94d8bdbec717c6b6b2534beb6
```

Runtime output

```
Original:  'Hello World'
Insert:    'Hello Beautiful World'
Overwrite: 'Hello Beautiful'
Delete:    'Hello'
Insert    (in-place): 'Hello Beaut'
Overwrite (in-place): 'Hello Beaut'
Delete    (in-place): 'Hello      '
```

In this example, we look for the index of the substring `World` and perform operations on this substring within the outer string. The procedure `Display_Adapted_String` uses both versions of the operations. For the procedural version of `Insert` and `Overwrite`, we apply truncation to the right side of the string (`Right`). For the `Delete` procedure, we specify the range of the substring, which is replaced by whitespaces. For the function version of `Delete`, we also call `Trim` which trims the trailing whitespace.

21.2 Limitation of fixed-length strings

Using fixed-length strings is usually good enough for strings that are initialized when they are declared. However, as seen in the previous section, procedural operations on strings cause difficulties when done on fixed-length strings because fixed-length strings are arrays of characters. The following example shows how cumbersome the initialization of fixed-length strings can be when it's not performed in the declaration:

Listing 4: show_char_array.adb

```
with Ada.Text_IO;         use Ada.Text_IO;

procedure Show_Char_Array is
   S : String (1 .. 15);
   --  Strings are arrays of Character
begin
   S := "Hello          ";
   --  Alternatively:
   --
   --  #1:
   --      S (1 .. 5)      := "Hello";
   --      S (6 .. S'Last) := (others => ' ');
   --
   --  #2:
   --      S := ('H', 'e', 'l', 'l', 'o',
   --            others => ' ');

   Put_Line ("String: " & S);
   Put_Line ("String Length: "
             & Integer'Image (S'Length));
end Show_Char_Array;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Char_Array
MD5: 9f3df03c9c5336184139cf2a22f2cb7e
```

Runtime output

```
String: Hello
String Length:  15
```

In this case, we can't simply write `S := "Hello"` because the resulting array of characters for the `Hello` constant has a different length than the `S` string. Therefore, we need to include trailing whitespaces to match the length of `S`. As shown in the example, we could use an exact range for the initialization (`S (1 .. 5)`) or use an explicit array of individual characters.

When strings are initialized or manipulated at run-time, it's usually better to use bounded or unbounded strings. An important feature of these types is that they aren't arrays, so the difficulties presented above don't apply. Let's start with bounded strings.

21.3 Bounded strings

Bounded strings are defined in the `Ada.Strings.Bounded.Generic_Bounded_Length` package. Because this is a generic package, you need to instantiate it and set the maximum length of the bounded string. You can then declare bounded strings of the `Bounded_String` type.

Both bounded and fixed-length strings have a maximum length that they can hold. How-

ever, bounded strings are not arrays, so initializing them at run-time is much easier. For example:

Listing 5: show_bounded_string.adb

```
with Ada.Strings;         use Ada.Strings;
with Ada.Strings.Bounded;
with Ada.Text_IO;         use Ada.Text_IO;

procedure Show_Bounded_String is
   package B_Str is new
     Ada.Strings.Bounded.Generic_Bounded_Length
       (Max => 15);
   use B_Str;

   S1, S2 : Bounded_String;

   procedure Display_String_Info
     (S : Bounded_String)
   is
   begin
      Put_Line ("String: " & To_String (S));
      Put_Line ("String Length: "
                & Integer'Image (Length (S)));
      --  String:
      --           S'Length => ok
      --  Bounded_String:
      --           S'Length => compilation error:
      --                       bounded strings are
      --                       not arrays!

      Put_Line ("Max.   Length: "
                & Integer'Image (Max_Length));
   end Display_String_Info;

begin
   S1 := To_Bounded_String ("Hello");
   Display_String_Info (S1);

   S2 := To_Bounded_String ("Hello World");
   Display_String_Info (S2);

   S1 := To_Bounded_String
     ("Something longer to say here...",
      Right);
   Display_String_Info (S1);
end Show_Bounded_String;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Bounded_String
MD5: a51fdeacfd43923145ee92bf5c72ecd6
```

Runtime output

```
String: Hello
String Length:  5
Max.   Length:  15
String: Hello World
String Length:  11
Max.   Length:  15
String: Something longe
```

(continues on next page)

(continued from previous page)

```
String Length:  15
Max.   Length:  15
```

By using bounded strings, we can easily assign to S1 and S2 multiple times during execution. We use the `To_Bounded_String` and `To_String` functions to convert, in the respective direction, between fixed-length and bounded strings. A call to `To_Bounded_String` raises an exception if the length of the input string is greater than the maximum capacity of the bounded string. To avoid this, we can use the truncation parameter (`Right` in our example).

Bounded strings are not arrays, so we can't use the `'Length` attribute as we did for fixed-length strings. Instead, we call the `Length` function, which returns the length of the bounded string. The `Max_Length` constant represents the maximum length of the bounded string that we set when we instantiated the package.

After initializing a bounded string, we can manipulate it. For example, we can append a string to a bounded string using `Append` or concatenate bounded strings using the `&` operator. Like so:

Listing 6: show_bounded_string_op.adb

```
with Ada.Strings;         use Ada.Strings;
with Ada.Strings.Bounded;
with Ada.Text_IO;         use Ada.Text_IO;

procedure Show_Bounded_String_Op is
   package B_Str is new
     Ada.Strings.Bounded.Generic_Bounded_Length
       (Max => 30);
   use B_Str;

   S1, S2 : Bounded_String;
begin
   S1 := To_Bounded_String ("Hello");
   --  Alternatively:
   --
   --  A := Null_Bounded_String & "Hello";

   Append (S1, " World");
   --  Alternatively:
   --    Append (A, " World", Right);

   Put_Line ("String: " & To_String (S1));

   S2 := To_Bounded_String ("Hello!");
   S1 := S1 & " " & S2;
   Put_Line ("String: " & To_String (S1));
end Show_Bounded_String_Op;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Bounded_String_Op
MD5: c7c6a840c314a9cd9f75aac082a63159
```

Runtime output

```
String: Hello World
String: Hello World Hello!
```

We can initialize a bounded string with an empty string using the `Null_Bounded_String` constant. Also, we can use the `Append` procedure and specify the truncation mode like we do with the `To_Bounded_String` function.

21.4 Unbounded strings

Unbounded strings are defined in the `Ada.Strings.Unbounded` package. This is *not* a generic package, so we don't need to instantiate it before using the `Unbounded_String` type. As you may recall from the previous section, bounded strings require a package instantiation.

Unbounded strings are similar to bounded strings. The main difference is that they can hold strings of any size and adjust according to the input string: if we assign, e.g., a 10-character string to an unbounded string and later assign a 50-character string, internal operations in the container ensure that memory is allocated to store the new string. In most cases, developers don't need to worry about these operations. Also, no truncation is necessary.

Initialization of unbounded strings is very similar to bounded strings. Let's look at an example:

Listing 7: show_unbounded_string.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Ada.Strings; use Ada.Strings;

with Ada.Strings.Unbounded;
use  Ada.Strings.Unbounded;

procedure Show_Unbounded_String is
   S1, S2 : Unbounded_String;

   procedure Display_String_Info
     (S : Unbounded_String)
   is
   begin
      Put_Line ("String: " & To_String (S));
      Put_Line ("String Length: "
                & Integer'Image (Length (S)));
   end Display_String_Info;
begin
   S1 := To_Unbounded_String ("Hello");
   --  Alternatively:
   --
   --  A := Null_Unbounded_String & "Hello";

   Display_String_Info (S1);

   S2 := To_Unbounded_String ("Hello World");
   Display_String_Info (S2);

   S1 := To_Unbounded_String
           ("Something longer to say here...");
   Display_String_Info (S1);
end Show_Unbounded_String;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Unbounded_String
MD5: 904402992c96eb393b875d1b7cf49c1b
```

Runtime output

```
String: Hello
String Length:  5
String: Hello World
```

(continues on next page)

(continued from previous page)

```
String Length:  11
String: Something longer to say here...
String Length:  31
```

Like bounded strings, we can assign to S1 and S2 multiple times during execution and use the `To_Unbounded_String` and `To_String` functions to convert back-and-forth between fixed-length strings and unbounded strings. However, in this case, truncation is not needed.

And, just like for bounded strings, you can use the Append procedure and the `&` operator for unbounded strings. For example:

Listing 8: show_unbounded_string_op.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Ada.Strings.Unbounded;
use  Ada.Strings.Unbounded;

procedure Show_Unbounded_String_Op is
   S1, S2 : Unbounded_String :=
               Null_Unbounded_String;
begin
   S1 := S1 & "Hello";
   S2 := S2 & "Hello!";

   Append (S1, " World");
   Put_Line ("String: " & To_String (S1));

   S1 := S1 & " " & S2;
   Put_Line ("String: " & To_String (S1));
end Show_Unbounded_String_Op;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Unbounded_String_Op
MD5: 806e24a6dd0bc87e76f73a22e42ba390
```

Runtime output

```
String: Hello World
String: Hello World Hello!
```

In this example, we're concatenating the unbounded S1 and S2 strings with the `"Hello"` and `"Hello!"` strings, respectively. Also, we're using the Append procedure, just like we did with bounded strings.

CHAPTER

TWENTYTWO

STANDARD LIBRARY: FILES AND STREAMS

Ada provides different approaches for file input/output (I/O):

- *Text I/O*, which supports file I/O in text format, including the display of information on the console.
- *Sequential I/O*, which supports file I/O in binary format written in a sequential fashion for a specific data type.
- *Direct I/O*, which supports file I/O in binary format for a specific data type, but also supporting access to any position of a file.
- *Stream I/O*, which supports I/O of information for multiple data types, including objects of unbounded types, using files in binary format.

This table presents a summary of the features we've just seen:

File I/O option	Format	Random access	Data types
Text I/O	text		string type
Sequential I/O	binary		single type
Direct I/O	binary	✓	single type
Stream I/O	binary	✓	multiple types

In the following sections, we discuss details about these I/O approaches.

22.1 Text I/O

In most parts of this course, we used the `Put_Line` procedure to display information on the console. However, this procedure also accepts a `File_Type` parameter. For example, you can select between standard output and standard error by setting this parameter explicitly:

Listing 1: show_std_text_out.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Std_Text_Out is
begin
   Put_Line (Standard_Output, "Hello World #1");
   Put_Line (Standard_Error,  "Hello World #2");
end Show_Std_Text_Out;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Std_Text_Out
MD5: 4d75bd2906226897244e3d2a611c9725
```

Runtime output

```
Hello World #1
Hello World #2
```

You can also use this parameter to write information to any text file. To create a new file for writing, use the `Create` procedure, which initializes a **`File_Type`** element that you can later pass to `Put_Line` (instead of, e.g., `Standard_Output`). After you finish writing information, you can close the file by calling the `Close` procedure.

You use a similar method to read information from a text file. However, when opening the file, you must specify that it's an input file (`In_File`) instead of an output file. Also, instead of calling the `Put_Line` procedure, you call the `Get_Line` function to read information from the file.

Let's see an example that writes information into a new text file and then reads it back from the same file:

Listing 2: show_simple_text_file_io.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Simple_Text_File_IO is
   F         : File_Type;
   File_Name : constant String := "simple.txt";
begin
   Create (F, Out_File, File_Name);
   Put_Line (F, "Hello World #1");
   Put_Line (F, "Hello World #2");
   Put_Line (F, "Hello World #3");
   Close (F);

   Open (F, In_File, File_Name);
   while not End_Of_File (F) loop
      Put_Line (Get_Line (F));
   end loop;
   Close (F);
end Show_Simple_Text_File_IO;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Simple_Text_File_IO
MD5: 7461e946eef18c93219fa4ce3afbb1ea
```

Runtime output

```
Hello World #1
Hello World #2
Hello World #3
```

In addition to the `Create` and `Close` procedures, the standard library also includes a `Reset` procedure, which, as the name implies, resets (erases) all the information from the file. For example:

Listing 3: show_text_file_reset.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Text_File_Reset is
   F         : File_Type;
   File_Name : constant String := "simple.txt";
begin
   Create (F, Out_File, File_Name);
   Put_Line (F, "Hello World #1");
```

(continues on next page)

(continued from previous page)

```
   Reset (F);
   Put_Line (F, "Hello World #2");
   Close (F);

   Open (F, In_File, File_Name);
   while not End_Of_File (F) loop
      Put_Line (Get_Line (F));
   end loop;
   Close (F);
end Show_Text_File_Reset;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Text_File_Reset
MD5: 5e5498f03b2c829513af062c5959fc93
```

Runtime output

```
Hello World #2
```

By running this program, we notice that, although we've written the first string (`"Hello World #1"`) to the file, it has been erased because of the call to `Reset`.

In addition to opening a file for reading or writing, you can also open an existing file and append to it. Do this by calling the `Open` procedure with the `Append_File` option.

When calling the `Open` procedure, an exception is raised if the specified file isn't found. Therefore, you should handle exceptions in that context. The following example deletes a file and then tries to open the same file for reading:

Listing 4: show_text_file_input_except.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Text_File_Input_Except is
   F         : File_Type;
   File_Name : constant String := "simple.txt";
begin
   --  Open output file and delete it
   Create (F, Out_File, File_Name);
   Delete (F);

   --  Try to open deleted file
   Open (F, In_File, File_Name);
   Close (F);
exception
   when Name_Error =>
      Put_Line ("File does not exist");
   when others =>
      Put_Line
        ("Error while processing input file");
end Show_Text_File_Input_Except;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Text_File_Input_Except
MD5: c8d257091831c48d10b6e70e34b4261b
```

Runtime output

```
File does not exist
```

In this example, we create the file by calling `Create` and then delete it by calling `Delete`. After the call to `Delete`, we can no longer use the **`File_Type`** element. After deleting the file, we try to open the non-existent file, which raises a `Name_Error` exception.

22.2 Sequential I/O

The previous section presented details about text file I/O. Here, we discuss doing file I/O in binary format. The first package we'll explore is the `Ada.Sequential_IO` package. Because this package is a generic package, you need to instantiate it for the data type you want to use for file I/O. Once you've done that, you can use the same procedures we've seen in the previous section: `Create`, `Open`, `Close`, `Reset` and `Delete`. However, instead of calling the `Get_Line` and `Put_Line` procedures, you'd call the `Read` and `Write` procedures.

In the following example, we instantiate the `Ada.Sequential_IO` package for floating-point types:

Listing 5: show_seq_float_io.adb

```
with Ada.Text_IO;
with Ada.Sequential_IO;

procedure Show_Seq_Float_IO is
   package Float_IO is
     new Ada.Sequential_IO (Float);
   use Float_IO;

   F         : Float_IO.File_Type;
   File_Name : constant String :=
                 "float_file.bin";
begin
   Create (F, Out_File, File_Name);
   Write (F,  1.5);
   Write (F,  2.4);
   Write (F,  6.7);
   Close (F);

   declare
      Value : Float;
   begin
      Open (F, In_File, File_Name);
      while not End_Of_File (F) loop
         Read (F, Value);
         Ada.Text_IO.Put_Line
           (Float'Image (Value));
      end loop;
      Close (F);
   end;
end Show_Seq_Float_IO;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Seq_Float_IO
MD5: 27aa5daf92cba5df23fdc55c3578aa34
```

Runtime output

```
 1.50000E+00
 2.40000E+00
 6.70000E+00
```

We use the same approach to read and write complex information. The following example

uses a record that includes a Boolean and a floating-point value:

Listing 6: show_seq_rec_io.adb

```
with Ada.Text_IO;
with Ada.Sequential_IO;

procedure Show_Seq_Rec_IO is
   type Num_Info is record
      Valid : Boolean := False;
      Value : Float;
   end record;

   procedure Put_Line (N : Num_Info) is
   begin
      if N.Valid then
         Ada.Text_IO.Put_Line
           ("(ok,     "
            & Float'Image (N.Value) & ")");
      else
         Ada.Text_IO.Put_Line
           ("(not ok,  ----------)");
      end if;
   end Put_Line;

   package Num_Info_IO is new
     Ada.Sequential_IO (Num_Info);
   use Num_Info_IO;

   F         : Num_Info_IO.File_Type;
   File_Name : constant String :=
                 "float_file.bin";
begin
   Create (F, Out_File, File_Name);
   Write (F,  (True,  1.5));
   Write (F,  (False, 2.4));
   Write (F,  (True,  6.7));
   Close (F);

   declare
      Value : Num_Info;
   begin
      Open (F, In_File, File_Name);
      while not End_Of_File (F) loop
         Read (F, Value);
         Put_Line (Value);
      end loop;
      Close (F);
   end;
end Show_Seq_Rec_IO;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Seq_Rec_IO
MD5: a88b1428cc50745dce0509087e74adb7
```

Runtime output

```
(ok,      1.50000E+00)
(not ok,  ----------)
(ok,      6.70000E+00)
```

As the example shows, we can use the same approach we used for floating-point types to

perform file I/O for this record. Once we instantiate the Ada.Sequential_IO package for the record type, file I/O operations are performed the same way.

22.3 Direct I/O

Direct I/O is available in the Ada.Direct_IO package. This mechanism is similar to the sequential I/O approach just presented, but allows us to access any position in the file. The package instantiation and most operations are very similar to sequential I/O. To rewrite the Show_Seq_Float_IO application presented in the previous section to use the Ada.Direct_IO package, we just need to replace the instances of the Ada.Sequential_IO package by the Ada.Direct_IO package. This is the new source code:

Listing 7: show_dir_float_io.adb

```
with Ada.Text_IO;
with Ada.Direct_IO;

procedure Show_Dir_Float_IO is
   package Float_IO is new Ada.Direct_IO (Float);
   use Float_IO;

   F         : Float_IO.File_Type;
   File_Name : constant String :=
                 "float_file.bin";
begin
   Create (F, Out_File, File_Name);
   Write (F,  1.5);
   Write (F,  2.4);
   Write (F,  6.7);
   Close (F);

   declare
      Value : Float;
   begin
      Open (F, In_File, File_Name);
      while not End_Of_File (F) loop
         Read (F, Value);
         Ada.Text_IO.Put_Line
           (Float'Image (Value));
      end loop;
      Close (F);
   end;
end Show_Dir_Float_IO;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Dir_Float_IO
MD5: e4e5855976de44f53a821eb90dcbb206
```

Runtime output

```
 1.50000E+00
 2.40000E+00
 6.70000E+00
```

Unlike sequential I/O, direct I/O allows you to access any position in the file. However, it doesn't offer an option to append information to a file. Instead, it provides an Inout_File mode allowing reading and writing to a file via the same **File_Type** element.

To access any position in the file, call the Set_Index procedure to set the new position / index. You can use the Index function to retrieve the current index. Let's see an example:

Listing 8: show_dir_float_in_out_file.adb

```
with Ada.Text_IO;
with Ada.Direct_IO;

procedure Show_Dir_Float_In_Out_File is
   package Float_IO is new Ada.Direct_IO (Float);
   use Float_IO;

   F         : Float_IO.File_Type;
   File_Name : constant String :=
                 "float_file.bin";
begin
   --  Open file for input / output
   Create (F, Inout_File, File_Name);
   Write (F,  1.5);
   Write (F,  2.4);
   Write (F,  6.7);

   --  Set index to previous position
   --  and overwrite value
   Set_Index (F, Index (F) - 1);
   Write (F,  7.7);

   declare
      Value : Float;
   begin
      --  Set index to start of file
      Set_Index (F, 1);

      while not End_Of_File (F) loop
         Read (F, Value);
         Ada.Text_IO.Put_Line
           (Float'Image (Value));
      end loop;
      Close (F);
   end;
end Show_Dir_Float_In_Out_File;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Dir_Float_In_Out_File
MD5: 17b83a16ab8fa30f07cf8a0bd54078a1
```

Runtime output

```
 1.50000E+00
 2.40000E+00
 7.70000E+00
```

By running this example, we see that the file contains `7.7`, rather than the previous `6.7` that we wrote. We overwrote the value by changing the index to the previous position before doing another write.

In this example we used the `Inout_File` mode. Using that mode, we just changed the index back to the initial position before reading from the file (`Set_Index (F, 1)`) instead of closing the file and reopening it for reading.

22.4 Stream I/O

All the previous approaches for file I/O in binary format (sequential and direct I/O) are specific for a single data type (the one we instantiate them with). You can use these approaches to write objects of a single data type that may be an array or record (potentially with many fields), but if you need to create and process files that include different data types, or any objects of an unbounded type, these approaches are not sufficient. Instead, you should use stream I/O.

Stream I/O shares some similarities with the previous approaches. We still use the `Create`, `Open` and `Close` procedures. However, instead of accessing the file directly via a **`File_Type`** element, you use a `Stream_Access` element. To read and write information, you use the `'Read` or `'Write` attributes of the data types you're reading or writing.

Let's look at a version of the `Show_Dir_Float_IO` procedure from the previous section that makes use of stream I/O instead of direct I/O:

Listing 9: show_float_stream.adb

```
with Ada.Text_IO;

with Ada.Streams.Stream_IO;
use  Ada.Streams.Stream_IO;

procedure Show_Float_Stream is
   F         : File_Type;
   S         : Stream_Access;
   File_Name : constant String :=
                 "float_file.bin";
begin
   Create (F, Out_File, File_Name);
   S := Stream (F);

   Float'Write (S, 1.5);
   Float'Write (S, 2.4);
   Float'Write (S, 6.7);

   Close (F);

   declare
      Value : Float;
   begin
      Open (F, In_File, File_Name);
      S := Stream (F);

      while not End_Of_File (F) loop
         Float'Read (S, Value);
         Ada.Text_IO.Put_Line
           (Float'Image (Value));
      end loop;
      Close (F);
   end;
end Show_Float_Stream;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Float_Stream
MD5: 34ccf04b0821074a332019ac0e38bb3e
```

Runtime output

```
 1.50000E+00
 2.40000E+00
 6.70000E+00
```

After the call to `Create`, we retrieve the corresponding `Stream_Access` element by calling the `Stream` function. We then use this stream to write information to the file via the `'Write` attribute of the **`Float`** type. After closing the file and reopening it for reading, we again retrieve the corresponding `Stream_Access` element and processed to read information from the file via the `'Read` attribute of the **`Float`** type.

You can use streams to create and process files containing different data types within the same file. You can also read and write unbounded data types such as strings. However, when using unbounded data types you must call the `'Input` and `'Output` attributes of the unbounded data type: these attributes write information about bounds or discriminants in addition to the object's actual data.

The following example shows file I/O that mixes both strings of different lengths and floating-point values:

Listing 10: show_string_stream.adb

```
1  with Ada.Text_IO;
2
3  with Ada.Streams.Stream_IO;
4  use  Ada.Streams.Stream_IO;
5
6  procedure Show_String_Stream is
7     F         : File_Type;
8     S         : Stream_Access;
9     File_Name : constant String :=
10                  "float_file.bin";
11
12    procedure Output (S  : Stream_Access;
13                      FV : Float;
14                      SV : String) is
15    begin
16       String'Output (S, SV);
17       Float'Output (S,  FV);
18    end Output;
19
20    procedure Input_Display (S : Stream_Access) is
21       SV : String := String'Input (S);
22       FV : Float  := Float'Input (S);
23    begin
24       Ada.Text_IO.Put_Line (Float'Image (FV)
25                             & " --- " & SV);
26    end Input_Display;
27
28 begin
29    Create (F, Out_File, File_Name);
30    S := Stream (F);
31
32    Output (S, 1.5, "Hi!!");
33    Output (S, 2.4, "Hello world!");
34    Output (S, 6.7, "Something longer here...");
35
36    Close (F);
37
38    Open (F, In_File, File_Name);
39    S := Stream (F);
40
41    while not End_Of_File (F) loop
```

(continues on next page)

(continued from previous page)

```
42       Input_Display (S);
43    end loop;
44    Close (F);
45
46 end Show_String_Stream;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_String_Stream
MD5: 3ae8276ada5f24cab49994e368e0fa34
```

Runtime output

```
 1.50000E+00 --- Hi!!
 2.40000E+00 --- Hello world!
 6.70000E+00 --- Something longer here...
```

When you use Stream I/O, no information is written into the file indicating the type of the data that you wrote. If a file contains data from different types, you must reference types in the same order when reading a file as when you wrote it. If not, the information you get will be corrupted. Unfortunately, strong data typing doesn't help you in this case. Writing simple procedures for file I/O (as in the example above) may help ensuring that the file format is consistent.

Like direct I/O, stream I/O support also allows you to access any location in the file. However, when doing so, you need to be extremely careful that the position of the new index is consistent with the data types you're expecting.

CHAPTER

TWENTYTHREE

STANDARD LIBRARY: NUMERICS

The standard library provides support for common numeric operations on floating-point types as well as on complex types and matrices. In the sections below, we present a brief introduction to these numeric operations.

23.1 Elementary Functions

The `Ada.Numerics.Elementary_Functions` package provides common operations for floating-point types, such as square root, logarithm, and the trigonometric functions (e.g., sin, cos). For example:

Listing 1: show_elem_math.adb

```
with Ada.Text_IO;  use Ada.Text_IO;
with Ada.Numerics; use Ada.Numerics;

with Ada.Numerics.Elementary_Functions;
use  Ada.Numerics.Elementary_Functions;

procedure Show_Elem_Math is
   X : Float;
begin
   X := 2.0;
   Put_Line ("Square root of "
             & Float'Image (X)
             & " is "
             & Float'Image (Sqrt (X)));

   X := e;
   Put_Line ("Natural log of "
             & Float'Image (X)
             & " is "
             & Float'Image (Log (X)));

   X := 10.0 ** 6.0;
   Put_Line ("Log_10      of "
             & Float'Image (X)
             & " is "
             & Float'Image (Log (X, 10.0)));

   X := 2.0 ** 8.0;
   Put_Line ("Log_2       of "
             & Float'Image (X)
             & " is "
             & Float'Image (Log (X, 2.0)));

   X := Pi;
```

(continues on next page)

(continued from previous page)

```
35    Put_Line ("Cos         of "
36              & Float'Image (X)
37              & " is "
38              & Float'Image (Cos (X)));
39
40    X := -1.0;
41    Put_Line ("Arccos      of "
42              & Float'Image (X)
43              & " is "
44              & Float'Image (Arccos (X)));
45 end Show_Elem_Math;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Elem_Math
MD5: 17511d7e17cd98d4b6e49ad302d6dcb6
```

Runtime output

```
Square root of  2.00000E+00 is  1.41421E+00
Natural log of  2.71828E+00 is  1.00000E+00
Log_10      of  1.00000E+06 is  6.00000E+00
Log_2       of  2.56000E+02 is  8.00000E+00
Cos         of  3.14159E+00 is -1.00000E+00
Arccos      of -1.00000E+00 is  3.14159E+00
```

Here we use the standard e and Pi constants from the `Ada.Numerics` package.

The `Ada.Numerics.Elementary_Functions` package provides operations for the **`Float`** type. Similar packages are available for **`Long_Float`** and **`Long_Long_Float`** types. For example, the `Ada.Numerics.Long_Elementary_Functions` package offers the same set of operations for the **`Long_Float`** type. In addition, the `Ada.Numerics.` **`Generic`**`_Elementary_Functions` package is a generic version of the package that you can instantiate for custom floating-point types. In fact, the `Elementary_Functions` package can be defined as follows:

```
package Elementary_Functions is new
  Ada.Numerics.Generic_Elementary_Functions (Float);
```

23.2 Random Number Generation

The `Ada.Numerics.Float_Random` package provides a simple random number generator for the range between 0.0 and 1.0. To use it, declare a generator `G`, which you pass to `Random`. For example:

Listing 2: show_float_random_num.adb

```
1  with Ada.Text_IO;  use Ada.Text_IO;
2
3  with Ada.Numerics.Float_Random;
4  use  Ada.Numerics.Float_Random;
5
6  procedure Show_Float_Random_Num is
7     G : Generator;
8     X : Uniformly_Distributed;
9  begin
10    Reset (G);
11
```

(continues on next page)

(continued from previous page)

```
   Put_Line ("Some random numbers between "
             & Float'Image
                (Uniformly_Distributed'First)
             & " and "
             & Float'Image
                (Uniformly_Distributed'Last)
             & ":");
   for I in 1 .. 15 loop
      X := Random (G);
      Put_Line (Float'Image (X));
   end loop;
end Show_Float_Random_Num;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Float_Random_Num
MD5: cf38ab00e27bad4309010e678113dd36
```

Runtime output

```
Some random numbers between  0.00000E+00 and  1.00000E+00:
 9.09676E-01
 6.31528E-01
 9.62992E-01
 9.03083E-01
 4.89644E-01
 7.57985E-01
 1.92530E-02
 6.85242E-01
 4.98962E-01
 1.64515E-01
 3.21340E-01
 6.80852E-01
 4.24395E-01
 3.86692E-01
 4.28303E-01
```

The standard library also includes a random number generator for discrete numbers, which is part of the `Ada.Numerics.Discrete_Random` package. Since it's a generic package, you have to instantiate it for the desired discrete type. This allows you to specify a range for the generator. In the following example, we create an application that displays random integers between 1 and 10:

Listing 3: show_discrete_random_num.adb

```
with Ada.Text_IO;  use Ada.Text_IO;
with Ada.Numerics.Discrete_Random;

procedure Show_Discrete_Random_Num is

   subtype Random_Range is Integer range 1 .. 10;

   package R is new
     Ada.Numerics.Discrete_Random (Random_Range);
   use R;

   G : Generator;
   X : Random_Range;
begin
   Reset (G);

```

(continues on next page)

(continued from previous page)

```
   Put_Line ("Some random numbers between "
             & Integer'Image (Random_Range'First)
             & " and "
             & Integer'Image (Random_Range'Last)
             & ":");

   for I in 1 .. 15 loop
      X := Random (G);
      Put_Line (Integer'Image (X));
   end loop;
end Show_Discrete_Random_Num;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Discrete_Random_Num
MD5: 892f6525477f9a2c56f88885de011fba
```

Runtime output

```
Some random numbers between  1 and  10:
 7
 10
 9
 3
 2
 5
 5
 8
 8
 10
 5
 10
 10
 3
 10
```

Here, package R is instantiated with the Random_Range type, which has a constrained range between 1 and 10. This allows us to control the range used for the random numbers. We could easily modify the application to display random integers between 0 and 20 by changing the specification of the Random_Range type. We can also use floating-point or fixed-point types.

23.3 Complex Types

The Ada.Numerics.Complex_Types package provides support for complex number types and the Ada.Numerics.Complex_Elementary_Functions package provides support for common operations on complex number types, similar to the Ada.Numerics.Elementary_Functions package. Finally, you can use the Ada.Text_IO.Complex_IO package to perform I/O operations on complex numbers. In the following example, we declare variables of the Complex type and initialize them using an aggregate:

Listing 4: show_elem_math.adb

```
with Ada.Text_IO;  use Ada.Text_IO;
with Ada.Numerics; use Ada.Numerics;

with Ada.Numerics.Complex_Types;
use  Ada.Numerics.Complex_Types;
```

(continues on next page)

(continued from previous page)

```
6
7  with Ada.Numerics.Complex_Elementary_Functions;
8  use  Ada.Numerics.Complex_Elementary_Functions;
9
10 with Ada.Text_IO.Complex_IO;
11
12 procedure Show_Elem_Math is
13
14    package C_IO is new
15      Ada.Text_IO.Complex_IO (Complex_Types);
16    use C_IO;
17
18    X, Y  : Complex;
19    R, Th : Float;
20 begin
21    X := (2.0, -1.0);
22    Y := (3.0,  4.0);
23
24    Put (X);
25    Put (" * ");
26    Put (Y);
27    Put (" is ");
28    Put (X * Y);
29    New_Line;
30    New_Line;
31
32    R  := 3.0;
33    Th := Pi / 2.0;
34    X  := Compose_From_Polar (R, Th);
35    --  Alternatively:
36    --  X := R * Exp ((0.0, Th));
37    --  X := R * e ** Complex'(0.0, Th);
38
39    Put ("Polar form:    "
40         & Float'Image (R)  & " * e**(i * "
41         & Float'Image (Th) & ")");
42    New_Line;
43
44    Put ("Modulus     of ");
45    Put (X);
46    Put (" is ");
47    Put (Float'Image (abs X));
48    New_Line;
49
50    Put ("Argument    of ");
51    Put (X);
52    Put (" is ");
53    Put (Float'Image (Argument (X)));
54    New_Line;
55    New_Line;
56
57    Put ("Sqrt        of ");
58    Put (X);
59    Put (" is ");
60    Put (Sqrt (X));
61    New_Line;
62 end Show_Elem_Math;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Elem_Math
```

(continues on next page)

(continued from previous page)

```
MD5: 73dfc0021c804fa1c5727e272546f172
```

Runtime output

```
( 2.00000E+00,-1.00000E+00) * ( 3.00000E+00, 4.00000E+00) is ( 1.00000E+01, 5.
↪00000E+00)

Polar form:     3.00000E+00 * e**(i *  1.57080E+00)
Modulus     of (-1.31134E-07, 3.00000E+00) is  3.00000E+00
Argument    of (-1.31134E-07, 3.00000E+00) is  1.57080E+00

Sqrt        of (-1.31134E-07, 3.00000E+00) is ( 1.22474E+00, 1.22474E+00)
```

As we can see from this example, all the common operators, such as * and +, are available for complex types. You also have typical operations on complex numbers, such as Argument and Exp. In addition to initializing complex numbers in the cartesian form using aggregates, you can do so from the polar form by calling the Compose_From_Polar function.

The Ada.Numerics.Complex_Types and Ada.Numerics.Complex_Elementary_Functions packages provide operations for the **Float** type. Similar packages are available for **Long_Float** and **Long_Long_Float** types. In addition, the Ada.Numerics.**Generic_**Complex_Types and Ada.Numerics.**Generic_**Complex_Elementary_Functions packages are generic versions that you can instantiate for custom or pre-defined floating-point types. For example:

```
with Ada.Numerics.Generic_Complex_Types;
with Ada.Numerics.Generic_Complex_Elementary_Functions;
with Ada.Text_IO.Complex_IO;

procedure Show_Elem_Math is

   package Complex_Types is new
     Ada.Numerics.Generic_Complex_Types (Float);
   use Complex_Types;

   package Elementary_Functions is new
     Ada.Numerics.Generic_Complex_Elementary_Functions
       (Complex_Types);
   use Elementary_Functions;

   package C_IO is new Ada.Text_IO.Complex_IO
     (Complex_Types);
   use C_IO;

   X, Y  : Complex;
   R, Th : Float;
```

23.4 Vector and Matrix Manipulation

The Ada.Numerics.Real_Arrays package provides support for vectors and matrices. It includes common matrix operations such as inverse, determinant, eigenvalues in addition to simpler operators such as matrix addition and multiplication. You can declare vectors and matrices using the Real_Vector and Real_Matrix types, respectively.

The following example uses some of the operations from the Ada.Numerics.Real_Arrays package:

Listing 5: show_matrix.adb

```
with Ada.Text_IO;  use Ada.Text_IO;

with Ada.Numerics.Real_Arrays;
use  Ada.Numerics.Real_Arrays;

procedure Show_Matrix is

   procedure Put_Vector (V : Real_Vector) is
   begin
      Put ("    (");
      for I in V'Range loop
         Put (Float'Image (V (I)) & " ");
      end loop;
      Put_Line (")");
   end Put_Vector;

   procedure Put_Matrix (M : Real_Matrix) is
   begin
      for I in M'Range (1) loop
         Put ("    (");
         for J in M'Range (2) loop
            Put (Float'Image (M (I, J)) & " ");
         end loop;
         Put_Line (")");
      end loop;
   end Put_Matrix;

   V1       : Real_Vector := (1.0, 3.0);
   V2       : Real_Vector := (75.0, 11.0);

   M1       : Real_Matrix :=
                ((1.0, 5.0, 1.0),
                 (2.0, 2.0, 1.0));
   M2       : Real_Matrix :=
                ((31.0, 11.0, 10.0),
                 (34.0, 16.0, 11.0),
                 (32.0, 12.0, 10.0),
                 (31.0, 13.0, 10.0));
   M3       : Real_Matrix := ((1.0, 2.0),
                              (2.0, 3.0));
begin
   Put_Line ("V1");
   Put_Vector (V1);
   Put_Line ("V2");
   Put_Vector (V2);
   Put_Line ("V1 * V2 =");
   Put_Line ("    "
             & Float'Image (V1 * V2));
   Put_Line ("V1 * V2 =");
   Put_Matrix (V1 * V2);
   New_Line;

   Put_Line ("M1");
   Put_Matrix (M1);
   Put_Line ("M2");
   Put_Matrix (M2);
   Put_Line ("M2 * Transpose(M1) =");
   Put_Matrix (M2 * Transpose (M1));
   New_Line;

```

(continues on next page)

(continued from previous page)

```
61    Put_Line ("M3");
62    Put_Matrix (M3);
63    Put_Line ("Inverse (M3) =");
64    Put_Matrix (Inverse (M3));
65    Put_Line ("abs Inverse (M3) =");
66    Put_Matrix (abs Inverse (M3));
67    Put_Line ("Determinant (M3) =");
68    Put_Line ("    "
69              & Float'Image (Determinant (M3)));
70    Put_Line ("Solve (M3, V1) =");
71    Put_Vector (Solve (M3, V1));
72    Put_Line ("Eigenvalues (M3) =");
73    Put_Vector (Eigenvalues (M3));
74    New_Line;
75 end Show_Matrix;
```

Code block metadata

```
Project: Courses.Intro_To_Ada.Standard_Library.Show_Matrix
MD5: c9df45a742a42bd47e03fbf2d0282238
```

Runtime output

```
V1
    ( 1.00000E+00  3.00000E+00 )
V2
    ( 7.50000E+01  1.10000E+01 )
V1 * V2 =
     1.08000E+02
V1 * V2 =
    ( 7.50000E+01  1.10000E+01 )
    ( 2.25000E+02  3.30000E+01 )

M1
    ( 1.00000E+00  5.00000E+00  1.00000E+00 )
    ( 2.00000E+00  2.00000E+00  1.00000E+00 )
M2
    ( 3.10000E+01  1.10000E+01  1.00000E+01 )
    ( 3.40000E+01  1.60000E+01  1.10000E+01 )
    ( 3.20000E+01  1.20000E+01  1.00000E+01 )
    ( 3.10000E+01  1.30000E+01  1.00000E+01 )
M2 * Transpose(M1) =
    ( 9.60000E+01  9.40000E+01 )
    ( 1.25000E+02  1.11000E+02 )
    ( 1.02000E+02  9.80000E+01 )
    ( 1.06000E+02  9.80000E+01 )

M3
    ( 1.00000E+00  2.00000E+00 )
    ( 2.00000E+00  3.00000E+00 )
Inverse (M3) =
    (-3.00000E+00  2.00000E+00 )
    ( 2.00000E+00 -1.00000E+00 )
abs Inverse (M3) =
    ( 3.00000E+00  2.00000E+00 )
    ( 2.00000E+00  1.00000E+00 )
Determinant (M3) =
    -1.00000E+00
Solve (M3, V1) =
    ( 3.00000E+00 -1.00000E+00 )
Eigenvalues (M3) =
```

(continues on next page)

(continued from previous page)

```
    ( 4.23607E+00 -2.36068E-01 )
```

Matrix dimensions are automatically determined from the aggregate used for initialization when you don't specify them. You can, however, also use explicit ranges. For example:

```
M1       : Real_Matrix (1 .. 2, 1 .. 3) :=
             ((1.0, 5.0, 1.0),
              (2.0, 2.0, 1.0));
```

The `Ada.Numerics.Real_Arrays` package implements operations for the **`Float`** type. Similar packages are available for **`Long_Float`** and **`Long_Long_Float`** types. In addition, the `Ada.Numerics.`**`Generic`**`_Real_Arrays` package is a generic version that you can instantiate with custom floating-point types. For example, the `Real_Arrays` package can be defined as follows:

```
package Real_Arrays is new
  Ada.Numerics.Generic_Real_Arrays (Float);
```

CHAPTER

TWENTYFOUR

APPENDICES

24.1 Appendix A: Generic Formal Types

The following tables contain examples of available formal types for generics:

Formal type	Actual type
Incomplete type **Format**: `type T;`	Any type
Discrete type **Format**: `type T is (<>);`	Any integer, modular or enumeration type
Range type **Format**: `type T is range <>;`	Any signed integer type
Modular type **Format**: `type T is mod <>;`	Any modular type
Floating-point type **Format**: `type T is digits <>;`	Any floating-point type
Binary fixed-point type **Format**: `type T is delta <>;`	Any binary fixed-point type
Decimal fixed-point type **Format**: `type T is delta <> digits <>;`	Any decimal fixed-point type
Definite nonlimited private type **Format**: `type T is private;`	Any nonlimited, definite type
Nonlimited Private type with discriminant **Format**: `type T (D : DT) is private;`	Any nonlimited type with discriminant
Access type **Format**: `type A is access T;`	Any access type for type T
Definite derived type **Format**: `type T is new B;`	Any concrete type derived from base type B
Limited private type **Format**: `type T is limited private;`	Any definite type, limited or not
Incomplete tagged type **Format**: `type T is tagged;`	Any concrete, definite, tagged type
Definite tagged private type **Format**: `type T is tagged private;`	Any concrete, definite, tagged type
Definite tagged limited private type **Format**: `type T is tagged limited private;`	Any concrete definite tagged type, limited or not
Definite abstract tagged private type **Format**: `type T is abstract tagged private;`	Any nonlimited, definite tagged type, abstract or concrete

continues on next page

Table 1 – continued from previous page

Formal type	Actual type
Definite abstract tagged limited private type **Format**: `type T is abstract tagged limited private;`	Any definite tagged type, limited or not, abstract or concrete
Definite derived tagged type **Format**: `type T is new B with private;`	Any concrete tagged type derived from base type B
Definite abstract derived tagged type **Format**: `type T is abstract new B with private;`	Any tagged type derived from base type B abstract or concrete
Array type **Format**: `type A is array (R) of T;`	Any array type with range R containing elements of type T
Interface type **Format**: `type T is interface;`	Any interface type T
Limited interface type **Format**: `type T is limited interface;`	Any limited interface type T
Task interface type **Format**: `type T is task interface;`	Any task interface type T
Synchronized interface type **Format**: `type T is synchronized interface;`	Any synchronized interface type T
Protected interface type **Format**: `type T is protected interface;`	Any protected interface type T
Derived interface type **Format**: `type T is new B and I with private;`	Any type T derived from base type B and interface I
Derived type with multiple interfaces **Format**: `type T is new B and I1 and I2 with private;`	Any type T derived from base type B and interfaces I1 and I2
Abstract derived interface type **Format**: `type T is abstract new B and I with private;`	Any type T derived from abstract base type B and interface I
Limited derived interface type **Format**: `type T is limited new B and I with private;`	Any type T derived from limited base type B and limited interface I
Abstract limited derived interface type **Format**: `type T is abstract limited new B and I with private;`	Any type T derived from abstract limited base type B and limited interface I
Synchronized interface type **Format**: `type T is synchronized new SI with private;`	Any type T derived from synchronized interface SI
Abstract synchronized interface type **Format**: `type T is abstract synchronized new SI with private;`	Any type T derived from synchronized interface SI

24.1.1 Indefinite version

Many of the examples above can be used for formal indefinite types:

Formal type	Actual type
Indefinite incomplete type **Format**: `type T (<>);`	Any type
Indefinite nonlimited private type **Format**: `type T (<>) is private;`	Any nonlimited type indefinite or definite
Indefinite limited private type **Format**: `type T (<>) is limited private;`	Any type, limited or not, indefinite or definite
Incomplete indefinite tagged private type **Format**: `type T (<>) is tagged;`	Any concrete tagged type, indefinite or definite
Indefinite tagged private type **Format**: `type T (<>) is tagged private;`	Any concrete, nonlimited tagged type, indefinite or definite
Indefinite tagged limited private type **Format**: `type T (<>) is tagged limited private;`	Any concrete tagged type, limited or not, indefinite or definite
Indefinite abstract tagged private type **Format**: `type T (<>) is abstract tagged private;`	Any nonlimited tagged type, indefinite or definite, abstract or concrete
Indefinite abstract tagged limited private type **Format**: `type T (<>) is abstract tagged limited private;`	Any tagged type, limited or not, indefinite or definite abstract or concrete
Indefinite derived tagged type **Format**: `type T (<>) is new B with private;`	Any tagged type derived from base type B, indefinite or definite
Indefinite abstract derived tagged type **Format**: `type T (<>) is abstract new B with private;`	Any tagged type derived from base type B, indefinite or definite abstract or concrete

The same examples could also contain discriminants. In this case, `(<>)` is replaced by a list of discriminants, e.g.: `(D: DT)`.

24.2 Appendix B: Containers

The following table shows all containers available in Ada, including their versions (standard, bounded, unbounded, indefinite):

Category	Container	Std	Bounded	Unbounded	Indefinite
Vector	`Vectors`	Y	Y		Y
List	`Doubly Linked Lists`	Y	Y		Y
Map	`Hashed Maps`	Y	Y		Y
Map	`Ordered Maps`	Y	Y		Y
Set	`Hashed Sets`	Y	Y		Y
Set	`Ordered Sets`	Y	Y		Y
Tree	`Multiway Trees`	Y	Y		Y
Generic	`Holders`				Y
Queue	`Synchronized Queue Interfaces`	Y			
Queue	`Synchronized Queues`		Y	Y	
Queue	`Priority Queues`		Y	Y	

Note

To get the correct container name, replace the whitespace by _ in the names above. (For example, `Hashed Maps` becomes `Hashed_Maps`.)

The following table presents the prefixing applied to the container name that depends on its version. As indicated in the table, the standard version does not have a prefix associated with it.

Version	Naming prefix
Std	
Bounded	`Bounded_`
Unbounded	`Unbounded_`
Indefinite	`Indefinite_`

Part II

Advanced Journey With Ada: A Flight In Progress

Copyright © 2019 – 2024, AdaCore

This book is published under a CC BY-SA license, which means that you can copy, redistribute, remix, transform, and build upon the content for any purpose, even commercially, as long as you give appropriate credit, provide a link to the license, and indicate if changes were made. If you remix, transform, or build upon the material, you must distribute your contributions under the same license as the original. You can find license details on this page[22]



Warning

This is work in progress!

Information in this document is subject to change at any time without prior notification.

Note

The code examples in this course use a 50-column limit, which greatly improves the readability of the code on devices with a small screen size. This constraint, however, leads to an unusual coding style. For instance, instead of calling `Put_Line` in a single line, we have this:

```
Put_Line
  (" is in the northeast quadrant");
```

or this:

```
Put_Line ("  (X => "
          & Integer'Image (P.X)
          & ")");
```

Note that typical Ada code uses a limit of at least 79 columns. Therefore, please don't take the coding style from this course as a reference!

Note

Each code example from this book has an associated "code block metadata", which contains the name of the "project" and an MD5 hash value. This information is used to identify a single code example.

You can find all code examples in a zip file, which you can download from the learn website[23]. The directory structure in the zip file is based on the code block metadata. For example, if you're searching for a code example with this metadata:

- Project: Courses.Intro_To_Ada.Imperative_Language.Greet
- MD5: cba89a34b87c9dfa71533d982d05e6ab

you will find it in this directory:

[22] http://creativecommons.org/licenses/by-sa/4.0

```
projects/Courses/Intro_To_Ada/Imperative_Language/Greet/
cba89a34b87c9dfa71533d982d05e6ab/
```

In order to use this code example, just follow these steps:

1. Unpack the zip file;
2. Go to target directory;
3. Start GNAT Studio on this directory;
4. Build (or compile) the project;
5. Run the application (if a main procedure is available in the project).

This course will teach you advanced topics of the Ada programming language. The *Introduction to Ada* (page 5) course is a prerequisite for this course.

This document was written by Gustavo A. Hoffmann, with major contributions from Robert A. Duff. The document also includes contributions from Franco Gasperoni, Gary Dismukes, Patrick Rogers, and Robert Dewar.

These contributions are clearly indicated in the document, together with the original publication source.

Special thanks to Patrick Rogers for all comments and suggestions. In particular, thanks for sharing the training slides on access types: many ideas from those slides were integrated into this course.

This document was reviewed by Patrick Rogers and Tucker Taft.

CHANGELOG

Changes are being tracked on the CHANGELOG page.

[23] https://learn.adacore.com/zip/learning-ada_code.zip

CHAPTER

TWENTYFIVE

DATA TYPES

25.1 Types

25.1.1 Names

In simple terms, a "name" can be an identifier, i.e. the *name* that we use to refer to an object or a subprogram, for example. This is what we call a *direct name*. However, in Ada, a name can also refer to other language constructs, as we discuss later on in this section.

In the Ada Reference Manual

- 4.1 Name[24]

Direct names

Direct names are the simplest form of names in Ada. They can be either identifiers or operator symbols.

Identifiers

An identifier — as the term implies — is a (direct) name that we use to *identify* an object, a subprogram, a type, and so on. When specifying an identifier, we aren't limited to ASCII[25] characters: we can use a subset of the Unicode[26] standard.

For further reading...

To be more precise, the Normalization Form KC of the Unicode standard is applied to identifiers. You can find more information about it in the Unicode Standard Annex #15[27].

For example:

Listing 1: show_identifiers.adb

```
1 procedure Show_Identifiers is
2 --        ^^^^^^^^^^^^^^^^
3 --           identifier
4
5    type New_Integer is new
6    --   ^^^^^^^^^^^
```

(continues on next page)

[24] http://www.ada-auth.org/standards/22rm/html/RM-4-1.html
[25] https://en.wikipedia.org/wiki/ASCII
[26] https://en.wikipedia.org/wiki/Universal_Coded_Character_Set
[27] https://unicode.org/reports/tr15/

(continued from previous page)

```
   --     identifier
     Integer;
   --  ^^^^^
   --   identifier

   Something_Important : New_Integer;
   --  ^^^^^^^^^^^^^^^
   --  identifier
   --                    ^^^^^^^^^^
   --                     identifier
begin
  null;
end Show_Identifiers;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Names.Identifiers
MD5: e427d3e5fe5f549df593b5e5941cf2ba
```

In this example, we see the following identifiers: `Show_Identifiers` (subprogram), `New_Integer` (type), **`Integer`** (type), and `Something_Important` (object).

Operator symbols

The set of operator symbols that we can use is restricted to the following symbols or reserved words specified in the Ada language:

Operator kind	Operators
Logical operators	**and**, **or**, **xor**
Relational operators	=, /=, <, <= >, >=
Binary adding operators	+, -, &
Unary adding operators	+, -
multiplying opertors	*, /, **mod**, **rem**
Highest precedence operators	**, **abs**, **not**

In the Ada Reference Manual

- 4.5 Operators and Expression Evaluation[28]

Other kinds of names

In addition to direct names, we have the following kinds of names: *explicit dereferences* (page 873), indexed components, slices, selected components, attribute references, *type conversions* (page 317), function calls, character literals, *qualified expressions* (page 336), *generalized references* (page 992), and target name.

Let's see an example of some of them:

Listing 2: show_other_names.adb

```
pragma Ada_2022;

procedure Show_Other_Names is
```

(continues on next page)

[28] http://www.ada-auth.org/standards/22rm/html/RM-4-5.html

(continued from previous page)

```
4
5     type Integer_Access is
6       access Integer;
7
8     type Integer_Array is array
9       (Positive range <>) of Integer;
10
11    type New_Integer is new
12      Integer;
13
14    function Zero
15      return New_Integer is
16        (0);
17
18    subtype Sub_Integer is
19      Integer;
20
21    type Rec is record
22       Val : Integer := 0;
23    end record;
24
25    type ABC_Enum is
26      ('A', 'B', 'C');
27
28    IA  : Integer_Access := new Integer;
29    Arr : Integer_Array (1 .. 5) :=
30            (others => 0);
31    R   : Rec;
32    NI  : New_Integer;
33    SI  : Sub_Integer;
34    E   : ABC_Enum := 'A';
35 begin
36    R.Val := IA.all;
37    --       ^^^^^^
38    --  explicit dereference
39
40    R.Val := Arr (1);
41    --       ^^^^^^^
42    --    indexed component
43
44    Arr (1 .. 2) := Arr (3 .. 4);
45    --              ^^^^^^^^^^^^
46    --                  slice
47
48    Arr (1 .. 2) := (others => R.Val);
49    --                          ^^^^^
50    --              selected component
51
52    R.Val := Arr'Size;
53    --       ^^^^^^^^
54    --  attribute reference
55
56    NI := New_Integer (IA.all);
57    --    ^^^^^^^^^^^^^^^^^^^^
58    --      type conversion
59
60    NI := Zero;
61    --    ^^^^
62    --  function call
63
64    E  := 'A';
```

(continues on next page)

(continued from previous page)

```
65    --     ^^^
66    --  character literal
67
68    IA.all := Sub_Integer (R.Val);
69    --        ^^^^^^^^^^^^^^^^^^^
70    --        qualified expression
71
72    R.Val := @ + 1;
73    --       ^
74    --  target name
75    --
76    --  equivalent to:
77    --     R.Val := R.Val + 1;
78
79 end Show_Other_Names;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Names.Other_Names
MD5: 8063a4c9ff7a01ff7a69454fae096089
```

In this example, we see instances of the following kinds of names:

- explicit dereference: `IA.all`;
- indexed components: `Arr (1)`;
- slices: `Arr (1 .. 2)`, `Arr (3 .. 4)`;
- selected components: `R.Val`;
- attribute references: `Arr'Size`;
- type conversions: `New_Integer (IA.all)`;
- function calls: `Zero`;
- character literals: `'A'`;
- qualified expressions: `Sub_Integer (R.Val)`;
- target name: `@`.

In the Ada Reference Manual

- 4.1 Name[29]
- 4.1.1 Indexed Components[30]
- 4.1.2 Slices[31]
- 4.1.3 Selected Components[32]
- 4.1.4 Attributes[33]
- 4.1.5 User-Defined References[34]
- 4.6 Type Conversions[35]
- 4.7 Qualified Expressions[36]
- 5.2.1 Target Name Symbols[37]

25.1.2 Objects

The term *object* may be misleading for readers that have a strong background in object-oriented programming. Moreover, its meaning can vary depending on the context. Therefore, it's important to define what we mean by *objects* when focusing on Ada programming.

In computer science, the term object[38] can refer to a piece of data stored in memory — but it can also refer to a table or a form in a database. Also, even when we define the term *object* as data in memory, we can still classify programming languages as object-based[39] or object-oriented[40] languages.

Important

In object-oriented programming, an object belongs to a *class* of objects. In Ada, objects of this kind are called *tagged* objects. Note, however, that we can have objects that don't belong to a class of objects: those are called *untagged* objects.

In the context of Ada programming, an object is an "entity that contains a value, and is either a constant or a variable" — according to the Ada Reference Manual. In other words, any constants or variables that we declare in Ada source code are objects. In addition, there are other examples of objects that don't originate from object declarations:

Listing 3: show_objects.adb

```
1  procedure Show_Objects is
2
3     type New_Integer is new
4       Integer;
5
6     type Integer_Array is
7       array (Positive range <>) of
8         Integer;
9
10    procedure Dummy (Obj : Integer)
11      is null;
12    --                 ^^^
13    --               object
14
15    task type TT is
16       entry Start (Id : Integer);
17       --           ^^
18       --         object
19    end TT;
20
21    task body TT is
22    begin
23       accept Start (Id : Integer) do
24          null;
25       end Start;
```

(continues on next page)

[29] http://www.ada-auth.org/standards/22rm/html/RM-4-1.html
[30] http://www.ada-auth.org/standards/22rm/html/RM-4-1-1.html
[31] http://www.ada-auth.org/standards/22rm/html/RM-4-1-2.html
[32] http://www.ada-auth.org/standards/22rm/html/RM-4-1-3.html
[33] http://www.ada-auth.org/standards/22rm/html/RM-4-1-4.html
[34] http://www.ada-auth.org/standards/22rm/html/RM-4-1-5.html
[35] http://www.ada-auth.org/standards/22rm/html/RM-4-6.html
[36] http://www.ada-auth.org/standards/22rm/html/RM-4-7.html
[37] http://www.ada-auth.org/standards/22rm/html/RM-5-2-1.html
[38] https://en.wikipedia.org/wiki/Object_(computer_science)
[39] https://en.wikipedia.org/wiki/Object-based_language
[40] https://en.wikipedia.org/wiki/Object-oriented_programming

(continued from previous page)

```
26    end TT;
27
28    function Add_One (V : Integer)
29    --                  ^
30    --    view of an object
31                        return Integer is
32    begin
33       return V + 1;
34       --     ^^^^^
35       --     object
36    end Add_One;
37
38    Arr : Integer_Array (1 .. 10);
39    --  ^^^^^^^^^^^^^^^^
40    --  object
41
42    NI  : New_Integer;
43 begin
44    Arr (1 .. 3) := (others => 1);
45    --  ^^^^^^^^
46    --  object
47    --                ^^^^^^^^^^^^^
48    --                   object
49
50    NI := New_Integer (Arr (1));
51    --    ^^^^^^^^^^^^^^^^^^^^^
52    --      object
53
54    for I in Arr'Range loop
55    --  ^
56    --  object
57
58       Arr (I) := Add_One (Arr (I));
59       --                  ^^^^^^^
60       --                  object
61    end loop;
62 end Show_Objects;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Objects.Object_Examples
MD5: edf9eab70ec0ecce90ef71591324ac94
```

As we can see in this code example a formal parameter of a subprogram or an entry is also an object — in addition, so are *value conversions* (page 317), the result returned by a function, the result of evaluating an *aggregate* (page 512), loop parameters, *arrays* (page 560), or the slices of arrays objects, or the components of composite objects.

Other examples of objects include:

- the object created via a *view conversion* (page 326);
- a *dereference* (page 873) of an *access-to-variable* (page 887) value;
- the return object of a function;
- a choice parameter of an *exception handler* (page 144).

In the Ada Reference Manual

- 3.3 Objects and Named Numbers[41]

Constant and variable objects

Objects can be classified as constant and variable objects. When declaring objects, the distinction is clear:

Listing 4: show_objects.adb

```
procedure Show_Objects is
   Const : constant Integer := 42;
   Var   :          Integer := 0;
begin
   null;
end Show_Objects;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Objects.Object_Declaration_Examples
MD5: 16b4d9546e9c05443ced05c7f6608cc9
```

In this example, `Const` is a constant object, while `Var` is a variable object.

In addition to this, constant objects include:

- the *discriminant component* (page 454) of a variable discriminant;
- a formal parameter or generic formal object of mode **in**.

On the other hand, variable objects include:

- the object created via a *view conversion* (page 326) of a variable;
- a *dereference* (page 873) of an *access-to-variable* (page 887) value.

For example:

Listing 5: show_objects.adb

```
procedure Show_Objects is

   type Device (Id : Positive) is
   record
      Value : Integer;
   end record;

   type Device_Access is
     access all Device;

   Dev : aliased Device (99);
   --                   ^^
   --  Discriminant `Id` is a
   --  constant object.
   --
   --  `Dev` is a variable object,
   --  though.

   Dev_Acc : Device_Access := Dev'Access;

   procedure Process (D : Device) is
     null;
   --                 ^
   --         constant object
begin
   Dev.Value := 0;
```

(continues on next page)

[41] http://www.ada-auth.org/standards/22rm/html/RM-3-3.html

(continued from previous page)

```
   --  ^^^^^
   --  variable object

   Dev_Acc.all.Value := 1;
   --  ^^^^^^^
   --  variable object
end Show_Objects;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Objects.Object_Examples
MD5: c0d1386a37e5ed31f0d3163fadbb1b30
```

In this example, we see that Dev is a variable object, while its Id discriminant is a constant object. In addition, the Dev_Acc.all dereference is a variable object. Finally, the **in** parameter of procedure Process is a constant object.

In the Ada Reference Manual

- 3.3 Objects and Named Numbers[42]
- 3.3.1 Object Declarations[43]

View of an object

As we've just seen, an object can be either constant or variable. In addition, the *view* of an object is classified as constant or variable as well.

Before we start, note that the classification of an object as constant or variable doesn't directly imply how its view is classified. You may, for example, expect that a constant object has a constant view, but this is not necessarily the case, as we discuss in this section. (In fact, a constant object only has a constant view if it doesn't have a part that has a variable view.)

A part of an object has a variable view if it is of *immutably limited type* (page 1051), *controlled type* (page 1083), *private type* (page 310), or private extension. In that sense, if any of those parts with variable view exist in a constant object, then we say that the *whole object* has a variable view. Only if a constant object doesn't have *any* parts with variable view, then this object has a constant view.

In contrast, variable objects always have a variable view.

Let's see an example:

Listing 6: devices.ads

```
package Devices is

   type Device_Settings is
   record
      Started : Boolean;
   end record;

   type Device (Id : Positive) is
     private;

   function Init (Id : Positive)
```

(continues on next page)

[42] http://www.ada-auth.org/standards/22rm/html/RM-3-3.html
[43] http://www.ada-auth.org/standards/22rm/html/RM-3-3-1.html

(continued from previous page)

```
                  return Device;

private

   type Device (Id : Positive) is
     null record;

   function Init (Id : Positive)
                  return Device is
      (Device'(Id => Id));

end Devices;
```

Listing 7: show_object_view.adb

```
with Devices; use Devices;

procedure Show_Object_View is
   Dev      : constant Device := Init (5);
   --  Constant object with
   --  variable view.

   Default  : constant Device_Settings
                := (Started => False);
   --  Constant object with
   --  constant view.

   Settings : Device_Settings;

begin
   Settings := (Started => True);
end Show_Object_View;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Objects.Object_View
MD5: b9a56ee937e71c728bac116f21d98742
```

In this example, both `Default_S` and `Dev` are constant objects. However, they have different views: while `Default_S` has a constant view because it doesn't have any parts with variable view, `Dev` has a variable view because it's a private type. Finally, as expected, `Settings` has a variable view because it's a variable object.

Named numbers

In addition to objects, we can have named numbers. Those aren't objects, but rather *names* (page 277) that we assign to numeric values. For example:

Listing 8: show_named_number.adb

```
procedure Show_Named_Number is

   Pi : constant := 3.1415926535;

begin
   null;
end Show_Named_Number;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Objects.Named_Number
MD5: ee6808bb7ecb7fef687831f53a8b6668
```

In this example, `Pi` is a named number.

A named number is always known at compilation time. Also, it doesn't have a type associated with it. In fact, its type is called universal real or universal integer — depending on the number being a real or integer number. (In this specific case, `Pi` is a universal real number.) We talk about *universal types* (page 300) later on in this chapter and about *universal real and integer types* (page 625) in another chapter.

In the Ada Reference Manual

- 3.3.2 Number Declarations[44]

25.1.3 Scalar Types

In general terms, scalar types are the most basic types that we can get. As we know, we can classify them as follows:

Category	Discrete	Numeric
Enumeration	Yes	No
Integer	Yes	Yes
Real	No	Yes

Many attributes exist for scalar types. For example, we can use the `Image` and `Value` attributes to convert between a given type and a string type. The following table presents the main attributes for scalar types:

Category	Attribute	Returned value
Ranges	`First`	First value of the discrete subtype's range.
	`Last`	Last value of the discrete subtype's range.
	`Range`	Range of the discrete subtype (corresponds to `Subtype'First .. Subtype'Last`).
Iterators	`Pred`	Predecessor of the input value.
	`Succ`	Successor of the input value.
Comparison	`Min`	Minimum of two values.
	`Max`	Maximum of two values.
String conversion	`Image`	String representation of the input value.
	`Value`	Value of a subtype based on input string.

We already discussed some of these attributes in the Introduction to Ada course (in the sections about *range and related attributes* (page 76) and *image attribute* (page 13)). In this section, we'll discuss some aspects that have been left out of the previous course.

In the Ada Reference Manual

- 3.5 Scalar types[45]

[44] http://www.ada-auth.org/standards/22rm/html/RM-3-3-2.html
[45] http://www.ada-auth.org/standards/22rm/html/RM-3-5.html

Ranges

We've seen that the `First` and `Last` attributes can be used with discrete types. Those attributes are also available for real types. Here's an example using the **`Float`** type and a subtype of it:

Listing 9: show_first_last_real.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_First_Last_Real is
   subtype Norm is Float range 0.0 .. 1.0;
begin
   Put_Line ("Float'First: " & Float'First'Image);
   Put_Line ("Float'Last:  " & Float'Last'Image);
   Put_Line ("Norm'First:  " & Norm'First'Image);
   Put_Line ("Norm'Last:   " & Norm'Last'Image);
end Show_First_Last_Real;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Scalar_Types.Ranges_Real_Types
MD5: 89745a94fbdc41a2880ba14e50401acb
```

Runtime output

```
Float'First: -3.40282E+38
Float'Last:   3.40282E+38
Norm'First:   0.00000E+00
Norm'Last:    1.00000E+00
```

This program displays the first and last values of both the **`Float`** type and the `Norm` subtype. In the case of the **`Float`** type, we see the full range, while for the `Norm` subtype, we get the values we used in the declaration of the subtype (i.e. 0.0 and 1.0).

Predecessor and Successor

We can use the `Pred` and `Succ` attributes to get the predecessor and successor of a specific value. For discrete types, this is simply the next discrete value. For example, `Pred (2)` is 1 and `Succ (2)` is 3. Let's look at a complete source-code example:

Listing 10: show_succ_pred_discrete.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Succ_Pred_Discrete is
   type State is (Idle, Started,
                  Processing, Stopped);

   Machine_State : constant State := Started;

   I : constant Integer := 2;
begin
   Put_Line ("State                    : "
             & Machine_State'Image);
   Put_Line ("State'Pred (Machine_State): "
             & State'Pred (Machine_State)'Image);
   Put_Line ("State'Succ (Machine_State): "
             & State'Succ (Machine_State)'Image);
   Put_Line ("----------");

   Put_Line ("I               : "
```

(continues on next page)

(continued from previous page)

```
            & I'Image);
   Put_Line ("Integer'Pred (I): "
            & Integer'Pred (I)'Image);
   Put_Line ("Integer'Succ (I): "
            & Integer'Succ (I)'Image);
end Show_Succ_Pred_Discrete;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Scalar_Types.Show_Succ_Pred_Discrete
MD5: e11d0f50105864fdc1594b3bb72d927e
```

Runtime output

```
State                     : STARTED
State'Pred (Machine_State): IDLE
State'Succ (Machine_State): PROCESSING
----------
I               :  2
Integer'Pred (I):  1
Integer'Succ (I):  3
```

In this example, we use the `Pred` and `Succ` attributes for a variable of enumeration type (`State`) and a variable of **`Integer`** type.

We can also use the `Pred` and `Succ` attributes with real types. In this case, however, the value we get depends on the actual type we're using:

- for fixed-point types, the value is calculated using the smallest value (`Small`), which is derived from the declaration of the fixed-point type;
- for floating-point types, the value used in the calculation depends on representation constraints of the actual target machine.

Let's look at this example with a decimal type (`Decimal`) and a floating-point type (`My_Float`):

Listing 11: show_succ_pred_real.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Succ_Pred_Real is
   subtype My_Float is
     Float range 0.0 .. 0.5;

   type Decimal is
     delta 0.1 digits 2
     range 0.0 .. 0.5;

   D : Decimal;
   N : My_Float;
begin
   Put_Line ("---- DECIMAL -----");
   Put_Line ("Small: " & Decimal'Small'Image);
   Put_Line ("----- Succ -------");
   D := Decimal'First;
   loop
      Put_Line (D'Image);
      D := Decimal'Succ (D);

      exit when D = Decimal'Last;
   end loop;
```

(continues on next page)

(continued from previous page)

```
24    Put_Line ("----- Pred -------");
25
26    D := Decimal'Last;
27    loop
28       Put_Line (D'Image);
29       D := Decimal'Pred (D);
30
31       exit when D = Decimal'First;
32    end loop;
33    Put_Line ("==================");
34
35    Put_Line ("---- MY_FLOAT ----");
36    Put_Line ("----- Succ -------");
37    N := My_Float'First;
38    for I in 1 .. 5 loop
39       Put_Line (N'Image);
40       N := My_Float'Succ (N);
41    end loop;
42    Put_Line ("----- Pred -------");
43
44    for I in 1 .. 5 loop
45       Put_Line (N'Image);
46       N := My_Float'Pred (N);
47    end loop;
48 end Show_Succ_Pred_Real;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Scalar_Types.Show_Succ_Pred_Real
MD5: f426d6539c3ce863101f1e6afb21c08f
```

Runtime output

```
---- DECIMAL -----
Small:  1.00000000000000000E-01
----- Succ -------
 0.0
 0.1
 0.2
 0.3
 0.4
----- Pred -------
 0.5
 0.4
 0.3
 0.2
 0.1
==================
---- MY_FLOAT ----
----- Succ -------
 0.00000E+00
 1.40130E-45
 2.80260E-45
 4.20390E-45
 5.60519E-45
----- Pred -------
 7.00649E-45
 5.60519E-45
 4.20390E-45
 2.80260E-45
 1.40130E-45
```

As the output of the program indicates, the smallest value (see `Decimal'Small` in the example) is used to calculate the previous and next values of `Decimal` type.

In the case of the `My_Float` type, the difference between the current and the previous or next values is 1.40130E-45 (or 2^{-149}) on a standard PC.

Scalar To String Conversion

We've seen that we can use the `Image` and `Value` attributes to perform conversions between values of a given subtype and a string:

Listing 12: show_image_value_attr.adb

```
1 with Ada.Text_IO; use Ada.Text_IO;
2
3 procedure Show_Image_Value_Attr is
4    I : constant Integer := Integer'Value ("42");
5 begin
6    Put_Line (I'Image);
7 end Show_Image_Value_Attr;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Scalar_Types.Image_Value_Attr
MD5: 9daa13b1f05511fac7e108eb9b8eefa7
```

Runtime output

```
 42
```

The `Image` and `Value` attributes are used for the **`String`** type specifically. In addition to them, there are also attributes for different string types — namely **`Wide_String`** and `Wide_Wide_String`. This is the complete list of available attributes:

Conversion type	Attribute	String type
Conversion to string	`Image`	**`String`**
	`Wide_Image`	**`Wide_String`**
	`Wide_Wide_Image`	`Wide_Wide_String`
Conversion to subtype	`Value`	**`String`**
	`Wide_Value`	**`Wide_String`**
	`Wide_Wide_Value`	`Wide_Wide_String`

We discuss more about **`Wide_String`** and `Wide_Wide_String` in *another section* (page 577).

Width attribute

When converting a value to a string by using the `Image` attribute, we get a string with variable width. We can assess the maximum width of that string for a specific subtype by using the `Width` attribute. For example, **`Integer`**`'Width` gives us the maximum width returned by the `Image` attribute when converting a value of **`Integer`** type to a string of **`String`** type.

This attribute is useful when we're using bounded strings in our code to store the string returned by the `Image` attribute. For example:

Listing 13: show_width_attr.adb

```
with Ada.Text_IO;          use Ada.Text_IO;
with Ada.Strings;          use Ada.Strings;
with Ada.Strings.Bounded;

procedure Show_Width_Attr is
   package B_Str is new
     Ada.Strings.Bounded.Generic_Bounded_Length
       (Max => Integer'Width);
   use B_Str;

   Str_I : Bounded_String;

   I : constant Integer := 42;
   J : constant Integer := 103;
begin
   Str_I := To_Bounded_String (I'Image);
   Put_Line ("Value:          "
             & To_String (Str_I));
   Put_Line ("String Length: "
             & Length (Str_I)'Image);
   Put_Line ("----");

   Str_I := To_Bounded_String (J'Image);
   Put_Line ("Value:          "
             & To_String (Str_I));
   Put_Line ("String Length: "
             & Length (Str_I)'Image);
end Show_Width_Attr;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Scalar_Types.Width_Attr
MD5: 82cff0cf4fecfdecce3020135cf98fd2
```

Runtime output

```
Value:          42
String Length:  3
----
Value:          103
String Length:  4
```

In this example, we're storing the string returned by `Image` in the `Str_I` variable of `Bounded_String` type.

Similar to the `Image` and `Value` attributes, the `Width` attribute is also available for string types other than **`String`**. In fact, we can use:

- the `Wide_Width` attribute for strings returned by `Wide_Image`; and
- the `Wide_Wide_Width` attribute for strings returned by `Wide_Wide_Image`.

Other attributes

The `Base` attribute is specific for numeric types. We discuss this topic *in another chapter* (page 640).

25.1.4 Enumerations

We've introduced enumerations back in the *Introduction to Ada course* (page 51). In this section, we'll discuss a few useful features of enumerations, such as enumeration renaming, enumeration overloading and representation clauses.

In the Ada Reference Manual

- 3.5.1 Enumeration Types[46]

Enumerations as functions

If you have used programming language such as C in the past, you're familiar with the concept of enumerations being constants with integer values. In Ada, however, enumerations are not integers. In fact, they're actually parameterless functions! Let's consider this example:

Listing 14: days.ads

```
1  package Days is
2
3     type Day is (Mon, Tue, Wed,
4                  Thu, Fri,
5                  Sat, Sun);
6
7     --  Essentially, we're declaring
8     --  these functions:
9     --
10    --  function Mon return Day;
11    --  function Tue return Day;
12    --  function Wed return Day;
13    --  function Thu return Day;
14    --  function Fri return Day;
15    --  function Sat return Day;
16    --  function Sun return Day;
17
18 end Days;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Enumerations.Enumeration_As_Function
MD5: fa3e58b58edffa5a3e04b060a7f8cb8b
```

In the package Days, we're declaring the enumeration type Day. When we do this, we're essentially declaring seven parameterless functions, one for each enumeration. For example, the Mon enumeration corresponds to `function Mon return Day`. You can see all seven function declarations in the comments of the example above.

Note that this has no direct relation to how an Ada compiler generates machine code for enumeration. Even though enumerations are parameterless functions, a typical Ada compiler doesn't generate function calls for code that deals with enumerations.

Enumeration renaming

The idea that enumerations are parameterless functions can be used when we want to rename enumerations. For example, we could rename the enumerations of the Day type like this:

[46] http://www.ada-auth.org/standards/22rm/html/RM-3-5-1.html

Listing 15: enumeration_example.ads

```
package Enumeration_Example is

   type Day is (Mon, Tue, Wed,
                Thu, Fri,
                Sat, Sun);

   function Monday    return Day renames Mon;
   function Tuesday   return Day renames Tue;
   function Wednesday return Day renames Wed;
   function Thursday  return Day renames Thu;
   function Friday    return Day renames Fri;
   function Saturday  return Day renames Sat;
   function Sunday    return Day renames Sun;

end Enumeration_Example;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Enumerations.Enumeration_Renaming
MD5: e2e12bb3bfcb0b6e94769ced9a4b80f9
```

Now, we can use both Monday or Mon to refer to Monday of the Day type:

Listing 16: show_renaming.adb

```
with Ada.Text_IO;         use Ada.Text_IO;
with Enumeration_Example; use Enumeration_Example;

procedure Show_Renaming is
   D1 : constant Day := Mon;
   D2 : constant Day := Monday;
begin
   if D1 = D2 then
      Put_Line ("D1 = D2");
      Put_Line (Day'Image (D1)
                & " =  "
                & Day'Image (D2));
   end if;
end Show_Renaming;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Enumerations.Enumeration_Renaming
MD5: 2d7177def2c9e9fb11c7dc5e036c3be3
```

Runtime output

```
D1 = D2
MON =  MON
```

When running this application, we can confirm that D1 is equal to D2. Also, even though we've assigned Monday to D2 (instead of Mon), the application displays Mon = Mon, since Monday is just another name to refer to the actual enumeration (Mon).

Hint

If you just want to have a single (renamed) enumeration visible in your application — and make the original enumeration invisible —, you can use a separate package. For

example:

Listing 17: enumeration_example.ads

```
package Enumeration_Example is

   type Day is (Mon, Tue, Wed,
                Thu, Fri,
                Sat, Sun);

end Enumeration_Example;
```

Listing 18: enumeration_renaming.ads

```
with Enumeration_Example;

package Enumeration_Renaming is

   subtype Day is Enumeration_Example.Day;

   function Monday    return Day renames
     Enumeration_Example.Mon;
   function Tuesday   return Day renames
     Enumeration_Example.Tue;
   function Wednesday return Day renames
     Enumeration_Example.Wed;
   function Thursday  return Day renames
     Enumeration_Example.Thu;
   function Friday    return Day renames
     Enumeration_Example.Fri;
   function Saturday  return Day renames
     Enumeration_Example.Sat;
   function Sunday    return Day renames
     Enumeration_Example.Sun;

end Enumeration_Renaming;
```

Listing 19: show_renaming.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Enumeration_Renaming;
use  Enumeration_Renaming;

procedure Show_Renaming is
   D1 : constant Day := Monday;
begin
   Put_Line (Day'Image (D1));
end Show_Renaming;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Enumerations.Enumeration_Renaming
MD5: 87fe75026f0fc118921eaee45fe55a8a
```

Runtime output

```
MON
```

Note that the call to Put_Line still display Mon instead of Monday.

Enumeration overloading

Enumerations can be overloaded. In simple terms, this means that the same name can be used to declare an enumeration of different types. A typical example is the declaration of colors:

Listing 20: colors.ads

```
package Colors is

   type Color is
     (Salmon,
      Firebrick,
      Red,
      Darkred,
      Lime,
      Forestgreen,
      Green,
      Darkgreen,
      Blue,
      Mediumblue,
      Darkblue);

   type Primary_Color is
     (Red,
      Green,
      Blue);

end Colors;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Enumerations.Enumeration_Overloading
MD5: b808f90d9164f044b6b7a8931863726f
```

Note that we have Red as an enumeration of type `Color` and of type `Primary_Color`. The same applies to Green and Blue. Because Ada is a strongly-typed language, in most cases, the enumeration that we're referring to is clear from the context. For example:

Listing 21: red_colors.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Colors;      use Colors;

procedure Red_Colors is
   C1 : constant Color         := Red;
   --  Using Red from Color

   C2 : constant Primary_Color := Red;
   --  Using Red from Primary_Color
begin
   if C1 = Red then
      Put_Line ("C1 = Red");
   end if;
   if C2 = Red then
      Put_Line ("C2 = Red");
   end if;
end Red_Colors;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Enumerations.Enumeration_Overloading
MD5: dd590eab88164773e974e748d77a51af
```

Runtime output

```
C1 = Red
C2 = Red
```

When assigning Red to C1 and C2, it is clear that, in the first case, we're referring to Red of Color type, while in the second case, we're referring to Red of the Primary_Color type. The same logic applies to comparisons such as the one in if C1 = Red: because the type of C1 is defined (Color), it's clear that the Red enumeration is the one of Color type.

Enumeration subtypes

Note that enumeration overloading is not the same as enumeration subtypes. For example, we could define the following subtype:

Listing 22: colors-shades.ads

```
package Colors.Shades is

   subtype Blue_Shades is
     Colors range Blue .. Darkblue;

end Colors.Shades;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Enumerations.Enumeration_Overloading
MD5: 9c13508bda487cae02dbf8b403271540
```

In this case, Blue of Blue_Shades and Blue of Colors are the same enumeration.

Enumeration ambiguities

A situation where enumeration overloading might lead to ambiguities is when we use them in ranges. For example:

Listing 23: colors.ads

```
package Colors is

   type Color is
     (Salmon,
      Firebrick,
      Red,
      Darkred,
      Lime,
      Forestgreen,
      Green,
      Darkgreen,
      Blue,
      Mediumblue,
      Darkblue);

   type Primary_Color is
     (Red,
      Green,
      Blue);

end Colors;
```

Listing 24: color_loop.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Colors;      use Colors;

procedure Color_Loop is
begin
   for C in Red .. Blue loop
   --       ^^^^^^^^^^^
   --  ERROR: range is ambiguous!
      Put_Line (Color'Image (C));
   end loop;
end Color_Loop;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Enumerations.Enumeration_Ambiguities
MD5: 82d0d3f28f1faf6b296a4f44db71f41b
```

Build output

```
color_loop.adb:6:17: error: ambiguous bounds in range of iteration
color_loop.adb:6:17: error: possible interpretations:
color_loop.adb:6:17: error: type "Primary_Color" defined at colors.ads:16
color_loop.adb:6:17: error: type "Color" defined at colors.ads:3
color_loop.adb:6:17: error: ambiguous bounds in discrete range
color_loop.adb:9:30: error: expected type "Color" defined at colors.ads:3
color_loop.adb:9:30: error: found type "Primary_Color" defined at colors.ads:16
gprbuild: *** compilation phase failed
```

Here, it's not clear whether the range in the loop is of `Color` type or of `Primary_Color` type. Therefore, we get a compilation error for this code example. The next line in the code example — the one with the call to `Put_Line` — gives us a hint about the developer's intention to refer to the `Color` type. In this case, we can use qualification — for example, `Color'(Red)` — to resolve the ambiguity:

Listing 25: color_loop.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Colors;      use Colors;

procedure Color_Loop is
begin
   for C in Color'(Red) .. Color'(Blue) loop
      Put_Line (Color'Image (C));
   end loop;
end Color_Loop;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Enumerations.Enumeration_Ambiguities
MD5: c3e946d330bb6aed258bcd005a540794
```

Runtime output

```
RED
DARKRED
LIME
FORESTGREEN
GREEN
```

(continues on next page)

(continued from previous page)

```
DARKGREEN
BLUE
```

Note that, in the case of ranges, we can also rewrite the loop by using a range declaration:

Listing 26: color_loop.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Colors;      use Colors;

procedure Color_Loop is
begin
   for C in Color range Red .. Blue loop
      Put_Line (Color'Image (C));
   end loop;
end Color_Loop;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Enumerations.Enumeration_Ambiguities
MD5: 23f8db4fcb5710f7bda6b511234e0448
```

Runtime output

```
RED
DARKRED
LIME
FORESTGREEN
GREEN
DARKGREEN
BLUE
```

Alternatively, `Color range Red .. Blue` could be used in a subtype declaration, so we could rewrite the example above using a subtype (such as Red_To_Blue) in the loop:

Listing 27: color_loop.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Colors;      use Colors;

procedure Color_Loop is
   subtype Red_To_Blue is Color range Red .. Blue;
begin
   for C in Red_To_Blue loop
      Put_Line (Color'Image (C));
   end loop;
end Color_Loop;
```

Position and Internal Code

As we've said above, a typical Ada compiler doesn't generate function calls for code that deals with enumerations. On the contrary, each enumeration has values associated with it, and the compiler uses those values instead.

Each enumeration has:

- a position value, which is a natural value indicating the position of the enumeration in the enumeration type; and
- an internal code, which, by default, in most cases, is the same as the position value.

Also, by default, the value of the first position is zero, the value of the second position is one, and so on. We can see this by listing each enumeration of the Day type and displaying the value of the corresponding position:

Listing 28: days.ads

```
package Days is

   type Day is (Mon, Tue, Wed,
                Thu, Fri,
                Sat, Sun);

end Days;
```

Listing 29: show_days.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Days;        use Days;

procedure Show_Days is
begin
   for D in Day loop
      Put_Line (Day'Image (D)
                & " position      = "
                & Integer'Image (Day'Pos (D)));
      Put_Line (Day'Image (D)
                & " internal code = "
                & Integer'Image
                   (Day'Enum_Rep (D)));
   end loop;
end Show_Days;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Enumerations.Enumeration_Values
MD5: d6c5cb99b9770893b7277c470f40e805
```

Runtime output

```
MON position      =  0
MON internal code =  0
TUE position      =  1
TUE internal code =  1
WED position      =  2
WED internal code =  2
THU position      =  3
THU internal code =  3
FRI position      =  4
FRI internal code =  4
SAT position      =  5
SAT internal code =  5
SUN position      =  6
SUN internal code =  6
```

Note that this application also displays the internal code, which, in this case, is equivalent to the position value for all enumerations.

We may, however, change the internal code of an enumeration using a representation clause. We discuss this topic *in another section* (page 350).

25.1.5 Universal and Root Types

Previously, in the section about *scalar types* (page 286), we said that scalar types are the most basic types that we can get. However, Ada has the concept of universal and root types, which could be considered *more basic* than scalar types. In fact, universal and root types are underlying scalar types used by the language designers to define the language semantics. In this section, we briefly introduce this topic.

Universal Types

The Ada standard defines four universal types:

1. universal integer types
2. universal real types
3. universal fixed types
4. universal access types

The first three are numeric types, and we discuss them in detail later on *in another chapter* (page 625). The last one is used for *anonymous access types* (page 959).

Universal types aren't types we can use directly, but rather via specific languages constructs. In this sense, we cannot derive from universal types, but only make use of them indirectly.

For instance, if we declare *named numbers* (page 285) using a real value, we're indirectly using a universal real type. If we declare another named number using an expression, the computation is performed based on the universal types of the elements of that expression:

Listing 30: show_universal_real_integer.ads

```
1  package Show_Universal_Real_Integer is
2
3     Pi     : constant := 3.1415926535;
4     --                   ^^^^^^^^^^^
5     --                universal real type
6
7     Two_Pi : constant := Pi * 2.0;
8     --                   ^^^^^^^^
9     --                  operation on
10    --               universal real type
11
12    N      : constant := 10;
13    --                   ^^
14    --             universal integer type
15
16    N_10   : constant := N * 10;
17    --                   ^^^^^^
18    --                 operation on
19    --             universal integer type
20
21 end Show_Universal_Real_Integer;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Universal_And_Root_Types.Universal_
 ↪Real_Integer
MD5: c9f002461d8ee7f11f2c42a33691f30d
```

In this example, the expression `Pi * 2.0` is computed using universal real types, while the expression `N * 10` is computed using universal integer types.

Similarly, for anonymous access types, the equality operator uses universal access types for the comparison:

Listing 31: show_universal_access.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Universal_Access is
   I : aliased Integer;
   A : access Integer := I'Access;
   B : access Integer := I'Access;
begin
   if A = B then
      Put_Line ("A = B");
   else
      Put_Line ("A /= B");
   end if;
end Show_Universal_Access;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Universal_And_Root_Types.Universal_
↪Access
MD5: e6a37de980cc3b2c19e36baa3a51c329
```

Runtime output

```
A = B
```

In this example, both A and B are variables of anonymous access types. Because the type isn't a known named type, the equality operation = uses the universal access type for the comparison.

In the Ada Reference Manual

- 3.3.2 Number Declarations[47]
- 4.5.2 Relational Operators and Membership Tests[48]

Root Types

The root types can be found on a level above the universal types. In this category, we can find the same numeric types that we have for universal types, namely the root real, root integer and root fixed types.

The term *root* is used in the context of type derivation. In fact, the root type is the first type that we derive all other types from. In other words, if we declare an integer range as a new type, that type is derived from the root integer type. Similarly, if we declare a new floating-point type, that type is derived from the root real type. For example:

Listing 32: show_root_integer_real.ads

```
package Show_Root_Integer_Real is

   type Score is range 0 .. 10;
   --  Type Score is derived from
   --  the root integer type.

```

(continues on next page)

[47] http://www.ada-auth.org/standards/22rm/html/RM-3-3-2.html
[48] http://www.ada-auth.org/standards/22rm/html/RM-4-5-2.html

(continued from previous page)

```
7     type Real_Score is
8       digits 10 range 0.0 .. 10.0;
9     --  Type Real_Score is derived from
10    --  the root real type.
11
12  end Show_Root_Integer_Real;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Universal_And_Root_Types.Root_
 ↪Integer_Real
MD5: 619ecddeab6fd751cc1af9daa8794a25
```

Here, `Score` and `Real_Score` are derived from the root integer and real types, respectively. Note that the derivation is always implicit, as we cannot write something like `type Score is new Root_Integer range 0 .. 10` or `type Real_Score is new Root_Real digits 10 range 0.0 .. 10.0`.

In contrast, if we derive from an existing floating-point or integer type defined by the Ada standard, we're not deriving directly from the root types:

Listing 33: show_standard_derivation.ads

```
1   package Show_Standard_Derivation is
2
3     type Score is new Integer
4       range 0 .. 10;
5     --  Type Score is derived from
6     --  the Integer type.
7
8     type Real_Score is new Float
9       range 0.0 .. 10.0;
10    --  Type Real_Score is derived from
11    --  the Float type.
12
13  end Show_Standard_Derivation;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Universal_And_Root_Types.Standard_
 ↪Integer_Float_Derivation
MD5: d32261966e1f1ae9626336f57ab16d89
```

In this case, we're explicitly deriving from the standard Ada types `Integer` and `Float`, which, on their turn, are derived from the root integer and root real types, respectively.

For further reading...

Ada also has the concept of *base types* (page 639), which *sounds* similar to the concept of the root type. However, the focus of each one is different: while the root type refers to the derivation tree of a type, the base type refers to the constraints of a type.

We discuss base types and the *Base attribute* (page 640) in another chapter.

25.1.6 Definite and Indefinite Subtypes

Indefinite types were mentioned back in the *Introduction to Ada course* (page 81). In this section, we'll recapitulate and extend on both definite and indefinite types.

Definite types are the basic kind of types we commonly use when programming applications. For example, we can only declare variables of definite types; otherwise, we get a compilation error. Interestingly, however, to be able to explain what definite types are, we need to first discuss indefinite types.

Indefinite types include:

- unconstrained arrays;
- record types with unconstrained discriminants without defaults.

Let's see some examples of indefinite types:

Listing 34: unconstrained_types.ads

```
package Unconstrained_Types is

   type Integer_Array is
     array (Positive range <>) of Integer;

   type Simple_Record (Extended : Boolean) is
   record
      V : Integer;
      case Extended is
         when False =>
            null;
         when True  =>
            V_Float : Float;
      end case;
   end record;

end Unconstrained_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Definite_Indefinite_Subtypes.
 ↪Indefinite_Types
MD5: e569dc73150b834c9315b14d46c0ac79
```

In this example, both `Integer_Array` and `Simple_Record` are indefinite types.

As we've just mentioned, we cannot declare variable of indefinite types:

Listing 35: using_unconstrained_type.adb

```
with Unconstrained_Types; use Unconstrained_Types;

procedure Using_Unconstrained_Type is

   A : Integer_Array;

   R : Simple_Record;

begin
   null;
end Using_Unconstrained_Type;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Definite_Indefinite_Subtypes.
 ↪Indefinite_Types
MD5: 806d4ec64b911a9978ad30fa45a6df10
```

Build output

```
using_unconstrained_type.adb:5:08: error: unconstrained subtype not allowed (need␣
 ↪initialization)
using_unconstrained_type.adb:5:08: error: provide initial value or explicit array␣
 ↪bounds
using_unconstrained_type.adb:7:08: error: unconstrained subtype not allowed (need␣
 ↪initialization)
using_unconstrained_type.adb:7:08: error: provide initial value or explicit␣
 ↪discriminant values
using_unconstrained_type.adb:7:08: error: or give default discriminant values for␣
 ↪type "Simple_Record"
gprbuild: *** compilation phase failed
```

As we can see when we try to build this example, the compiler complains about the declaration of A and R because we're trying to use indefinite types to declare variables. The main reason we cannot use indefinite types here is that the compiler needs to know at this point how much memory it should allocate. Therefore, we need to provide the information that is missing. In other words, we need to change the declaration so the type becomes definite. We can do this by either declaring a definite type or providing constraints in the variable declaration. For example:

Listing 36: using_unconstrained_type.adb

```
1  with Unconstrained_Types; use Unconstrained_Types;
2
3  procedure Using_Unconstrained_Type is
4
5     subtype Integer_Array_5 is
6       Integer_Array (1 .. 5);
7
8     A1 : Integer_Array_5;
9     A2 : Integer_Array (1 .. 5);
10
11    subtype Simple_Record_Ext is
12      Simple_Record (Extended => True);
13
14    R1 : Simple_Record_Ext;
15    R2 : Simple_Record (Extended => True);
16
17 begin
18    null;
19 end Using_Unconstrained_Type;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Definite_Indefinite_Subtypes.
 ↪Indefinite_Types
MD5: f8e192537f42eea0ebc7873bdaa898f1
```

In this example, we declare the `Integer_Array_5` subtype, which is definite because we're constraining it to a range from 1 to 5, thereby defining the information that was missing in the indefinite type `Integer_Array`. Because we now have a definite type, we can use it to declare the A1 variable. Similarly, we can use the indefinite type `Integer_Array` directly in the declaration of A2 by specifying the previously unknown range.

Similarly, in this example, we declare the `Simple_Record_Ext` subtype, which is definite because we're initializing the record discriminant `Extended`. We can therefore use it in the declaration of the R1 variable. Alternatively, we can simply use the indefinite type `Simple_Record` and specify the information required for the discriminants. This is what we do in the declaration of the R2 variable.

Although we cannot use indefinite types directly in variable declarations, they're very useful to generalize algorithms. For example, we can use them as parameters of a subprogram:

Listing 37: show_integer_array.ads

```
with Unconstrained_Types; use Unconstrained_Types;

procedure Show_Integer_Array (A : Integer_Array);
```

Listing 38: show_integer_array.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Integer_Array (A : Integer_Array)
is
begin
   for I in A'Range loop
      Put_Line (Positive'Image (I)
                & ": "
                & Integer'Image (A (I)));
   end loop;
   Put_Line ("--------");
end Show_Integer_Array;
```

Listing 39: using_unconstrained_type.adb

```
with Unconstrained_Types; use Unconstrained_Types;
with Show_Integer_Array;

procedure Using_Unconstrained_Type is
   A_5  : constant Integer_Array (1 .. 5)  :=
            (1, 2, 3, 4, 5);
   A_10 : constant Integer_Array (1 .. 10) :=
            (1, 2, 3, 4, 5, others => 99);
begin
   Show_Integer_Array (A_5);
   Show_Integer_Array (A_10);
end Using_Unconstrained_Type;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Definite_Indefinite_Subtypes.
 ↪Indefinite_Types
MD5: 3f744fa5921a55865bc5361ec4c6eb88
```

Runtime output

```
 1:  1
 2:  2
 3:  3
 4:  4
 5:  5
--------
 1:  1
 2:  2
 3:  3
 4:  4
 5:  5
 6:  99
 7:  99
 8:  99
 9:  99
 10:  99
--------
```

In this particular example, the compiler doesn't know a priori which range is used for the A parameter of Show_Integer_Array. It could be a range from 1 to 5 as used for variable A_5 of the Using_Unconstrained_Type procedure, or it could be a range from 1 to 10 as used for variable A_10, or it could be anything else. Although the parameter A of Show_Integer_Array is unconstrained, both calls to Show_Integer_Array — in Using_Unconstrained_Type procedure — use constrained objects.

Note that we could call the Show_Integer_Array procedure above with another unconstrained parameter. For example:

Listing 40: show_integer_array_header.ads

```
with Unconstrained_Types; use Unconstrained_Types;

procedure Show_Integer_Array_Header
  (AA : Integer_Array;
   HH : String);
```

Listing 41: show_integer_array_header.adb

```
with Ada.Text_IO;         use Ada.Text_IO;
with Show_Integer_Array;

procedure Show_Integer_Array_Header
  (AA : Integer_Array;
   HH : String)
is
begin
   Put_Line (HH);
   Show_Integer_Array (AA);
end Show_Integer_Array_Header;
```

Listing 42: using_unconstrained_type.adb

```
with Unconstrained_Types; use Unconstrained_Types;

with Show_Integer_Array_Header;

procedure Using_Unconstrained_Type is
   A_5  : constant Integer_Array (1 .. 5)  :=
            (1, 2, 3, 4, 5);
   A_10 : constant Integer_Array (1 .. 10) :=
            (1, 2, 3, 4, 5, others => 99);
begin
   Show_Integer_Array_Header (A_5,
                              "First example");
   Show_Integer_Array_Header (A_10,
                              "Second example");
end Using_Unconstrained_Type;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Definite_Indefinite_Subtypes.
 ↪Indefinite_Types
MD5: dd09f8c4089c6ad4c18410879f80f731
```

Runtime output

```
First example
 1:  1
 2:  2
 3:  3
```

(continues on next page)

(continued from previous page)

```
 4:  4
 5:  5
--------
Second example
 1:  1
 2:  2
 3:  3
 4:  4
 5:  5
 6:  99
 7:  99
 8:  99
 9:  99
 10:  99
--------
```

In this case, we're calling the Show_Integer_Array procedure with another unconstrained parameter (the AA parameter). However, although we could have a long *chain* of procedure calls using indefinite types in their parameters, we still use a (definite) object at the beginning of this chain. For example, for the A_5 object, we have this chain:

```
A_5

    ==> Show_Integer_Array_Header (AA => A_5,
                                   ...);

        ==> Show_Integer_Array (A => AA);
```

Therefore, at this specific call to Show_Integer_Array, even though A is declared as a parameter of indefinite type, the actual argument is of definite type because A_5 is constrained — and, thus, of definite type.

Note that we can declare variables based on parameters of indefinite type. For example:

Listing 43: show_integer_array_plus.ads

```
1  with Unconstrained_Types; use Unconstrained_Types;
2
3  procedure Show_Integer_Array_Plus
4    (A : Integer_Array;
5     V : Integer);
```

Listing 44: show_integer_array_plus.adb

```
1  with Show_Integer_Array;
2
3  procedure Show_Integer_Array_Plus
4    (A : Integer_Array;
5     V : Integer)
6  is
7     A_Plus : Integer_Array (A'Range);
8  begin
9     for I in A_Plus'Range loop
10       A_Plus (I) := A (I) + V;
11    end loop;
12    Show_Integer_Array (A_Plus);
13 end Show_Integer_Array_Plus;
```

Listing 45: using_unconstrained_type.adb

```
with Unconstrained_Types; use Unconstrained_Types;

with Show_Integer_Array_Plus;

procedure Using_Unconstrained_Type is
   A_5 : constant Integer_Array (1 .. 5) :=
           (1, 2, 3, 4, 5);
begin
   Show_Integer_Array_Plus (A_5, 5);
end Using_Unconstrained_Type;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Definite_Indefinite_Subtypes.
 ↪Indefinite_Types
MD5: e58ae62272ff0b27c5f6e171c88a6880
```

Runtime output

```
 1:  6
 2:  7
 3:  8
 4:  9
 5:  10
--------
```

In the `Show_Integer_Array_Plus` procedure, we're declaring `A_Plus` based on the range of `A`, which is itself of indefinite type. However, since the object passed as an argument to `Show_Integer_Array_Plus` must have a constraint, `A_Plus` will also be constrained. For example, in the call to `Show_Integer_Array_Plus` using `A_5` as an argument, the declaration of `A_Plus` becomes `A_Plus : Integer_Array (1 .. 5);`. Therefore, it becomes clear that the compiler needs to allocate five elements for `A_Plus`.

We'll see later how definite and indefinite types apply to formal parameters.

In the Ada Reference Manual

- 3.3 Objects and Named Numbers[49]

25.1.7 Incomplete types

Incomplete types — as the name suggests — are types that have missing information in their declaration. This is a simple example:

```
type Incomplete;
```

Because this type declaration is incomplete, we need to provide the missing information at some later point. Consider the incomplete type R in the following example:

Listing 46: incomplete_type_example.ads

```
package Incomplete_Type_Example is

   type R;
   --  Incomplete type declaration!
```

(continues on next page)

[49] http://www.ada-auth.org/standards/22rm/html/RM-3-3.html

(continued from previous page)

```
5
6     type R is record
7        I : Integer;
8     end record;
9     --  type R is now complete!
10
11 end Incomplete_Type_Example;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Incomplete_Types.Incomplete_Types
MD5: 5ca250595f2b0cc101df286ab319982f
```

The first declaration of type R is incomplete. However, in the second declaration of R, we specify that R is a record. By providing this missing information, we're completing the type declaration of R.

It's also possible to declare an incomplete type in the private part of a package specification and its complete form in the package body. Let's rewrite the example above accordingly:

Listing 47: incomplete_type_example.ads

```
1  package Incomplete_Type_Example is
2
3  private
4
5     type R;
6     --  Incomplete type declaration!
7
8  end Incomplete_Type_Example;
```

Listing 48: incomplete_type_example.adb

```
1  package body Incomplete_Type_Example is
2
3     type R is record
4        I : Integer;
5     end record;
6     --  type R is now complete!
7
8  end Incomplete_Type_Example;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Incomplete_Types.Incomplete_Types_2
MD5: fd2f0301b4a63887add1cb2093692ddb
```

A typical application of incomplete types is to create linked lists using *access types* (page 843) based on those incomplete types. This kind of type is called a recursive type. For example:

Listing 49: linked_list_example.ads

```
1  package Linked_List_Example is
2
3     type Integer_List;
4
5     type Next is access Integer_List;
6
7     type Integer_List is record
8        I : Integer;
```

(continues on next page)

(continued from previous page)

```
9        N : Next;
10    end record;
11
12 end Linked_List_Example;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Incomplete_Types.Linked_List_Example
MD5: b2d3a048473d498bbe691bc6e38ca1e9
```

Here, the N component of `Integer_List` is essentially giving us access to the next element of `Integer_List` type. Because the `Next` type is both referring to the `Integer_List` type and being used in the declaration of the `Integer_List` type, we need to start with an incomplete declaration of the `Integer_List` type and then complete it after the declaration of `Next`.

Incomplete types are useful to declare *mutually dependent types* (page 444), as we'll see later on. Also, we can also have formal incomplete types, as we'll discuss later.

In the Ada Reference Manual

- 3.10.1 Incomplete Type Declarations[50]

25.1.8 Type view

Ada distinguishes between the partial and the full view of a type. The full view is a type declaration that contains all the information needed by the compiler. For example, the following declaration of type R represents the full view of this type:

Listing 50: full_view.ads

```
1  package Full_View is
2
3     --  Full view of the R type:
4     type R is record
5        I : Integer;
6     end record;
7
8  end Full_View;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Type_View.Full_View
MD5: d37792287d08f9aa3d32499e233516df
```

As soon as we start applying encapsulation and information hiding — via the **private** keyword — to a specific type, we are introducing a partial view and making only that view compile-time visible to clients. Doing so requires us to introduce the private part of the package (unless already present). For example:

Listing 51: partial_full_views.ads

```
1  package Partial_Full_Views is
2
3     --  Partial view of the R type:
4     type R is private;
```

(continues on next page)

[50] http://www.ada-auth.org/standards/22rm/html/RM-3-10-1.html

(continued from previous page)

```
5
6  private
7
8     --  Full view of the R type:
9     type R is record
10       I : Integer;
11    end record;
12
13 end Partial_Full_Views;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Type_View.Partial_Full_View
MD5: b0cf748e43b23ea6c845e283c4266ff3
```

As indicated in the example, the `type R is private` declaration is the partial view of the R type, while the `type R is record [...]` declaration in the private part of the package is the full view.

Although the partial view doesn't contain the full type declaration, it contains very important information for the users of the package where it's declared. In fact, the partial view of a private type is all that users actually need to know to effectively use this type, while the full view is only needed by the compiler.

In the previous example, the partial view indicates that R is a private type, which means that, even though users cannot directly access any information stored in this type — for example, read the value of the I component of R —, they can use the R type to declare objects. For example:

Listing 52: main.adb

```
1  with Partial_Full_Views; use Partial_Full_Views;
2
3  procedure Main is
4     --  Partial view of R indicates that
5     --  R exists as a private type, so we
6     --  can declare objects of this type:
7     C : R;
8  begin
9     --  But we cannot directly access any
10    --  information declared in the full
11    --  view of R:
12    --
13    --  C.I := 42;
14    --
15    null;
16 end Main;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Type_View.Partial_Full_View
MD5: 05bc9a75406d0a46f6d009d97885d010
```

In many cases, the restrictions applied to the partial and full views must match. For example, if we declare a limited type in the full view of a private type, its partial view must also be limited:

Listing 53: limited_private_example.ads

```
1  package Limited_Private_Example is
2
```

(continues on next page)

(continued from previous page)

```
   --  Partial view must be limited,
   --  since the full view is limited.
   type R is limited private;

private

   type R is limited record
      I : Integer;
   end record;

end Limited_Private_Example;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Type_View.Limited_Private
MD5: 23d01b93fe052a500c8ca6ff76a2fd51
```

There are, however, situations where the full view may contain additional requirements that aren't mentioned in the partial view. For example, a type may be declared as non-tagged in the partial view, but, at the same time, be tagged in the full view:

Listing 54: tagged_full_view_example.ads

```
package Tagged_Full_View_Example is

   --  Partial view using non-tagged type:
   type R is private;

private

   --  Full view using tagged type:
   type R is tagged record
      I : Integer;
   end record;

end Tagged_Full_View_Example;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Type_View.Tagged_Full_View
MD5: 0ff9142b1ee086695b98b72a9d0f50ac
```

In this case, from a user's perspective, the R type is non-tagged, so that users cannot use any object-oriented programming features for this type. In the package body of Tagged_Full_View_Example, however, this type is tagged, so that all object-oriented programming features are available for subprograms of the package body that make use of this type. Again, the partial view of the private type contains the most important information for users that want to declare objects of this type.

In the Ada Reference Manual

- 7.3 Private Types and Private Extensions[51]

[51] http://www.ada-auth.org/standards/22rm/html/RM-7-3.html

Non-Record Private Types

Although it's very common to declare private types as record types, this is not the only option. In fact, we could declare any type in the full view — scalars, for example —, so we could declare a "private integer" type:

Listing 55: private_integers.ads

```
package Private_Integers is

   --  Partial view of private Integer type:
   type Private_Integer is private;

private

   --  Full view of private Integer type:
   type Private_Integer is new Integer;

end Private_Integers;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Type_View.Private_Integer
MD5: f1fcbed95e0f66a6f67d1bfd9ba9df1c
```

This code compiles as expected, but isn't very useful. We can improve it by adding operators to it, for example:

Listing 56: private_integers.ads

```
package Private_Integers is

   --  Partial view of private Integer type:
   type Private_Integer is private;

   function "+" (Left, Right : Private_Integer)
                 return Private_Integer;

private

   --  Full view of private Integer type:
   type Private_Integer is new Integer;

end Private_Integers;
```

Listing 57: private_integers.adb

```
package body Private_Integers is

   function "+" (Left, Right : Private_Integer)
                 return Private_Integer
   is
      Res : constant Integer :=
               Integer (Left) + Integer (Right);
      --  Note that we're converting Left
      --  and Right to Integer, which calls
      --  the "+" operator of the Integer
      --  type. Writing "Left + Right" would
      --  have called the "+" operator of
      --  Private_Integer, which leads to
      --  recursive calls, as this is the
      --  operator we're currently in.
```

(continues on next page)

(continued from previous page)

```
16    begin
17       return Private_Integer (Res);
18    end "+";
19
20 end Private_Integers;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Type_View.Private_Integer
MD5: ac161cb5debfde16465c45949cf682d7
```

Now, let's use the new operator in a test application:

Listing 58: show_private_integers.adb

```
1  with Private_Integers; use Private_Integers;
2
3  procedure Show_Private_Integers is
4     A, B : Private_Integer;
5  begin
6     A := A + B;
7  end Show_Private_Integers;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Type_View.Private_Integer
MD5: 5933779ce5f0802b448df96c42e65a8d
```

Build output

```
show_private_integers.adb:4:07: warning: variable "B" is read but never assigned [-
 ↪gnatwv]
show_private_integers.adb:6:09: warning: "A" may be referenced before it has a␣
 ↪value [enabled by default]
```

In this example, we use the `+` operator as if we were adding two common integer variables of `Integer` type.

Unconstrained Types

There are, however, some limitations: we cannot use unconstrained types such as arrays or even discriminants for arrays in the same way as we did for scalars. For example, the following declarations won't work:

Listing 59: private_arrays.ads

```
1  package Private_Arrays is
2
3     type Private_Unconstrained_Array is private;
4
5     type Private_Constrained_Array
6       (L : Positive) is private;
7
8  private
9
10    type Integer_Array is
11      array (Positive range <>) of Integer;
12
13    type Private_Unconstrained_Array is
14      array (Positive range <>) of Integer;
```

(continues on next page)

(continued from previous page)

```
15
16    type Private_Constrained_Array
17      (L : Positive) is
18        array (1 .. 2) of Integer;
19
20    --  NOTE: using an array type fails as well:
21    --
22    --  type Private_Constrained_Array
23    --    (L : Positive) is
24    --      Integer_Array (1 .. L);
25
26 end Private_Arrays;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Type_View.Private_Array
MD5: b873c2d381c159532b429101e4533c05
```

Build output

```
private_arrays.ads:13:09: error: full view of "Private_Unconstrained_Array" not␣
 ↪compatible with declaration at line 3
private_arrays.ads:13:09: error: one is constrained, the other unconstrained
private_arrays.ads:17:07: error: elementary or array type cannot have discriminants
gprbuild: *** compilation phase failed
```

Completing the private type with an unconstrained array type in the full view is not allowed because clients could expect, according to their view, to declare objects of the type. But doing so would not be allowed according to the full view. So this is another case of the partial view having to present clients with a sufficiently *true* view of the type's capabilities.

One solution is to rewrite the declaration of `Private_Constrained_Array` using a record type:

Listing 60: private_arrays.ads

```
1  package Private_Arrays is
2
3     type Private_Constrained_Array
4       (L : Positive) is private;
5
6  private
7
8     type Integer_Array is
9       array (Positive range <>) of Integer;
10
11    type Private_Constrained_Array
12      (L : Positive) is
13    record
14       Arr : Integer_Array  (1 .. 2);
15    end record;
16
17 end Private_Arrays;
```

Listing 61: declare_private_array.adb

```
1  with Private_Arrays; use Private_Arrays;
2
3  procedure Declare_Private_Array is
4    Arr : Private_Constrained_Array (5);
5  begin
```

(continues on next page)

(continued from previous page)

```
  null;
end Declare_Private_Array;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Type_View.Private_Array
MD5: 3830721499a59d85efddd4989aa7c288
```

Now, the code compiles fine — but we had to use a record type in the full view to make it work.

Another solution is to make the private type indefinite. In this case, the client's partial view would be consistent with a completion as an indefinite type in the private part:

Listing 62: private_arrays.ads

```
package Private_Arrays is

   type Private_Constrained_Array (<>) is
     private;

   function Init
     (L : Positive)
      return Private_Constrained_Array;

private

   type Private_Constrained_Array is
     array (Positive range <>) of Integer;

end Private_Arrays;
```

Listing 63: private_arrays.adb

```
package body Private_Arrays is

   function Init
     (L : Positive)
      return Private_Constrained_Array
   is
      PCA : Private_Constrained_Array (1 .. L);
   begin
      return PCA;
   end Init;

end Private_Arrays;
```

Listing 64: declare_private_array.adb

```
with Private_Arrays; use Private_Arrays;

procedure Declare_Private_Array is
  Arr : Private_Constrained_Array := Init (5);
begin
  null;
end Declare_Private_Array;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Type_View.Private_Array
MD5: cd170a1e44fffb93314776a68f1cb413
```

Build output

```
private_arrays.adb:7:07: warning: variable "PCA" is read but never assigned [-
↪gnatwv]
```

The bounds for the object's declaration come from the required initial value when an object is declared. In this case, we initialize the object with a call to the `Init` function.

25.1.9 Type conversion

An important operation when dealing with objects of different types is type conversion, which we already discussed in the *Introduction to Ada course* (page 56). In fact, we can convert an object `Obj_X` of an *operand* type X to a similar, closely related *target* type Y by simply indicating the target type: `Y (Obj_X)`. In this section, we discuss type conversions for different kinds of types.

Ada distinguishes between two kinds of conversion: value conversion and view conversion. The main difference is the way how the operand (argument) of the conversion is evaluated:

- in a value conversion, the operand is evaluated as an *expression* (page 687);
- in a view conversion, the operand is evaluated as a name.

In other words, we cannot use expressions such as `2 * A` in a view conversion, but only A. In a value conversion, we could use both forms.

In the Ada Reference Manual

- 4.6 Type Conversions[52]

Value conversion

Value conversions are possible for various types. In this section, we see some examples, starting with types derived from scalar types up to array conversions.

Root and derived types

Let's start with the conversion between a scalar type and its derived types. For example, we can convert back-and-forth between the **`Integer`** type and the derived `Int` type:

Listing 65: custom_integers.ads

```
1  package Custom_Integers is
2
3     type Int is new Integer
4       with Dynamic_Predicate => Int /= 0;
5
6     function Double (I : Integer)
7                      return Integer is
8       (I * 2);
9
10 end Custom_Integers;
```

Listing 66: show_conversion.adb

```
1  with Ada.Text_IO;      use Ada.Text_IO;
2  with Custom_Integers; use Custom_Integers;
```

(continues on next page)

[52] http://www.ada-auth.org/standards/22rm/html/RM-4-6.html

(continued from previous page)

```
3
4  procedure Show_Conversion is
5     Int_Var     : Int     := 1;
6     Integer_Var : Integer := 2;
7  begin
8     --  Int to Integer conversion
9     Integer_Var := Integer (Int_Var);
10
11    Put_Line ("Integer_Var : "
12              & Integer_Var'Image);
13
14    --  Int to Integer conversion
15    --  as an actual parameter
16    Integer_Var := Double (Integer (Int_Var));
17
18    Put_Line ("Integer_Var : "
19              & Integer_Var'Image);
20
21    --  Integer to Int conversion
22    --  using an expression
23    Int_Var     := Int (Integer_Var * 2);
24
25    Put_Line ("Int_Var :     "
26              & Int_Var'Image);
27 end Show_Conversion;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Type_Conversion.Root_Derived_Type_
↪Conversion
MD5: 7cd324f308edc34de3bc4bccce63f1ee
```

Runtime output

```
Integer_Var :  1
Integer_Var :  2
Int_Var :      4
```

In the `Show_Conversion` procedure from this example, we first convert from `Int` to **`Integer`**. Then, we do the same conversion while providing the resulting value as an actual parameter for the `Double` function. Finally, we convert the `Integer_Var * 2` expression from **`Integer`** to `Int`.

Note that the converted value must conform to any constraints that the target type might have. In the example above, `Int` has a predicate that dictates that its value cannot be zero. This (dynamic) predicate is checked at runtime, so an exception is raised if it fails:

Listing 67: show_conversion.adb

```
1  with Ada.Text_IO;     use Ada.Text_IO;
2  with Custom_Integers; use Custom_Integers;
3
4  procedure Show_Conversion is
5     Int_Var     : Int;
6     Integer_Var : Integer;
7  begin
8     Integer_Var := 0;
9     Int_Var     := Int (Integer_Var);
10
11    Put_Line ("Int_Var : "
12              & Int_Var'Image);
```

(continues on next page)

(continued from previous page)

```
13 end Show_Conversion;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Type_Conversion.Root_Derived_Type_
 ↪Conversion
MD5: 4150cdffd4c1fed39fa1728a77fa599f
```

Runtime output

```
raised ADA.ASSERTIONS.ASSERTION_ERROR : Dynamic_Predicate failed at show_
 ↪conversion.adb:9
```

In this case, the conversion from **Integer** to Int fails because, while zero is a valid integer value, it doesn't obey Int's predicate.

Numeric type conversion

A typical conversion is the one between integer and floating-point values. For example:

Listing 68: show_conversion.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  procedure Show_Conversion is
4     F : Float   := 1.0;
5     I : Integer := 2;
6  begin
7     I := Integer (F);
8
9     Put_Line ("I : "
10              & I'Image);
11
12    I := 4;
13    F := Float (I);
14
15    Put_Line ("F :   "
16              & F'Image);
17 end Show_Conversion;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Type_Conversion.Numeric_Type_
 ↪Conversion
MD5: f64649c786377617b0bc9ff49475ba55
```

Runtime output

```
I :  1
F :    4.00000E+00
```

Also, we can convert between fixed-point types and floating-point or integer types:

Listing 69: fixed_point_defs.ads

```
1  package Fixed_Point_Defs is
2     S     : constant := 32;
3     Exp   : constant := 15;
4     D     : constant := 2.0 ** (-S + Exp + 1);
```

(continues on next page)

(continued from previous page)

```
5
6     type TQ15_31 is delta D
7       range -1.0 * 2.0 ** Exp ..
8             1.0 * 2.0 ** Exp - D;
9
10    pragma Assert (TQ15_31'Size = S);
11 end Fixed_Point_Defs;
```

Listing 70: show_conversion.adb

```
1  with Fixed_Point_Defs; use Fixed_Point_Defs;
2  with Ada.Text_IO;      use Ada.Text_IO;
3
4  procedure Show_Conversion is
5     F  : Float;
6     FP : TQ15_31;
7     I  : Integer;
8  begin
9     FP := TQ15_31 (10.25);
10    I  := Integer (FP);
11
12    Put_Line ("FP : "
13              & FP'Image);
14    Put_Line ("I : "
15              & I'Image);
16
17    I  := 128;
18    FP := TQ15_31 (I);
19    F  := Float (FP);
20
21    Put_Line ("FP : "
22              & FP'Image);
23    Put_Line ("F :   "
24              & F'Image);
25 end Show_Conversion;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Type_Conversion.Numeric_Type_
 ↪Conversion
MD5: 70714ba396b03469397b982e00299561
```

Runtime output

```
FP :  10.25000
I :  10
FP :  128.00000
F :    1.28000E+02
```

As we can see in the examples above, converting between different numeric types works in all directions. (Of course, rounding is applied when converting from floating-point to integer types, but this is expected.)

Enumeration conversion

We can also convert between an enumeration type and a type derived from it:

Listing 71: custom_enumerations.ads

```
package Custom_Enumerations is

   type Priority is (Low, Mid, High);

   type Important_Priority is new
     Priority range Mid .. High;

end Custom_Enumerations;
```

Listing 72: show_conversion.adb

```
with Ada.Text_IO;         use Ada.Text_IO;
with Custom_Enumerations; use Custom_Enumerations;

procedure Show_Conversion is
   P  : Priority           := Low;
   IP : Important_Priority := High;
begin
   P := Priority (IP);

   Put_Line ("P:  "
             & P'Image);

   P  := Mid;
   IP := Important_Priority (P);

   Put_Line ("IP: "
             & IP'Image);
end Show_Conversion;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Type_Conversion.Enumeration_Type_
 ↪Conversion
MD5: b1e42cbd8b57291d3b3a9968c41efdd7
```

Runtime output

```
P:  HIGH
IP: MID
```

In this example, we have the `Priority` type and the derived type `Important_Priority`. As expected, the conversion works fine when the converted value is in the range of the target type. If not, an exception is raised:

Listing 73: show_conversion.adb

```
with Ada.Text_IO;         use Ada.Text_IO;
with Custom_Enumerations; use Custom_Enumerations;

procedure Show_Conversion is
   P  : Priority;
   IP : Important_Priority;
begin
   P  := Low;
   IP := Important_Priority (P);

   Put_Line ("IP: "
             & IP'Image);
```

(continues on next page)

(continued from previous page)

```
13 end Show_Conversion;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Type_Conversion.Enumeration_Type_
 ↪Conversion
MD5: 6bbc777d4b44023bf572ca5dc6c2b4f8
```

Build output

```
show_conversion.adb:9:10: warning: value not in range of type "Important_Priority"␣
 ↪defined at custom_enumerations.ads:5 [enabled by default]
show_conversion.adb:9:10: warning: Constraint_Error will be raised at run time␣
 ↪[enabled by default]
```

Runtime output

```

raised CONSTRAINT_ERROR : show_conversion.adb:9 range check failed
```

In this example, an exception is raised because Low is not in the Important_Priority type's range.

Array conversion

Similarly, we can convert between array types. For example, if we have the array type Integer_Array and its derived type Derived_Integer_Array, we can convert between those array types:

Listing 74: custom_arrays.ads

```
1  package Custom_Arrays is
2
3     type Integer_Array is
4       array (Positive range <>) of Integer;
5
6     type Derived_Integer_Array is new
7       Integer_Array;
8
9  end Custom_Arrays;
```

Listing 75: show_conversion.adb

```
1  with Ada.Text_IO;   use Ada.Text_IO;
2  with Custom_Arrays; use Custom_Arrays;
3
4  procedure Show_Conversion is
5     subtype Common_Range is Positive range 1 .. 3;
6
7     AI : Integer_Array (Common_Range);
8     AI_D : Derived_Integer_Array (Common_Range);
9  begin
10    AI_D := [1, 2, 3];
11    AI := Integer_Array (AI_D);
12
13    Put_Line ("AI: "
14              & AI'Image);
15
16    AI   := [4, 5, 6];
17    AI_D := Derived_Integer_Array (AI);
```

(continues on next page)

(continued from previous page)

```
18
19    Put_Line ("AI_D: "
20              & AI_D'Image);
21 end Show_Conversion;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Type_Conversion.Array_Type_
 ↪Conversion
MD5: 72cdf4850bec78893b6985b0c7ef02b9
```

Runtime output

```
AI:
[ 1,  2,  3]
AI_D:
[ 4,  5,  6]
```

Note that both arrays must have the same number of components in order for the conversion to be successful. (Sliding is fine, though.) In this example, both arrays have the same range: Common_Range.

We can also convert between array types that aren't derived one from the other. As long as the components and the index subtypes are of the same type, the conversion between those types is possible. To be more precise, these are the requirements for the array conversion to be accepted:

- The component types must be the same type.
- The index types (or subtypes) must be the same or, at least, convertible.
- The dimensionality of the arrays must be the same.
- The bounds must be compatible (but not necessarily equal).

Converting between different array types can be very handy, especially when we're dealing with array types that were not declared in the same package. For example:

Listing 76: custom_arrays_1.ads

```
1 package Custom_Arrays_1 is
2
3    type Integer_Array_1 is
4      array (Positive range <>) of Integer;
5
6    type Float_Array_1 is
7      array (Positive range <>) of Float;
8
9 end Custom_Arrays_1;
```

Listing 77: custom_arrays_2.ads

```
1 package Custom_Arrays_2 is
2
3    type Integer_Array_2 is
4      array (Positive range <>) of Integer;
5
6    type Float_Array_2 is
7      array (Positive range <>) of Float;
8
9 end Custom_Arrays_2;
```

Listing 78: show_conversion.adb

```
with Ada.Text_IO;     use Ada.Text_IO;
with Custom_Arrays_1; use Custom_Arrays_1;
with Custom_Arrays_2; use Custom_Arrays_2;

procedure Show_Conversion is
   subtype Common_Range is Positive range 1 .. 3;

   AI_1 : Integer_Array_1 (Common_Range);
   AI_2 : Integer_Array_2 (Common_Range);
   AF_1 : Float_Array_1 (Common_Range);
   AF_2 : Float_Array_2 (Common_Range);
begin
   AI_2 := [1, 2, 3];
   AI_1 := Integer_Array_1 (AI_2);

   Put_Line ("AI_1: "
             & AI_1'Image);

   AI_1 := [4, 5, 6];
   AI_2 := Integer_Array_2 (AI_1);

   Put_Line ("AI_2: "
             & AI_2'Image);

   --  ERROR: Cannot convert arrays whose
   --         components have different types:
   --
   --  AF_1 := Float_Array_1 (AI_1);
   --
   --  Instead, use array aggregate where each
   --  component is converted from integer to
   --  float:
   --
   AF_1 := [for I in AF_1'Range =>
              Float (AI_1 (I))];

   Put_Line ("AF_1: "
             & AF_1'Image);

   AF_2 := Float_Array_2 (AF_1);

   Put_Line ("AF_2: "
             & AF_2'Image);
end Show_Conversion;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Type_Conversion.Array_Type_
 ↪Conversion
MD5: 42b89fa5fe1f20af26b5da4586cea8e8
```

Runtime output

```
AI_1:
[ 1,  2,  3]
AI_2:
[ 4,  5,  6]
AF_1:
[ 4.00000E+00,  5.00000E+00,  6.00000E+00]
```

(continues on next page)

(continued from previous page)

```
AF_2:
[ 4.00000E+00,  5.00000E+00,  6.00000E+00]
```

As we can see in this example, the fact that `Integer_Array_1` and `Integer_Array_2` have the same component type (**`Integer`**) allows us to convert between them. The same applies to the `Float_Array_1` and `Float_Array_2` types.

A conversion is not possible when the component types don't match. Even though we can convert between integer and floating-point types, we cannot convert an array of integers to an array of floating-point directly. Therefore, we cannot write a statement such as `AF_1 := Float_Array_1 (AI_1);`.

However, when the components don't match, we can of course implement the array conversion by converting the individual components. For the example above, we used an iterated component association in an array aggregate: `[for I in AF_1'Range => Float (AI_1 (I))];`. (We discuss this topic later *in another chapter* (page 527).)

We may also encounter array types originating from the instantiation of generic packages. In this case as well, we can use array conversions. Consider the following generic package:

Listing 79: custom_arrays.ads

```
generic
   type T is private;
package Custom_Arrays is
   type T_Array is
     array (Positive range <>) of T;
end Custom_Arrays;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Type_Conversion.Generic_Array_Type_
↪Conversion
MD5: 8b3a963a1292a90d99d83c6d81ce3995
```

We could instantiate this generic package and reuse parts of the previous code example:

Listing 80: show_conversion.adb

```
with Ada.Text_IO;   use Ada.Text_IO;
with Custom_Arrays;

procedure Show_Conversion is
   package CA_Int_1 is
     new Custom_Arrays (T => Integer);
   package CA_Int_2 is
     new Custom_Arrays (T => Integer);

   subtype Common_Range is Positive range 1 .. 3;

   AI_1 : CA_Int_1.T_Array (Common_Range);
   AI_2 : CA_Int_2.T_Array (Common_Range);
begin
   AI_2 := [1, 2, 3];
   AI_1 := CA_Int_1.T_Array (AI_2);

   Put_Line ("AI_1: "
             & AI_1'Image);

   AI_1 := [4, 5, 6];
   AI_2 := CA_Int_2.T_Array (AI_1);
```

(continues on next page)

(continued from previous page)

```
23
24    Put_Line ("AI_2: "
25              & AI_2'Image);
26 end Show_Conversion;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Type_Conversion.Generic_Array_Type_
 ↪Conversion
MD5: f5348b3bed5cbd93dab44394358e1ce6
```

Runtime output

```
AI_1:
[ 1,  2,  3]
AI_2:
[ 4,  5,  6]
```

As we can see in this example, each of the instantiated `CA_Int_1` and `CA_Int_2` packages has a `T_Array` type. Even though these `T_Array` types have the same name, they're actually completely unrelated types. However, we can still convert between them in the same way as we did in the previous code examples.

View conversion

As mentioned before, view conversions just allow names to be converted. Thus, we cannot use expressions in this case.

Note that a view conversion never changes the value during the conversion. We could say that a view conversion is simply making us *view* an object from a different angle. The object itself is still the same for both the original and the target types.

For example, consider this package:

Listing 81: some_tagged_types.ads

```
1  package Some_Tagged_Types is
2
3     type T is tagged record
4        A : Integer;
5     end record;
6
7     type T_Derived is new T with record
8        B : Float;
9     end record;
10
11    Obj : T_Derived;
12
13 end Some_Tagged_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Type_Conversion.Tagged_Types_View
MD5: 2e18ba972682f1ae1d38e38842fde48e
```

Here, `Obj` is an object of type `T_Derived`. When we *view* this object, we notice that it has two components: `A` and `B`. However, we could *view* this object as being of type `T`. From that perspective, this object only has one component: `A`. (Note that changing the perspective doesn't change the object itself.) Therefore, a view conversion from `T_Derived` to `T` just makes us *view* the object `Obj` from a different angle.

In this sense, a view conversion changes the view of a given object to the target type's view, both in terms of components that exist and operations that are available. It doesn't really change anything at all in the value itself.

There are basically two kinds of view conversions: the ones using tagged types and the ones using untagged types. We discuss these kinds of conversion in this section.

View conversion of tagged types

A conversion between tagged types is a view conversion. Let's consider a typical code example that declares one, two and three-dimensional points:

Listing 82: points.ads

```
package Points is

   type Point_1D is tagged record
      X : Float;
   end record;

   procedure Display (P : Point_1D);

   type Point_2D is new Point_1D with record
      Y : Float;
   end record;

   procedure Display (P : Point_2D);

   type Point_3D is new Point_2D with record
      Z : Float;
   end record;

   procedure Display (P : Point_3D);

end Points;
```

Listing 83: points.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Points is

   procedure Display (P : Point_1D) is
   begin
      Put_Line ("(X => " & P.X'Image & ")");
   end Display;

   procedure Display (P : Point_2D) is
   begin
      Put_Line ("(X => " & P.X'Image
                & ", Y => " & P.Y'Image & ")");
   end Display;

   procedure Display (P : Point_3D) is
   begin
      Put_Line ("(X => " & P.X'Image
                & ", Y => " & P.Y'Image
                & ", Z => " & P.Z'Image & ")");
   end Display;

end Points;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Type_Conversion.Tagged_Type_
 ↪Conversion
MD5: 0acc05ae2310ab4ba038dfdb6bae0495
```

We can use the types from the `Points` package and convert between each other:

Listing 84: show_conversion.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Points;      use Points;

procedure Show_Conversion is
   P_1D : Point_1D;
   P_3D : Point_3D;
begin
   P_3D := (X => 0.1, Y => 0.5, Z => 0.3);
   P_1D := Point_1D (P_3D);

   Put ("P_3D : ");
   Display (P_3D);

   Put ("P_1D : ");
   Display (P_1D);
end Show_Conversion;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Type_Conversion.Tagged_Type_
 ↪Conversion
MD5: fb8e07c8f2399cfae935179d8f413150
```

Runtime output

```
P_3D : (X =>  1.00000E-01, Y =>  5.00000E-01, Z =>  3.00000E-01)
P_1D : (X =>  1.00000E-01)
```

In this example, as expected, we're able to convert from the `Point_3D` type (which has three components) to the `Point_1D` type, which has only one component.

View conversion of untagged types

For untagged types, a view conversion is the one that happens when we have an object of an untagged type as an actual parameter for a formal **`in out`** or **`out`** parameter.

Let's see a code example. Consider the following simple procedure:

Listing 85: double.ads

```
procedure Double (X : in out Float);
```

Listing 86: double.adb

```
procedure Double (X : in out Float) is
begin
   X := X * 2.0;
end Double;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Type_Conversion.Untagged_Type_View_
 ↪Conversion
MD5: 31f4409d9faeaf213c5940de65eeb014
```

The Double procedure has an **in out** parameter of **Float** type. We can call this procedure using an integer variable I as the actual parameter. For example:

Listing 87: show_conversion.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Double;

procedure Show_Conversion is
   I : Integer;
begin
   I := 2;
   Put_Line ("I : "
             & I'Image);

   --  Calling Double with
   --  Integer parameter:
   Double (Float (I));
   Put_Line ("I : "
             & I'Image);
end Show_Conversion;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Type_Conversion.Untagged_Type_View_
 ↪Conversion
MD5: 2256d3c120d569789dcd4c9959ed9d0f
```

Runtime output

```
I :  2
I :  4
```

In this case, the **Float** (I) conversion in the call to Double creates a temporary floating-point variable. This is the same as if we had written the following code:

Listing 88: show_conversion.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Double;

procedure Show_Conversion is
   I : Integer;
begin
   I := 2;
   Put_Line ("I : "
             & I'Image);

   declare
      F : Float := Float (I);
   begin
      Double (F);
      I := Integer (F);
   end;
   Put_Line ("I : "
             & I'Image);
end Show_Conversion;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Type_Conversion.Untagged_Type_View_
 ↪Conversion
MD5: 3b90caf789952710ece42141a7b60968
```

Runtime output

```
I :  2
I :  4
```

In this sense, the view conversion that happens in `Double (Float (I))` can be considered syntactic sugar, as it allows us to elegantly write two conversions in a single statement.

Implicit conversions

Implicit conversions are only possible when we have a type T and a subtype S related to the T type. For example:

Listing 89: custom_integers.ads

```
package Custom_Integers is

   type Int is new Integer
     with Dynamic_Predicate => Int /= 0;

   subtype Sub_Int_1 is Integer
     with Dynamic_Predicate => Sub_Int_1 /= 0;

   subtype Sub_Int_2 is Sub_Int_1
     with Dynamic_Predicate => Sub_Int_2 /= 1;

end Custom_Integers;
```

Listing 90: show_conversion.adb

```
with Ada.Text_IO;     use Ada.Text_IO;
with Custom_Integers; use Custom_Integers;

procedure Show_Conversion is
   Int_Var       : Int;
   Sub_Int_1_Var : Sub_Int_1;
   Sub_Int_2_Var : Sub_Int_2;
   Integer_Var   : Integer;
begin
   Integer_Var := 5;
   Int_Var     := Int (Integer_Var);

   Put_Line ("Int_Var :       "
             & Int_Var'Image);

   --  Implicit conversions:
   --  no explicit conversion required!
   Sub_Int_1_Var := Integer_Var;
   Sub_Int_2_Var := Integer_Var;

   Put_Line ("Sub_Int_1_Var : "
             & Sub_Int_1_Var'Image);
   Put_Line ("Sub_Int_2_Var : "
             & Sub_Int_2_Var'Image);
end Show_Conversion;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Type_Conversion.Implicit_Subtype_
 ↪Conversion
MD5: dbbe498fa66701ca94f48119b1bc1a91
```

Runtime output

```
Int_Var :        5
Sub_Int_1_Var :  5
Sub_Int_2_Var :  5
```

In this example, we declare the `Int` type and the `Sub_Int_1` and `Sub_Int_2` subtypes:

- the `Int` type is derived from the **`Integer`** type,
- `Sub_Int_1` is a subtype of the **`Integer`** type, and
- `Sub_Int_2` is a subtype of the `Sub_Int_1` subtype.

We need an explicit conversion when converting between the **`Integer`** and `Int` types. However, as the conversion is implicit for subtypes, we can simply write `Sub_Int_1_Var := Integer_Var;`. (Of course, writing the explicit conversion `Sub_Int_1 (Integer_Var)` in the assignment is possible as well.) Also, the same applies to the `Sub_Int_2` subtype: we can write an implicit conversion in the `Sub_Int_2_Var := Integer_Var;` statement.

Conversion of other types

For other kinds of types, such as records, a direct conversion as we've seen so far isn't possible. In this case, we have to write a conversion function ourselves. A common convention in Ada is to name this function `To_Typename`. For example, if we want to convert from any type to **`Integer`** or **`Float`**, we implement the `To_Integer` and `To_Float` functions, respectively. (Obviously, because Ada supports subprogram overloading, we can have multiple `To_Typename` functions for different operand types.)

Let's see a code example:

Listing 91: custom_rec.ads

```
1  package Custom_Rec is
2
3     type Rec is record
4        X : Integer;
5     end record;
6
7     function To_Integer (R : Rec)
8                          return Integer is
9       (R.X);
10
11 end Custom_Rec;
```

Listing 92: show_conversion.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2  with Custom_Rec;  use Custom_Rec;
3
4  procedure Show_Conversion is
5     R : Rec;
6     I : Integer;
7  begin
8     R := (X => 2);
9     I := To_Integer (R);
10
```

(continues on next page)

(continued from previous page)

```
11    Put_Line ("I : " & I'Image);
12 end Show_Conversion;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Type_Conversion.Other_Type_
 ↪Conversions
MD5: d52a4fde48243a7dd6942f0b2b91ce62
```

Runtime output

```
I :  2
```

In this example, we have the `To_Integer` function that converts from the Rec type to the **`Integer`** type.

In other languages

In C++, you can define conversion operators to cast between objects of different classes. Also, you can overload the `=` operator. Consider this example:

```
#include <iostream>

class T1 {
public:
    T1 (float x) :
      x(x) {}

    // If class T3 is declared before class
    // T1, we can overload the "=" operator.
    //
    // void operator=(T3 v) {
    //     x = static_cast<float>(v);
    // }

    void display();
private:
   float x;
};

class T3 {
public:
    T3 (float x, float y, float z) :
      x(x), y(y), z(z) {}

    // implicit conversion
    operator float() const {
        return (x + y + z) / 3.0;
    }

    // implicit conversion
    //
    // operator T1() const {
    //     return T1((x + y + z) / 3.0);
    // }

    // explicit conversion (C++11)
    explicit operator T1() const {
        return T1(float(*this));
    }
```

```
    void display();

private:
    float x, y, z;
};

void T1::display()
{
    std::cout << "(x => " << x
              << ")" << std::endl;
}

void T3::display()
{
    std::cout << "(x => " << x
              << "y => "  << y
              << "z => "  << z
              << ")" << std::endl;
}

int main ()
{
    const T3 t_3 (0.5, 0.4, 0.6);
    T1 t_1 (0.0);
    float f;

    // Implicit conversion
    f = t_3;

    std::cout << "f : " << f
              << std::endl;

    // Explicit conversion
    f = static_cast<float>(t_3);

    // f = (float)t_3;

    std::cout << "f : " << f
              << std::endl;

    // Explicit conversion
    t_1 = static_cast<T1>(t_3);

    // t_1 = (T1)t_3;

    std::cout << "t_1 : ";
    t_1.display();
    std::cout << std::endl;
}
```

Here, we're using `operator float()` and `operator T1()` to cast from an object of class T3 to a floating-point value and an object of class T1, respectively. (If we switch the order and declare the T3 class before the T1 class, we could overload the `=` operator, as you can see in the commented-out lines.)

In Ada, this kind of conversions isn't available. Instead, we have to implement conversion functions such as the `To_Integer` function from the previous code example. This is the corresponding implementation:

Listing 93: custom_defs.ads

```
package Custom_Defs is

   type T1 is private;

   function Init (X : Float)
                  return T1;

   procedure Display (Obj : T1);

   type T3 is private;

   function Init (X, Y, Z : Float)
                  return T3;

   function To_Float (Obj : T3)
                      return Float;

   function To_T1 (Obj : T3)
                   return T1;

   procedure Display (Obj : T3);

private
   type T1 is record
      X : Float;
   end record;

   function Init (X : Float)
                  return T1 is
     (X => X);

   type T3 is record
      X, Y, Z : Float;
   end record;

   function Init (X, Y, Z : Float)
                  return T3 is
     (X => X, Y => Y, Z => Z);

end Custom_Defs;
```

Listing 94: custom_defs.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Custom_Defs is

   procedure Display (Obj : T1) is
   begin
      Put_Line ("(X => "
                & Obj.X'Image & ")");
   end Display;

   function To_Float (Obj : T3)
                      return Float is
     ((Obj.X + Obj.Y + Obj.Z) / 3.0);

   function To_T1 (Obj : T3)
                   return T1 is
     (Init (To_Float (Obj)));

   procedure Display (Obj : T3) is
   begin
      Put_Line ("(X => "    & Obj.X'Image
                & ", Y => " & Obj.Y'Image
                & ", Z => " & Obj.Z'Image
                & ")");
   end Display;

end Custom_Defs;
```

Listing 95: show_conversion.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Custom_Defs; use Custom_Defs;

procedure Show_Conversion is
   T_3 : constant T3 := Init (0.5, 0.4, 0.6);
   T_1 :          T1 := Init (0.0);
   F   : Float;
begin
   --  Explicit conversion from
   --  T3 to Float type
   F := To_Float (T_3);

   Put_Line ("F : " & F'Image);

   --  Explicit conversion from
   --  T3 to T1 type
   T_1 := To_T1 (T_3);

   Put ("T_1 : ");
   Display (T_1);
end Show_Conversion;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Type_Conversion.Explicit_Rec_
 ↪Conversion
MD5: b3e7be5488fb8026b4386063ba16aaeb
```

Runtime output

```
F :  5.00000E-01
T_1 : (X =>  5.00000E-01)
```

In this example, we *translate* the casting operators from the C++ version by implementing the `To_Float` and `To_T1` functions. (In addition to that, we replace the C++ constructors by `Init` functions.)

25.1.10 Qualified Expressions

We already saw qualified expressions in the *Introduction to Ada* (page 91) course. As mentioned there, a qualified expression specifies the exact type or subtype that the target expression will be resolved to, and it can be either any expression in parentheses, or an aggregate:

Listing 96: simple_integers.ads

```
package Simple_Integers is

   type Int is new Integer;

   subtype Int_Not_Zero is Int
     with Dynamic_Predicate => Int_Not_Zero /= 0;

end Simple_Integers;
```

Listing 97: show_qualified_expressions.adb

```
with Simple_Integers; use Simple_Integers;

procedure Show_Qualified_Expressions is
   I : Int;
begin
   --  Using qualified expression Int'(N)
   I := Int'(0);
end Show_Qualified_Expressions;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Qualified_Expressions.Example
MD5: 0a83e10b51c72827e322984bd5c8009d
```

Here, the qualified expression `Int'(0)` indicates that the value zero is of `Int` type.

In the Ada Reference Manual

- 4.7 Qualified Expressions[53]

Verifying subtypes

Note

This feature was introduced in Ada 2022.

We can use qualified expressions to verify a subtype's predicate:

[53] http://www.ada-auth.org/standards/22rm/html/RM-4-7.html

Listing 98: show_qualified_expressions.adb

```
with Simple_Integers; use Simple_Integers;

procedure Show_Qualified_Expressions is
   I : Int;
begin
   I := Int_Not_Zero'(0);
end Show_Qualified_Expressions;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Qualified_Expressions.Example
MD5: 3c4ab8ad7bf75ae029047f673aa15d70
```

Build output

```
show_qualified_expressions.adb:6:23: warning: expression fails predicate check on
 ↪"Int_Not_Zero" [enabled by default]
show_qualified_expressions.adb:6:23: warning: check will fail at run time [-gnatw.
 ↪a]
```

Runtime output

```

raised ADA.ASSERTIONS.ASSERTION_ERROR : Dynamic_Predicate failed at show_qualified_
 ↪expressions.adb:6
```

Here, the qualified expression `Int_Not_Zero'(0)` checks the dynamic predicate of the subtype. (This predicate check fails at runtime.)

25.1.11 Default initial values

In the *Introduction to Ada course* (page 65), we've seen that record components can have default values. For example:

Listing 99: defaults.ads

```
package Defaults is

   type R is record
     X : Positive := 1;
     Y : Positive := 10;
   end record;

end Defaults;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Default_Initial_Values.Defaults_1
MD5: e230be602cbb24a854e71c8176c7148c
```

In this section, we'll extend the concept of default values to other kinds of type declarations, such as scalar types and arrays.

To assign a default value for a scalar type declaration — such as an enumeration and a new integer —, we use the `Default_Value` aspect:

Listing 100: defaults.ads

```
package Defaults is

   type E is (E1, E2, E3)
     with Default_Value => E1;

   type T is new Integer
     with Default_Value => -1;

end Defaults;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Default_Initial_Values.Defaults_2
MD5: e6cd8261b099278ceeb5fda91d318f6e
```

Note that we cannot specify a default value for a subtype:

Listing 101: defaults.ads

```
package Defaults is

   subtype T is Integer
     with Default_Value => -1;
   --  ERROR!!

end Defaults;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Default_Initial_Values.Defaults_3
MD5: beef68e4a7a3714cfa3e547bdcda9a0c
```

Build output

```
defaults.ads:4:11: error: aspect "Default_Value" cannot apply to subtype
gprbuild: *** compilation phase failed
```

For array types, we use the `Default_Component_Value` aspect:

Listing 102: defaults.ads

```
package Defaults is

   type Arr is
     array (Positive range <>) of Integer
       with Default_Component_Value => -1;

end Defaults;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Default_Initial_Values.Defaults_4
MD5: 2c390e3900e4af42498381025a37955e
```

This is a package containing the declarations we've just seen:

Listing 103: defaults.ads

```
package Defaults is

```

(continues on next page)

(continued from previous page)

```
   type E is (E1, E2, E3)
     with Default_Value => E1;

   type T is new Integer
     with Default_Value => -1;

   --  We cannot specify default
   --  values for subtypes:
   --
   --  subtype T is Integer
   --    with Default_Value => -1;

   type R is record
     X : Positive := 1;
     Y : Positive := 10;
   end record;

   type Arr is
     array (Positive range <>) of Integer
       with Default_Component_Value => -1;

end Defaults;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Default_Initial_Values.Defaults
MD5: e9263ff5b96523c129a3d2d9bbb5a4dd
```

In the example below, we declare variables of the types from the `Defaults` package:

Listing 104: use_defaults.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Defaults; use Defaults;

procedure Use_Defaults is
   E1 : E;
   T1 : T;
   R1 : R;
   A1 : Arr (1 .. 5);
begin
   Put_Line ("Enumeration:  "
             & E'Image (E1));
   Put_Line ("Integer type: "
             & T'Image (T1));
   Put_Line ("Record type:  "
             & Positive'Image (R1.X)
             & ", "
             & Positive'Image (R1.Y));

   Put ("Array type:   ");
   for V of A1 loop
      Put (Integer'Image (V) & " ");
   end loop;
   New_Line;
end Use_Defaults;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Default_Initial_Values.Defaults
MD5: f8e55d31cbda2447fe14eb07eaad1975
```

Runtime output

```
Enumeration:  E1
Integer type: -1
Record type:   1,  10
Array type:   -1 -1 -1 -1 -1
```

As we see in the `Use_Defaults` procedure, all variables still have their default values, since we haven't assigned any value to them.

In the Ada Reference Manual

- 3.5 Scalar Types[54]
- 3.6 Array Types[55]

25.1.12 Deferred Constants

Deferred constants are declarations where the value of the constant is not specified immediately, but rather *deferred* to a later point. In that sense, if a constant declaration is deferred, it is actually declared twice:

1. in the deferred constant declaration, and
2. in the full constant declaration.

The simplest form of deferred constant is the one that has a full constant declaration in the private part of the package specification. For example:

Listing 105: deferred_constants.ads

```
1  package Deferred_Constants is
2
3     type Speed is new Long_Float;
4
5     Light : constant Speed;
6     --      ^ deferred constant declaration
7
8  private
9
10    Light : constant Speed := 299_792_458.0;
11    --      ^ full constant declaration
12
13 end Deferred_Constants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Deferred_Constants.Deferred_
 ↪Constant_Private
MD5: f76e42326889f70fa7e1e216576f9771
```

Another form of deferred constant is the one that imports a constant from an external implementation — using the `Import` keyword. We can use this to import a constant declaration from an implementation in C. For example, we can declare the `light` constant in a C file:

[54] http://www.ada-auth.org/standards/22rm/html/RM-3-5.html
[55] http://www.ada-auth.org/standards/22rm/html/RM-3-6.html

Listing 106: constants.c

```c
double light = 299792458.0;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Deferred_Constants.Deferred_
 ↪Constant_C
MD5: 71194a329dc5adaac3e01aff143a9943
```

Then, we can import this constant in the `Deferred_Constants` package:

Listing 107: deferred_constants.ads

```
package Deferred_Constants is

   type Speed is new Long_Float;

   Light : constant Speed with
     Import, Convention => C;
   --  ^^^^ deferred constant
   --       declaration; imported
   --       from C file

end Deferred_Constants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Deferred_Constants.Deferred_
 ↪Constant_C
MD5: 9355d194e973c6c6540485178b2259c9
```

In this case, we don't have a full declaration in the `Deferred_Constants` package, as the `Light` constant is imported from the `constants.c` file.

As a rule, the deferred and the full declarations should match — except, of course, for the actual value that is missing in the deferred declaration. For instance, we're not allowed to use different types in both declarations. However, we may use a subtype in the full declaration — as long as it's compatible with the type that was used in the deferred declaration. For example:

Listing 108: deferred_constants.ads

```
package Deferred_Constants is

   type Speed is new Long_Float;

   subtype Positive_Speed is
     Speed range 0.0 .. Speed'Last;

   Light : constant Speed;
   --      ^ deferred constant declaration

private

   Light : constant Positive_Speed :=
             299_792_458.0;
   --      ^ full constant declaration
   --        using a subtype

end Deferred_Constants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Deferred_Constants.Deferred_
 ↪Constant_Subtype
MD5: ad6e13e30bacb6d97ccfa6c7345ffb67
```

Here, we're using the Speed type in the deferred declaration of the Light constant, but we're using the Positive_Speed subtype in the full declaration.

A useful application of deferred constants is when the value of the constant is calculated using entities not meant to be compile-time visible to clients. As such, these other entities are only visible in the private part of the package, so that's where the value of the deferred constant must be computed. For example, the full constant declaration may be computed by a call to an expression function:

Listing 109: deferred_constants.ads

```
1  package Deferred_Constants is
2
3     type Speed is new Long_Float;
4
5     Light : constant Speed;
6     --      ^ deferred constant declaration
7
8  private
9
10    function Calculate_Light return Speed is
11      (299_792_458.0);
12
13    Light : constant Speed := Calculate_Light;
14    --      ^ full constant declaration
15    --        calling a private function
16
17 end Deferred_Constants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Deferred_Constants.Deferred_
 ↪Constant_Function
MD5: f0b1a9521af31a4b48bbd54891f1c32b
```

Here, we call the Calculate_Light function — declared in the private part of the Deferred_Constants package — for the full declaration of the Light constant.

In the Ada Reference Manual

- 7.4 Deferred Constants[56]

25.1.13 User-defined literals

Note

This feature was introduced in Ada 2022.

Any type definition has a kind of literal associated with it. For example, integer types are associated with integer literals. Therefore, we can initialize an object of integer type with an integer literal:

[56] http://www.ada-auth.org/standards/22rm/html/RM-7-4.html

Listing 110: simple_integer_literal.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Simple_Integer_Literal is
   V : Integer;
begin
   V := 10;

   Put_Line (Integer'Image (V));
end Simple_Integer_Literal;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.User_Defined_Literals.Simple_
 ↪Integer_Literal
MD5: 9f65e7c319be2b292dc1fdf02dd7cfb4
```

Runtime output

```
 10
```

Here, `10` is the integer literal that we use to initialize the integer variable V. Other examples of literals are real literals and string literals, as we'll see later.

When we declare an enumeration type, we limit the set of literals that we can use to initialize objects of that type:

Listing 111: simple_enumeration.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Simple_Enumeration is
   type Activation_State is (Unknown, Off, On);

   S : Activation_State;
begin
   S := On;
   Put_Line (Activation_State'Image (S));
end Simple_Enumeration;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.User_Defined_Literals.Simple_
 ↪Enumeration
MD5: 075df146fcb567817dadfdb245659773
```

Runtime output

```
ON
```

For objects of `Activation_State` type, such as S, the only possible literals that we can use are Unknown, `Off` and `On`. In this sense, types have a constrained set of literals that can be used for objects of that type.

User-defined literals allow us to extend this set of literals. We could, for example, extend the type declaration of `Activation_State` and allow the use of integer literals for objects of that type. In this case, we need to use the `Integer_Literal` aspect and specify a function that implements the conversion from literals to the type we're declaring. For this conversion from integer literals to the `Activation_State` type, we could specify that 0 corresponds to `Off`, 1 corresponds to `On` and other values correspond to Unknown. We'll see the corresponding implementation later.

These are the three kinds of literals and their corresponding aspect:

Literal	Example	Aspect
Integer	1	Integer_Literal
Real	1.0	Real_Literal
String	"On"	String_Literal

For our previous Activation_States type, we could declare a function Integer_To_Activation_State that converts integer literals to one of the enumeration literals that we've specified for the Activation_States type:

Listing 112: activation_states.ads

```
package Activation_States is

   type Activation_State is (Unknown, Off, On)
     with Integer_Literal =>
            Integer_To_Activation_State;

   function Integer_To_Activation_State
     (S : String)
      return Activation_State;

end Activation_States;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.User_Defined_Literals.User_Defined_
↪Literals
MD5: 37c497105ea3a5ad67f72955911eb31a
```

Based on this specification, we can now use an integer literal to initialize an object S of Activation_State type:

```
S : Activation_State := 1;
```

Note that we have a string parameter in the declaration of the Integer_To_Activation_State function, even though the function itself is only used to convert integer literals (but not string literals) to the Activation_State type. It's our job to process that string parameter in the implementation of the Integer_To_Activation_State function and convert it to an integer value — using Integer'Value, for example:

Listing 113: activation_states.adb

```
package body Activation_States is

   function Integer_To_Activation_State
     (S : String)
      return Activation_State is
   begin
      case Integer'Value (S) is
         when 0      => return Off;
         when 1      => return On;
         when others => return Unknown;
      end case;
   end Integer_To_Activation_State;

end Activation_States;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.User_Defined_Literals.User_Defined_
 ↪Literals
MD5: c130c42ee2b91e4306c0b49bd6d5d322
```

Let's look at a complete example that makes use of all three kinds of literals:

Listing 114: activation_states.ads

```
package Activation_States is

   type Activation_State is (Unknown, Off, On)
     with String_Literal  =>
            To_Activation_State,
          Integer_Literal =>
            Integer_To_Activation_State,
          Real_Literal    =>
            Real_To_Activation_State;

   function To_Activation_State
     (S : Wide_Wide_String)
      return Activation_State;

   function Integer_To_Activation_State
     (S : String)
      return Activation_State;

   function Real_To_Activation_State
     (S : String)
      return Activation_State;

end Activation_States;
```

Listing 115: activation_states.adb

```
package body Activation_States is

   function To_Activation_State
     (S : Wide_Wide_String)
      return Activation_State
   is
   begin
      if S = "Off" then
         return Off;
      elsif S = "On" then
         return On;
      else
         return Unknown;
      end if;
   end To_Activation_State;

   function Integer_To_Activation_State
     (S : String)
      return Activation_State
   is
   begin
      case Integer'Value (S) is
         when 0      => return Off;
         when 1      => return On;
         when others => return Unknown;
      end case;
   end Integer_To_Activation_State;
```

(continues on next page)

(continued from previous page)

```
28
29    function Real_To_Activation_State
30      (S : String)
31       return Activation_State
32    is
33       V : constant Float := Float'Value (S);
34    begin
35       if V < 0.0 then
36          return Unknown;
37       elsif V < 1.0 then
38          return Off;
39       else
40          return On;
41       end if;
42    end Real_To_Activation_State;
43
44 end Activation_States;
```

Listing 116: activation_examples.adb

```
1  with Ada.Text_IO;       use Ada.Text_IO;
2  with Activation_States; use Activation_States;
3
4  procedure Activation_Examples is
5     S : Activation_State;
6  begin
7     S := "Off";
8     Put_Line ("String: Off  => "
9               & Activation_State'Image (S));
10
11    S := 1;
12    Put_Line ("Integer: 1   => "
13              & Activation_State'Image (S));
14
15    S := 1.5;
16    Put_Line ("Real:    1.5 => "
17              & Activation_State'Image (S));
18 end Activation_Examples;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.User_Defined_Literals.Activation_
 ↪States
MD5: 8b34393e9b624cb5620ca77d5502ec8e
```

Runtime output

```
String: Off  => OFF
Integer: 1   => ON
Real:    1.5 => ON
```

In this example, we're extending the declaration of the `Activation_State` type to include string and real literals. For string literals, we use the `To_Activation_State` function, which converts:

- the `"Off"` string to `Off`,
- the `"On"` string to `On`, and
- any other string to `Unknown`.

For real literals, we use the `Real_To_Activation_State` function, which converts:

- any negative number to Unknown,
- a value in the interval [0, 1) to Off, and
- a value equal or above 1.0 to On.

Note that the string parameter of To_Activation_State function — which converts string literals — is of Wide_Wide_String type, and not of **String** type, as it's the case for the other conversion functions.

In the Activation_Examples procedure, we show how we can initialize an object of Activation_State type with all kinds of literals (string, integer and real literals).

With the definition of the Activation_State type that we've seen in the complete example, we can initialize an object of this type with an enumeration literal or a string, as both forms are defined in the type specification:

Listing 117: using_string_literal.adb

```
with Ada.Text_IO;       use Ada.Text_IO;
with Activation_States; use Activation_States;

procedure Using_String_Literal is
   S1 : constant Activation_State := On;
   S2 : constant Activation_State := "On";
begin
   Put_Line (Activation_State'Image (S1));
   Put_Line (Activation_State'Image (S2));
end Using_String_Literal;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.User_Defined_Literals.Activation_
 ↪States
MD5: 975a3c56e7a938a89a617dc59c5302a7
```

Runtime output

```
ON
ON
```

Note we need to be very careful when designing conversion functions. For example, the use of string literals may limit the kind of checks that we can do. Consider the following misspelling of the Off literal:

Listing 118: misspelling_example.adb

```
with Ada.Text_IO;       use Ada.Text_IO;
with Activation_States; use Activation_States;

procedure Misspelling_Example is
   S : constant Activation_State :=
         Offf;
   --    ^ Error: Off is misspelled.
begin
   Put_Line (Activation_State'Image (S));
end Misspelling_Example;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.User_Defined_Literals.Activation_
 ↪States
MD5: 81a8ff17e0fb8c7dce18780d8c11a6ad
```

Build output

```
misspelling_example.adb:6:10: error: "Offf" is undefined
misspelling_example.adb:6:10: error: possible misspelling of "Off"
gprbuild: *** compilation phase failed
```

As expected, the compiler detects this error. However, this error is accepted when using the corresponding string literal:

Listing 119: misspelling_example.adb

```
with Ada.Text_IO;       use Ada.Text_IO;
with Activation_States; use Activation_States;

procedure Misspelling_Example is
   S : constant Activation_State :=
         "Offf";
   --     ^ Error: Off is misspelled.
begin
   Put_Line (Activation_State'Image (S));
end Misspelling_Example;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.User_Defined_Literals.Activation_
↪States
MD5: 23b708a133ce1e24c0e9f7f72fa2eb29
```

Runtime output

```
UNKNOWN
```

Here, our implementation of `To_Activation_State` simply returns `Unknown`. In some cases, this might be exactly the behavior that we want. However, let's assume that we'd prefer better error handling instead. In this case, we could change the implementation of `To_Activation_State` to check all literals that we want to allow, and indicate an error otherwise — by raising an exception, for example. Alternatively, we could specify this in the preconditions of the conversion function:

```
function To_Activation_State
  (S : Wide_Wide_String)
   return Activation_State
     with Pre => S = "Off"  or
                 S = "On"   or
                 S = "Unknown";
```

In this case, the precondition explicitly indicates which string literals are allowed for the `To_Activation_State` type.

User-defined literals can also be used for more complex types, such as records. For example:

Listing 120: silly_records.ads

```
package Silly_Records is

   type Silly is record
      X : Integer;
      Y : Float;
   end record
     with String_Literal => To_Silly;

```

(continues on next page)

(continued from previous page)

```
   function To_Silly (S : Wide_Wide_String)
                      return Silly;
end Silly_Records;
```

Listing 121: silly_records.adb

```
package body Silly_Records is

   function To_Silly (S : Wide_Wide_String)
                      return Silly
   is
   begin
      if S = "Magic" then
         return (X => 42, Y => 42.0);
      else
         return (X => 0, Y => 0.0);
      end if;
   end To_Silly;

end Silly_Records;
```

Listing 122: silly_magic.adb

```
with Ada.Text_IO;   use Ada.Text_IO;
with Silly_Records; use Silly_Records;

procedure Silly_Magic is
   R1 : Silly;
begin
   R1 := "Magic";
   Put_Line (R1.X'Image & ", " & R1.Y'Image);
end Silly_Magic;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.User_Defined_Literals.Record_
 ↪Literals
MD5: 7395145a41de38dbbee117e27aec8c64
```

Runtime output

```
 42,  4.20000E+01
```

In this example, when we initialize an object of `Silly` type with a string, its components are:

- set to 42 when using the "Magic" string; or
- simply set to zero when using any other string.

Obviously, this example isn't particularly useful. However, the goal is to show that this approach is useful for more complex types where a string literal (or a numeric literal) might simplify handling those types. Used-defined literals let you design types in ways that, otherwise, would only be possible when using a preprocessor or a domain-specific language.

In the Ada Reference Manual

- 4.2.1 User-Defined Literals[57]

[57] http://www.ada-auth.org/standards/22rm/html/RM-4-2-1.html

25.2 Types and Representation

25.2.1 Enumeration Representation Clauses

We have talked about the internal code of an enumeration *in another section* (page 298). We may change this internal code by using a representation clause, which has the following format:

```
for Primary_Color is (Red   =>    1,
                      Green =>    5,
                      Blue  => 1000);
```

The value of each code in a representation clause must be distinct. However, as you can see above, we don't need to use sequential values — the values must, however, increase for each enumeration.

We can rewrite the previous example using a representation clause:

Listing 123: days.ads

```
1  package Days is
2
3     type Day is (Mon, Tue, Wed,
4                  Thu, Fri,
5                  Sat, Sun);
6
7     for Day use (Mon => 2#00000001#,
8                  Tue => 2#00000010#,
9                  Wed => 2#00000100#,
10                 Thu => 2#00001000#,
11                 Fri => 2#00010000#,
12                 Sat => 2#00100000#,
13                 Sun => 2#01000000#);
14
15 end Days;
```

Listing 124: show_days.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2  with Days;        use Days;
3
4  procedure Show_Days is
5  begin
6     for D in Day loop
7        Put_Line (Day'Image (D)
8                  & " position      = "
9                  & Integer'Image (Day'Pos (D)));
10       Put_Line (Day'Image (D)
11                 & " internal code = "
12                 & Integer'Image
13                     (Day'Enum_Rep (D)));
14    end loop;
15 end Show_Days;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Enumeration_
 ↪Representation_Clauses.Enumeration_Values
MD5: a70c3f8a967c355a4bf8f2d669f9c541
```

Runtime output

```
MON position      =  0
MON internal code =  1
TUE position      =  1
TUE internal code =  2
WED position      =  2
WED internal code =  4
THU position      =  3
THU internal code =  8
FRI position      =  4
FRI internal code =  16
SAT position      =  5
SAT internal code =  32
SUN position      =  6
SUN internal code =  64
```

Now, the value of the internal code is the one that we've specified in the representation clause instead of being equivalent to the value of the enumeration position.

In the example above, we're using binary values for each enumeration — basically viewing the integer value as a bit-field and assigning one bit for each enumeration. As long as we maintain an increasing order, we can use totally arbitrary values as well. For example:

Listing 125: days.ads

```
1  package Days is
2
3     type Day is (Mon, Tue, Wed,
4                  Thu, Fri,
5                  Sat, Sun);
6
7     for Day use (Mon =>  5,
8                  Tue =>  9,
9                  Wed => 42,
10                 Thu => 49,
11                 Fri => 50,
12                 Sat => 66,
13                 Sun => 99);
14
15 end Days;
```

25.2.2 Data Representation

The following sections provide a glimpse on attributes and aspects used for data representation. They are usually used for embedded applications because of strict requirements that are often found there. Therefore, unless you have very specific requirements for your application, in most cases, you won't need them. However, you should at least have a rudimentary understanding of them. To read a thorough overview on this topic, please refer to the *Introduction to Embedded Systems Programming* (page 1389) course.

In the Ada Reference Manual

- 13.2 Packed Types[58]
- 13.3 Operational and Representation Attributes[59]
- 13.5.3 Bit Ordering[60]

[58] http://www.ada-auth.org/standards/22rm/html/RM-13-2.html
[59] http://www.ada-auth.org/standards/22rm/html/RM-13-3.html
[60] http://www.ada-auth.org/standards/22rm/html/RM-13-5-3.html

25.2.3 Sizes

Ada offers multiple attributes to retrieve the size of a type or an object:

Attribute	Description
`Size`	Size of the representation of a subtype or an object (in bits).
`Object_Size`	Size of a component or an aliased object (in bits).
`Component_Size`	Size of a component of an array (in bits).
`Storage_Size`	Number of storage elements reserved for an access type or a task object.

For the first three attributes, the size is measured in bits. In the case of `Storage_Size`, the size is measured in storage elements. Note that the size information depends your target architecture. We'll discuss some examples to better understand the differences among those attributes.

Important

A storage element is the smallest element we can use to store data in memory. As we'll see soon, a storage element corresponds to a byte in many architectures.

The size of a storage element is represented by the `System.Storage_Unit` constant. In other words, the storage unit corresponds to the number of bits used for a single storage element.

In typical architectures, `System.Storage_Unit` is 8 bits. In this specific case, a storage element is equal to a byte in memory. Note, however, that `System.Storage_Unit` might have a value different than eight in certain architectures.

Size attribute and aspect

Let's start with a code example using the `Size` attribute:

Listing 126: custom_types.ads

```
1  package Custom_Types is
2
3     type UInt_7 is range 0 .. 127;
4
5     type UInt_7_S32 is range 0 .. 127
6       with Size => 32;
7
8  end Custom_Types;
```

Listing 127: show_sizes.adb

```
1  with Ada.Text_IO;  use Ada.Text_IO;
2
3  with Custom_Types; use Custom_Types;
4
5  procedure Show_Sizes is
6     V1 : UInt_7;
7     V2 : UInt_7_S32;
8  begin
9     Put_Line ("UInt_7'Size:            "
10              & UInt_7'Size'Image);
11    Put_Line ("UInt_7'Object_Size:     "
```

(continues on next page)

(continued from previous page)

```
12             & UInt_7'Object_Size'Image);
13    Put_Line ("V1'Size:                "
14             & V1'Size'Image);
15    New_Line;
16
17    Put_Line ("UInt_7_S32'Size:        "
18             & UInt_7_S32'Size'Image);
19    Put_Line ("UInt_7_S32'Object_Size: "
20             & UInt_7_S32'Object_Size'Image);
21    Put_Line ("V2'Size:                "
22             & V2'Size'Image);
23 end Show_Sizes;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Data_Representation.
 ↪Sizes
MD5: e0da7cd23dc6989bea3d2902221f033e
```

Build output

```
show_sizes.adb:6:04: warning: variable "V1" is read but never assigned [-gnatwv]
show_sizes.adb:7:04: warning: variable "V2" is read but never assigned [-gnatwv]
```

Runtime output

```
UInt_7'Size:             7
UInt_7'Object_Size:      8
V1'Size:                 8

UInt_7_S32'Size:         32
UInt_7_S32'Object_Size:  32
V2'Size:                 32
```

Depending on your target architecture, you may see this output:

```
UInt_7'Size:             7
UInt_7'Object_Size:      8
V1'Size:                 8

UInt_7_S32'Size:         32
UInt_7_S32'Object_Size:  32
V2'Size:                 32
```

When we use the `Size` attribute for a type T, we're retrieving the minimum number of bits necessary to represent objects of that type. Note that this is not the same as the actual size of an object of type T because the compiler will select an object size that is appropriate for the target architecture.

In the example above, the size of the `UInt_7` is 7 bits, while the most appropriate size to store objects of this type in the memory of our target architecture is 8 bits. To be more specific, the range of `UInt_7` (0 .. 127) can be perfectly represented in 7 bits. However, most target architectures don't offer 7-bit registers or 7-bit memory storage, so 8 bits is the most appropriate size in this case.

We can retrieve the size of an object of type T by using the `Object_Size`. Alternatively, we can use the `Size` attribute directly on objects of type T to retrieve their actual size — in our example, we write `V1'Size` to retrieve the size of `V1`.

In the example above, we've used both the `Size` attribute (for example, `UInt_7'Size`) and the `Size` aspect (`with Size => 32`). While the size attribute is a function that returns the size, the size aspect is a request to the compiler to verify that the expected size can be used

on the target platform. You can think of this attribute as a dialog between the developer and the compiler:

> (Developer) "I think that UInt_7_S32 should be stored using at least 32 bits. Do you agree?"
>
> (Ada compiler) "For the target platform that you selected, I can confirm that this is indeed the case."

Depending on the target platform, however, the conversation might play out like this:

> (Developer) "I think that UInt_7_S32 should be stored using at least 32 bits. Do you agree?"
>
> (Ada compiler) "For the target platform that you selected, I cannot possibly do it! COMPILATION ERROR!"

Component size

Let's continue our discussion on sizes with an example that makes use of the Component_Size attribute:

Listing 128: custom_types.ads

```
package Custom_Types is

   type UInt_7 is range 0 .. 127;

   type UInt_7_Array is
     array (Positive range <>) of UInt_7;

   type UInt_7_Array_Comp_32 is
     array (Positive range <>) of UInt_7
       with Component_Size => 32;

end Custom_Types;
```

Listing 129: show_sizes.adb

```
with Ada.Text_IO;  use Ada.Text_IO;

with Custom_Types; use Custom_Types;

procedure Show_Sizes is
   Arr_1 : UInt_7_Array (1 .. 20);
   Arr_2 : UInt_7_Array_Comp_32 (1 .. 20);
begin
   Put_Line
     ("UInt_7_Array'Size:                  "
      & UInt_7_Array'Size'Image);
   Put_Line
     ("UInt_7_Array'Object_Size:           "
      & UInt_7_Array'Object_Size'Image);
   Put_Line
     ("UInt_7_Array'Component_Size:        "
      & UInt_7_Array'Component_Size'Image);
   Put_Line
     ("Arr_1'Component_Size:               "
      & Arr_1'Component_Size'Image);
   Put_Line
     ("Arr_1'Size:                         "
      & Arr_1'Size'Image);
   New_Line;
```

(continues on next page)

(continued from previous page)

```
25
26    Put_Line
27      ("UInt_7_Array_Comp_32'Object_Size:    "
28       & UInt_7_Array_Comp_32'Size'Image);
29    Put_Line
30      ("UInt_7_Array_Comp_32'Object_Size:    "
31       & UInt_7_Array_Comp_32'Object_Size'Image);
32    Put_Line
33      ("UInt_7_Array_Comp_32'Component_Size: "
34       &
35       UInt_7_Array_Comp_32'Component_Size'Image);
36    Put_Line
37      ("Arr_2'Component_Size:                "
38       & Arr_2'Component_Size'Image);
39    Put_Line
40      ("Arr_2'Size:                          "
41       & Arr_2'Size'Image);
42    New_Line;
43 end Show_Sizes;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Data_Representation.
 ↪Sizes
MD5: e316bcb827e014075dfbf044935827ae
```

Build output

```
show_sizes.adb:6:04: warning: variable "Arr_1" is read but never assigned [-gnatwv]
show_sizes.adb:7:04: warning: variable "Arr_2" is read but never assigned [-gnatwv]
```

Runtime output

```
UInt_7_Array'Size:                    17179869176
UInt_7_Array'Object_Size:             17179869176
UInt_7_Array'Component_Size:          8
Arr_1'Component_Size:                 8
Arr_1'Size:                           160

UInt_7_Array_Comp_32'Object_Size:     68719476704
UInt_7_Array_Comp_32'Object_Size:     68719476704
UInt_7_Array_Comp_32'Component_Size:  32
Arr_2'Component_Size:                 32
Arr_2'Size:                           640
```

Depending on your target architecture, you may see this output:

```
UInt_7_Array'Size:                    17179869176
UInt_7_Array'Object_Size:             17179869176
UInt_7_Array'Component_Size:          8
Arr_1'Component_Size:                 8
Arr_1'Size:                           160

UInt_7_Array_Comp_32'Size:            68719476704
UInt_7_Array_Comp_32'Object_Size:     68719476704
UInt_7_Array_Comp_32'Component_Size:  32
Arr_2'Component_Size:                 32
Arr_2'Size:                           640
```

Here, the value we get for `Component_Size` of the `UInt_7_Array` type is 8 bits, which

matches the UInt_7'Object_Size — as we've seen in the previous subsection. In general, we expect the component size to match the object size of the underlying type.

However, we might have component sizes that aren't equal to the object size of the component's type. For example, in the declaration of the UInt_7_Array_Comp_32 type, we're using the Component_Size aspect to query whether the size of each component can be 32 bits:

```
type UInt_7_Array_Comp_32 is
  array (Positive range <>) of UInt_7
    with Component_Size => 32;
```

If the code compiles, we see this value when we use the Component_Size attribute. In this case, even though UInt_7'Object_Size is 8 bits, the component size of the array type (UInt_7_Array_Comp_32'Component_Size) is 32 bits.

Note that we can use the Component_Size attribute with data types, as well as with actual objects of that data type. Therefore, we can write UInt_7_Array'Component_Size and Arr_1'Component_Size, for example.

This big number (17179869176 bits) for UInt_7_Array'Size and UInt_7_Array'Object_Size might be surprising for you. This is due to the fact that Ada is reporting the size of the UInt_7_Array type for the case when the complete range is used. Considering that we specified a positive range in the declaration of the UInt_7_Array type, the maximum length on this machine is 2^{31} - 1. The object size of an array type is calculated by multiplying the maximum length by the component size. Therefore, the object size of the UInt_7_Array type corresponds to the multiplication of 2^{31} - 1 components (maximum length) by 8 bits (component size).

Storage size

To complete our discussion on sizes, let's look at this example of storage sizes:

Listing 130: custom_types.ads

```
1  package Custom_Types is
2
3     type UInt_7 is range 0 .. 127;
4
5     type UInt_7_Access is access UInt_7;
6
7  end Custom_Types;
```

Listing 131: show_sizes.adb

```
1  with Ada.Text_IO;  use Ada.Text_IO;
2  with System;
3
4  with Custom_Types; use Custom_Types;
5
6  procedure Show_Sizes is
7     AV1, AV2 : UInt_7_Access;
8  begin
9     Put_Line
10      ("UInt_7_Access'Storage_Size:          "
11       & UInt_7_Access'Storage_Size'Image);
12    Put_Line
13      ("UInt_7_Access'Storage_Size (bits):   "
14       & Integer'Image (UInt_7_Access'Storage_Size
15                        * System.Storage_Unit));
16
```

(continues on next page)

(continued from previous page)

```
   Put_Line
     ("UInt_7'Size:               "
      & UInt_7'Size'Image);
   Put_Line
     ("UInt_7_Access'Size:        "
      & UInt_7_Access'Size'Image);
   Put_Line
     ("UInt_7_Access'Object_Size: "
      & UInt_7_Access'Object_Size'Image);
   Put_Line
     ("AV1'Size:                  "
      & AV1'Size'Image);
   New_Line;

   Put_Line ("Allocating AV1...");
   AV1 := new UInt_7;
   Put_Line ("Allocating AV2...");
   AV2 := new UInt_7;
   New_Line;

   Put_Line
     ("AV1.all'Size:              "
      & AV1.all'Size'Image);
   New_Line;
end Show_Sizes;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Data_Representation.
 ↪Sizes
MD5: 5e652ee25b8550ac331f3ce98e24f7ba
```

Runtime output

```
UInt_7_Access'Storage_Size:          0
UInt_7_Access'Storage_Size (bits):   0
UInt_7'Size:                 7
UInt_7_Access'Size:          64
UInt_7_Access'Object_Size:   64
AV1'Size:                    64

Allocating AV1...
Allocating AV2...

AV1.all'Size:                8
```

Depending on your target architecture, you may see this output:

```
UInt_7_Access'Storage_Size:          0
UInt_7_Access'Storage_Size (bits):   0

UInt_7'Size:                 7
UInt_7_Access'Size:          64
UInt_7_Access'Object_Size:   64
AV1'Size:                    64

Allocating AV1...
Allocating AV2...

AV1.all'Size:                8
```

As we've mentioned earlier on, `Storage_Size` corresponds to the number of storage elements reserved for an access type or a task object. In this case, we see that the storage size of the `UInt_7_Access` type is zero. This is because we haven't indicated that memory should be reserved for this data type. Thus, the compiler doesn't reserve memory and simply sets the size to zero.

Because `Storage_Size` gives us the number of storage elements, we have to multiply this value by `System.Storage_Unit` to get the total storage size in bits. (In this particular example, however, the multiplication doesn't make any difference, as the number of storage elements is zero.)

Note that the size of our original data type `UInt_7` is 7 bits, while the size of its corresponding access type `UInt_7_Access` (and the access object AV1) is 64 bits. This is due to the fact that the access type doesn't contain an object, but rather memory information about an object. You can retrieve the size of an object allocated via **new** by first dereferencing it — in our example, we do this by writing `AV1.all'Size`.

Now, let's use the `Storage_Size` aspect to actually reserve memory for this data type:

Listing 132: custom_types.ads

```
package Custom_Types is

   type UInt_7 is range 0 .. 127;

   type UInt_7_Reserved_Access is access UInt_7
     with Storage_Size => 8;

end Custom_Types;
```

Listing 133: show_sizes.adb

```
with Ada.Text_IO;  use Ada.Text_IO;
with System;

with Custom_Types; use Custom_Types;

procedure Show_Sizes is
   RAV1, RAV2 : UInt_7_Reserved_Access;
begin
   Put_Line
   ("UInt_7_Reserved_Access'Storage_Size:        "
    & UInt_7_Reserved_Access'Storage_Size'Image);

   Put_Line
   ("UInt_7_Reserved_Access'Storage_Size (bits): "
    & Integer'Image
        (UInt_7_Reserved_Access'Storage_Size
         * System.Storage_Unit));

   Put_Line
     ("UInt_7_Reserved_Access'Size:        "
      & UInt_7_Reserved_Access'Size'Image);
   Put_Line
     ("UInt_7_Reserved_Access'Object_Size: "
      & UInt_7_Reserved_Access'Object_Size'Image);
   Put_Line
     ("RAV1'Size:                          "
      & RAV1'Size'Image);
   New_Line;

   Put_Line ("Allocating RAV1...");
```

(continues on next page)

(continued from previous page)

```
31    RAV1 := new UInt_7;
32    Put_Line ("Allocating RAV2...");
33    RAV2 := new UInt_7;
34    New_Line;
35 end Show_Sizes;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Data_Representation.
 ↪Sizes
MD5: 6ac085d8467a61ba4f9cd138c024442d
```

Runtime output

```
UInt_7_Reserved_Access'Storage_Size:         8
UInt_7_Reserved_Access'Storage_Size (bits):  64
UInt_7_Reserved_Access'Size:         64
UInt_7_Reserved_Access'Object_Size:  64
RAV1'Size:                           64

Allocating RAV1...
Allocating RAV2...

raised STORAGE_ERROR : s-poosiz.adb:108 explicit raise
```

Depending on your target architecture, you may see this output:

```
UInt_7_Reserved_Access'Storage_Size:         8
UInt_7_Reserved_Access'Storage_Size (bits):  64

UInt_7_Reserved_Access'Size:         64
UInt_7_Reserved_Access'Object_Size:  64
RAV1'Size:                           64

Allocating RAV1...
Allocating RAV2...

raised STORAGE_ERROR : s-poosiz.adb:108 explicit raise
```

In this case, we're reserving 8 storage elements in the declaration of `UInt_7_Reserved_Access`.

```
type UInt_7_Reserved_Access is access UInt_7
  with Storage_Size => 8;
```

Since each storage element corresponds to one byte (8 bits) in this architecture, we're reserving a maximum of 64 bits (or 8 bytes) for the `UInt_7_Reserved_Access` type.

This example raises an exception at runtime — a storage error, to be more specific. This is because the maximum reserved size is 64 bits, and the size of a single access object is 64 bits as well. Therefore, after the first allocation, the reserved storage space is already consumed, so we cannot allocate a second access object.

This behavior might be quite limiting in many cases. However, for certain applications where memory is very constrained, this might be exactly what we want to see. For example, having an exception being raised when the allocated memory for this data type has reached its limit might allow the application to have enough memory to at least handle the exception gracefully.

25.2.4 Alignment

For many algorithms, it's important to ensure that we're using the appropriate alignment. This can be done by using the `Alignment` attribute and the `Alignment` aspect. Let's look at this example:

Listing 134: custom_types.ads

```
package Custom_Types is

   type UInt_7 is range 0 .. 127;

   type Aligned_UInt_7 is new UInt_7
     with Alignment => 4;

end Custom_Types;
```

Listing 135: show_alignment.adb

```
with Ada.Text_IO;  use Ada.Text_IO;

with Custom_Types; use Custom_Types;

procedure Show_Alignment is
   V         : constant UInt_7         := 0;
   Aligned_V : constant Aligned_UInt_7 := 0;
begin
   Put_Line
     ("UInt_7'Alignment:           "
      & UInt_7'Alignment'Image);
   Put_Line
     ("UInt_7'Size:                "
      & UInt_7'Size'Image);
   Put_Line
     ("UInt_7'Object_Size:         "
      & UInt_7'Object_Size'Image);
   Put_Line
     ("V'Alignment:                "
      & V'Alignment'Image);
   Put_Line
     ("V'Size:                     "
      & V'Size'Image);
   New_Line;

   Put_Line
     ("Aligned_UInt_7'Alignment:   "
      & Aligned_UInt_7'Alignment'Image);
   Put_Line
     ("Aligned_UInt_7'Size:        "
      & Aligned_UInt_7'Size'Image);
   Put_Line
     ("Aligned_UInt_7'Object_Size: "
      & Aligned_UInt_7'Object_Size'Image);
   Put_Line
     ("Aligned_V'Alignment:        "
      & Aligned_V'Alignment'Image);
   Put_Line
     ("Aligned_V'Size:             "
      & Aligned_V'Size'Image);
   New_Line;
end Show_Alignment;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Data_Representation.
 ↪Alignment
MD5: a2fea340559193c293ccaee226de2558
```

Runtime output

```
UInt_7'Alignment:            1
UInt_7'Size:                 7
UInt_7'Object_Size:          8
V'Alignment:                 1
V'Size:                      8

Aligned_UInt_7'Alignment:    4
Aligned_UInt_7'Size:         7
Aligned_UInt_7'Object_Size:  32
Aligned_V'Alignment:         4
Aligned_V'Size:              32
```

Depending on your target architecture, you may see this output:

```
UInt_7'Alignment:            1
UInt_7'Size:                 7
UInt_7'Object_Size:          8
V'Alignment:                 1
V'Size:                      8

Aligned_UInt_7'Alignment:    4
Aligned_UInt_7'Size:         7
Aligned_UInt_7'Object_Size:  32
Aligned_V'Alignment:         4
Aligned_V'Size:              32
```

In this example, we're reusing the `UInt_7` type that we've already been using in previous examples. Because we haven't specified any alignment for the `UInt_7` type, it has an alignment of 1 storage unit (or 8 bits). However, in the declaration of the `Aligned_UInt_7` type, we're using the `Alignment` aspect to request an alignment of 4 storage units (or 32 bits):

```
type Aligned_UInt_7 is new UInt_7
  with Alignment => 4;
```

When using the `Alignment` attribute for the `Aligned_UInt_7` type, we can confirm that its alignment is indeed 4 storage units (bytes).

Note that we can use the `Alignment` attribute for both data types and objects — in the code above, we're using `UInt_7'Alignment` and `V'Alignment`, for example.

Because of the alignment we're specifying for the `Aligned_UInt_7` type, its size — indicated by the `Object_Size` attribute — is 32 bits instead of 8 bits as for the `UInt_7` type.

Note that you can also retrieve the alignment associated with a class using `S'Class'Alignment`. For example:

Listing 136: show_class_alignment.adb

```
1 with Ada.Text_IO; use Ada.Text_IO;
2
3 procedure Show_Class_Alignment is
4
5    type Point_1D is tagged record
6       X : Integer;
```

(continues on next page)

(continued from previous page)

```
   end record;

   type Point_2D is new Point_1D with record
      Y : Integer;
   end record
     with Alignment => 16;

   type Point_3D is new Point_2D with record
      Z : Integer;
   end record;

begin
   Put_Line ("1D_Point'Alignment:       "
             & Point_1D'Alignment'Image);
   Put_Line ("1D_Point'Class'Alignment: "
             & Point_1D'Class'Alignment'Image);
   Put_Line ("2D_Point'Alignment:       "
             & Point_2D'Alignment'Image);
   Put_Line ("2D_Point'Class'Alignment: "
             & Point_2D'Class'Alignment'Image);
   Put_Line ("3D_Point'Alignment:       "
             & Point_3D'Alignment'Image);
   Put_Line ("3D_Point'Class'Alignment: "
             & Point_3D'Class'Alignment'Image);
end Show_Class_Alignment;
```

25.2.5 Overlapping Storage

Algorithms can be designed to perform in-place or out-of-place processing. In other words, they can take advantage of the fact that input and output arrays share the same storage space or not.

We can use the `Has_Same_Storage` and the `Overlaps_Storage` attributes to retrieve more information about how the storage space of two objects related to each other:

- the `Has_Same_Storage` attribute indicates whether two objects have the exact same storage.
  - A typical example is when both objects are exactly the same, so they obviously share the same storage. For example, for array `A`, `A'Has_Same_Storage (A)` is always `True`.
- the `Overlaps_Storage` attribute indicates whether two objects have at least one bit in common.
  - Note that, if two objects have the same storage, this implies that their storage also overlaps. In other words, `A'Has_Same_Storage (B) = True` implies that `A'Overlaps_Storage (B) = True`.

Let's look at this example:

Listing 137: int_array_processing.ads

```
package Int_Array_Processing is

   type Int_Array is
     array (Positive range <>) of Integer;

   procedure Show_Storage (X : Int_Array;
                           Y : Int_Array);

```

(continues on next page)

(continued from previous page)

```
   procedure Process (X :     Int_Array;
                      Y : out Int_Array);

end Int_Array_Processing;
```

Listing 138: int_array_processing.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Int_Array_Processing is

   procedure Show_Storage (X : Int_Array;
                           Y : Int_Array) is
   begin
      if X'Has_Same_Storage (Y) then
         Put_Line
         ("Info: X and Y have the same storage.");
      else
         Put_Line
           ("Info: X and Y don't have"
            & "the same storage.");
      end if;
      if X'Overlaps_Storage (Y) then
         Put_Line
           ("Info: X and Y overlap.");
      else
         Put_Line
           ("Info: X and Y don't overlap.");
      end if;
   end Show_Storage;

   procedure Process (X :     Int_Array;
                      Y : out Int_Array) is
   begin
      Put_Line ("==== PROCESS ====");
      Show_Storage (X, Y);

      if X'Has_Same_Storage (Y) then
         Put_Line ("In-place processing...");
      else
         if not X'Overlaps_Storage (Y) then
            Put_Line
              ("Out-of-place processing...");
         else
            Put_Line
              ("Cannot process "
               & "overlapping arrays...");
         end if;
      end if;
      New_Line;
   end Process;

end Int_Array_Processing;
```

Listing 139: main.adb

```
with Int_Array_Processing;
use  Int_Array_Processing;

procedure Main is
```

(continues on next page)

(continued from previous page)

```
   A : Int_Array (1 .. 20) := (others => 3);
   B : Int_Array (1 .. 20) := (others => 4);
begin
   Process (A, A);
   --  In-place processing:
   --  sharing the exact same storage

   Process (A (1 .. 10), A (10 .. 20));
   --  Overlapping one component: A (10)

   Process (A (1 .. 10), A (11 .. 20));
   --  Out-of-place processing:
   --  same array, but not sharing any storage

   Process (A, B);
   --  Out-of-place processing:
   --  two different arrays
end Main;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Data_Representation.
 ↪Overlapping_Storage
MD5: 0f599163c6f24c3ef46ec6577b501c21
```

Build output

```
int_array_processing.adb:29:24: warning: "Y" may be referenced before it has a␣
 ↪value [enabled by default]
```

Runtime output

```
==== PROCESS ====
Info: X and Y have the same storage.
Info: X and Y overlap.
In-place processing...

==== PROCESS ====
Info: X and Y don't havethe same storage.
Info: X and Y overlap.
Cannot process overlapping arrays...

==== PROCESS ====
Info: X and Y don't havethe same storage.
Info: X and Y don't overlap.
Out-of-place processing...

==== PROCESS ====
Info: X and Y don't havethe same storage.
Info: X and Y don't overlap.
Out-of-place processing...
```

In this code example, we implement two procedures:

- `Show_Storage`, which shows storage information about two arrays by using the `Has_Same_Storage` and `Overlaps_Storage` attributes.
- `Process`, which are supposed to process an input array `X` and store the processed data in the output array `Y`.
  - Note that the implementation of this procedure is actually just a mock-up, so that no processing is actually taking place.

We have four different instances of how we can call the `Process` procedure:

- in the `Process (A, A)` call, we're using the same array for the input and output arrays. This is a perfect example of in-place processing. Because the input and the output arrays arguments are actually the same object, they obviously share the exact same storage.
- in the `Process (A (1 .. 10), A (10 .. 20))` call, we're using two slices of the `A` array as input and output arguments. In this case, a single component of the `A` array is shared: `A (10)`. Because the storage space is overlapping, but not exactly the same, neither in-place nor out-of-place processing can usually be used in this case.
- in the `Process (A (1 .. 10), A (11 .. 20))` call, even though we're using the same array `A` for the input and output arguments, we're using slices that are completely independent from each other, so that the input and output arrays are not sharing any storage in this case. Therefore, we can use out-of-place processing.
- in the `Process (A, B)` call, we have two different arrays — which obviously don't share any storage space —, so we can use out-of-place processing.

25.2.6 Packed Representation

As we've seen previously, the minimum number of bits required to represent a data type might be less than the actual number of bits used to store an object of that same type. We've seen an example where `UInt_7'Size` was 7 bits, while `UInt_7'Object_Size` was 8 bits. The most extreme case is the one for the **`Boolean`** type: in this case, **`Boolean`**`'Size` is 1 bit, while **`Boolean`**`'Object_Size` might be 8 bits (or even more on certain architectures). In such cases, we have 7 (or more) unused bits in memory for each object of **`Boolean`** type. In other words, we're wasting memory. On the other hand, we're gaining speed of access because we can directly access each element without having to first change its internal representation back and forth. We'll come back to this point later.

The situation is even worse when implementing bit-fields, which can be declared as an array of **`Boolean`** components. For example:

Listing 140: flag_definitions.ads

```
package Flag_Definitions is

   type Flags is
     array (Positive range <>) of Boolean;

end Flag_Definitions;
```

Listing 141: show_flags.adb

```
with Ada.Text_IO;      use Ada.Text_IO;
with Flag_Definitions; use Flag_Definitions;

procedure Show_Flags is
   Flags_1 : Flags (1 .. 8);
begin
   Put_Line ("Boolean'Size:           "
             & Boolean'Size'Image);
   Put_Line ("Boolean'Object_Size:    "
             & Boolean'Object_Size'Image);
   Put_Line ("Flags_1'Size:           "
             & Flags_1'Size'Image);
   Put_Line ("Flags_1'Component_Size: "
             & Flags_1'Component_Size'Image);
end Show_Flags;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Data_Representation.
 ↪Non_Packed_Flags
MD5: 6fd7a913e3c6717e846c2e822c1cbad7
```

Build output

```
show_flags.adb:5:04: warning: variable "Flags_1" is read but never assigned [-
 ↪gnatwv]
```

Runtime output

```
Boolean'Size:            1
Boolean'Object_Size:     8
Flags_1'Size:            64
Flags_1'Component_Size:  8
```

Depending on your target architecture, you may see this output:

```
Boolean'Size:            1
Boolean'Object_Size:     8
Flags_1'Size:            64
Flags_1'Component_Size:  8
```

In this example, we're declaring the Flags type as an array of **Boolean** components. As we can see in this case, although the size of the **Boolean** type is just 1 bit, an object of this type has a size of 8 bits. Consequently, each component of the Flags type has a size of 8 bits. Moreover, an array with 8 components of **Boolean** type — such as the Flags_1 array — has a size of 64 bits.

Therefore, having a way to compact the representation — so that we can store multiple objects without wasting storage space — may help us improving memory usage. This is actually possible by using the Pack aspect. For example, we could extend the previous example and declare a Packed_Flags type that makes use of this aspect:

Listing 142: flag_definitions.ads

```
1  package Flag_Definitions is
2
3     type Flags is
4       array (Positive range <>) of Boolean;
5
6     type Packed_Flags is
7       array (Positive range <>) of Boolean
8         with Pack;
9
10 end Flag_Definitions;
```

Listing 143: show_packed_flags.adb

```
1  with Ada.Text_IO;      use Ada.Text_IO;
2  with Flag_Definitions; use Flag_Definitions;
3
4  procedure Show_Packed_Flags is
5     Flags_1 : Flags (1 .. 8);
6     Flags_2 : Packed_Flags (1 .. 8);
7  begin
8     Put_Line ("Boolean'Size:           "
9               & Boolean'Size'Image);
10    Put_Line ("Boolean'Object_Size:    "
11              & Boolean'Object_Size'Image);
```

(continues on next page)

(continued from previous page)

```
12    Put_Line ("Flags_1'Size:           "
13              & Flags_1'Size'Image);
14    Put_Line ("Flags_1'Component_Size: "
15              & Flags_1'Component_Size'Image);
16    Put_Line ("Flags_2'Size:           "
17              & Flags_2'Size'Image);
18    Put_Line ("Flags_2'Component_Size: "
19              & Flags_2'Component_Size'Image);
20 end Show_Packed_Flags;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Data_Representation.
 ↪Packed_Flags
MD5: c71cf68dc8bc41d0df2a5e3eb61b51fd
```

Build output

```
show_packed_flags.adb:5:04: warning: variable "Flags_1" is read but never assigned␣
 ↪[-gnatwv]
show_packed_flags.adb:6:04: warning: variable "Flags_2" is read but never assigned␣
 ↪[-gnatwv]
```

Runtime output

```
Boolean'Size:            1
Boolean'Object_Size:     8
Flags_1'Size:            64
Flags_1'Component_Size:  8
Flags_2'Size:            8
Flags_2'Component_Size:  1
```

Depending on your target architecture, you may see this output:

```
Boolean'Size:            1
Boolean'Object_Size:     8
Flags_1'Size:            64
Flags_1'Component_Size:  8
Flags_2'Size:            8
Flags_2'Component_Size:  1
```

In this example, we're declaring the `Flags_2` array of `Packed_Flags` type. Its size is 8 bits — instead of the 64 bits required for the `Flags_1` array. Because the array type `Packed_Flags` is packed, we can now effectively use this type to store an object of **`Boolean`** type using just 1 bit of the memory, as indicated by the `Flags_2'Component_Size` attribute.

In many cases, we need to convert between a *normal* representation (such as the one used for the `Flags_1` array above) to a packed representation (such as the one for the `Flags_2` array). In many programming languages, this conversion may require writing custom code with manual bit-shifting and bit-masking to get the proper target representation. In Ada, however, we just need to indicate the actual type conversion, and the compiler takes care of generating code containing bit-shifting and bit-masking to performs the type conversion.

Let's modify the previous example and introduce this type conversion:

Listing 144: flag_definitions.ads

```
1  package Flag_Definitions is
2
3     type Flags is
4       array (Positive range <>) of Boolean;
```

(continues on next page)

(continued from previous page)

```
5
6     type Packed_Flags is
7       array (Positive range <>) of Boolean
8         with Pack;
9
10    Default_Flags : constant Flags :=
11      (True, True, False, True,
12       False, False, True, True);
13
14 end Flag_Definitions;
```

Listing 145: show_flag_conversion.adb

```
1  with Ada.Text_IO;      use Ada.Text_IO;
2  with Flag_Definitions; use Flag_Definitions;
3
4  procedure Show_Flag_Conversion is
5     Flags_1 : Flags (1 .. 8);
6     Flags_2 : Packed_Flags (1 .. 8);
7  begin
8     Flags_1 := Default_Flags;
9     Flags_2 := Packed_Flags (Flags_1);
10
11    for I in Flags_2'Range loop
12       Put_Line (I'Image & ": "
13                 & Flags_1 (I)'Image & ", "
14                 & Flags_2 (I)'Image);
15    end loop;
16 end Show_Flag_Conversion;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Data_Representation.
↪Flag_Conversion
MD5: faff2079f6779097b6e0f7cd6cd48612
```

Runtime output

```
 1: TRUE, TRUE
 2: TRUE, TRUE
 3: FALSE, FALSE
 4: TRUE, TRUE
 5: FALSE, FALSE
 6: FALSE, FALSE
 7: TRUE, TRUE
 8: TRUE, TRUE
```

In this extended example, we're now declaring `Default_Flags` as an array of constant flags, which we use to initialize `Flags_1`.

The actual conversion happens with `Flags_2 := Packed_Flags (Flags_1)`. Here, the type conversion `Packed_Flags()` indicates that we're converting from the normal representation (used for the `Flags` type) to the packed representation (used for `Packed_Flags` type). We don't need to write more code than that to perform the correct type conversion.

Also, by using the same strategy, we could read information from a packed representation. For example:

```
Flags_1 := Flags (Flags_2);
```

In this case, we use `Flags()` to convert from a packed representation to the normal representation.

We elaborate on the topic of converting between data representations in the section on *changing data representation* (page 378).

Trade-offs

As indicated previously, when we're using a packed representation (vs. using a standard *unpacked* representation), we're trading off speed of access for less memory consumption. The following table summarizes this:

Representation	More speed of access	Less memory consumption
Unpacked	X	
Packed		X

On one hand, we have better memory usage when we apply packed representations because we may save many bits for each object. On the other hand, there's a cost associated with accessing those packed objects because they need to be unpacked before we can actually access them. In fact, the compiler generates code — using bit-shifting and bit-masking — that converts a packed representation into an unpacked representation, which we can then access. Also, when storing a packed object, the compiler generates code that converts the unpacked representation of the object into the packed representation.

This packing and unpacking mechanism has a performance cost associated with it, which results in less speed of access for packed objects. As usual in those circumstances, before using packed representation, we should assess whether memory constraints are more important than speed in our target architecture.

25.2.7 Record Representation and storage clauses

In this section, we discuss how to use record representation clauses to specify how a record is represented in memory. Our goal is to provide a brief introduction into the topic. If you're interested in more details, you can find a thorough discussion about record representation clauses in the *Introduction to Embedded Systems Programming* (page 1389) course.

Let's start with the simple approach of declaring a record type without providing further information. In this case, we're basically asking the compiler to select a reasonable representation for that record in the memory of our target architecture.

Let's see a simple example:

Listing 146: p.ads

```
1  package P is
2
3     type R is record
4        A : Integer;
5        B : Integer;
6     end record;
7
8  end P;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Record_Representation_
 ↪Storage_Clauses.Rep_Clauses_1
MD5: 88171257118810bb7e02cea60ffb1ad9
```

Considering a typical 64-bit PC architecture with 8-bit storage units, and `Integer` defined as a 32-bit type, we get this memory representation:

position	0	1	2	3	4	5	6	7
component	A				B			

Each storage unit is a position in memory. In the graph above, the numbers on the top (0, 1, 2, ...) represent those positions for record R.

In addition, we can show the bits that are used for components A and B:

position	0	1	2	3	4	5	6	7
bits	#0 .. 7	#8 .. #15	#16 .. #23	#24 .. #31	#0 .. 7	#8 .. #15	#16 .. #23	#24 .. #31
component	A				B			

The memory representation we see in the graph above can be described in Ada using representation clauses, as you can see in the code starting at the `for R use record` line in the code example below — we'll discuss the syntax and further details right after this example.

Listing 147: p.ads

```
package P is

   type R is record
      A : Integer;
      B : Integer;
   end record;

   --  Representation clause for record R:
   for R use record
      A at 0 range 0 .. 31;
      --   ^ starting memory position
      B at 4 range 0 .. 31;
      --           ^ first bit .. last bit
   end record;

end P;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Record_Representation_
 ↪Storage_Clauses.Rep_Clauses_2
MD5: b6be86ae7e1a5c2e7d981fe37bad49ed
```

Here, we're specifying that the A component is stored in the bits #0 up to #31 starting at position #0. Note that the position itself doesn't represent an absolute address in the device's memory; instead, it's relative to the memory space reserved for that record. The B component has the same 32-bit range, but starts at position #4.

This is a generalized view of the syntax:

```
for Record_Type use record
   Component_Name at Start_Position
```

(continues on next page)

(continued from previous page)

```
                  range First_Bit .. Last_Bit;
end record;
```

These are the elements we see above:

- `Component_Name`: name of the component (from the record type declaration);
- `Start_Position`: start position — in storage units — of the memory space reserved for that component;
- `First_Bit`: first bit (in the start position) of the component;
- `Last_Bit`: last bit of the component.

Note that the last bit of a component might be in a different storage unit. Since the `Integer` type has a larger width (32 bits) than the storage unit (8 bits), components of that type span over multiple storage units. Therefore, in our example, the first bit of component A is at position #0, while the last bit is at position #3.

Also note that the last eight bits of component A are bits #24 .. #31. If we think in terms of storage units, this corresponds to bits #0 .. #7 of position #3. However, when specifying the last bit in Ada, we always use the `First_Bit` value as a reference, not the position where those bits might end up. Therefore, we write `range 0 .. 31`, well knowing that those 32 bits span over four storage units (positions #0 .. #3).

In the Ada Reference Manual

- 13.5.1 Record Representation Clauses[61]

Storage Place Attributes

We can retrieve information about the start position, and the first and last bits of a component by using the storage place attributes:

- `Position`, which retrieves the start position of a component;
- `First_Bit`, which retrieves the first bit of a component;
- `Last_Bit`, which retrieves the last bit of a component.

Note, however, that these attributes can only be used with actual records, and not with record types.

We can revisit the previous example and verify how the compiler represents the R type in memory:

Listing 148: p.ads

```
1  package P is
2
3     type R is record
4        A : Integer;
5        B : Integer;
6     end record;
7
8  end P;
```

[61] http://www.ada-auth.org/standards/22rm/html/RM-13-5-1.html

Listing 149: show_storage.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with System;

with P;           use P;

procedure Show_Storage is
   R1 : R;
begin
   Put_Line ("R'Size:              "
             & R'Size'Image);
   Put_Line ("R'Object_Size:       "
             & R'Object_Size'Image);
   New_Line;

   Put_Line ("System.Storage_Unit: "
             & System.Storage_Unit'Image);
   New_Line;

   Put_Line ("R1.A'Position  : "
             & R1.A'Position'Image);
   Put_Line ("R1.A'First_Bit : "
             & R1.A'First_Bit'Image);
   Put_Line ("R1.A'Last_Bit  : "
             & R1.A'Last_Bit'Image);
   New_Line;

   Put_Line ("R1.B'Position  : "
             & R1.B'Position'Image);
   Put_Line ("R1.B'First_Bit : "
             & R1.B'First_Bit'Image);
   Put_Line ("R1.B'Last_Bit  : "
             & R1.B'Last_Bit'Image);
end Show_Storage;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Record_Representation_
 ↪Storage_Clauses.Storage_Place_Attributes
MD5: 05a402585ce71eb47cf972e68c02835e
```

Build output

```
show_storage.adb:7:04: warning: variable "R1" is read but never assigned [-gnatwv]
```

Runtime output

```
R'Size:              64
R'Object_Size:       64

System.Storage_Unit:  8

R1.A'Position  :  0
R1.A'First_Bit :  0
R1.A'Last_Bit  :  31

R1.B'Position  :  4
R1.B'First_Bit :  0
R1.B'Last_Bit  :  31
```

First of all, we see that the size of the R type is 64 bits, which can be explained by those

two 32-bit integer components. Then, we see that components A and B start at positions #0 and #4, and each one makes use of bits in the range from #0 to #31. This matches the graph we've seen above.

In the Ada Reference Manual

- 13.5.2 Storage Place Attributes[62]

Using Representation Clauses

We can use representation clauses to change the way the compiler handles memory for a record type. For example, let's say we want to have an empty storage unit between components A and B. We can use a representation clause where we specify that component B starts at position #5 instead of #4, leaving an empty byte after component A and before component B:

position	0	1	2	3	4	5	6	7	8
bits	#0 .. 7	#8 .. #15	#16 .. #23	#24 .. #31		#0 .. 7	#8 .. #15	#16 .. #23	#24 .. #31
component	A					B			

This is the code that implements that:

Listing 150: p.ads

```
package P is

   type R is record
      A : Integer;
      B : Integer;
   end record;

   for R use record
      A at 0 range 0 .. 31;
      B at 5 range 0 .. 31;
   end record;

end P;
```

Listing 151: show_empty_byte.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with P;           use P;

procedure Show_Empty_Byte is
begin
   Put_Line ("R'Size:        "
             & R'Size'Image);
   Put_Line ("R'Object_Size: "
             & R'Object_Size'Image);
end Show_Empty_Byte;
```

Code block metadata

[62] http://www.ada-auth.org/standards/22rm/html/RM-13-5-2.html

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Record_Representation_
 ↪Storage_Clauses.Rep_Clauses_Empty_Byte
MD5: c616e534e95a06f2e8b3052a3e8a9aab
```

Runtime output

```
R'Size:         72
R'Object_Size:  96
```

When running the application above, we see that, due to the extra byte in the record representation, the sizes increase. On a typical 64-bit PC, R'Size is now 76 bits, which reflects the additional eight bits that we introduced between components A and B. Depending on the target architecture, you may also see that R'Object_Size is now 96 bits, which is the size the compiler selects as the most appropriate for this record type. As we've mentioned in the previous section, we can use aspects to request a specific size to the compiler. In this case, we could use the Object_Size aspect:

Listing 152: p.ads

```
1  package P is
2
3     type R is record
4        A : Integer;
5        B : Integer;
6     end record
7       with Object_Size => 72;
8
9     for R use record
10       A at 0 range 0 .. 31;
11       B at 5 range 0 .. 31;
12    end record;
13
14 end P;
```

Listing 153: show_empty_byte.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  with P;           use P;
4
5  procedure Show_Empty_Byte is
6  begin
7     Put_Line ("R'Size:        "
8               & R'Size'Image);
9     Put_Line ("R'Object_Size: "
10              & R'Object_Size'Image);
11 end Show_Empty_Byte;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Record_Representation_
 ↪Storage_Clauses.Rep_Clauses_Empty_Byte
MD5: 9d7bae2b2aabeda4bc03752544cee9b9
```

Runtime output

```
R'Size:         72
R'Object_Size:  72
```

If the code compiles, R'Size and R'Object_Size should now have the same value.

Derived Types And Representation Clauses

In some cases, you might want to modify the memory representation of a record without impacting existing code. For example, you might want to use a record type that was declared in a package that you're not allowed to change. Also, you would like to modify its memory representation in your application. A nice strategy is to derive a type and use a representation clause for the derived type.

We can apply this strategy on our previous example. Let's say we would like to use record type R from package P in our application, but we're not allowed to modify package P — or the record type, for that matter. In this case, we could simply derive R as R_New and use a representation clause for R_New. This is exactly what we do in the specification of the child package P.Rep:

Listing 154: p.ads

```
package P is

   type R is record
      A : Integer;
      B : Integer;
   end record;

end P;
```

Listing 155: p-rep.ads

```
package P.Rep is

   type R_New is new R
     with Object_Size => 72;

   for R_New use record
      A at 0 range 0 .. 31;
      B at 5 range 0 .. 31;
   end record;

end P.Rep;
```

Listing 156: show_empty_byte.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with P;           use P;
with P.Rep;       use P.Rep;

procedure Show_Empty_Byte is
begin
   Put_Line ("R'Size:        "
             & R'Size'Image);
   Put_Line ("R'Object_Size: "
             & R'Object_Size'Image);

   Put_Line ("R_New'Size:        "
             & R_New'Size'Image);
   Put_Line ("R_New'Object_Size: "
             & R_New'Object_Size'Image);
end Show_Empty_Byte;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Record_Representation_
 ↪Storage_Clauses.Derived_Rep_Clauses_Empty_Byte
MD5: 3a1e0837f8bd8250f20fc7b274b869d5
```

Runtime output

```
R'Size:         64
R'Object_Size:  64
R_New'Size:         72
R_New'Object_Size:  72
```

When running this example, we see that the R type retains the memory representation selected by the compiler for the target architecture, while the R_New has the memory representation that we specified.

Representation on Bit Level

A very common application of representation clauses is to specify individual bits of a record. This is particularly useful, for example, when mapping registers or implementing protocols.

Let's consider the following fictitious register as an example:

bit	0	1	2	3	4	5	6	7
component	S		(reserved)		Error	V1		

Here, S is the current status, `Error` is a flag, and V1 contains a value. Due to the fact that we can use representation clauses to describe individual bits of a register as records, the implementation becomes as simple as this:

Listing 157: p.ads

```
1  package P is
2
3    type Status is (Ready, Waiting,
4                    Processing, Done);
5    type UInt_3 is range 0 .. 2 ** 3 - 1;
6
7     type Simple_Reg is record
8        S     : Status;
9        Error : Boolean;
10       V1    : UInt_3;
11    end record;
12
13    for Simple_Reg use record
14       S     at 0 range 0 .. 1;
15       --  Bit #2 and 3: reserved!
16       Error at 0 range 4 .. 4;
17       V1    at 0 range 5 .. 7;
18    end record;
19
20 end P;
```

Listing 158: show_simple_reg.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with P;           use P;

procedure Show_Simple_Reg is
begin
   Put_Line ("Simple_Reg'Size:        "
             & Simple_Reg'Size'Image);
   Put_Line ("Simple_Reg'Object_Size: "
             & Simple_Reg'Object_Size'Image);
end Show_Simple_Reg;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Record_Representation_
 ↪Storage_Clauses.Rep_Clauses_Simple_Reg
MD5: cbac444336572460062f922767c226a5
```

Runtime output

```
Simple_Reg'Size:         8
Simple_Reg'Object_Size:  8
```

As we can see in the declaration of the `Simple_Reg` type, each component represents a field from our register, and it has a fixed location (which matches the register representation we see in the graph above). Any operation on the register is as simple as accessing the record component. For example:

Listing 159: show_simple_reg.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with P;           use P;

procedure Show_Simple_Reg is
   Default : constant Simple_Reg :=
               (S     => Ready,
                Error => False,
                V1    => 0);

   R : Simple_Reg := Default;
begin
   Put_Line ("R.S:  " & R.S'Image);

   R.V1 := 4;

   Put_Line ("R.V1: " & R.V1'Image);
end Show_Simple_Reg;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Record_Representation_
 ↪Storage_Clauses.Rep_Clauses_Simple_Reg
MD5: e442396e43d6609c1c837165bbc21641
```

Runtime output

```
R.S:  READY
R.V1:  4
```

As we can see in the example, to retrieve the current status of the register, we just have to write `R.S`. To update the *V1* field of the register with the value 4, we just have to write `R.V1 := 4`. No extra code — such as bit-masking or bit-shifting — is needed here.

In other languages

Some programming languages require that developers use complicated, error-prone approaches — which may include manually bit-shifting and bit-masking variables — to retrieve information from or store information to individual bits or registers. In Ada, however, this is efficiently handled by the compiler, so that developers only need to correctly describe the register mapping using representation clauses.

25.2.8 Changing Data Representation

Note

This section was originally written by Robert Dewar and published as Gem #27: Changing Data Representation[63] and Gem #28[64].

A powerful feature of Ada is the ability to specify the exact data layout. This is particularly important when you have an external device or program that requires a very specific format. Some examples are:

Listing 160: communication.ads

```
package Communication is

   type Com_Packet is record
      Key : Boolean;
      Id  : Character;
      Val : Integer range 100 .. 227;
   end record;

   for Com_Packet use record
      Key at 0 range 0 .. 0;
      Id  at 0 range 1 .. 8;
      Val at 0 range 9 .. 15;
   end record;

end Communication;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Changing_Data_
 ↪Representation.Com_Packet
MD5: cbd7f5547c5b0458853ac21d03aa41f8
```

Build output

```
communication.ads:12:11: warning: component clause forces biased representation␣
 ↪for "Val" [-gnatw.b]
```

which lays out the fields of a record, and in the case of `Val`, forces a biased representation in which all zero bits represents 100. Another example is:

[63] https://www.adacore.com/gems/gem-27
[64] https://www.adacore.com/gems/gem-28

Listing 161: array_representation.ads

```
package Array_Representation is

   type Val is (A, B, C, D, E, F, G, H);

   type Arr is array (1 .. 16) of Val
     with Component_Size => 3;

end Array_Representation;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Changing_Data_
 ↪Representation.Array_Rep
MD5: 7eb17fc2cd415acb7c53a363fa336807
```

which forces the components to take only 3 bits, crossing byte boundaries as needed. A final example is:

Listing 162: enumeration_representation.ads

```
package Enumeration_Representation is

   type Status is (Off, On, Unknown);
   for Status use (Off     => 2#001#,
                   On      => 2#010#,
                   Unknown => 2#100#);

end Enumeration_Representation;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Changing_Data_
 ↪Representation.Enum_Rep
MD5: 3c3e9f4ae11e9bb2482588d27ba43c30
```

which allows specified values for an enumeration type, instead of the efficient default values of 0, 1, 2.

In all these cases, we might use these representation clauses to match external specifications, which can be very useful. The disadvantage of such layouts is that they are inefficient, and accessing individual components, or, in the case of the enumeration type, looping through the values can increase space and time requirements for the program code.

One approach that is often effective is to read or write the data in question in this specified form, but internally in the program represent the data in the normal default layout, allowing efficient access, and do all internal computations with this more efficient form.

To follow this approach, you will need to convert between the efficient format and the specified format. Ada provides a very convenient method for doing this, as described in RM 13.6 "Change of Representation"[65].

The idea is to use type derivation, where one type has the specified format and the other has the normal default format. For instance for the array case above, we would write:

Listing 163: array_representation.ads

```
package Array_Representation is

```

(continues on next page)

[65] http://www.ada-auth.org/standards/22rm/html/RM-13-6.html

(continued from previous page)

```
   type Val is (A, B, C, D, E, F, G, H);
   type Arr is array (1 .. 16) of Val;

   type External_Arr is new Arr
     with Component_Size => 3;

end Array_Representation;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Changing_Data_
 ↪Representation.Array_Rep
MD5: d4e90f6ef8ff81771980771356eab235
```

Now we read and write the data using the `External_Arr` type. When we want to convert to the efficient form, `Arr`, we simply use a type conversion.

Listing 164: using_array_for_io.adb

```
with Array_Representation;
use  Array_Representation;

procedure Using_Array_For_IO is
   Input_Data  : External_Arr;
   Work_Data   : Arr;
   Output_Data : External_Arr;
begin
   --  (read data into Input_Data)

   --  Now convert to internal form
   Work_Data := Arr (Input_Data);

   --  (computations using efficient
   --   Work_Data form)

   --  Convert back to external form
   Output_Data := External_Arr (Work_Data);

end Using_Array_For_IO;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Changing_Data_
 ↪Representation.Array_Rep
MD5: 88efe4b8a7f07e0c32f11131d6eafbc1
```

Build output

```
using_array_for_io.adb:5:04: warning: variable "Input_Data" is read but never␣
 ↪assigned [-gnatwv]
```

Using this approach, the quite complex task of copying all the data of the array from one form to another, with all the necessary masking and shift operations, is completely automatic.

Similar code can be used in the record and enumeration type cases. It is even possible to specify two different representations for the two types, and convert from one form to the other, as in:

Listing 165: enumeration_representation.ads

```
package Enumeration_Representation is

   type Status_In is (Off, On, Unknown);
   type Status_Out is new Status_In;

   for Status_In use (Off     => 2#001#,
                      On      => 2#010#,
                      Unknown => 2#100#);
   for Status_Out use (Off     => 103,
                       On      => 1045,
                       Unknown => 7700);

end Enumeration_Representation;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Changing_Data_
 ↪Representation.Enum_Rep
MD5: f78c3718280f9265ff54270c5834b458
```

There are two restrictions that must be kept in mind when using this feature. First, you have to use a derived type. You can't put representation clauses on subtypes, which means that the conversion must always be explicit. Second, there is a rule RM 13.1[66] (10) that restricts the placement of interesting representation clauses:

> 10 For an untagged derived type, no type-related representation items are allowed if the parent type is a by-reference type, or has any user-defined primitive subprograms.

All the representation clauses that are interesting from the point of view of change of representation are "type related", so for example, the following sequence would be illegal:

Listing 166: array_representation.ads

```
package Array_Representation is

   type Val is (A, B, C, D, E, F, G, H);
   type Arr is array (1 .. 16) of Val;

   procedure Rearrange (Arg : in out Arr);

   type External_Arr is new Arr
     with Component_Size => 3;

end Array_Representation;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Changing_Data_
 ↪Representation.Array_Rep_2
MD5: 70201932d40e3fb356bc1d8ab188f2df
```

Build output

```
array_representation.ads:9:11: error: representation item not permitted before Ada␣
 ↪2022
array_representation.ads:9:11: error: parent type "Arr" has primitive operations
gprbuild: *** compilation phase failed
```

[66] http://www.ada-auth.org/standards/22rm/html/RM-13-1.html

Why these restrictions? Well, the answer is a little complex, and has to do with efficiency considerations, which we will address below.

Restrictions

In the previous subsection, we discussed the use of derived types and representation clauses to achieve automatic change of representation. More accurately, this feature is not completely automatic, since it requires you to write an explicit conversion. In fact there is a principle behind the design here which says that a change of representation should never occur implicitly behind the back of the programmer without such an explicit request by means of a type conversion.

The reason for that is that the change of representation operation can be very expensive, since in general it can require component by component copying, changing the representation on each component.

Let's have a look at the `-gnatG` expanded code to see what is hidden under the covers here. For example, the conversion `Arr (Input_Data)` from the previous example generates the following expanded code:

```
B26b : declare
   [subtype p__TarrD1 is integer range 1 .. 16]
   R25b : p__TarrD1 := 1;
begin
   for L24b in 1 .. 16 loop
      [subtype p__arr___XP3 is
        system__unsigned_types__long_long_unsigned range 0 ..
        16#FFFF_FFFF_FFFF#]
      work_data := p__arr___XP3!((work_data and not shift_left!(
        16#7#, 3 * (integer(L24b - 1)))) or shift_left!(p__arr___XP3!
        (input_data (R25b)), 3 * (integer(L24b - 1))));
      R25b := p__TarrD1'succ(R25b);
   end loop;
end B26b;
```

That's pretty horrible! In fact, we could have simplified it for this section, but we have left it in its original form, so that you can see why it is nice to let the compiler generate all this stuff so you don't have to worry about it yourself.

Given that the conversion can be pretty inefficient, you don't want to convert backwards and forwards more than you have to, and the whole approach is only worthwhile if we'll be doing extensive computations involving the value.

The expense of the conversion explains two aspects of this feature that are not obvious. First, why do we require derived types instead of just allowing subtypes to have different representations, avoiding the need for an explicit conversion?

The answer is precisely that the conversions are expensive, and you don't want them happening behind your back. So if you write the explicit conversion, you get all the gobbledygook listed above, but you can be sure that this never happens unless you explicitly ask for it.

This also explains the restriction we mentioned in previous subsection from RM 13.1[67] (10):

> 10 For an untagged derived type, no type-related representation items are allowed if the parent type is a by-reference type, or has any user-defined primitive subprograms.

It turns out this restriction is all about avoiding implicit changes of representation. Let's have a look at how type derivation works when there are primitive subprograms defined at the point of derivation. Consider this example:

[67] http://www.ada-auth.org/standards/22rm/html/RM-13-1.html

Listing 167: my_ints.ads

```
package My_Ints is

   type My_Int_1 is range 1 .. 10;

   function Odd (Arg : My_Int_1)
                 return Boolean;

   type My_Int_2 is new My_Int_1;

end My_Ints;
```

Listing 168: my_ints.adb

```
package body My_Ints is

   function Odd (Arg : My_Int_1)
                 return Boolean is
     (True);
   --  Dummy implementation!

end My_Ints;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Changing_Data_
 ↪Representation.My_Int
MD5: a29401698307998288f02b349d04d1d2
```

Now when we do the type derivation, we inherit the function Odd for My_Int_2. But where does this function come from? We haven't written it explicitly, so the compiler somehow materializes this new implicit function. How does it do that?

We might think that a complete new function is created including a body in which My_Int_2 replaces My_Int_1, but that would be impractical and expensive. The actual mechanism avoids the need to do this by use of implicit type conversions. Suppose after the above declarations, we write:

Listing 169: using_my_int.adb

```
with My_Ints; use My_Ints;

procedure Using_My_Int is
   Var : My_Int_2;
begin

   if Odd (Var) then
      --   ^ Calling Odd function
      --     for My_Int_2 type.
      null;
   end if;

end Using_My_Int;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Changing_Data_
 ↪Representation.My_Int
MD5: f68272d55e68687b7102885313c7831b
```

Build output

```
using_my_int.adb:4:04: warning: variable "Var" is read but never assigned [-gnatwv]
```

The compiler translates this as:

Listing 170: using_my_int.adb

```
with My_Ints; use My_Ints;

procedure Using_My_Int is
   Var : My_Int_2;
begin

   if Odd (My_Int_1 (Var)) then
      --   ^ Converting My_Int_2 to
      --     My_Int_1 type before
      --     calling Odd function.
      null;
   end if;

end Using_My_Int;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Changing_Data_
 ↪Representation.My_Int
MD5: b3d0053c61412a2b985cd580b645e048
```

Build output

```
using_my_int.adb:4:04: warning: variable "Var" is read but never assigned [-gnatwv]
```

This implicit conversion is a nice trick, it means that we can get the effect of inheriting a new operation without actually having to create it. Furthermore, in a case like this, the type conversion generates no code, since `My_Int_1` and `My_Int_2` have the same representation.

But the whole point is that they might not have the same representation if one of them had a representation clause that made the representations different, and in this case the implicit conversion inserted by the compiler could be expensive, perhaps generating the junk we quoted above for the `Arr` case. Since we never want that to happen implicitly, there is a rule to prevent it.

The business of forbidding by-reference types (which includes all tagged types) is also driven by this consideration. If the representations are the same, it is fine to pass by reference, even in the presence of the conversion, but if there was a change of representation, it would force a copy, which would violate the by-reference requirement.

So to summarize this section, on the one hand Ada gives you a very convenient way to trigger these complex conversions between different representations. On the other hand, Ada guarantees that you never get these potentially expensive conversions happening unless you explicitly ask for them.

25.2.9 Valid Attribute

When receiving data from external sources, we're subjected to problems such as transmission errors. If not handled properly, erroneous data can lead to major issues in an application.

One of those issues originates from the fact that transmission errors might lead to invalid information stored in memory. When proper checks are active, using invalid information is detected at runtime and an exception is raised at this point, which might then be handled by the application.

Instead of relying on exception handling, however, we could instead ensure that the information we're about to use is valid. We can do this by using the `Valid` attribute. For example, if we have a variable `Var`, we can verify that the value stored in `Var` is valid by writing `Var'Valid`, which returns a **`Boolean`** value. Therefore, if the value of `Var` isn't valid, `Var'Valid` returns **`False`**, so we can have code that handles this situation before we actually make use of `Var`. In other words, instead of handling a potential exception in other parts of the application, we can proactively verify that input information is correct and avoid that an exception is raised.

In the next example, we show an application that

- generates a file containing mock-up data, and then
- reads information from this file as state values.

The mock-up data includes valid and invalid states.

Listing 171: create_test_file.ads

```
procedure Create_Test_File (File_Name : String);
```

Listing 172: create_test_file.adb

```
with Ada.Sequential_IO;

procedure Create_Test_File (File_Name : String)
is
   package Integer_Sequential_IO is new
     Ada.Sequential_IO (Integer);
   use Integer_Sequential_IO;

   F : File_Type;
begin
   Create (F, Out_File, File_Name);
   Write (F,  1);
   Write (F,  2);
   Write (F,  4);
   Write (F,  3);
   Write (F,  2);
   Write (F,  10);
   Close (F);
end Create_Test_File;
```

Listing 173: states.ads

```
with Ada.Sequential_IO;

package States is

   type State is (Off, On, Waiting)
     with Size => Integer'Size;

   for State use (Off     => 1,
                  On      => 2,
                  Waiting => 4);

   package State_Sequential_IO is new
     Ada.Sequential_IO (State);

   procedure Read_Display_States
     (File_Name : String);

end States;
```

Listing 174: states.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body States is

   procedure Read_Display_States
     (File_Name : String)
   is
      use State_Sequential_IO;

      F : State_Sequential_IO.File_Type;
      S : State;

      procedure Display_State (S : State) is
      begin
         --  Before displaying the value,
         --  check whether it's valid or not.
         if S'Valid then
            Put_Line (S'Image);
         else
            Put_Line ("Invalid value detected!");
         end if;
      end Display_State;

   begin
      Open (F, In_File, File_Name);

      while not End_Of_File (F) loop
         Read (F, S);
         Display_State (S);
      end loop;

      Close (F);
   end Read_Display_States;

end States;
```

Listing 175: show_states_from_file.adb

```
with States;           use States;
with Create_Test_File;

procedure Show_States_From_File is
   File_Name : constant String := "data.bin";
begin
   Create_Test_File (File_Name);
   Read_Display_States (File_Name);
end Show_States_From_File;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Valid_Attribute.Valid_
↪States
MD5: f7af2946ebe663932494448a0d3d3020
```

Runtime output

```
OFF
ON
WAITING
```

(continues on next page)

(continued from previous page)

```
Invalid value detected!
ON
Invalid value detected!
```

Let's start our discussion on this example with the `States` package, which contains the declaration of the `State` type. This type is a simple enumeration containing three states: `Off`, `On` and `Waiting`. We're assigning specific integer values for this type by declaring an enumeration representation clause. Note that we're using the `Size` aspect to request that objects of this type have the same size as the **`Integer`** type. This becomes important later on when parsing data from the file.

In the `Create_Test_File` procedure, we create a file containing integer values, which is parsed later by the `Read_Display_States` procedure. The `Create_Test_File` procedure doesn't contain any reference to the `State` type, so we're not constrained to just writing information that is valid for this type. On the contrary, this procedure makes use of the **`Integer`** type, so we can write any integer value to the file. We use this strategy to write both valid and invalid values of `State` to the file. This allows us to simulate an environment where transmission errors occur.

We call the `Read_Display_States` procedure to read information from the file and display each state stored in the file. In the main loop of this procedure, we call `Read` to read a state from the file and store it in the `S` variable. We then call the nested `Display_State` procedure to display the actual state stored in `S`. The most important line of code in the `Display_State` procedure is the one that uses the `Valid` attribute:

```
if S'Valid then
```

In this line, we're verifying that the `S` variable contains a valid state before displaying the actual information from `S`. If the value stored in `S` isn't valid, we can handle the issue accordingly. In this case, we're simply displaying a message indicating that an invalid value was detected. If we didn't have this check, the `Constraint_Error` exception would be raised when trying to use invalid data stored in `S` — this would happen, for example, after reading the integer value 3 from the input file.

In summary, using the `Valid` attribute is a good strategy we can employ when we know that information stored in memory might be corrupted.

In the Ada Reference Manual

- 13.9.2 The Valid Attribute[68]

25.2.10 Unchecked Union

We've introduced variant records back in the *Introduction to Ada course* (page 104). In simple terms, a variant record is a record with discriminants that allows for changing its structure. Basically, it's a record containing a **`case`**. (We talk again about *variant records* (page 494) in another chapter.)

The `State_Or_Integer` declaration in the `States` package below is an example of a variant record:

Listing 176: states.ads

```
1  package States is
2
3     type State is (Off, On, Waiting)
```

(continues on next page)

[68] http://www.ada-auth.org/standards/22rm/html/RM-13-9-2.html

(continued from previous page)

```
     with Size => Integer'Size;

   for State use (Off     => 1,
                  On      => 2,
                  Waiting => 4);

   type State_Or_Integer (Use_Enum : Boolean) is
   record
      case Use_Enum is
         when False => I : Integer;
         when True  => S : State;
      end case;
   end record;

   procedure Display_State_Value
     (V : State_Or_Integer);

end States;
```

Listing 177: states.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body States is

   procedure Display_State_Value
     (V : State_Or_Integer)
   is
   begin
      Put_Line ("State: " & V.S'Image);
      Put_Line ("Value: " & V.I'Image);
   end Display_State_Value;

end States;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Unchecked_Union.State_
 ↪Or_Integer
MD5: fa72f52a4396a2e66931ff6932c567fc
```

As mentioned in the previous course, if you try to access a component that is not valid for your record, a `Constraint_Error` exception is raised. For example, in the implementation of the `Display_State_Value` procedure, we're trying to retrieve the value of the integer component (`I`) of the `V` record. When calling this procedure, the `Constraint_Error` exception is raised as expected because `Use_Enum` is set to **`True`**, so that the `I` component is invalid — only the `S` component is valid in this case.

Listing 178: show_variant_rec_error.adb

```
with States; use States;

procedure Show_Variant_Rec_Error is
   V : State_Or_Integer (Use_Enum => True);
begin
   V.S := On;
   Display_State_Value (V);
end Show_Variant_Rec_Error;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Unchecked_Union.State_
 ↪Or_Integer
MD5: b8cf215dd55bfdec6950df35c7bc19b9
```

Runtime output

```
State: ON

raised CONSTRAINT_ERROR : states.adb:10 discriminant check failed
```

In addition to not being able to read the value of a component that isn't valid, assigning a value to a component that isn't valid also raises an exception at runtime. In this example, we cannot assign to `V.I`:

Listing 179: show_variant_rec_error.adb

```
1  with States; use States;
2
3  procedure Show_Variant_Rec_Error is
4     V : State_Or_Integer (Use_Enum => True);
5  begin
6     V.I := 4;
7     --  Error: V.I cannot be accessed because
8     --         Use_Enum is set to True.
9  end Show_Variant_Rec_Error;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Unchecked_Union.State_
 ↪Or_Integer
MD5: 985a84faccc3d590ac767e914bea0c1d
```

Build output

```
show_variant_rec_error.adb:6:05: warning: component not present in subtype of
 ↪"State_Or_Integer" defined at line 4 [enabled by default]
show_variant_rec_error.adb:6:05: warning: Constraint_Error will be raised at run␣
 ↪time [enabled by default]
```

Runtime output

```

raised CONSTRAINT_ERROR : show_variant_rec_error.adb:6 discriminant check failed
```

We may circumvent this limitation by using the `Unchecked_Union` aspect. For example, we can derive a new type from `State_Or_Integer` and use this aspect in its declaration. We do this in the declaration of the `Unchecked_State_Or_Integer` type below.

Listing 180: states.ads

```
1  package States is
2
3     type State is (Off, On, Waiting)
4       with Size => Integer'Size;
5
6     for State use (Off     => 1,
7                    On      => 2,
8                    Waiting => 4);
9
10    type State_Or_Integer (Use_Enum : Boolean) is
11    record
```

(continues on next page)

(continued from previous page)

```
      case Use_Enum is
         when False => I : Integer;
         when True  => S : State;
      end case;
   end record;

   type Unchecked_State_Or_Integer
     (Use_Enum : Boolean) is new
       State_Or_Integer (Use_Enum)
         with Unchecked_Union;

   procedure Display_State_Value
     (V : Unchecked_State_Or_Integer);

end States;
```

Listing 181: states.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body States is

   procedure Display_State_Value
     (V : Unchecked_State_Or_Integer)
   is
   begin
      Put_Line ("State: " & V.S'Image);
      Put_Line ("Value: " & V.I'Image);
   end Display_State_Value;

end States;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Unchecked_Union.
 ↪Unchecked_State_Or_Integer
MD5: e97271a24aab23d2db450308401667ac
```

Because we now use the `Unchecked_State_Or_Integer` type for the input parameter of the `Display_State_Value` procedure, no exception is raised at runtime, as both components are now accessible. For example:

Listing 182: show_unchecked_union.adb

```
with States; use States;

procedure Show_Unchecked_Union is
   V : State_Or_Integer (Use_Enum => True);
begin
   V.S := On;
   Display_State_Value
     (Unchecked_State_Or_Integer (V));
end Show_Unchecked_Union;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Unchecked_Union.
 ↪Unchecked_State_Or_Integer
MD5: 331cc1ab6709ab7e0062d64c55a75a6c
```

Runtime output

```
State: ON
Value:  2
```

Note that, in the call to the Display_State_Value procedure, we first need to convert the V argument from the State_Or_Integer to the Unchecked_State_Or_Integer type.

Also, we can assign to any of the components of a record that has the Unchecked_Union aspect. In our example, we can now assign to both the S and the I components of the V record:

Listing 183: show_unchecked_union.adb

```
with States; use States;

procedure Show_Unchecked_Union is
   V : Unchecked_State_Or_Integer
         (Use_Enum => True);
begin
   V := (Use_Enum => True, S => On);
   Display_State_Value (V);

   V := (Use_Enum => False, I => 4);
   Display_State_Value (V);
end Show_Unchecked_Union;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Unchecked_Union.
↪Unchecked_State_Or_Integer
MD5: bb472e91c5e7b7e63d6246dbcf5226a0
```

Runtime output

```
State: ON
Value:  2
State: WAITING
Value:  4
```

In the example above, we're use an aggregate in the assignments to V. By doing so, we avoid that Use_Enum is set to the *wrong* component. For example:

Listing 184: show_unchecked_union.adb

```
with States; use States;

procedure Show_Unchecked_Union is
   V : Unchecked_State_Or_Integer
         (Use_Enum => True);
begin
   V.S := On;
   Display_State_Value (V);

   V.I := 4;
   --  Error: cannot directly assign to V.I,
   --         as Use_Enum is set to True.

   Display_State_Value (V);
end Show_Unchecked_Union;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Unchecked_Union.
 ↪Unchecked_State_Or_Integer
MD5: 74ac11a3effdafd3959fface295a86da
```

Build output

```
show_unchecked_union.adb:10:05: warning: component not present in subtype of
 ↪"Unchecked_State_Or_Integer" defined at line 4 [enabled by default]
show_unchecked_union.adb:10:05: warning: Constraint_Error will be raised at run␣
 ↪time [enabled by default]
```

Runtime output

```
State: ON
Value:  2

raised CONSTRAINT_ERROR : show_unchecked_union.adb:10 discriminant check failed
```

Here, even though the record has the `Unchecked_Union` attribute, we cannot directly assign to the `I` component because `Use_Enum` is set to **`True`**, so only the `S` is accessible. We can, however, read its value, as we do in the `Display_State_Value` procedure.

Be aware that, due to the fact the union is not checked, we might write invalid data to the record. In the example below, we initialize the `I` component with 3, which is a valid integer value, but results in an invalid value for the `S` component, as the value 3 cannot be mapped to the representation of the `State` type.

Listing 185: show_unchecked_union.adb

```
1 with States; use States;
2
3 procedure Show_Unchecked_Union is
4    V : Unchecked_State_Or_Integer
5          (Use_Enum => True);
6 begin
7    V := (Use_Enum => False, I => 3);
8    Display_State_Value (V);
9 end Show_Unchecked_Union;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Unchecked_Union.
 ↪Unchecked_State_Or_Integer
MD5: f63e64df137cfc3c29e41f784306f0e4
```

Runtime output

```

raised CONSTRAINT_ERROR : states.adb:9 invalid data
```

To mitigate this problem, we could use the `Valid` attribute — discussed in the previous section — for the `S` component before trying to use its value in the implementation of the `Display_State_Value` procedure:

Listing 186: states.adb

```
1 with Ada.Text_IO; use Ada.Text_IO;
2
3 package body States is
4
5    procedure Display_State_Value
```

(continues on next page)

(continued from previous page)

```
      (V : Unchecked_State_Or_Integer)
   is
   begin
      if V.S'Valid then
         Put_Line ("State: " & V.S'Image);
      else
         Put_Line ("State: <invalid>");
      end if;
      Put_Line ("Value: " & V.I'Image);
   end Display_State_Value;

end States;
```

Listing 187: show_unchecked_union.adb

```
with States; use States;

procedure Show_Unchecked_Union is
   V : Unchecked_State_Or_Integer
         (Use_Enum => True);
begin
   V := (Use_Enum => False, I => 3);
   Display_State_Value (V);
end Show_Unchecked_Union;
```

However, in general, you should avoid using the `Unchecked_Union` aspect due to the potential issues you might introduce into your application. In the majority of the cases, you don't need it at all — except for special cases such as when interfacing with C code that makes use of union types or solving very specific problems when doing low-level programming.

In the Ada Reference Manual

- B.3.3 Unchecked Union Types[69]

25.2.11 Addresses

In other languages, such as C, the concept of pointers and addresses plays a prominent role. (In fact, in C, many optimizations rely on the usage of pointer arithmetic.) The concept of addresses does exist in Ada, but it's mainly reserved for very specific applications, mostly related to low-level programming. In general, other approaches — such as using access types — are more than sufficient. (We discuss *access types* (page 843) in another chapter. Also, later on in that chapter, we discuss the *relation between access types and addresses* (page 955).) In this section, we discuss some details about using addresses in Ada.

We make use of the **`Address`** type, which is defined in the `System` package, to handle addresses. In contrast to other programming languages (such as C or C++), an address in Ada isn't an integer value: its definition depends on the compiler implementation, and it's actually driven directly by the hardware. For now, let's consider it to usually be a private type — this can be seen as an attempt to achieve application code portability, given the variations in hardware that result in different definitions of what an address actually is.

The **`Address`** type has support for *address comparison* (page 397) and *address arithmetic* (page 399) (also known as *pointer arithmetic* in C). We discuss these topics later in this section. First, let's talk about the **`Address`** attribute and the **`Address`** aspect.

[69] http://www.ada-auth.org/standards/22rm/html/RM-B-3-3.html

In the Ada Reference Manual

- 13.7 The Package System[70]

Address attribute

The `Address` attribute allows us to get the address of an object. For example:

Listing 188: use_address.adb

```
with System; use System;

procedure Use_Address is
   I : aliased Integer := 5;
   A : Address;
begin
   A := I'Address;
end Use_Address;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Addresses.Address_
 ↪Attribute
MD5: 1ee71b7cd3ed278647eb72f383da877f
```

Here, we're assigning the address of the `I` object to the `A` address.

In the GNAT toolchain

GNAT offers a very useful extension to the `System` package to retrieve a string for an address: `System.Address_Image`. This is the function profile:

```
function System.Address_Image
  (A : System.Address) return String;
```

We can use this function to display the address in an user message, for example:

Listing 189: show_address_attribute.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with System.Address_Image;

procedure Show_Address_Attribute is
   I  : aliased Integer := 5;
begin
   Put_Line ("Address : "
             & System.Address_Image (I'Address));
end Show_Address_Attribute;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Addresses.Show_
 ↪Address_Attribute
MD5: 72efddedc57701665594de5ee1939d3d
```

Runtime output

```
Address : 00007FFCA4E762F4
```

[70] http://www.ada-auth.org/standards/22rm/html/RM-13-7.html

In the Ada Reference Manual

- 13.3 Operational and Representation Attributes[71]
- 13.7 The Package System[72]

Address aspect

Usually, we let the compiler select the address of an object in memory, or let it use a register to store that object. However, we can specify the address of an object with the **Address** aspect. In this case, the compiler won't select an address automatically, but use the address that we're specifying. For example:

Listing 190: show_address.adb

```
with System; use System;
with System.Address_Image;

with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Address is

   I_Main   : aliased Integer;
   I_Mapped : Integer
                with Address => I_Main'Address;
begin
   Put_Line ("I_Main'Address   : "
             & System.Address_Image
                 (I_Main'Address));
   Put_Line ("I_Mapped'Address : "
             & System.Address_Image
                 (I_Mapped'Address));
end Show_Address;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Addresses.Address_
↪Aspect
MD5: 6339c743b1ca2b1adf58c977540b43d5
```

Runtime output

```
I_Main'Address   : 00007FFFF84B26C4
I_Mapped'Address : 00007FFFF84B26C4
```

This approach allows us to create an overlay. For example:

Listing 191: simple_overlay.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Simple_Overlay is
   type State is (Off, State_1, State_2)
     with Size => Integer'Size;

   for State use (Off     => 0,
                  State_1 => 32,
                  State_2 => 64);
```

(continues on next page)

[71] http://www.ada-auth.org/standards/22rm/html/RM-13-3.html
[72] http://www.ada-auth.org/standards/22rm/html/RM-13-7.html

(continued from previous page)

```
10
11    S : State;
12    I : Integer
13      with Address => S'Address, Import, Volatile;
14 begin
15    S := State_2;
16    Put_Line ("I = " & Integer'Image (I));
17 end Simple_Overlay;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Addresses.Simple_
 ↪Overlay
MD5: a65057882518824d3ea173d193a7ae67
```

Runtime output

```
I =  64
```

Here, I is an overlay of S, as it uses S'Address. With this approach, we can either use the enumeration directly (by using the S object of State type) or its integer representation (by using the I variable).

In the GNAT toolchain

We could call the GNAT-specific System'To_Address attribute when using the **Address** aspect:

Listing 192: shared_var_types.ads

```
1  with System;
2
3  package Shared_Var_Types is
4
5  private
6     R : Integer
7           with Atomic,
8                Address =>
9                  System'To_Address (16#FFFF00A0#);
10
11 end Shared_Var_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Addresses.Show_
 ↪Access_Address
MD5: 5c2d8e0a9615084c2a15f896c61adaa6
```

In this case, R will refer to the address in memory that we're specifying (16#FFFF00A0# in this case).

As explained in the GNAT Reference Manual[73], the System'To_Address attribute denotes a function identical to To_Address (from the System.Storage_Elements package) except that it is a static attribute. (We talk about the *To_Address function* (page 398) function later on.)

Note that we're using the Atomic aspect here, which we discuss *in another chapter* (page 411).

[73] https://gcc.gnu.org/onlinedocs/gnat_rm/Attribute-To_005fAddress.html

In the Ada Reference Manual

- 13.3 Operational and Representation Attributes[74]
- 13.7 The Package System[75]
- 13.7.1 The Package System.Storage_Elements[76]

Address comparison

We can compare addresses using the common comparison operators. For example:

Listing 193: show_address.adb

```
with System; use System;
with System.Address_Image;

with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Address is

   I, J : Integer;
begin
   Put_Line ("I'Address   : "
             & System.Address_Image
                 (I'Address));
   Put_Line ("J'Address   : "
             & System.Address_Image
                 (J'Address));

   if I'Address = J'Address then
      Put_Line ("I'Address = J'Address");
   elsif I'Address < J'Address then
      Put_Line ("I'Address < J'Address");
   else
      Put_Line ("I'Address > J'Address");
   end if;
end Show_Address;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Addresses.Address_
↪Aspect
MD5: 24ddb7d05159f26ef3b2ff6bcc2691e8
```

Runtime output

```
I'Address   : 00007FFEDCCCA5AC
J'Address   : 00007FFEDCCCA5A8
I'Address > J'Address
```

In this example, we compare the address of the I object with the address of the J object using the =, < and > operators.

In the Ada Reference Manual

- 13.7 The Package System[77]

[74] http://www.ada-auth.org/standards/22rm/html/RM-13-3.html
[75] http://www.ada-auth.org/standards/22rm/html/RM-13-7.html
[76] http://www.ada-auth.org/standards/22rm/html/RM-13-7-1.html

Address to integer conversion

The System.Storage_Elements package offers an integer representation of an address via the Integer_Address type, which is an integer type unrelated to common integer types such as **Integer** and **Long_Integer**. (The actual definition of Integer_Address is compiler-dependent, and it can be a signed or modular integer subtype.)

We can convert between the **Address** and Integer_Address types by using the To_Address and To_Integer functions. Let's see an example:

Listing 194: show_address.adb

```
with System;      use System;

with System.Storage_Elements;
use  System.Storage_Elements;

with System.Address_Image;

with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Address is
   I      : Integer;
   A1, A2 : Address;
   IA     : Integer_Address;
begin
   A1 := I'Address;
   IA := To_Integer (A1);
   A2 := To_Address (IA);

   Put_Line ("A1 : "
             & System.Address_Image (A1));
   Put_Line ("IA : "
             & Integer_Address'Image (IA));
   Put_Line ("A2 : "
             & System.Address_Image (A2));
end Show_Address;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Addresses.Pointer_
 ↪Arith_Ada
MD5: 69e053886fb8e8571d6c94247dc9f30f
```

Runtime output

```
A1 : 00007FFF775FF9F4
IA :  140735196166644
A2 : 00007FFF775FF9F4
```

Here, we retrieve the address of the I object and store it in the A1 address. Then, we convert A1 to an integer address by calling To_Integer (and store it in IA). Finally, we convert this integer address back to an actual address by calling To_Address.

In the Ada Reference Manual

- 13.7.1 The Package System.Storage_Elements[78]

[77] http://www.ada-auth.org/standards/22rm/html/RM-13-7.html
[78] http://www.ada-auth.org/standards/22rm/html/RM-13-7-1.html

Address arithmetic

Although Ada supports address arithmetic, which we discuss in this section, it should be reserved for very specific applications such as low-level programming. However, even in situations that require close access to the underlying hardware, using address arithmetic might not be the approach you should consider — make sure to evaluate other options first!

Ada supports address arithmetic via the `System.Storage_Elements` package, which includes operators such as `+` and `-` for addresses. Let's see a code example where we iterate over an array by incrementing an address that *points* to each component in memory:

Listing 195: show_address.adb

```
with System;      use System;

with System.Storage_Elements;
use  System.Storage_Elements;

with System.Address_Image;

with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Address is

   Arr : array (1 .. 10) of Integer;
   A   : Address := Arr'Address;
   --               ^^^^^^^^^^^
   --   Initializing address object with
   --   address of the first component of Arr.
   --
   --   We could write this as well:
   --   ___ := Arr (1)'Address

begin
   for I in Arr'Range loop
      declare
         Curr : Integer
                  with Address => A;
      begin
         Curr := I;
         Put_Line ("Curr'Address : "
                   & System.Address_Image
                       (Curr'Address));
      end;

      --
      --  Address arithmetic
      --
      A := A + Storage_Offset (Integer'Size)
                 / Storage_Unit;
      --     ^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^
      --       Moving to next component
   end loop;

   for I in Arr'Range loop
     Put_Line ("Arr ("
               & Integer'Image (I)
               & ") :"
               & Integer'Image (Arr (I)));
   end loop;
end Show_Address;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Addresses.Pointer_
 ↪Arith_Ada
MD5: 2c1cdd6874036fb9a527baae63a312d9
```

Runtime output

```
Curr'Address : 00007FFCF9340BE0
Curr'Address : 00007FFCF9340BE4
Curr'Address : 00007FFCF9340BE8
Curr'Address : 00007FFCF9340BEC
Curr'Address : 00007FFCF9340BF0
Curr'Address : 00007FFCF9340BF4
Curr'Address : 00007FFCF9340BF8
Curr'Address : 00007FFCF9340BFC
Curr'Address : 00007FFCF9340C00
Curr'Address : 00007FFCF9340C04
Arr ( 1) : 1
Arr ( 2) : 2
Arr ( 3) : 3
Arr ( 4) : 4
Arr ( 5) : 5
Arr ( 6) : 6
Arr ( 7) : 7
Arr ( 8) : 8
Arr ( 9) : 9
Arr ( 10) : 10
```

In this example, we initialize the address A by retrieving the address of the first component of the array `Arr`. (Note that we could have written `Arr(1)'Address` instead of `Arr'Address`. In any case, the language guarantees that `Arr'Address` gives us the address of the first component, i.e. `Arr'Address = Arr(1)'Address`.)

Then, in the loop, we declare an overlay `Curr` using the current value of the A address. We can then operate on this overlay — here, we assign `I` to `Curr`. Finally, in the loop, we increment address A and make it *point* to the next component in the `Arr` array — to do so, we calculate the size of an **`Integer`** component in storage units. (For details on storage units, see the section on *storage size attribute* (page 356).)

In other languages

The code example above corresponds (more or less) to the following C code:

Listing 196: main.c

```c
#include <stdio.h>

int main(int argc, const char * argv[])
{
    int i;
    int arr[10];

    int *a = arr;
    /* int *a = &arr[0]; */

    for (i = 0; i < 10; i++)
    {
        *a++ = i;
        printf("curr address: %p\n", a);
    }

    for (i = 0; i < 10; i++)
    {
```

```
19          printf("arr[%d]: %d\n", i, arr[i]);
20      }
21
22      return 0;
23  }
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Addresses.Pointer_
↪Arith_C
MD5: 7aa709a4d7ed6ce2346dbabc853e28c0
```

Runtime output

```
curr address: 0x7fff276809f4
curr address: 0x7fff276809f8
curr address: 0x7fff276809fc
curr address: 0x7fff27680a00
curr address: 0x7fff27680a04
curr address: 0x7fff27680a08
curr address: 0x7fff27680a0c
curr address: 0x7fff27680a10
curr address: 0x7fff27680a14
curr address: 0x7fff27680a18
arr[0]: 0
arr[1]: 1
arr[2]: 2
arr[3]: 3
arr[4]: 4
arr[5]: 5
arr[6]: 6
arr[7]: 7
arr[8]: 8
arr[9]: 9
```

While pointer arithmetic is very common in C, using address arithmetic in Ada is far from common, and it should be only used when it's really necessary to do so.

In the Ada Reference Manual

- 13.3 Operational and Representation Attributes[79]
- 13.7.1 The Package System.Storage_Elements[80]

25.2.12 Discarding names

As we know, we can use the `Image` attribute of a type to get a string associated with this type. This is useful for example when we want to display a user message for an enumeration type:

Listing 197: show_enumeration_image.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  procedure Show_Enumeration_Image is
4
5     type Months is
```

(continues on next page)

[79] http://www.ada-auth.org/standards/22rm/html/RM-13-3.html
[80] http://www.ada-auth.org/standards/22rm/html/RM-13-7-1.html

(continued from previous page)

```
      (January, February, March, April,
       May, June, July, August, September,
       October, November, December);

   M : constant Months := January;
begin
   Put_Line ("Month: "
             & Months'Image (M));
end Show_Enumeration_Image;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Discarding_Names.
 ↪Enumeration_Image
MD5: 3863c5e06641d96b59edb9e76daa7560
```

Runtime output

```
Month: JANUARY
```

This is similar to having this code:

Listing 198: show_enumeration_image.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Enumeration_Image is

   type Months is
     (January, February, March, April,
      May, June, July, August, September,
      October, November, December);

   M : constant Months := January;

   function Months_Image (M : Months)
                          return String is
   begin
      case M is
         when January   => return "JANUARY";
         when February  => return "FEBRUARY";
         when March     => return "MARCH";
         when April     => return "APRIL";
         when May       => return "MAY";
         when June      => return "JUNE";
         when July      => return "JULY";
         when August    => return "AUGUST";
         when September => return "SEPTEMBER";
         when October   => return "OCTOBER";
         when November  => return "NOVEMBER";
         when December  => return "DECEMBER";
      end case;
   end Months_Image;

begin
   Put_Line ("Month: "
             & Months_Image (M));
end Show_Enumeration_Image;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Discarding_Names.
 ↪Enumeration_Image
MD5: 2db86044d2045bd9d4c3998cca36d51c
```

Runtime output

```
Month: JANUARY
```

Here, the Months_Image function associates a string with each month of the Months enumeration. As expected, the compiler needs to store the strings used in the Months_Image function when compiling this code. Similarly, the compiler needs to store strings for the Months enumeration for the Image attribute.

Sometimes, we don't need to call the Image attribute for a type. In this case, we could save some storage by eliminating the strings associated with the type. Here, we can use the Discard_Names aspect to request the compiler to reduce — as much as possible — the amount of storage used for storing names for this type. Let's see an example:

Listing 199: show_discard_names.adb

```
1  procedure Show_Discard_Names is
2     pragma Warnings (Off, "is not referenced");
3
4     type Months is
5       (January, February, March, April,
6        May, June, July, August, September,
7        October, November, December)
8       with Discard_Names;
9
10    M : constant Months := January;
11 begin
12    null;
13 end Show_Discard_Names;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Discarding_Names.
 ↪Discard_Names
MD5: 7891caac459a4be2096d443ca3190036
```

In this example, the compiler attempts to not store strings associated with the Months type duration compilation.

Note that the Discard_Names aspect is available for enumerations, exceptions, and tagged types.

In the GNAT toolchain

If we add this statement to the Show_Discard_Names procedure above:

```
Put_Line ("Month: "
          & Months'Image (M));
```

we see that the application displays "0" instead of "JANUARY". This is because GNAT doesn't store the strings associated with the Months type when we use the Discard_Names aspect for the Months type. (Therefore, the Months'Image attribute doesn't have that information.) Instead, the compiler uses the integer value of the enumeration, so that Months'Image returns the corresponding string for this integer value.

In the Ada Reference Manual

- Aspect Discard_Names[81]

25.3 Shared variable control

Ada has built-in support for handling both volatile and atomic data. Let's start by discussing volatile objects.

In the Ada Reference Manual

- C.6 Shared Variable Control[82]

25.3.1 Volatile

A volatile[83] object can be described as an object in memory whose value may change between two consecutive memory accesses of a process A — even if process A itself hasn't changed the value. This situation may arise when an object in memory is being shared by multiple threads. For example, a thread *B* may modify the value of that object between two read accesses of a thread *A*. Another typical example is the one of memory-mapped I/O[84], where the hardware might be constantly changing the value of an object in memory.

Because the value of a volatile object may be constantly changing, a compiler cannot generate code to store the value of that object in a register and then use the value from the register in subsequent operations. Storing into a register is avoided because, if the value is stored there, it would be outdated if another process had changed the volatile object in the meantime. Instead, the compiler generates code in such a way that the process must read the value of the volatile object from memory for each access.

Let's look at a simple example:

Listing 200: show_volatile_object.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Volatile_Object is
   Val : Long_Float with Volatile;
begin
   Val := 0.0;
   for I in 0 .. 999 loop
      Val := Val + 2.0 * Long_Float (I);
   end loop;

   Put_Line ("Val: " & Long_Float'Image (Val));
end Show_Volatile_Object;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Shared_Variable_Control.Volatile.Object_
 ↪Ada
MD5: aa1e276e64e69813bfc3e3ef39f3dd47
```

Runtime output

[81] http://www.ada-auth.org/standards/22rm/html/RM-C-5.html
[82] http://www.ada-auth.org/standards/22rm/html/RM-C-6.html
[83] https://en.wikipedia.org/wiki/Volatile_(computer_programming)
[84] https://en.wikipedia.org/wiki/Memory-mapped_I/O

```
Val:  9.99000000000000E+05
```

In this example, Val has the Volatile aspect, which makes the object volatile. We can also use the Volatile aspect in type declarations. For example:

Listing 201: shared_var_types.ads

```
package Shared_Var_Types is

   type Volatile_Long_Float is new
     Long_Float with Volatile;

end Shared_Var_Types;
```

Listing 202: show_volatile_type.adb

```
with Ada.Text_IO;      use Ada.Text_IO;
with Shared_Var_Types; use Shared_Var_Types;

procedure Show_Volatile_Type is
   Val : Volatile_Long_Float;
begin
   Val := 0.0;
   for I in 0 .. 999 loop
      Val := Val + 2.0 * Volatile_Long_Float (I);
   end loop;

   Put_Line ("Val: "
             & Volatile_Long_Float'Image (Val));
end Show_Volatile_Type;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Shared_Variable_Control.Volatile.Type
MD5: 0d31156d47b2edcfb94debd016c8bb87
```

Runtime output

```
Val:  9.99000000000000E+05
```

Here, we're declaring a new type Volatile_Long_Float in the Shared_Var_Types package. This type is based on the **Long_Float** type and uses the Volatile aspect. Any object of this type is automatically volatile.

In addition to that, we can declare components of an array to be volatile. In this case, we can use the Volatile_Components aspect in the array declaration. For example:

Listing 203: show_volatile_array_components.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Volatile_Array_Components is
   Arr : array (1 .. 2) of Long_Float
           with Volatile_Components;
begin
   Arr := (others => 0.0);

   for I in 0 .. 999 loop
      Arr (1) := Arr (1) +  2.0 * Long_Float (I);
      Arr (2) := Arr (2) + 10.0 * Long_Float (I);
   end loop;
```

(continues on next page)

(continued from previous page)

```
13
14    Put_Line ("Arr (1): "
15              & Long_Float'Image (Arr (1)));
16    Put_Line ("Arr (2): "
17              & Long_Float'Image (Arr (2)));
18 end Show_Volatile_Array_Components;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Shared_Variable_Control.Volatile.Array_
 ↪Components
MD5: 05b3ee20f08c5a85f5872727a61c148d
```

Runtime output

```
Arr (1):  9.99000000000000E+05
Arr (2):  4.99500000000000E+06
```

Note that it's possible to use the `Volatile` aspect for the array declaration as well:

Listing 204: shared_var_types.ads

```
1  package Shared_Var_Types is
2
3  private
4     Arr : array (1 .. 2) of Long_Float
5             with Volatile;
6
7  end Shared_Var_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Shared_Variable_Control.Volatile.Array
MD5: c9b7b9f94f1fac295753c7e7b9426fb2
```

Note that, if the `Volatile` aspect is specified for an object, then the `Volatile_Components` aspect is also specified automatically — if it makes sense in the context, of course. In the example above, even though `Volatile_Components` isn't specified in the declaration of the `Arr` array , it's automatically set as well.

25.3.2 Independent

When you write code to access a single object in memory, you might actually be accessing multiple objects at once. For example, when you declare types that make use of representation clauses — as we've seen in previous sections —, you might be accessing multiple objects that are grouped together in a single storage unit. For example, if you have components A and B stored in the same storage unit, you cannot update A without actually writing (the same value) to B. Those objects aren't independently addressable because, in order to access one of them, we have to actually address multiple objects at once.

When an object is independently addressable, we call it an independent object. In this case, we make sure that, when accessing that object, we won't be simultaneously accessing another object. As a consequence, this feature limits the way objects can be represented in memory, as we'll see next.

To indicate that an object is independent, we use the `Independent` aspect:

Listing 205: shared_var_types.ads

```
package Shared_Var_Types is

   I : Integer with Independent;

end Shared_Var_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Shared_Variable_Control.Independent.Object
MD5: d90fef37584ca8802b8a3e3858c0095b
```

Similarly, we can use this aspect when declaring types:

Listing 206: shared_var_types.ads

```
package Shared_Var_Types is

   type Independent_Boolean is new Boolean
     with Independent;

   type Flags is record
      F1 : Independent_Boolean;
      F2 : Independent_Boolean;
   end record;

end Shared_Var_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Shared_Variable_Control.Independent.Type
MD5: 7bcbee5b73067149b14c4b1b061f803c
```

In this example, we're declaring the `Independent_Boolean` type and using it in the declaration of the `Flag` record type. Let's now derive the `Flags` type and use a representation clause for the derived type:

Listing 207: shared_var_types-representation.ads

```
package Shared_Var_Types.Representation is

   type Rep_Flags is new Flags;

   for Rep_Flags use record
      F1 at 0 range 0 .. 0;
      F2 at 0 range 1 .. 1;
      --            ^  ERROR: start position of
      --                      F2 is wrong!
      --    ^          ERROR: F1 and F2 share the
      --                      same storage unit!
   end record;

end Shared_Var_Types.Representation;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Shared_Variable_Control.Independent.Type
MD5: bb9d5badf33401660e7e20a7cd612dab
```

Build output

```
shared_var_types-representation.ads:6:26: error: size for independent "F1" must be␣
 ↪multiple of Storage_Unit
shared_var_types-representation.ads:7:21: error: position for independent "F2"␣
 ↪must be multiple of Storage_Unit
shared_var_types-representation.ads:7:26: error: size for independent "F2" must be␣
 ↪multiple of Storage_Unit
gprbuild: *** compilation phase failed
```

As you can see when trying to compile this example, the representation clause that we used for Rep_Flags isn't following these limitations:

1. The size of each independent component must be a multiple of a storage unit.
2. The start position of each independent component must be a multiple of a storage unit.

For example, for architectures that have a storage unit of one byte — such as standard desktop computers —, this means that the size and the position of independent components must be a multiple of a byte. Let's correct the issues in the code above by:

- setting the size of each independent component to correspond to `Storage_Unit` — using a range between 0 and `Storage_Unit - 1` —, and
- setting the start position to zero.

This is the corrected version:

Listing 208: shared_var_types-representation.ads

```
with System;

package Shared_Var_Types.Representation is

   type Rep_Flags is new Flags;

   for Rep_Flags use record
      F1 at 0 range 0 .. System.Storage_Unit - 1;
      F2 at 1 range 0 .. System.Storage_Unit - 1;
   end record;

end Shared_Var_Types.Representation;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Shared_Variable_Control.Independent.Type
MD5: ed57e57cd746698909a4f7ce40a29dfc
```

Note that the representation that we're now using for Rep_Flags is most likely the representation that the compiler would have chosen for this data type. We could, however, have added an empty storage unit between F1 and F2 — by simply writing `F2 at 2 ...`:

Listing 209: shared_var_types-representation.ads

```
with System;

package Shared_Var_Types.Representation is

   type Rep_Flags is new Flags;

   for Rep_Flags use record
      F1 at 0 range 0 .. System.Storage_Unit - 1;
      F2 at 2 range 0 .. System.Storage_Unit - 1;
   end record;
```

(continues on next page)

(continued from previous page)

```
11
12 end Shared_Var_Types.Representation;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Shared_Variable_Control.Independent.Type
MD5: 71fedf8aac7c19bca1ba3b487efa9b17
```

As long as we follow the rules for independent objects, we're still allowed to use representation clauses that don't correspond to the one that the compiler might select.

For arrays, we can use the `Independent_Components` aspect:

Listing 210: shared_var_types.ads

```
1 package Shared_Var_Types is
2
3    Flags : array (1 .. 8) of Boolean
4              with Independent_Components;
5
6 end Shared_Var_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Shared_Variable_Control.Independent.
 ↪Components
MD5: b331d0a13adf45624b664839fe4ba42c
```

We've just seen in a previous example that some representation clauses might not work with objects and types that have the `Independent` aspect. The same restrictions apply when we use the `Independent_Components` aspect. For example, this aspect prevents that array components are packed when the `Pack` aspect is used. Let's discuss the following erroneous code example:

Listing 211: shared_var_types.ads

```
1 package Shared_Var_Types is
2
3    type Flags is
4      array (Positive range <>) of Boolean
5        with Independent_Components, Pack;
6
7    F : Flags (1 .. 8) with Size => 8;
8
9 end Shared_Var_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Shared_Variable_Control.Independent.
 ↪Packed_Independent_Components
MD5: dbaff4f2559ef8a449dad251f42cddc0
```

Build output

```
shared_var_types.ads:5:37: warning: cannot pack independent components (RM 13.2(7))
shared_var_types.ads:7:36: error: size for "F" too small, minimum allowed is 64
gprbuild: *** compilation phase failed
```

As expected, this code doesn't compile. Here, we can have either independent components, or packed components. We cannot have both at the same time because packed

components aren't independently addressable. The compiler warns us that the Pack aspect won't have any effect on independent components. When we use the Size aspect in the declaration of F, we confirm this limitation. If we remove the Size aspect, however, the code is compiled successfully because the compiler ignores the Pack aspect and allocates a larger size for F:

Listing 212: shared_var_types.ads

```
package Shared_Var_Types is

   type Flags is
     array (Positive range <>) of Boolean
       with Independent_Components, Pack;

end Shared_Var_Types;
```

Listing 213: show_flags_size.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with System;

with Shared_Var_Types; use Shared_Var_Types;

procedure Show_Flags_Size is
   F : Flags (1 .. 8);
begin
   Put_Line ("Flags'Size:      "
             & F'Size'Image & " bits");
   Put_Line ("Flags (1)'Size:  "
             & F (1)'Size'Image & " bits");
   Put_Line ("# storage units: "
             & Integer'Image
                 (F'Size /
                  System.Storage_Unit));
end Show_Flags_Size;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Shared_Variable_Control.Independent.
 ↪Packed_Independent_Components
MD5: b96f921b08b1d8207749517f833fc121
```

Build output

```
show_flags_size.adb:7:04: warning: variable "F" is read but never assigned [-
 ↪gnatwv]
shared_var_types.ads:5:37: warning: cannot pack independent components (RM 13.2(7))
```

Runtime output

```
Flags'Size:       64 bits
Flags (1)'Size:   8 bits
# storage units:  8
```

As you can see in the output of the application, even though we specify the Pack aspect for the Flags type, the compiler allocates eight storage units, one per each component of the F array.

25.3.3 Atomic

An atomic object is an object that only accepts atomic reads and updates. The Ada standard specifies that "for an atomic object (including an atomic component), all reads and updates of the object as a whole are indivisible." In this case, the compiler must generate Assembly code in such a way that reads and updates of an atomic object must be done in a single instruction, so that no other instruction could execute on that same object before the read or update completes.

In other contexts

Generally, we can say that operations are said to be atomic when they can be completed without interruptions. This is an important requirement when we're performing operations on objects in memory that are shared between multiple processes.

This definition of atomicity above is used, for example, when implementing databases. However, for this section, we're using the term "atomic" differently. Here, it really means that reads and updates must be performed with a single Assembly instruction.

For example, if we have a 32-bit object composed of four 8-bit bytes, the compiler cannot generate code to read or update the object using four 8-bit store / load instructions, or even two 16-bit store / load instructions. In this case, in order to maintain atomicity, the compiler must generate code using one 32-bit store / load instruction.

Because of this strict definition, we might have objects for which the `Atomic` aspect cannot be specified. Lots of machines support integer types that are larger than the native word-sized integer. For example, a 16-bit machine probably supports both 16-bit and 32-bit integers, but only 16-bit integer objects can be marked as atomic — or, more generally, only objects that fit into at most 16 bits.

Atomicity may be important, for example, when dealing with shared hardware registers. In fact, for certain architectures, the hardware may require that memory-mapped registers are handled atomically. In Ada, we can use the `Atomic` aspect to indicate that an object is atomic. This is how we can use the aspect to declare a shared hardware register:

Listing 214: shared_var_types.ads

```
with System;

package Shared_Var_Types is

private
   R : Integer
         with Atomic,
              Address =>
                System'To_Address (16#FFFF00A0#);

end Shared_Var_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Shared_Variable_Control.Atomic.Object
MD5: 5c2d8e0a9615084c2a15f896c61adaa6
```

Note that the **Address** aspect allows for assigning a variable to a specific location in the memory. In this example, we're using this aspect to specify the address of the memory-mapped register.

Later on, we talk again about the *Address aspect* (page 395) and the GNAT-specific *System'To_Address attribute* (page 396).

In addition to atomic objects, we can declare atomic types — similar to what we've seen

before for volatile types. For example:

Listing 215: shared_var_types.ads

```
with System;

package Shared_Var_Types is

   type Atomic_Integer is new Integer
     with Atomic;

private
   R : Atomic_Integer
         with Address =>
                System'To_Address (16#FFFF00A0#);

end Shared_Var_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Shared_Variable_Control.Atomic.Types
MD5: 009632ba0155d70def8281ba590f3d12
```

In this example, we're declaring the `Atomic_Integer` type, which is an atomic type. Objects of this type — such as R in this example — are automatically atomic.

We can also declare atomic array components:

Listing 216: shared_var_types.ads

```
package Shared_Var_Types is

private
   Arr : array (1 .. 2) of Integer
           with Atomic_Components;

end Shared_Var_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Shared_Variable_Control.Atomic.Array_
 ↪Components
MD5: 7501bdf618621a822d451da8d731ef75
```

This example shows the declaration of the `Arr` array, which has atomic components — the atomicity of its components is indicated by the `Atomic_Components` aspect.

Note that if an object is atomic, it is also volatile and independent. In other words, these type declarations are equivalent:

Listing 217: shared_var_types.ads

```
package Shared_Var_Types is

   type Atomic_Integer_1 is new Integer
     with Atomic;

   type Atomic_Integer_2 is new Integer
     with Atomic,
          Volatile,
          Independent;

end Shared_Var_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Shared_Variable_Control.Atomic.Volatile_
 ↪Independent
MD5: 3034c7a07698491f961d9b4fb74f03d8
```

A simular rule applies to components of an array. When we use the `Atomic_Components`, the following aspects are implied: `Volatile`, `Volatile_Components` and `Independent_Components`. For example, these array declarations are equivalent:

Listing 218: shared_var_types.ads

```
1  package Shared_Var_Types is
2
3     Arr_1 : array (1 .. 2) of Integer
4             with Atomic_Components;
5
6     Arr_2 : array (1 .. 2) of Integer
7             with Atomic_Components,
8                  Volatile,
9                  Volatile_Components,
10                 Independent_Components;
11
12 end Shared_Var_Types;
```

25.3.4 Full-access only

Note

This feature was introduced in Ada 2022.

A full-access object is an object that requires that read or write operations on this object are performed by reading or writing all bits of the object (i.e. the *full object*) at once. Accordingly, a full-access type is a type whose objects follow this requirement. Note that a full-access type must be simultaneously a *volatile type* (page 404) or an *atomic type* (page 411). (In other words, if a type is neither volatile nor atomic, it cannot be a full-access type.)

Important

Just as a reminder, any atomic type is automatically also *volatile* (page 404) and *independent* (page 406).

Let's see some examples:

Listing 219: show_full_access_only_types.ads

```
1  package Show_Full_Access_Only_Types is
2
3     type Nonatomic_Full_Access_Type is
4       new Long_Float
5         with Volatile, Full_Access_Only;
6
7     type Atomic_Full_Access_Type is
8       new Long_Float
9         with Atomic, Full_Access_Only;
10
11 end Show_Full_Access_Only_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Shared_Variable_
 ↪Control.Full_Access_Only_Types
MD5: 6e7d4ee2e89b943d25319de9d8cebdcd
```

Likewise, we can define nonatomic and atomic full-access objects:

Listing 220: show_full_access_only_objects.ads

```
package Show_Full_Access_Only_Objects is

   Nonatomic_Full_Access_Obj : Long_Float
     with Volatile, Full_Access_Only;

   Atomic_Full_Access_Obj : Long_Float
     with Atomic, Full_Access_Only;

end Show_Full_Access_Only_Objects;
```

Relevant topics

- 9.10 Shared Variables[85]
- C.6 Shared Variable Control[86]

Nonatomic full-access

As we already know, the value of a volatile object may be constantly changing, so the compiler generates code to read the value of the volatile object from memory for each access. (In other words, the value cannot be stored in a register for further processing.)

In the case of nonatomic full-access objects, the value of the object must not only be read from memory or updated to memory every time, but those operations must also be performed for the complete record object — not just parts of it.

Consider the following example:

Listing 221: registers.ads

```
with System;

package Registers is

   type Boolean_Bit is new Boolean
     with Size => 1;

   type UInt1 is mod 2**1
     with Size => 1;

   type UInt2 is mod 2**2
     with Size => 2;

   type UInt14 is mod 2**14
     with Size => 14;

   type Window_Register is record
      --  horizontal line count
```

(continues on next page)

[85] http://www.ada-auth.org/standards/22rm/html/RM-9-10.html
[86] http://www.ada-auth.org/standards/22rm/html/RM-C-6.html

(continued from previous page)

```
      Horizontal_Cnt : UInt14 := 16#0#;

      --  unspecified
      Reserved_14_15 : UInt2  := 16#0#;

      --  vertical line count
      Vertical_Cnt   : UInt14 := 16#0#;

      --  refresh signalling
      Refresh_Needed : Boolean_Bit := False;

      --  unspecified
      Reserved_30    : UInt1  := 16#0#;
   end record
     with Size      => 32,
          Bit_Order => System.Low_Order_First,
          Volatile,
          Full_Access_Only;

   for Window_Register use record
      Horizontal_Cnt at 0 range 0 .. 13;
      Reserved_14_15 at 0 range 14 .. 15;
      Vertical_Cnt   at 0 range 16 .. 29;
      Refresh_Needed at 0 range 30 .. 30;
      Reserved_30    at 0 range 31 .. 31;
   end record;

   procedure Show (WR : Window_Register);

end Registers;
```

Listing 222: registers.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Registers is

   procedure Show (WR : Window_Register) is
   begin
      Put_Line ("WR = (Horizontal_Cnt => "
                & WR.Horizontal_Cnt'Image
                & ",");
      Put_Line ("      Vertical_Cnt   => "
                & WR.Vertical_Cnt'Image
                & ",");
      Put_Line ("      Refresh_Needed => "
                & WR.Refresh_Needed'Image
                & ")");
   end Show;

end Registers;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Shared_Variable_
 ↪Control.Nonatomic_Full_Access_Register
MD5: b825ec2dbbc54201203bf71e4e32fb57
```

In this example, we have a 32-bit register (of `Window_Register` type) that contains window information for a display:

position	0			
bits	#0 .. 13	#14 .. #15	#16 .. #29	#30 .. #31
component	Horizontal_Cnt	Reserved_14_15	Vertical_Cnt	Reserved_30_31

Let's use the `Window_Register` type from the `Registers` package in a test application:

Listing 223: show_register.adb

```
with Registers;   use Registers;

procedure Show_Register is
   WR : Window_Register;
begin
   --  Nonatomic full-access assignments
   WR.Horizontal_Cnt := 800;
   WR.Vertical_Cnt   := 600;
   WR.Refresh_Needed := True;

   Show (WR);
end Show_Register;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Shared_Variable_
 ↪Control.Nonatomic_Full_Access_Register
MD5: 7ff302d6cb282a6276747e8e17f26dfd
```

Runtime output

```
WR = (Horizontal_Cnt =>  800,
      Vertical_Cnt   =>  600,
      Refresh_Needed => TRUE)
```

The example contains assignments such as `WR.Horizontal_Cnt  :=  800` and `WR.Vertical_Cnt:= 600`. Because `Window_Register` is a full-access type, these assignments are performed for the complete 32-bit register, even though we're updating just a single component of the record object.

Note that if `Window_Register` wasn't a *full-access* object, an assignment such as `WR.Horizontal_Cnt := 800` could be performed with a 16-bit operation. In fact, this is what a compiler would most probably select for this assignment, because that is more efficient than manipulating the entire object. Therefore, using a *full-access* object prevents the compiler from generating operations that could lead to unexpected results.

Whenever possible, this *full-access* assignment is performed in a single machine operation. However, if it's not possible to generate a single machine operation on the target machine, the compiler may generate multiple operations for the update of the record components.

Note that we could combine these two assignments into a single one using an aggregate:

Listing 224: show_register.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Registers;   use Registers;

procedure Show_Register is
```

(continues on next page)

(continued from previous page)

```
   WR : Window_Register;
begin
   --  Nonatomic full-access assignment
   --  using an aggregate:
   WR := (Horizontal_Cnt => 800,
          Vertical_Cnt   => 600,
          Refresh_Needed => True,
          others         => <>);

   Show (WR);
end Show_Register;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Shared_Variable_
 ↪Control.Nonatomic_Full_Access_Register
MD5: 9caf39e4a01ee1ec62f0b24747640c01
```

Runtime output

```
WR = (Horizontal_Cnt =>  800,
      Vertical_Cnt   =>  600,
      Refresh_Needed => TRUE)
```

Again, this assignment is performed for the complete 32-bit register — ideally, using a single 32-bit machine operation — by reading the value from the memory.

Let's add another statement to the code example:

Listing 225: show_register.adb

```
with Registers;   use Registers;

procedure Show_Register is
   WR : Window_Register :=
          (Horizontal_Cnt => 800,
           Vertical_Cnt   => 600,
           Refresh_Needed => True,
           others         => <>);
begin
   WR := (Horizontal_Cnt =>
            WR.Horizontal_Cnt * 2,
          Vertical_Cnt   =>
            Wr.Vertical_Cnt   * 2,
          others         => <>);

   Show (WR);
end Show_Register;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Shared_Variable_
 ↪Control.Nonatomic_Full_Access_Register
MD5: cc4e218aef11af34e6d3262084a5c9ce
```

Runtime output

```
WR = (Horizontal_Cnt =>  1600,
      Vertical_Cnt   =>  1200,
      Refresh_Needed => FALSE)
```

In this example, we have an initialization using the same aggregate as in the previous code

example. We also have an assignment, in which we read the value of WR and use it in the calculation.

Delta aggregates

If we want to just change two components, but leave the information of other components untouched, we can use a *delta aggregate* (page 553). (Note that we haven't discussed the topic of delta aggregates yet: we'll do that *later on in this course* (page 553). However, in simple terms, we can use them to modify specific components of a record without changing the remaining components of the record.)

For example, we might want to update just the vertical count and indicate that update via the Refresh_Needed flag, but keep the same horizontal count:

Listing 226: show_registers.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Registers;   use Registers;

procedure Show_Registers is
   WR : Window_Register :=
          (Horizontal_Cnt => 800,
           Vertical_Cnt   => 600,
           others         => <>);
begin
   --  Delta assignment
   WR := (WR with delta
                Vertical_Cnt   => 800,
                Refresh_Needed => True);

   Show (WR);
end Show_Registers;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Shared_Variable_
 ↪Control.Nonatomic_Full_Access_Register
MD5: 29df44d4fb13539cbd6070c37c217f8a
```

Runtime output

```
WR = (Horizontal_Cnt =>  800,
      Vertical_Cnt   =>  800,
      Refresh_Needed => TRUE)
```

A delta assignment using an aggregate such as (WR `with` delta ...) includes reading the value of the complete 32-bit WR object from memory, changing the components specified after `with` delta, and writing the complete 32-bit WR object back to memory. The reason is that we need to retrieve the information that is supposed to remain intact — the Horizontal_Cnt and the reserved components — in order to write them back as a *full-access* operation.

Atomic full-access

As we already know, *atomic objects* (page 411) only accept atomic reads and updates, which — as a whole — are indivisible, i.e. they must be done in a single instruction, so that no other instruction could execute on that same object before the read or update completes. (Again, if an object is atomic, this implies it is also volatile.)

In the case of atomic full-access objects, the complete object must be read and updated.

Ideally, this operation corresponds to a single atomic operation on the target machine, but it can also translate to multiple atomic operations.

Let's adapt the previous example to illustrate this. First, we adapt the type in the package:

Listing 227: registers.ads

```
with System;

package Registers is

   type Boolean_Bit is new Boolean
     with Size => 1;

   type UInt1 is mod 2**1
     with Size => 1;

   type UInt2 is mod 2**2
     with Size => 2;

   type UInt14 is mod 2**14
     with Size => 14;

   type Window_Register is record
      --  horizontal line count
      Horizontal_Cnt : UInt14 := 16#0#;

      --  unspecified
      Reserved_14_15 : UInt2  := 16#0#;

      --  vertical line count
      Vertical_Cnt   : UInt14 := 16#0#;

      --  refresh signalling
      Refresh_Needed : Boolean_Bit := False;

      --  unspecified
      Reserved_30    : UInt1  := 16#0#;
   end record
     with Size      => 32,
          Bit_Order => System.Low_Order_First,
          Atomic,
          Full_Access_Only;

   for Window_Register use record
      Horizontal_Cnt at 0 range 0 .. 13;
      Reserved_14_15 at 0 range 14 .. 15;
      Vertical_Cnt   at 0 range 16 .. 29;
      Refresh_Needed at 0 range 30 .. 30;
      Reserved_30    at 0 range 31 .. 31;
   end record;

   procedure Show (WR : Window_Register);

end Registers;
```

Listing 228: registers.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Registers is

```

(continues on next page)

(continued from previous page)

```
   procedure Show (WR : Window_Register) is
   begin
      Put_Line ("WR = (Horizontal_Cnt => "
                & WR.Horizontal_Cnt'Image
                & ",");
      Put_Line ("      Vertical_Cnt   => "
                & WR.Vertical_Cnt'Image
                & ",");
      Put_Line ("      Refresh_Needed => "
                & WR.Refresh_Needed'Image
                & ")");
   end Show;

end Registers;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Shared_Variable_
 ↪Control.Atomic_Full_Access_Register
MD5: dc088d1b0df1af5086a1ae8b46bb6d4d
```

We then use the package in our test application:

Listing 229: show_register.adb

```
with Registers;   use Registers;

procedure Show_Register is
   WR : Window_Register :=
          (Horizontal_Cnt => 800,
           Vertical_Cnt   => 600,
           Refresh_Needed => True,
           others         => <>);
begin
   WR := (Horizontal_Cnt =>
            WR.Horizontal_Cnt * 2,
          Vertical_Cnt   =>
            Wr.Vertical_Cnt   * 2,
          others         => <>);

   Show (WR);
end Show_Register;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Type_Representation.Shared_Variable_
 ↪Control.Atomic_Full_Access_Register
MD5: cc4e218aef11af34e6d3262084a5c9ce
```

In this example, we first have an atomic initialization of `WR` using an aggregate. Then, we have an atomic assignment to the atomic full-access object `WR`. Because its type is an atomic full-access type, the operations are atomic operations that always access the full object from and to memory.

Comparison: full-access and non-full-access types

An interesting exercise for the reader is to compare the Assembly code generated for the code example above with a version of this code where the `Window_Register` is not a full-access type.

Relevant topics

On a Linux platform, you can use *objdump* to retrieve the Assembly code and *diff* to see the difference between both versions of the type. For example:

```
objdump --target=elf64-x86-64 -d -S ./show_register > full_access.txt

#  [...]

diff --width=80 -t -y full_access.txt no_full_access.txt
```

By doing this kind of comparisons, you might gain more insights on the impact of the `Full_Access_Only` aspect.

For further reading...

By running on a PC, we can compare the Intel Assembly[87] code for various versions of the code. Let's start with the version using a nonatomic full-access version of `Window_Register` vs. the nonatomic (non-full-access) version of `Window_Register`:

```
type Window_Register is record
   --  [...]
end record
  with Size      => 32,
       Bit_Order => System.Low_Order_First,
       Volatile,
       Full_Access_Only;

type Window_Register is record
   --  [...]
end record
  with Size      => 32,
       Bit_Order => System.Low_Order_First,
       Volatile;
```

These are the manually-adapted differences between both versions:

```
--  Volatile, Full_Access_Only         |  --  Volatile

procedure Show_Register is                  procedure Show_Register is
    push   %rbp                                 push   %rbp
    mov    %rsp,%rbp                            mov    %rsp,%rbp
    sub    $0x20,%rsp                   |       sub    $0x10,%rsp
   WR : Window_Register :=                     WR : Window_Register :=
          (Horizontal_Cnt => 800,                     (Horizontal_Cnt => 800,
    mov    -0x4(%rbp),%eax                      mov    -0x4(%rbp),%eax
    and    $0xffffc000,%eax                     and    $0xffffc000,%eax
    or     $0x320,%eax                          or     $0x320,%eax
    mov    %eax,-0x4(%rbp)                      mov    %eax,-0x4(%rbp)
    mov    -0x4(%rbp),%eax                      mov    -0x4(%rbp),%eax
    and    $0x3f,%ah                            and    $0x3f,%ah
    mov    %eax,-0x4(%rbp)                      mov    %eax,-0x4(%rbp)
    mov    -0x4(%rbp),%eax                      mov    -0x4(%rbp),%eax
    and    $0xc000ffff,%eax                     and    $0xc000ffff,%eax
    or     $0x2580000,%eax                      or     $0x2580000,%eax
    mov    %eax,-0x4(%rbp)                      mov    %eax,-0x4(%rbp)
    mov    -0x4(%rbp),%eax                      mov    -0x4(%rbp),%eax
    or     $0x40000000,%eax                     or     $0x40000000,%eax
    mov    %eax,-0x4(%rbp)                      mov    %eax,-0x4(%rbp)
    mov    -0x4(%rbp),%eax                      mov    -0x4(%rbp),%eax
    and    $0x7fffffff,%eax                     and    $0x7fffffff,%eax
```

```
    mov    %eax,-0x4(%rbp)                          mov    %eax,-0x4(%rbp)
    mov    -0x4(%rbp),%eax            <
    mov    %eax,-0x14(%rbp)           <
    mov    -0x14(%rbp),%eax           <
    mov    %eax,-0x8(%rbp)            <
           Vertical_Cnt   => 600,                   Vertical_Cnt   => 600,
           Refresh_Needed => True,                  Refresh_Needed => True,
           others         => <>);                   others         => <>);
begin                                          begin
   WR := (Horizontal_Cnt =>                       WR := (Horizontal_Cnt =>
            WR.Horizontal_Cnt * 2,                         WR.Horizontal_Cnt * 2,
    mov    -0x8(%rbp),%eax            |      mov    -0x4(%rbp),%eax
    mov    %eax,%ecx                  <
    and    $0x3fff,%cx                |      and    $0x3fff,%ax
                                      >      add    %eax,%eax
   WR := (Horizontal_Cnt =>           <
    mov    -0xc(%rbp),%eax            <
    mov    %eax,%edx                  <
            WR.Horizontal_Cnt * 2,    <
    lea    (%rcx,%rcx,1),%eax         <
    and    $0x3fff,%ax                            and    $0x3fff,%ax
   WR := (Horizontal_Cnt =>                       WR := (Horizontal_Cnt =>
    movzwl %ax,%eax                                movzwl %ax,%eax
    and    $0x3fff,%eax                            and    $0x3fff,%eax
    and    $0xffffc000,%edx           <
    or     %edx,%eax                  <
    mov    %eax,%edx                               mov    %eax,%edx
    mov    %edx,%eax                  |      mov    -0x8(%rbp),%eax
    mov    %eax,-0xc(%rbp)            |      and    $0xffffc000,%eax
    mov    -0xc(%rbp),%eax            |      or     %edx,%eax
                                      >      mov    %eax,-0x8(%rbp)
                                      >      mov    -0x8(%rbp),%eax
    and    $0x3f,%ah                               and    $0x3f,%ah
    mov    %eax,-0xc(%rbp)            |      mov    %eax,-0x8(%rbp)
          Vertical_Cnt   =>                              Vertical_Cnt   =>
            Wr.Vertical_Cnt   * 2,                         Wr.Vertical_Cnt   * 2,
    mov    -0x8(%rbp),%eax            |      mov    -0x4(%rbp),%eax
    shr    $0x10,%eax                              shr    $0x10,%eax
    mov    %eax,%ecx                  |      and    $0x3fff,%ax
    and    $0x3fff,%cx                |      add    %eax,%eax
   WR := (Horizontal_Cnt =>           <
    mov    -0xc(%rbp),%eax            <
    mov    %eax,%edx                  <
            Wr.Vertical_Cnt   * 2,    <
    lea    (%rcx,%rcx,1),%eax         <
    and    $0x3fff,%ax                            and    $0x3fff,%ax
   WR := (Horizontal_Cnt =>                       WR := (Horizontal_Cnt =>
    movzwl %ax,%eax                                movzwl %ax,%eax
    and    $0x3fff,%eax                            and    $0x3fff,%eax
    shl    $0x10,%eax                              shl    $0x10,%eax
    and    $0xc000ffff,%edx           <
    or     %edx,%eax                  <
    mov    %eax,%edx                               mov    %eax,%edx
    mov    %edx,%eax                  |      mov    -0x8(%rbp),%eax
    mov    %eax,-0xc(%rbp)            |      and    $0xc000ffff,%eax
    mov    -0xc(%rbp),%eax            |      or     %edx,%eax
                                      >      mov    %eax,-0x8(%rbp)
                                      >      mov    -0x8(%rbp),%eax
    and    $0xbfffffff,%eax                        and    $0xbfffffff,%eax
    mov    %eax,-0xc(%rbp)            |      mov    %eax,-0x8(%rbp)
    mov    -0xc(%rbp),%eax            |      mov    -0x8(%rbp),%eax
    and    $0x7fffffff,%eax                        and    $0x7fffffff,%eax
```

```
    mov    %eax,-0xc(%rbp)             <
    mov    -0xc(%rbp),%eax             <
    mov    %eax,-0x8(%rbp)                     mov    %eax,-0x8(%rbp)
                                       >       mov    -0x8(%rbp),%eax
                                       >       mov    %eax,-0x4(%rbp)
          others         => <>);                    others         => <>);
```

As we can see, although parts of the Assembly code are the same or look very similar, there are some differences between both versions. These differences are mostly related to the fact that we have to operate on the full object when reading it from memory.

Likewise, we can compare the Assembly code for the atomic full-access version of `Window_Register` vs. the atomic (non-full-access) version of `Window_Register`:

```
type Window_Register is record
   --  [...]
end record
  with Size      => 32,
       Bit_Order => System.Low_Order_First,
       Atomic,
       Full_Access_Only;

type Window_Register is record
   --  [...]
end record
  with Size      => 32,
       Bit_Order => System.Low_Order_First,
       Atomic;
```

These are the manually-adapted differences between both versions:

```
--  Atomic, Full_Access_Only           |  --  Atomic

procedure Show_Register is                 procedure Show_Register is
    push   %rbp                                push   %rbp
    mov    %rsp,%rbp                           mov    %rsp,%rbp
    sub    $0x20,%rsp                  |       sub    $0x10,%rsp
   WR : Window_Register :=                    WR : Window_Register :=
          (Horizontal_Cnt => 800,                    (Horizontal_Cnt => 800,
    mov    -0x4(%rbp),%eax                     mov    -0x4(%rbp),%eax
    and    $0xffffc000,%eax                    and    $0xffffc000,%eax
    or     $0x320,%eax                         or     $0x320,%eax
    mov    %eax,-0x4(%rbp)                     mov    %eax,-0x4(%rbp)
    mov    -0x4(%rbp),%eax                     mov    -0x4(%rbp),%eax
    and    $0x3f,%ah                           and    $0x3f,%ah
    mov    %eax,-0x4(%rbp)                     mov    %eax,-0x4(%rbp)
    mov    -0x4(%rbp),%eax                     mov    -0x4(%rbp),%eax
    and    $0xc000ffff,%eax                    and    $0xc000ffff,%eax
    or     $0x2580000,%eax                     or     $0x2580000,%eax
    mov    %eax,-0x4(%rbp)                     mov    %eax,-0x4(%rbp)
    mov    -0x4(%rbp),%eax                     mov    -0x4(%rbp),%eax
    or     $0x40000000,%eax                    or     $0x40000000,%eax
    mov    %eax,-0x4(%rbp)                     mov    %eax,-0x4(%rbp)
    mov    -0x4(%rbp),%eax                     mov    -0x4(%rbp),%eax
    and    $0x7fffffff,%eax                    and    $0x7fffffff,%eax
    mov    %eax,-0x4(%rbp)                     mov    %eax,-0x4(%rbp)
   WR : Window_Register :=                    WR : Window_Register :=
    mov    -0x4(%rbp),%eax                     mov    -0x4(%rbp),%eax
    mov    %eax,-0x14(%rbp)            <
    mov    -0x14(%rbp),%eax            <
    mov    %eax,-0x8(%rbp)                     mov    %eax,-0x8(%rbp)
           Vertical_Cnt   => 600,                     Vertical_Cnt   => 600,
           Refresh_Needed => True,                    Refresh_Needed => True,
           others         => <>);                     others         => <>);
```

```
begin                                          begin
   WR := (Horizontal_Cnt =>                       WR := (Horizontal_Cnt =>
            WR.Horizontal_Cnt * 2,                         WR.Horizontal_Cnt * 2,
    mov    -0x8(%rbp),%eax                          mov    -0x8(%rbp),%eax
    mov    %eax,%ecx                        <
    and    $0x3fff,%cx                      |       and    $0x3fff,%ax
                                            |       add    %eax,%eax
   WR := (Horizontal_Cnt =>                 <
    mov    -0xc(%rbp),%eax                  <
    mov    %eax,%edx                        <
            WR.Horizontal_Cnt * 2,          <
    lea    (%rcx,%rcx,1),%eax               <
    and    $0x3fff,%ax                              and    $0x3fff,%ax
   WR := (Horizontal_Cnt =>                        WR := (Horizontal_Cnt =>
    movzwl %ax,%eax                                 movzwl %ax,%eax
    and    $0x3fff,%eax                             and    $0x3fff,%eax
                                            >       mov    %eax,%edx
                                            >       mov    -0xc(%rbp),%eax
    and    $0xffffc000,%edx                 |       and    $0xffffc000,%eax
    or     %edx,%eax                                or     %edx,%eax
    mov    %eax,%edx                        <
    mov    %edx,%eax                        <
    mov    %eax,-0xc(%rbp)                          mov    %eax,-0xc(%rbp)
    mov    -0xc(%rbp),%eax                          mov    -0xc(%rbp),%eax
    and    $0x3f,%ah                                and    $0x3f,%ah
    mov    %eax,-0xc(%rbp)                          mov    %eax,-0xc(%rbp)
          Vertical_Cnt   =>                               Vertical_Cnt   =>
            Wr.Vertical_Cnt   * 2,                          Wr.Vertical_Cnt   * 2,
    mov    -0x8(%rbp),%eax                          mov    -0x8(%rbp),%eax
    shr    $0x10,%eax                               shr    $0x10,%eax
    mov    %eax,%ecx                        <
    and    $0x3fff,%cx                      |       and    $0x3fff,%ax
                                            >       add    %eax,%eax
   WR := (Horizontal_Cnt =>                 <
    mov    -0xc(%rbp),%eax                  <
    mov    %eax,%edx                        <
            Wr.Vertical_Cnt   * 2,          <
    lea    (%rcx,%rcx,1),%eax               <
    and    $0x3fff,%ax                              and    $0x3fff,%ax
   WR := (Horizontal_Cnt =>                        WR := (Horizontal_Cnt =>
    movzwl %ax,%eax                                 movzwl %ax,%eax
    and    $0x3fff,%eax                             and    $0x3fff,%eax
    shl    $0x10,%eax                               shl    $0x10,%eax
                                            >       mov    %eax,%edx
                                            >       mov    -0xc(%rbp),%eax
    and    $0xc000ffff,%edx                 |       and    $0xc000ffff,%eax
    or     %edx,%eax                                or     %edx,%eax
    mov    %eax,%edx                        <
    mov    %edx,%eax                        <
    mov    %eax,-0xc(%rbp)                          mov    %eax,-0xc(%rbp)
    mov    -0xc(%rbp),%eax                          mov    -0xc(%rbp),%eax
    and    $0xbfffffff,%eax                         and    $0xbfffffff,%eax
    mov    %eax,-0xc(%rbp)                          mov    %eax,-0xc(%rbp)
    mov    -0xc(%rbp),%eax                          mov    -0xc(%rbp),%eax
    and    $0x7fffffff,%eax                         and    $0x7fffffff,%eax
    mov    %eax,-0xc(%rbp)                          mov    %eax,-0xc(%rbp)
    mov    -0xc(%rbp),%eax                          mov    -0xc(%rbp),%eax
    xchg   %eax,-0x8(%rbp)                          xchg   %eax,-0x8(%rbp)
          others         => <>);                         others         => <>);
```

Again, there are some differences between both versions, even though some parts of the Assembly code are the same or look very similar.

Finally, we might want to compare the nonatomic full-access version vs. the atomic full-access version of the `Window_Register` type:

```
type Window_Register is record
   --  [...]
end record
  with Size      => 32,
       Bit_Order => System.Low_Order_First,
       Volatile,
       Full_Access_Only;

type Window_Register is record
   --  [...]
end record
  with Size      => 32,
       Bit_Order => System.Low_Order_First,
       Atomic,
       Full_Access_Only;
```

These are the differences between both versions:

```
--  Volatile, Full_Access_Only         |  --  Atomic, Full_Access_Only

procedure Show_Register is                procedure Show_Register is
    push   %rbp                               push   %rbp
    mov    %rsp,%rbp                          mov    %rsp,%rbp
    sub    $0x20,%rsp                         sub    $0x20,%rsp
   WR : Window_Register :=                   WR : Window_Register :=
          (Horizontal_Cnt => 800,                   (Horizontal_Cnt => 800,
    mov    -0x4(%rbp),%eax                    mov    -0x4(%rbp),%eax
    and    $0xffffc000,%eax                   and    $0xffffc000,%eax
    or     $0x320,%eax                        or     $0x320,%eax
    mov    %eax,-0x4(%rbp)                    mov    %eax,-0x4(%rbp)
    mov    -0x4(%rbp),%eax                    mov    -0x4(%rbp),%eax
    and    $0x3f,%ah                          and    $0x3f,%ah
    mov    %eax,-0x4(%rbp)                    mov    %eax,-0x4(%rbp)
    mov    -0x4(%rbp),%eax                    mov    -0x4(%rbp),%eax
    and    $0xc000ffff,%eax                   and    $0xc000ffff,%eax
    or     $0x2580000,%eax                    or     $0x2580000,%eax
    mov    %eax,-0x4(%rbp)                    mov    %eax,-0x4(%rbp)
    mov    -0x4(%rbp),%eax                    mov    -0x4(%rbp),%eax
    or     $0x40000000,%eax                   or     $0x40000000,%eax
    mov    %eax,-0x4(%rbp)                    mov    %eax,-0x4(%rbp)
    mov    -0x4(%rbp),%eax                    mov    -0x4(%rbp),%eax
    and    $0x7fffffff,%eax                   and    $0x7fffffff,%eax
    mov    %eax,-0x4(%rbp)                    mov    %eax,-0x4(%rbp)
   WR : Window_Register :=                   WR : Window_Register :=
    mov    -0x4(%rbp),%eax                    mov    -0x4(%rbp),%eax
    mov    %eax,-0x14(%rbp)                   mov    %eax,-0x14(%rbp)
    mov    -0x14(%rbp),%eax                   mov    -0x14(%rbp),%eax
    mov    %eax,-0x8(%rbp)                    mov    %eax,-0x8(%rbp)
           Vertical_Cnt   => 600,                    Vertical_Cnt   => 600,
           Refresh_Needed => True,                   Refresh_Needed => True,
           others         => <>);                    others         => <>);
begin                                     begin
   WR := (Horizontal_Cnt =>                  WR := (Horizontal_Cnt =>
            WR.Horizontal_Cnt * 2,                    WR.Horizontal_Cnt * 2,
    mov    -0x8(%rbp),%eax                    mov    -0x8(%rbp),%eax
    mov    %eax,%ecx                          mov    %eax,%ecx
    and    $0x3fff,%cx                        and    $0x3fff,%cx
   WR := (Horizontal_Cnt =>                  WR := (Horizontal_Cnt =>
    mov    -0xc(%rbp),%eax                    mov    -0xc(%rbp),%eax
    mov    %eax,%edx                          mov    %eax,%edx
           WR.Horizontal_Cnt * 2,                    WR.Horizontal_Cnt * 2,
```

```
    lea    (%rcx,%rcx,1),%eax                lea    (%rcx,%rcx,1),%eax
    and    $0x3fff,%ax                       and    $0x3fff,%ax
   WR := (Horizontal_Cnt =>                 WR := (Horizontal_Cnt =>
    movzwl %ax,%eax                          movzwl %ax,%eax
    and    $0x3fff,%eax                      and    $0x3fff,%eax
    and    $0xffffc000,%edx                  and    $0xffffc000,%edx
    or     %edx,%eax                         or     %edx,%eax
    mov    %eax,%edx                         mov    %eax,%edx
    mov    %edx,%eax                         mov    %edx,%eax
    mov    %eax,-0xc(%rbp)                   mov    %eax,-0xc(%rbp)
    mov    -0xc(%rbp),%eax                   mov    -0xc(%rbp),%eax
    and    $0x3f,%ah                         and    $0x3f,%ah
    mov    %eax,-0xc(%rbp)                   mov    %eax,-0xc(%rbp)
          Vertical_Cnt   =>                        Vertical_Cnt   =>
            Wr.Vertical_Cnt   * 2,                   Wr.Vertical_Cnt   * 2,
    mov    -0x8(%rbp),%eax                   mov    -0x8(%rbp),%eax
    shr    $0x10,%eax                        shr    $0x10,%eax
    mov    %eax,%ecx                         mov    %eax,%ecx
    and    $0x3fff,%cx                       and    $0x3fff,%cx
   WR := (Horizontal_Cnt =>                 WR := (Horizontal_Cnt =>
    mov    -0xc(%rbp),%eax                   mov    -0xc(%rbp),%eax
    mov    %eax,%edx                         mov    %eax,%edx
           Wr.Vertical_Cnt   * 2,                   Wr.Vertical_Cnt   * 2,
    lea    (%rcx,%rcx,1),%eax                lea    (%rcx,%rcx,1),%eax
    and    $0x3fff,%ax                       and    $0x3fff,%ax
   WR := (Horizontal_Cnt =>                 WR := (Horizontal_Cnt =>
    movzwl %ax,%eax                          movzwl %ax,%eax
    and    $0x3fff,%eax                      and    $0x3fff,%eax
    shl    $0x10,%eax                        shl    $0x10,%eax
    and    $0xc000ffff,%edx                  and    $0xc000ffff,%edx
    or     %edx,%eax                         or     %edx,%eax
    mov    %eax,%edx                         mov    %eax,%edx
    mov    %edx,%eax                         mov    %edx,%eax
    mov    %eax,-0xc(%rbp)                   mov    %eax,-0xc(%rbp)
    mov    -0xc(%rbp),%eax                   mov    -0xc(%rbp),%eax
    and    $0xbfffffff,%eax                  and    $0xbfffffff,%eax
    mov    %eax,-0xc(%rbp)                   mov    %eax,-0xc(%rbp)
    mov    -0xc(%rbp),%eax                   mov    -0xc(%rbp),%eax
    and    $0x7fffffff,%eax                  and    $0x7fffffff,%eax
    mov    %eax,-0xc(%rbp)                   mov    %eax,-0xc(%rbp)
    mov    -0xc(%rbp),%eax                   mov    -0xc(%rbp),%eax
    mov    %eax,-0x8(%rbp)            |      xchg   %eax,-0x8(%rbp)
          others         => <>);                  others         => <>);
```

As we can see, the code is basically the same — except for the last Assembly instruction, which is a *mov* instruction in the volatile version and an *xchg* instruction in the atomic version — which is an atomic instruction on this platform.

25.3.5 Atomic operations

Note

This feature was introduced in Ada 2022.

Ada offers four packages to handle atomic operations. Those packages are child packages of the `System.Atomic_Operations` package. We will discuss each of those package individually in this section.

[87] https://en.wikipedia.org/wiki/X86_instruction_listings

Relevant topics

- C.6.1 The Package System.Atomic_Operations[88]

Atomic Exchange

The generic `System.Atomic_Operations.Exchange` package provides operations to compare and exchange objects atomically.

`Atomic_Exchange` function

One of those operations is the `Atomic_Exchange` function, which performs the following operations atomically:

```
function Atomic_Exchange
  (Item  : aliased in out Atomic_Type;
   Value :                Atomic_Type)
   return Atomic_Type
is
   Old_Item : Atomic_Type := Item;
begin
   Item := Value;
   return Old_Item;
end Atomic_Exchange;
```

As mentioned in the Ada Reference Manual[89], we can use this function to implement a spinlock[90]. For example:

Listing 230: spinlocks.ads

```
with System.Atomic_Operations.Exchange;

package Spinlocks is

   type Lock is new Boolean with Atomic;

   package Lock_Exchange is new
     System.Atomic_Operations.Exchange (Lock);

end Spinlocks;
```

Listing 231: show_locks.adb

```
with Spinlocks;
use Spinlocks;
use Spinlocks.Lock_Exchange;

procedure Show_Locks is
   L : aliased Lock := False;
begin
   --  Get the lock
   while Atomic_Exchange (Item  => L,
                          Value => True) loop
      null;
   end loop;

```

(continues on next page)

[88] http://www.ada-auth.org/standards/22rm/html/RM-C-6-1.html
[89] http://www.ada-auth.org/standards/22rm/html/RM-C-6-2.html
[90] https://en.wikipedia.org/wiki/Spinlock

(continued from previous page)

```
14    --  At this point, we got the lock.
15    --  Do some stuff here...
16
17    --  Release the lock.
18    L := False;
19 end Show_Locks;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Shared_Variable_Control.Atomic_Operations.
↪Exchange
MD5: 36699b917485f14c4e8a905a6c48027b
```

In this example, we call the `Atomic_Exchange` function for the L lock until we get it. Then, we can use the resource that we protected via the lock. After we finish our work, we can release the lock by setting L to **`False`**.

Note that `System.Atomic_Operations.Exchange` is a generic package, so we have to instantiate it for a specific atomic type — in this case, the atomic Boolean `Lock` type.

We can use multiple tasks to illustrate a situation where using a lock is important to ensure that no race conditions[91] occur:

Listing 232: spinlocks.ads

```
1  with System.Atomic_Operations.Exchange;
2
3  package Spinlocks is
4
5     type Lock is new Boolean with Atomic;
6
7     package Lock_Exchange is new
8       System.Atomic_Operations.Exchange (Lock);
9
10 end Spinlocks;
```

Listing 233: show_locks.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  with Spinlocks;
4  use Spinlocks;
5  use Spinlocks.Lock_Exchange;
6
7  procedure Show_Locks is
8     L          : aliased Lock := False;
9     Task_Count : Integer      := 0;
10
11    task type A_Task;
12
13    task body A_Task is
14       Task_Number : Integer;
15    begin
16       --  Get the lock
17       while Atomic_Exchange (Item  => L,
18                              Value => True) loop
19          null;
20       end loop;
21
```

(continues on next page)

[91] https://en.wikipedia.org/wiki/Race_condition

(continued from previous page)

```
      --  At this point, we got the lock.
      Task_Count  := Task_Count + 1;
      Task_Number := Task_Count;

      --  Release the lock.
      L := False;

      Put_Line ("Task_Number: "
                & Task_Number'Image);

   end A_Task;

   A, B, C, D, E, F : A_Task;
begin
   null;
end Show_Locks;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Shared_Variable_Control.Atomic_Operations.
 ↪Exchange
MD5: af7aad741c20be1e8433b04def90dcdb
```

Runtime output

```
Task_Number:  1
Task_Number:  4
Task_Number:  5
Task_Number:  2
Task_Number:  6
Task_Number:  3
```

In this example, we create multiple tasks (A, B, C, D, E, F) and initialize the **Task_Number** of each task based on the value of the **Task_Count** variable. To avoid multiple tasks accessing the **Task_Count** variable at the same time, we use the L lock, which we get before updating the **Task_Count**.

Atomic_Compare_And_Exchange function

Another function from the System.Atomic_Operations.Exchange package is Atomic_Compare_And_Exchange, which performs the following operations atomically:

```
function Atomic_Compare_And_Exchange
  (Item    : aliased in out Atomic_Type;
   Prior   : aliased in out Atomic_Type;
   Desired :               Atomic_Type)
   return Boolean is
 begin
    if Item = Prior then
       Item := Value;
       --  The item is only updated if its
       --  value and the prior value match

       return True;
    else
       Prior := Item;
       return False;
    end if;
 end Atomic_Exchange;
```

This function can be used for lazy initialization[92] of variables. For example, consider an application with multiple tasks that make use of a certain value that isn't initialized at its declaration, but at a later point in time by an arbitrary task. We can use Atomic_Compare_And_Exchange to ensure that we only update that value if it wasn't already initialized.

Let's start with the package specification:

Listing 234: lazy_initialization.ads

```
with System.Atomic_Operations.Exchange;
with Ada.Numerics.Discrete_Random;

package Lazy_Initialization is

   subtype Lazy_Value_Total_Range is
     Integer range 99 .. 1000;

   Lazy_Value_Default_Value : constant
      := Lazy_Value_Total_Range'First;

   subtype Lazy_Value_Range is Integer
     range Lazy_Value_Default_Value + 1 ..
           Lazy_Value_Total_Range'Last;

   type Lazy_Value is new Lazy_Value_Total_Range
     with Atomic,
          Default_Value =>
            Lazy_Value_Default_Value;

   package Value_Exchange is new
     System.Atomic_Operations.Exchange
       (Lazy_Value);

   package Lazy_Value_Random is new
     Ada.Numerics.Discrete_Random
       (Lazy_Value_Range);

end Lazy_Initialization;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Shared_Variable_Control.Atomic_Operations.
 ↪Compare_And_Exchange
MD5: 09d49998aa7e3d5c0cfb4b74af8e542b
```

In this package, we declare the Lazy_Value type with a default value (specified by the Lazy_Value_Default_Value constant). Note that we have two ranges here: Lazy_Value_Total_Range and Lazy_Value_Range. We use the Lazy_Value_Total_Range in the declaration of the Lazy_Value type: it indicates the *total range* of the type. We use the Lazy_Value_Range as a constraint for the total range. This range doesn't contain the default value (Lazy_Value_Default_Value), and we use it to indicate the valid values of the type. (We discuss the application of Lazy_Value_Range later on.)

Also, in addition to instantiating the System.Atomic_Operations.Exchange package, we instantiate the Ada.Numerics.Discrete_Random package, which we'll use to generate random numbers in the expected range (Lazy_Value_Range) for the Lazy_Value type. (We discussed the Ada.Numerics.Discrete_Random package in the *Introduction to Ada* (page 260) course.)

Let's use this package in the Show_Lazy_Initialization procedure:

[92] https://en.wikipedia.org/wiki/Lazy_initialization

Listing 235: show_lazy_initialization.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Ada.Numerics.Discrete_Random;

with Lazy_Initialization;
use Lazy_Initialization;
use Lazy_Initialization.Value_Exchange;

procedure Show_Lazy_Initialization is
  subtype A_Task_Number is Natural;

   Value             : aliased Lazy_Value;
   Value_Modified_By : A_Task_Number := 0;

   task type A_Task is
      entry Start (This : A_Task_Number);
      entry Stop;
   end A_Task;

   task body A_Task is
      Task_Number : A_Task_Number;
   begin
      accept Start (This : A_Task_Number) do
         Task_Number := This;
      end Start;

      Sleep_Some_Time : declare
         subtype Sleep_Range is
           Integer range 1 .. 3;

         package Random_Sleep is new
           Ada.Numerics.Discrete_Random
             (Sleep_Range);
         use Random_Sleep;

         G : Generator;
      begin
         Reset (G);
         delay Duration (Random (G));
      end Sleep_Some_Time;

      Generate_Value : declare
         use Lazy_Value_Random;

         G             :         Generator;
         Initial_Value :         Lazy_Value_Range;
         Prior         : aliased Lazy_Value;
      begin
         Reset (G);
         Initial_Value := Random (G);

         if Atomic_Compare_And_Exchange
           (Item    => Value,
            Prior   => Prior,
            Desired => Lazy_Value (Initial_Value))
         then
            Value_Modified_By := Task_Number;
         end if;

      end Generate_Value;

```

(continues on next page)

(continued from previous page)

```
61       accept Stop do
62          Put_Line ("Current task number:     "
63                    & Task_Number'Image);
64          Put_Line ("Value:                   "
65                    & Value'Image);
66          Put_Line ("Modified by task number: "
67                    & Value_Modified_By'Image);
68          Put_Line ("----------------------");
69       end Stop;
70    end A_Task;
71
72    Some_Tasks : array (1 .. 5) of A_Task;
73 begin
74    for I in Some_Tasks'Range loop
75       Some_Tasks (I).Start (I);
76    end loop;
77    for I in Some_Tasks'Range loop
78       Some_Tasks (I).Stop;
79    end loop;
80 end Show_Lazy_Initialization;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Shared_Variable_Control.Atomic_Operations.
 ↪Compare_And_Exchange
MD5: 9cc898edd767f8bbcfe2c81e7ca0e442
```

Runtime output

```
Current task number:      1
Value:                  863
Modified by task number:  5
----------------------
Current task number:      2
Value:                  863
Modified by task number:  5
----------------------
Current task number:      3
Value:                  863
Modified by task number:  5
----------------------
Current task number:      4
Value:                  863
Modified by task number:  5
----------------------
Current task number:      5
Value:                  863
Modified by task number:  5
----------------------
```

In the `Show_Lazy_Initialization` procedure, the most important variable is `Value`, which is the variable we have to protect via a lock. In addition, we have the auxiliary `Value_Modified_By` variable, which indicates the number of the task that initialized the `Value` variable.

In this procedure, we also see two main *block statements* (page 720):

- the block statement with the `Sleep_Some_Time` identifier, where we make the task *sleep* for a random amount of time (in the `Sleep_Range` range); and
- the block statement with the `Generate_Value` identified, where we generate a new value randomly and attempt to update the `Value` variable (of `Lazy_Value` type).

Let's discuss some details about the Generate_Value block statement. We start by declaring some variables. Here, it's important to highlight that the Prior variable is initialized with the default value (Lazy_Value_Default_Value). We then call the Atomic_Compare_And_Exchange function, and pass Value and Prior as actual parameters. We can have two possible outcomes:

1. If Value hasn't been modified by a task yet, it will contain the default value — which means that the values of the Prior and Value variables match. In this case, the call to Atomic_Compare_And_Exchange will update the Value variable and return **True**. (Note that we also update the Value_Modified_By variable when Atomic_Compare_And_Exchange returns **True**.)
2. If Value has already been modified by a task, its value doesn't match the (default) value of Prior anymore, so the call to Atomic_Compare_And_Exchange doesn't modify the Value variable.

As mentioned before, we use a stricter range for the random number generator: the Lazy_Value_Range. Because this range doesn't contain the default value (Lazy_Value_Default_Value), we will never generate a random value that matches the default value.

Relevant topics

- C.6.2 The Package System.Atomic_Operations.Exchange[93]

Atomic Test and Set

The System.Atomic_Operations.Test_And_Set package provides atomic operations to set and clear atomic flags. To declare flags, we use the Test_And_Set_Flag type. The following operations are available:

1. the Atomic_Test_And_Set function, which we call to verify whether the flag can be set and, if positive, set it accordingly.
   - The function returns **True** if the flag has been set, and **False** otherwise.
2. the Atomic_Clear procedure, which we call to clear the flag.

We can use these functions to implement an application similar to the *spinlocks* (page 427) that we've seen before:

Listing 236: show_test_and_set.adb

```
1  with System.Atomic_Operations.Test_And_Set;
2  use  System.Atomic_Operations.Test_And_Set;
3
4  with Ada.Text_IO; use Ada.Text_IO;
5
6  procedure Show_Test_And_Set is
7     Lock       : aliased Test_And_Set_Flag;
8     Task_Count : Integer := 0;
9
10    task type A_Task;
11
12    task body A_Task is
13       Task_Number : Integer;
14    begin
15       --  Get the lock
16       while Atomic_Test_And_Set (Lock) loop
```

(continues on next page)

[93] http://www.ada-auth.org/standards/22rm/html/RM-C-6-2.html

(continued from previous page)

```
17            null;
18         end loop;
19
20         --  At this point, we got the lock.
21         Task_Count  := Task_Count + 1;
22         Task_Number := Task_Count;
23
24         --  Release the lock.
25         Atomic_Clear (Lock);
26
27         Put_Line ("Task_Number: "
28                   & Task_Number'Image);
29
30      end A_Task;
31
32      A, B, C, D, E, F : A_Task;
33   begin
34      null;
35   end Show_Test_And_Set;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Shared_Variable_Control.Atomic_Operations.
 ↪Test_And_Set
MD5: 45814e2e157d3fd45f876c89914a5cc5
```

Runtime output

```
Task_Number:  1
Task_Number:  3
Task_Number:  2
Task_Number:  4
Task_Number:  6
Task_Number:  5
```

Here, we call `Atomic_Test_And_Set` in a loop until it returns **`True`**. Then, we update the **`Task_Count`** and **`Task_Number`**. When we're finished, we call the `Atomic_Clear` procedure to release the lock.

Relevant topics

- C.6.3 The Package System.Atomic_Operations.Test_and_Set[94]

Atomic Operations using Integer Arithmetic

The generic `System.Atomic_Operations.Integer_Arithmetic` package is used to perform atomic operations on atomic integer types. It provides the following operations: the procedures `Atomic_Add` and `Atomic_Subtract`, and the functions `Atomic_Fetch_And_Add` and `Atomic_Fetch_And_Subtract`. The procedures and the corresponding `Atomic_Fetch_` functions do basically the same thing, with the difference that `Atomic_Fetch` functions return the previous (older) value of the input item.

The `Atomic_Add` procedure performs the following operations atomically:

```
procedure Atomic_Add
  (Item  : aliased in out Atomic_Type;
   Value :               Atomic_Type) is
```

(continues on next page)

[94] http://www.ada-auth.org/standards/22rm/html/RM-C-6-3.html

(continued from previous page)

```
begin
   Item := Item + Value;
end Atomic_Add;
```

The corresponding `Atomic_Fetch_And_Add` function performs the following operations atomically:

```
function Atomic_Fetch_And_Add
  (Item  : aliased in out Atomic_Type;
   Value :                Atomic_Type)
   return Atomic_Type
is
   Old_Item : Atomic_Type := Item;
begin
   Item := Item + Value;
   return Old_Item;
end Atomic_Fetch_And_Add;
```

The `Atomic_Subtract` procedure performs the following operations atomically:

```
procedure Atomic_Subtract
  (Item  : aliased in out Atomic_Type;
   Value :                Atomic_Type) is
begin
   Item := Item - Value;
end Atomic_Subtract;
```

The corresponding `Atomic_Fetch_And_Subtract` function performs the following operations atomically:

```
function Atomic_Fetch_And_Subtract
  (Item  : aliased in out Atomic_Type;
   Value :                Atomic_Type)
   return Atomic_Type
is
   Old_Item : Atomic_Type := Item;
begin
   Item := Item - Value;
   return Old_Item;
end Atomic_Fetch_And_Subtract;
```

Let's reuse a *previous code example* (page 428) that sets a unique number for each task. In this case, instead of using locks, we use the atomic operations from the `System.Atomic_Operations.Integer_Arithmetic` package:

Listing 237: atomic_integers.ads

```
1  with System.Atomic_Operations.Integer_Arithmetic;
2
3  package Atomic_Integers is
4
5     type Atomic_Integer is new Integer
6       with Atomic;
7
8     package Atomic_Integer_Arithmetic is new
9       System.Atomic_Operations.Integer_Arithmetic
10        (Atomic_Integer);
11
12 end Atomic_Integers;
```

Listing 238: show_atomic_integers.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Atomic_Integers;
use  Atomic_Integers;
use  Atomic_Integers.Atomic_Integer_Arithmetic;

procedure Show_Atomic_Integers is
   Task_Count : aliased Atomic_Integer := 0;

   task type A_Task;

   task body A_Task is
      Task_Number : Atomic_Integer;
   begin
      Task_Number :=
        Atomic_Fetch_And_Add (Task_Count, 1);

      Put_Line ("Task_Number: "
                & Task_Number'Image);

   end A_Task;

   A, B, C, D, E, F : A_Task;
begin
   null;
end Show_Atomic_Integers;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Shared_Variable_Control.Atomic_Operations.
 ↪Integer_Arithmetic
MD5: 835093f90b9efe37b93ca84fe1ce3444
```

Runtime output

```
Task_Number:  0
Task_Number:  2
Task_Number:  1
Task_Number:  3
Task_Number:  4
Task_Number:  5
```

In this example, we call the `Atomic_Fetch_And_Add` function to update the **`Task_Count`** variable and, at the same time, initialize the **`Task`**`_Number` variable of the current task.

Relevant topics

- C.6.4 The Package System.Atomic_Operations.Integer_Arithmetic[95]

Atomic Operations using Modular Arithmetic

The generic `System.Atomic_Operations.Modular_Arithmetic` package is very similar to the `System.Atomic_Operations.Integer_Arithmetic` package. In fact, it provides the same operations: the procedures `Atomic_Add` and `Atomic_Subtract`, and the functions `Atomic_Fetch_And_Add` and `Atomic_Fetch_And_Subtract`. The only difference is that it is used for modular types instead of integer types.

[95] http://www.ada-auth.org/standards/22rm/html/RM-C-6-4.html

Let's reuse the *previous code example* (page 435), but replace the atomic integer type by an atomic modular type:

Listing 239: atomic_modulars.ads

```
with System.Atomic_Operations.Modular_Arithmetic;

package Atomic_Modulars is

   type Atomic_Modular is mod 100
     with Atomic;

   package Atomic_Modular_Arithmetic is new
     System.Atomic_Operations.Modular_Arithmetic
       (Atomic_Modular);

end Atomic_Modulars;
```

Listing 240: show_atomic_modulars.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Atomic_Modulars;
use  Atomic_Modulars;
use  Atomic_Modulars.Atomic_Modular_Arithmetic;

procedure Show_Atomic_Modulars is
   Task_Count : aliased Atomic_Modular := 0;

   task type A_Task;

   task body A_Task is
      Task_Number : Atomic_Modular;
   begin
      Task_Number :=
        Atomic_Fetch_And_Add (Task_Count, 1);

      Put_Line ("Task_Number: "
                & Task_Number'Image);

   end A_Task;

   A, B, C, D, E, F : A_Task;
begin
   null;
end Show_Atomic_Modulars;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Shared_Variable_Control.Atomic_Operations.
 ↪Modular_Arithmetic
MD5: 3a5a85febacd13f5e053cf00b19746ff
```

Runtime output

```
Task_Number:  2
Task_Number:  3
Task_Number:  0
Task_Number:  1
Task_Number:  4
Task_Number:  5
```

As we did in the previous example, we again call the Atomic_Fetch_And_Add function to

update the `Task_Count` variable and, at the same time, initialize the `Task_Number` variable of the current task. The only difference is that we use a modular type (`Atomic_Modular`).

Relevant topics

- C.6.5 The Package System.Atomic_Operations.Modular_Arithmetic[96]

25.4 Records

25.4.1 Default Initialization

As mentioned in the *Introduction to Ada* (page 65) course, record components can have default initial values. Also, we've seen that other kinds of types can have *default values* (page 337).

In the Ada Reference Manual, we refer to these default initial values as "default expressions of record components." The term *default expression* indicates that we can use any kind of expression for the default initialization of record components — which includes subprogram calls for example:

Listing 241: show_default_initialization.ads

```
1  package Show_Default_Initialization is
2
3     function Init return Integer is
4       (42);
5
6     type Rec is record
7        A : Integer := Init;
8     end record;
9
10 end Show_Default_Initialization;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Default_Initialization.Simple_
 ↪Example
MD5: 6d06be7f087513b669ba5481d6ee5004
```

In this example, the `A` component is initialized by default by a call to the `Init` procedure.

In the Ada Reference Manual

- 3.8 Record Types[97]

Dependencies

Default expressions cannot depend on other components. For example, if we have two components `A` and `B`, we cannot initialize `B` based on the value that `A` has:

Listing 242: show_default_initialization_dependency.ads

```
1  package Show_Default_Initialization_Dependency is
2
```

(continues on next page)

[96] http://www.ada-auth.org/standards/22rm/html/RM-C-6-5.html
[97] http://www.ada-auth.org/standards/22rm/html/RM-3-8.html

(continued from previous page)

```
   function Init return Integer is
     (42);

   type Rec is record
      A : Integer := Init;
      B : Integer := Rec.A;  --  Illegal!
   end record;

end Show_Default_Initialization_Dependency;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Default_Initialization.No_
 ↪Dependency
MD5: ca23cbd7e4a54d0b9c6974aed0ee77c8
```

Build output

```
show_default_initialization_dependency.ads:8:25: error: component "Rec.A" cannot␣
 ↪be used before end of record declaration
gprbuild: *** compilation phase failed
```

In this example, we cannot initialize the B component based on the value of the A component. (In fact, the syntax `Rec.A` as a way to refer to the A component is only allowed in predicates, not in the record component declaration.)

Initialization Order

The default initialization of record components is performed in arbitrary order. In fact, the order is decided by the compiler, so we don't have control over it.

Let's see an example:

Listing 243: simple_recs.ads

```
package Simple_Recs is

   function Init (S : String;
                  I : Integer)
                  return Integer;

   type Rec is record
      A : Integer := Init ("A", 1);
      B : Integer := Init ("B", 2);
   end record;

end Simple_Recs;
```

Listing 244: simple_recs.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Simple_Recs is

   function Init (S : String;
                  I : Integer)
                  return Integer is
   begin
      Put_Line (S & ": " & I'Image);
      return I;
```

(continues on next page)

(continued from previous page)

```
11    end Init;
12
13 end Simple_Recs;
```

Listing 245: show_initialization_order.adb

```
1  with Simple_Recs; use Simple_Recs;
2
3  procedure Show_Initialization_Order is
4     R : Rec;
5  begin
6     null;
7  end Show_Initialization_Order;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Default_Initialization.
 ↪Initialization_Order
MD5: e3ab92ea9b2a99815cea8c2ea11cbbfb
```

Runtime output

```
A:  1
B:  2
```

When running this code example, you might see this:

```
A: 1
B: 2
```

However, the compiler is allowed to rearrange the operations, so this output is possible as well:

```
B: 2
A: 1
```

Therefore, we must write the default expression of each individual record components in such a way that the resulting initialization value is always correct, independently of the order that those expressions are evaluated.

Evaluation

According to the Annotated Ada Reference Manual, the "default expression of a record component is only evaluated upon the creation of a default-initialized object of the record type." This means that the default expression is by itself not evaluated when we declare the record type, but when we create an object of this type. It follows from this rule that the default is only evaluated when necessary, i.e,, when an explicit initial value is not specified in the object declaration.

Let's see an example:

Listing 246: show_initialization_order.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2  with Simple_Recs; use Simple_Recs;
3
4  procedure Show_Initialization_Order is
5  begin
6     Put_Line ("Some processing first...");
7     Put_Line
```

(continues on next page)

(continued from previous page)

```
      ("Now, let's declare an object "
       & "of the record type Rec...");

   declare
      R : Rec;
   begin
      Put_Line
        ("An object of Rec type has "
         & "just been created.");
   end;

end Show_Initialization_Order;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Default_Initialization.
 ↪Initialization_Order
MD5: 126e3edfe4cb8033f40b939ff9922958
```

Runtime output

```
Some processing first...
Now, let's declare an object of the record type Rec...
A:  1
B:  2
An object of Rec type has just been created.
```

Here, we only see the information displayed by the `Init` function — which is called to initialize the A and B components of the R record — during the object creation. In other words, the default expressions `Init ("A", 1)` and `Init ("B", 2)` are *not* evaluated when we declare the R type, but when we create an object of this type.

In the Ada Reference Manual

- 3.8 Record Types[98]

Defaults and object declaration

Note

This subsection was originally written by Robert A. Duff and published as Gem #12: Limited Types in Ada 2005[99].

Consider the following type declaration:

Listing 247: type_defaults.ads

```
package Type_Defaults is
   type Color_Enum is (Red, Blue, Green);

   type T is private;
private
   type T is
      record
```

(continues on next page)

[98] http://www.ada-auth.org/standards/22aarm/html/AA-3-8.html
[99] https://www.adacore.com/gems/ada-gem-12

(continued from previous page)

```
         Color     : Color_Enum := Red;
         Is_Gnarly : Boolean := False;
         Count     : Natural;
      end record;

   procedure Do_Something;
end Type_Defaults;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Default_Initialization.Default_
 ↪Init
MD5: 218154278081f89595534bc02e34539b
```

If we want to say, "make `Count` equal `100`, but initialize `Color` and `Is_Gnarly` to their defaults", we can do this:

Listing 248: type_defaults.adb

```
package body Type_Defaults is

   Object_100 : constant T :=
                  (Color     => <>,
                   Is_Gnarly => <>,
                   Count     => 100);

   procedure Do_Something is null;

end Type_Defaults;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Default_Initialization.Default_
 ↪Init
MD5: e64f8881ee74b90dd6058ca8961aae31
```

Historically

Prior to Ada 2005, the following style was common:

Listing 249: type_defaults.adb

```
package body Type_Defaults is

   Object_100 : constant T :=
                  (Color     => Red,
                   Is_Gnarly => False,
                   Count     => 100);

   procedure Do_Something is null;

end Type_Defaults;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Default_Initialization.Default_
 ↪Init
MD5: c1ddfae75d7f0c691356027903a6d144
```

Here, we only wanted `Object_100` to be a default-initialized T, with `Count` equal to `100`. It's a little bit annoying that we had to write the default values Red and `False` twice. What

if we change our mind about Red, and forget to change it in all the relevant places? Since Ada 2005, the <> notation comes to the rescue, as we've just seen.

On the other hand, if we want to say, "make **Count** equal 100, but initialize all other components, including the ones we might add next week, to their defaults", we can do this:

Listing 250: type_defaults.adb

```
package body Type_Defaults is

   Object_100 : constant T := (Count  => 100,
                               others => <>);

   procedure Do_Something is null;

end Type_Defaults;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Default_Initialization.Default_
 ↪Init
MD5: 93f5d71ae80ff0ebad54f2569539f536
```

Note that if we add a component `Glorp : Integer;` to type T, then the **others** case leaves `Glorp` undefined just as this code would do:

Listing 251: type_defaults.adb

```
package body Type_Defaults is

   procedure Do_Something is
      Object_100 : T;
   begin
      Object_100.Count := 100;
   end Do_Something;

end Type_Defaults;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Default_Initialization.Default_
 ↪Init
MD5: 6d328318e2695516794df33466fa5283
```

Therefore, you should be careful and think twice before using **others**.

Advanced Usages

In addition to expressions such as subprogram calls, we can use *per-object expressions* (page 510) for the default value of a record component. (We discuss this topic later on in more details.)

For example:

Listing 252: rec_per_object_expressions.ads

```
package Rec_Per_Object_Expressions is

   type T (D : Positive) is private;

```

(continues on next page)

(continued from previous page)

```
private

   type T (D : Positive) is record
      V : Natural := D - 1;
      --             ^^^^^
      --    Per-object expression
   end record;

end Rec_Per_Object_Expressions;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Default_Initialization.Per_Object_
 ↪Expressions
MD5: 92591ea482db2b009b8eeafe633ca6cd
```

In this example, component `V` is initialized by default with the per-object expression `D - 1`, where `D` refers to the discriminant `D`.

25.4.2 Mutually dependent types

In this section, we discuss how to use *incomplete types* (page 308) to declare mutually dependent types. Let's start with this example:

Listing 253: mutually_dependent.ads

```
package Mutually_Dependent is

   type T1 is record
      B : T2;
   end record;

   type T2 is record
      A : T1;
   end record;

end Mutually_Dependent;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Mutually_Dependent_Types.Mutually_
 ↪Dependent
MD5: ffa8d6ab83a1172dcbae0978952dacb2
```

Build output

```
mutually_dependent.ads:4:11: error: "T2" is undefined
gprbuild: *** compilation phase failed
```

When you try to compile this example, you get a compilation error. The first problem with this code is that, in the declaration of the T1 record, the compiler doesn't know anything about T2. We could solve this by declaring an incomplete type (`type T2;`) before the declaration of T1. This, however, doesn't solve all the problems in the code: the compiler still doesn't know the size of T2, so we cannot create a component of this type. We could, instead, declare an access type and use it here. By doing this, even though the compiler doesn't know the size of T2, it knows the size of an access type designating T2, so the record component can be of such an access type.

To summarize, in order to solve the compilation error above, we need to:

- use at least one incomplete type;

- declare at least one component as an access to an object.

For example, we could declare an incomplete type T2 and then declare the component B of the T1 record as an access to T2. This is the corrected version:

Listing 254: mutually_dependent.ads

```
package Mutually_Dependent is

   type T2;
   type T2_Access is access T2;

   type T1 is record
      B : T2_Access;
   end record;

   type T2 is record
      A : T1;
   end record;

end Mutually_Dependent;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Mutually_Dependent_Types.Mutually_
 ↪Dependent
MD5: 1ae10638624a97fa18b9d8f96bfa74ed
```

We could strive for consistency and declare two incomplete types and two accesses, but this isn't strictly necessary in this case. Here's the adapted code:

Listing 255: mutually_dependent.ads

```
package Mutually_Dependent is

   type T1;
   type T1_Access is access T1;

   type T2;
   type T2_Access is access T2;

   type T1 is record
      B : T2_Access;
   end record;

   type T2 is record
      A : T1_Access;
   end record;

end Mutually_Dependent;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Mutually_Dependent_Types.Mutually_
 ↪Dependent
MD5: 9a9899cd0dd2525bd27d67d6629a0071
```

Later on, we'll see that these code examples can be written using *anonymous access types* (page 983).

In the Ada Reference Manual

- 3.10.1 Incomplete Type Declarations[100]

25.4.3 Null records

A null record is a record that doesn't have any components. Consequently, it cannot store any information. When declaring a null record, we simply write **null** instead of declaring actual components, as we usually do for records. For example:

Listing 256: null_recs.ads

```
package Null_Recs is

   type Null_Record is record
      null;
   end record;

end Null_Recs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Null_Records.Null_Record
MD5: 3c82da822710342354134fa71a03452a
```

Note that the syntax can be simplified to **is null record**, which is much more common than the previous form:

Listing 257: null_recs.ads

```
package Null_Recs is

   type Null_Record is null record;

end Null_Recs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Null_Records.Null_Record
MD5: 1da1746ce5b0a237276272d2b620e282
```

Although a null record doesn't have components, we can still specify subprograms for it. For example, we could specify an addition operation for it:

Listing 258: null_recs.ads

```
package Null_Recs is

   type Null_Record is null record;

   function "+" (A, B : Null_Record)
                 return Null_Record;

end Null_Recs;
```

Listing 259: null_recs.adb

```
package body Null_Recs is

   function "+" (A, B : Null_Record)
```

(continues on next page)

[100] http://www.ada-auth.org/standards/22rm/html/RM-3-10-1.html

(continued from previous page)

```
                  return Null_Record
   is
      pragma Unreferenced (A, B);
   begin
      return (null record);
   end "+";

end Null_Recs;
```

Listing 260: show_null_rec.adb

```
with Null_Recs; use Null_Recs;

procedure Show_Null_Rec is
   A, B : Null_Record;
begin
   B := A + A;
   A := A + B;
end Show_Null_Rec;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Null_Records.Null_Record
MD5: 3a1c2fbae75541dfb0b2ff4c14d22039
```

In the Ada Reference Manual

- 4.3.1 Record Aggregates[101]

Simple Prototyping

A null record doesn't provide much functionality on itself, as we're not storing any information in it. However, it's far from being useless. For example, we can make use of null records to design an API, which we can then use in an application without having to implement the actual functionality of the API. This allows us to design a prototype without having to think about all the implementation details of the API in the first stage.

Consider this example:

Listing 261: devices.ads

```
package Devices is

   type Device is private;

   function Create
     (Active : Boolean)
      return Device;

   procedure Reset
     (D : out Device) is null;

   procedure Process
     (D : in out Device) is null;

   procedure Activate
```

(continues on next page)

[101] http://www.ada-auth.org/standards/22rm/html/RM-4-3-1.html

(continued from previous page)

```
      (D : in out Device) is null;

   procedure Deactivate
      (D : in out Device) is null;

private

   type Device is null record;

   function Create (Active : Boolean)
                    return Device is
      (null record);

end Devices;
```

Listing 262: show_device.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Devices;     use Devices;

procedure Show_Device is
   A : Device;
begin
   Put_Line ("Creating device...");
   A := Create (Active => True);

   Put_Line ("Processing on device...");
   Process (A);

   Put_Line ("Deactivating device...");
   Deactivate (A);

   Put_Line ("Activating device...");
   Activate (A);

   Put_Line ("Resetting device...");
   Reset (A);
end Show_Device;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Null_Records.Device
MD5: 7d2fce20ac33607f7081381b307a564a
```

Runtime output

```
Creating device...
Processing on device...
Deactivating device...
Activating device...
Resetting device...
```

In the `Devices` package, we're declaring the `Device` type and its primitive subprograms: `Create`, `Reset`, `Process`, `Activate` and `Deactivate`. This is the API that we use in our prototype. Note that, although the `Device` type is declared as a private type, it's still defined as a null record in the full view.

In this example, the `Create` function, implemented as an expression function in the private part, simply returns a null record. As expected, this null record returned by `Create` matches the definition of the `Device` type.

All procedures associated with the `Device` type are implemented as null procedures, which

means they don't actually have an implementation nor have any effect. We'll discuss this topic *later on in the course* (page 758).

In the Show_Device procedure — which is an application that implements our prototype —, we declare an object of Device type and call all subprograms associated with that type.

Extending the prototype

Because we're either using expression functions or null procedures in the specification of the Devices package, we don't have a package body for it (as there's nothing to be implemented). We could, however, move those user messages from the Show_Devices procedure to a dummy implementation of the Devices package. This is the adapted code:

Listing 263: devices.ads

```
package Devices is

   type Device is null record;

   function Create (Active : Boolean)
                    return Device;

   procedure Reset (D : out Device);

   procedure Process (D : in out Device);

   procedure Activate (D : in out Device);

   procedure Deactivate (D : in out Device);

end Devices;
```

Listing 264: devices.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Devices is

   function Create (Active : Boolean)
                    return Device
   is
      pragma Unreferenced (Active);
   begin
      Put_Line ("Creating device...");
      return (null record);
   end Create;

   procedure Reset (D : out Device)
   is
      pragma Unreferenced (D);
   begin
      Put_Line ("Processing on device...");
   end Reset;

   procedure Process (D : in out Device)
   is
      pragma Unreferenced (D);
   begin
      Put_Line ("Deactivating device...");
   end Process;

   procedure Activate (D : in out Device)
```

(continues on next page)

(continued from previous page)

```
   is
      pragma Unreferenced (D);
   begin
      Put_Line ("Activating device...");
   end Activate;

   procedure Deactivate (D : in out Device)
   is
      pragma Unreferenced (D);
   begin
      Put_Line ("Resetting device...");
   end Deactivate;

end Devices;
```

Listing 265: show_device.adb

```
with Devices; use Devices;

procedure Show_Device is
   A : Device;
begin
   A := Create (Active => True);
   Process (A);
   Deactivate (A);
   Activate (A);
   Reset (A);
end Show_Device;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Null_Records.Device
MD5: 1a21b41f3847f6c132ccbc9696ab7689
```

Runtime output

```
Creating device...
Deactivating device...
Resetting device...
Activating device...
Processing on device...
```

As we changed the specification of the `Devices` package to not use null procedures, we now need a corresponding package body for it. In this package body, we implement the operations on the `Device` type, which actually just display a user message indicating which operation is being called.

Let's focus on this updated version of the `Show_Device` procedure. Now that we've removed all those calls to `Put_Line` from this procedure and just have the calls to operations associated with the `Device` type, it becomes more apparent that, even though `Device` is just a null record, we can design an application with a sequence of various commands operating on it. Also, when we just read the source-code of the `Show_Device` procedure, there's no clear indication that the `Device` type doesn't actually hold any information.

More complex applications

As we've just seen, we can use null records like any other type and create complex prototypes with them. We could, for instance, design an application that makes use of many null records, or even have types that depend on or derive from null records. Let's see a simple example:

Listing 266: many_devices.ads

```
package Many_Devices is

   type Device is null record;

   type Device_Config is null record;

   function Create (Config : Device_Config)
                    return Device is
     (null record);

   type Derived_Device is new Device;

   procedure Process (D : Derived_Device) is null;

end Many_Devices;
```

Listing 267: show_derived_device.adb

```
with Many_Devices; use Many_Devices;

procedure Show_Derived_Device is
   A : Device;
   B : Derived_Device;
   C : Device_Config;
begin
   A := Create (Config => C);
   B := Create (Config => C);

   Process (B);
end Show_Derived_Device;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Null_Records.Derived_Device
MD5: 757a3def24c8333a27b64943727d8d4e
```

In this example, the `Create` function has a null record parameter (of `Device_Config` type) and returns a null record (of `Device` type). Also, we derive the `Derived_Device` type from the `Device` type. Consequently, `Derived_Device` is also a null record (since it's derived from a null record). In the `Show_Derived_Device` procedure, we declare objects of those types (`A`, `B` and `C`) and call primitive subprograms to operate on them.

This example shows that, even though the types we've declared are *just* null records, they can still be used to represent dependencies in our application.

Implementing the API

Let's focus again on the previous example. After we have an initial prototype, we can start implementing some of the functionality needed for the `Device` type. For example, we can store information about the current activation state in the record:

Listing 268: devices.ads

```
package Devices is

   type Device is private;

   function Create (Active : Boolean)
```

(continues on next page)

(continued from previous page)

```
                    return Device;

   procedure Reset (D : out Device);

   procedure Process (D : in out Device);

   procedure Activate (D : in out Device);

   procedure Deactivate (D : in out Device);

private

   type Device is record
      Active : Boolean;
   end record;

end Devices;
```

Listing 269: devices.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Devices is

   function Create (Active : Boolean)
                    return Device
   is
      pragma Unreferenced (Active);
   begin
      Put_Line ("Creating device...");
      return (Active => Active);
   end Create;

   procedure Reset (D : out Device)
   is
      pragma Unreferenced (D);
   begin
      Put_Line ("Processing on device...");
   end Reset;

   procedure Process (D : in out Device)
   is
      pragma Unreferenced (D);
   begin
      Put_Line ("Deactivating device...");
   end Process;

   procedure Activate (D : in out Device)
   is
   begin
      Put_Line ("Activating device...");
      D.Active := True;
   end Activate;

   procedure Deactivate (D : in out Device)
   is
   begin
      Put_Line ("Resetting device...");
      D.Active := False;
   end Deactivate;

```

(continues on next page)

(continued from previous page)

```
42 end Devices;
```

Listing 270: show_device.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2  with Devices;     use Devices;
3
4  procedure Show_Device is
5     A : Device;
6  begin
7     A := Create (Active => True);
8     Process (A);
9     Deactivate (A);
10    Activate (A);
11    Reset (A);
12 end Show_Device;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Null_Records.Device
MD5: 348ce0c110b47a6b6fd1c9fe73ef0558
```

Build output

```
devices.adb:11:25: warning: aspect Unreferenced specified for "Active" [enabled by␣
↪default]
```

Runtime output

```
Creating device...
Deactivating device...
Resetting device...
Activating device...
Processing on device...
```

Now, the `Device` record contains an `Active` component, which is used in the updated versions of `Create`, `Activate` and `Deactivate`.

Note that we haven't done any change to the implementation of the `Show_Device` procedure: it's still the same application as before. As we've been hinting in the beginning, using null records makes it easy for us to first create a prototype — as we did in the `Show_Device` procedure — and postpone the API implementation to a later phase of the project.

Tagged null records

A null record may be tagged, as we can see in this example:

Listing 271: null_recs.ads

```
1  package Null_Recs is
2
3     type Tagged_Null_Record is
4       tagged null record;
5
6     type Abstract_Tagged_Null_Record is
7       abstract tagged null record;
8
9  end Null_Recs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Null_Records.Tagged_Null_Record
MD5: 918572d2c50911b84c80a9c601b75439
```

As we see in this example, a type can be **tagged**, or even **abstract tagged**. We discuss abstract types later on in the course.

As expected, in addition to deriving from tagged types, we can also extend them. For example:

Listing 272: devices.ads

```
1  package Devices is
2
3     type Device is private;
4
5     function Create (Active : Boolean)
6                      return Device;
7
8     type Derived_Device is private;
9
10 private
11
12    type Device is tagged null record;
13
14    function Create (Active : Boolean)
15                     return Device is
16      (null record);
17
18    type Derived_Device is new Device with record
19       Active : Boolean;
20    end record;
21
22    function Create (Active : Boolean)
23                     return Derived_Device is
24      (Active => Active);
25
26 end Devices;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Null_Records.Extended_Device
MD5: 15e06a5115cbcb131477b5224a6594db
```

In this example, we derive `Derived_Device` from the `Device` type and extend it with the `Active` component. (Because we have a type extension, we also need to override the `Create` function.)

Since we're now introducing elements from object-oriented programming, we could consider using interfaces instead of null records. We'll discuss this topic later on in the course.

25.4.4 Record discriminants

We introduced the topic of record discriminants in the *Introduction to Ada course* (page 102). Also, in a previous chapter, we mentioned that record types with unconstrained discriminants without defaults are *indefinite types* (page 302).

In this section, we discuss a couple of details about record discriminants that we haven't covered yet. Although the discussion will be restricted to record discriminants, keep in mind that tasks and protected types can also have discriminants. We'll focus on discriminants for tasks and protected types in separate chapters.

In addition, discriminants can be used to write *per-object expressions* (page 507). We discuss this topic later in this chapter.

In the Ada Reference Manual

- 3.7 Discriminants[102]

Known and unknown discriminant parts

When it comes to discriminants, a type declaration falls into one of the following three categories: it has either no discriminants at all, known discriminants or unknown discriminants.

In order to have no discriminants, a type simply doesn't have a discriminant part in its declaration. For example:

Listing 273: show_discriminants.ads

```
1  package Show_Discriminants is
2
3     type T_No_Discr is private;
4     --             ^^^
5     --   no discriminant part
6
7  private
8
9     type T_No_Discr is null record;
10
11 end Show_Discriminants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants.No_Discriminant_Part
MD5: f6701bd9c46b265753a258a6f99a5c7a
```

By using parentheses after the type name, we're defining a discriminant part. In this case, the type can either have unknown or known discriminants. For example:

Listing 274: show_discriminants.ads

```
1  package Show_Discriminants is
2
3     type T_Unknown_Discr (<>) is
4     --                    ^^
5     --   Unknown discriminant
6       private;
7
8     type T_Known_Discr (D : Integer) is
9     --                  ^^^^^^^^^^^
10    --   Known discriminant
11      private;
12
13 private
14
15    type T_Unknown_Discr is
16      null record;
17
18    type T_Known_Discr (D : Integer) is
19      null record;
```

(continues on next page)

[102] http://www.ada-auth.org/standards/12rm/html/RM-3-7.html

(continued from previous page)

```
20
21 end Show_Discriminants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants.Discriminant_Parts
MD5: 486edc81b72473e022bb9e56ebaca559
```

An unknown discriminant part is represented by (<>) in the partial view — this is basically the so-called *box notation* <> (also known as *box compound delimiter*) in parentheses. We discuss unknown discriminant parts and their peculiarities *later on in this chapter* (page 484). In this section, we mainly focus on known discriminants.

We've already seen examples of known discriminants in previous chapters. In simple terms, known discriminants are composed by one or more discriminant specifications, which are similar to subprogram parameters, but without parameter modes. In fact, we can think of discriminants as parameters for a type T, but with the goal of defining specific characteristics or constraints when declaring objects of type T.

Discriminant as constant property

We can think of discriminants as constant properties of a type. In fact, if you want to specify a record component C that shouldn't change, declaring it constant isn't allowed in Ada:

Listing 275: constant_properties.ads

```
1  package Constant_Properties is
2
3     type Rec is record
4        C : constant Integer;
5        --  ^^^^^^^^
6        --  ERROR: record components
7        --          cannot be constant.
8        V :          Integer;
9     end record;
10
11 end Constant_Properties;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants.Constant_Properties
MD5: ba189f437348c5892847d067b0bc2e78
```

Build output

```
constant_properties.ads:4:11: error: constant component not permitted
gprbuild: *** compilation phase failed
```

A simple solution is to use a record discriminant:

Listing 276: constant_properties.ads

```
1  package Constant_Properties is
2
3     type Rec (C : Integer) is
4     record
5        V :          Integer;
6     end record;
7
8  end Constant_Properties;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants.Constant_Properties
MD5: b638c2fd78761def2b60e9ae7dceb765
```

A record discriminant can be accessed as a normal component, but it is read-only, so we cannot change it:

Listing 277: show_constant_property.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Constant_Properties;
use  Constant_Properties;

procedure Show_Constant_Property is
   R : Rec (10);
begin
   Put_Line ("R.C = "
             & R.C'Image);

   R.C := R.C + 1;
   --  ERROR: cannot change
   --         record discriminant
end Show_Constant_Property;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants.Constant_Properties
MD5: 82cde0032f2cb022e690f1175216fd77
```

Build output

```
show_constant_property.adb:12:05: error: assignment to discriminant not allowed
gprbuild: *** compilation phase failed
```

In this code example, the compilation fails because we cannot change the C discriminant. In this sense, C is a basically a constant component of the R object.

Private types

As we've seen in previous chapters, private types can have discriminants. For example:

Listing 278: private_with_discriminants.ads

```
package Private_With_Discriminants is

   type T (L : Positive) is private;

private

   type Integer_Array is
     array (Positive range <>) of Integer;

   type T (L : Positive) is
   record
      Arr : Integer_Array (1 .. L);
   end record;

end Private_With_Discriminants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants.Private_With_
 ↪Discriminants
MD5: 8f63443479e31a187a038381d9a32831
```

Here, discriminant L is used to specify the constraints of the array component `Arr`. Note that the same discriminant part must appear in both *the partial and the full view* (page 310) of type T.

Object declaration

As we've already seen, we declare objects of a type T with a discriminant `D` by specifying the actual value of discriminant `D`. This is called a *discriminant constraint* (page 478). For example:

Listing 279: recs.ads

```
1  package Recs is
2
3     type T (L : Positive;
4             M : Positive) is
5       null record;
6
7  end Recs;
```

Listing 280: show_object_declaration.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  with Recs;        use Recs;
4
5  procedure Show_Object_Declaration is
6     A : T (L => 5, M => 6);
7     B : T (7, 8);
8  begin
9     Put_Line ("A.L = "
10              & A.L'Image);
11    Put_Line ("A.M = "
12              & A.M'Image);
13    Put_Line ("B.L = "
14              & B.L'Image);
15    Put_Line ("B.M = "
16              & B.M'Image);
17 end Show_Object_Declaration;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants.Objects_
 ↪Discriminants
MD5: 9daae29be9d0f99980ca152a3aca7363
```

Runtime output

```
A.L =  5
A.M =  6
B.L =  7
B.M =  8
```

As we can see in the declaration of objects A and B, for the discriminant values, we can use a positional (`(7, 8)`) or named association (`(L => 5, M => 6)`).

Object size

Discriminants can have an impact on the object size because we can set the discriminant to constraint a component of an *indefinite subtype* (page 302). For example:

Listing 281: recs.ads

```
package Recs is

   type Null_Rec (L : Positive;
                  M : Positive) is
     private;

   type Rec_Array (L : Positive) is
     private;

private

   type Null_Rec (L : Positive;
                  M : Positive) is
     null record;

   type Integer_Array is
     array (Positive range <>) of Integer;

   type Rec_Array (L : Positive) is
   record
      Arr : Integer_Array (1 .. L);
   end record;

end Recs;
```

Listing 282: show_object_sizes.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Recs;        use Recs;

procedure Show_Object_Sizes is
   Null_Rec_A  : Null_Rec (1, 2);
   Null_Rec_B  : Null_Rec (5, 6);
   Rec_Array_A : Rec_Array (10);
   Rec_Array_B : Rec_Array (20);
begin
   Put_Line ("Null_Rec_A'Size = "
             & Null_Rec_A'Size'Image);
   Put_Line ("Null_Rec_B'Size = "
             & Null_Rec_B'Size'Image);
   Put_Line ("Rec_Array_A'Size = "
             & Rec_Array_A'Size'Image);
   Put_Line ("Rec_Array_B'Size = "
             & Rec_Array_B'Size'Image);
end Show_Object_Sizes;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants.Objects_
 ↪Discriminants_Size
MD5: 0abbc12286aff9fe428ea585564cf6d4
```

Build output

```
show_object_sizes.adb:8:04: warning: variable "Rec_Array_A" is read but never␣
 ↪assigned [-gnatwv]
show_object_sizes.adb:9:04: warning: variable "Rec_Array_B" is read but never␣
 ↪assigned [-gnatwv]
```

Runtime output

```
Null_Rec_A'Size =  64
Null_Rec_B'Size =  64
Rec_Array_A'Size =  352
Rec_Array_B'Size =  672
```

In this example, `Null_Rec_A` and `Null_Rec_B` have the same size because the type is a null record. However, `Rec_Array_A` and `Rec_Array_B` have different sizes because we're setting the `L` discriminant — which we use to constraint the `Arr` array component of the `Rec_Array` type — to 10 and 20, respectively.

Object assignments

As we've just seen, when we set the values for the discriminants of a type in the object declaration, we're constraining the objects. Those constraints are checked at runtime by the *discriminant check* (page 771). If the discriminants don't match, the `Constraint_Error` exception is raised.

Let's see an example:

Listing 283: recs.ads

```
1  package Recs is
2
3     type T (L : Positive;
4             M : Positive) is
5       null record;
6
7  end Recs;
```

Listing 284: show_object_assignments.adb

```
1  with Recs;        use Recs;
2
3  procedure Show_Object_Assignments is
4     A1, A2 : T (5, 6);
5     B      : T (7, 8);
6  begin
7     A1 := A2;     --  OK
8     B  := A1;     --  ERROR!
9  end Show_Object_Assignments;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants.Object_Assignments
MD5: 199247f1c0575c6845d85fd1911e1cf2
```

Build output

```
show_object_assignments.adb:8:10: warning: incorrect value for discriminant "L"␣
 ↪[enabled by default]
show_object_assignments.adb:8:10: warning: Constraint_Error will be raised at run␣
 ↪time [enabled by default]
```

Runtime output

```
raised CONSTRAINT_ERROR : show_object_assignments.adb:8 discriminant check failed
```

In this example, the `A1 := A2` assignment is accepted because both `A1` and `A2` have the same constraints (`(5, 6)`). However, the `B := A1` assignment is not accepted because the discriminant check fails at runtime.

Note that the discriminant check is not performed when we use *mutable subtypes* (page 465) — we discuss this specific kind of subtypes later on.

Discriminant type

In a discriminant specification, the type of the discriminant can only be a discrete subtype or an *access type* (page 853). Other kinds of types — e.g. composite types such as record types — are illegal for discriminants. However, we can always use them indirectly by using access types. (We'll see an example later.)

In addition to that, we can also use a different kind of access types, namely *anonymous access-to-object subtypes* (page 963). This specific kind of discriminant is called *access discriminant* (page 973). We discuss this topic in more details in another chapter.

Let's see a code example:

Listing 285: recs.ads

```
package Recs is

   type Usage_Mode is (Off,
                       Simple_Usage,
                       Advanced_Usage);

   type Priv_Info is private;

   type Priv_Info_Access is access Priv_Info;

   type Proc_Access is
     access procedure (P : in out Priv_Info);

   type Priv_Rec (Last  : Positive;
                  Usage : Usage_Mode;
                  Info  : Priv_Info_Access;
                  Proc  : Proc_Access) is
     private;

private

   type Priv_Info is record
     A : Positive;
     B : Positive;
   end record;

   type Priv_Rec (Last  : Positive;
                  Usage : Usage_Mode;
                  Info  : Priv_Info_Access;
                  Proc  : Proc_Access) is
     null record;

end Recs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants.Discriminants_
 ↪Subtype
MD5: 4ddbc703d8ffcd6dc31e3715df62931a
```

In this example, we're declaring the Priv_Rec type with the following discriminants:

- The Last discriminant of the scalar (i.e. discrete) type **Positive**;
- The Usage discriminant of the enumeration (i.e. discrete) type Usage_Mode;
- The Info discriminant of the *access-to-object type* (page 843) Priv_Info_Access;
  - We discuss *access-to-object types as discriminant type* (page 853) in another chapter.
- The Proc discriminant of the *access-to-subprogram type* (page 926) Proc_Access;
  - We discuss *access-to-subprogram types as discriminant type* (page 932) in another chapter.

As indicated previously, it's illegal to use a private type or a record type as the type of a discriminant. For example:

Listing 286: recs.ads

```
1  package Recs is
2
3     type Priv_Info is private;
4
5     type Priv_Rec (Info : Priv_Info) is
6       private;
7     --              ^^^^^^^^^^^^^^^^
8     --  ERROR: cannot use private type
9     --         in discriminant.
10
11 private
12
13    type Priv_Info is record
14      A : Positive;
15      B : Positive;
16    end record;
17
18    type Priv_Rec (Info  : Priv_Info) is
19      null record;
20
21 end Recs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants.Discriminants_
 ↪Subtype_Error
MD5: 17f36f0e09cb069d8215b38adbb46541
```

Build output

```
recs.ads:5:26: error: discriminants must have a discrete or access type
gprbuild: *** compilation phase failed
```

We cannot use the Priv_Info directly as a discriminant type because it's a private type. However, as we've just seen in the previous code example, we use it indirectly by using an access type to this private type (see Priv_Info_Access in the code example).

Indefinite subtypes as discriminants

As we already implied, we cannot use indefinite subtypes as discriminants. For example, the following code won't compile:

Listing 287: unconstrained_types.ads

```
package Unconstrained_Types is

   type Integer_Array is
     array (Positive range <>) of Integer;

   type Simple_Record (Arr : Integer_Array) is
   --                        ^^^^^^^^^^^^^^^^^^^
   --  ERROR: cannot use indefinite type
   --         in discriminant.
   record
      L : Natural := Arr'Length;
   end record;

end Unconstrained_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Definite_Indefinite_Subtypes.
 ↪Indefinite_Types_Error
MD5: f373b401ef1b179fef15cce0d2077286
```

Build output

```
unconstrained_types.ads:6:30: error: discriminants must have a discrete or access␣
 ↪type
gprbuild: *** compilation phase failed
```

`Integer_Array` is a correct type declaration — although the type itself is indefinite after the declaration. However, we cannot use it as the discriminant in the declaration of `Simple_Record`. We could, however, have a correct declaration by using discriminants as access values:

Listing 288: unconstrained_types.ads

```
package Unconstrained_Types is

   type Integer_Array is
     array (Positive range <>) of Integer;

   type Integer_Array_Access is
     access Integer_Array;

   type Simple_Record
     (Arr : Integer_Array_Access) is
   record
      L : Natural := Arr'Length;
   end record;

end Unconstrained_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Types.Definite_Indefinite_Subtypes.
 ↪Indefinite_Types_Error
MD5: dc8193e3684b172e8503e1c5427cf93d
```

By adding the `Integer_Array_Access` type and using it in `Simple_Record`'s type declaration, we can indirectly use an indefinite type in the declaration of another indefinite type. We discuss this topic later *in another chapter* (page 853).

Default values

We can specify default values for discriminants. Note, however, that we must either specify default values for **all** discriminants of the discriminant part or for none of them. This contrasts with default values for subprogram parameters, where we can *specify default values for just a subset of all parameters of a specific subprogram* (page 732).

As expected, we can override the default values by specifying the values of each discriminant when declaring an object. Let's see a simple example:

Listing 289: recs.ads

```
package Recs is

   type T (L : Positive := 1;
           M : Positive := 2) is
     private;

private

   type T (L : Positive := 1;
           M : Positive := 2) is
     null record;

end Recs;
```

Listing 290: show_object_declaration.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Recs;        use Recs;

procedure Show_Object_Declaration is
   A : T;
   B : T (7, 8);
begin
   Put_Line ("A.L = "
             & A.L'Image);
   Put_Line ("A.M = "
             & A.M'Image);
   Put_Line ("B.L = "
             & B.L'Image);
   Put_Line ("B.M = "
             & B.M'Image);
end Show_Object_Declaration;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants.Discriminant_
 ↪Default_Value
MD5: 33385c4ba4ed9fc90c55990bde0b70cb
```

Runtime output

```
A.L =  1
A.M =  2
B.L =  7
B.M =  8
```

In this example, object A makes use of the default values for the discriminants of type T, so it has the discriminants (L => 1, M => 2). In the case of object B, we're specifying the values (L => 7, M => 8), which are used instead of the default values.

Note that we cannot set default values for nonlimited tagged types. The same applies to generic formal types. For example:

Listing 291: recs.ads

```
package Recs is

   type TT (L : Positive := 1;
            M : Positive := 2) is
   --       ^^^^^^^^^^^^^^^^^
   --  ERROR: cannot assign default
   --          in discriminant of
   --          nonlimited tagged type.
     tagged private;

   type LTT (L : Positive := 1;
             M : Positive := 2) is
     tagged limited private;

private

   type TT (L : Positive := 1;
            M : Positive := 2) is
     tagged null record;

   type LTT (L : Positive := 1;
             M : Positive := 2) is
     tagged limited null record;

end Recs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants.Discriminant_
 ↪Default_Value_Tagged_TYpe
MD5: 94b78f032efe49de0b8198083a25d79b
```

Build output

```
recs.ads:3:29: error: discriminants of nonlimited tagged type cannot have defaults
recs.ads:4:29: error: discriminants of nonlimited tagged type cannot have defaults
gprbuild: *** compilation phase failed
```

As we can see, compilation fails because of the default values for the discriminants of the nonlimited tagged type TT. In the case of the limited tagged type LTT, the default values for the discriminants are legal.

Mutable subtypes

An unconstrained discriminated subtype with defaults is called a mutable subtype, and a variable of such a subtype is called a mutable variable because the discriminants of such a variable can be changed. An important feature of mutable subtypes is that it allows for changing the discriminants of an object via assignments — in this case, no *discriminant check* (page 771) is performed.

Let's see an example:

Listing 292: mutability.ads

```
package Mutability is

   type T_Non_Mutable
     (L : Positive;
      M : Positive) is
     null record;

   type T_Mutable
     (L : Positive := 1;
      M : Positive := 2) is
     null record;

end Mutability;
```

Listing 293: show_mutable_subtype_assignment.adb

```
with Mutability; use Mutability;

procedure Show_Mutable_Subtype_Assignment is
   NM_1 : T_Non_Mutable (5, 6);
   NM_2 : T_Non_Mutable (7, 8);

   M_1  : T_Mutable (7, 8);
   M_2  : T_Mutable;
begin
   NM_2 := NM_1;  --  ERROR!
   M_2  := M_1;   --  OK
end Show_Mutable_Subtype_Assignment;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants.Mutable_Subtype
MD5: ace4470544bdc6efb0dca7039ca33cbc
```

Build output

```
show_mutable_subtype_assignment.adb:10:12: warning: incorrect value for␣
 ↪discriminant "L" [enabled by default]
show_mutable_subtype_assignment.adb:10:12: warning: Constraint_Error will be␣
 ↪raised at run time [enabled by default]
```

Runtime output

```

raised CONSTRAINT_ERROR : show_mutable_subtype_assignment.adb:10 discriminant␣
 ↪check failed
```

In this example, the `NM_2 := NM_1` assignment fails because both objects are of a non-mutable subtype with different discriminants, so that the discriminant check fails at run-time. However, the `M_2 := M_1` assignment is OK because both objects are mutable variables. In this case, this assignment changes the discriminants of `M_2` from `(L => 1, M => 2)` to `(L => 7, M => 8)`.

Note that assignments of mutable variables may not always work at runtime. For example, if a discriminant of a mutable subtype is used to constraint a component of indefinite subtype, we might see the corresponding checks fail at runtime. For example:

Listing 294: mutability.ads

```
package Mutability is

   type T_Mutable_Array (L : Positive := 10) is
     private;

private

   type Integer_Array is
     array (Positive range <>) of Integer;

   type T_Mutable_Array (L : Positive := 10) is
   record
      Arr : Integer_Array (1 .. L);
   end record;

end Mutability;
```

Listing 295: show_mutable_subtype_error.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Mutability;  use Mutability;

procedure Show_Mutable_Subtype_Error is
   A : T_Mutable_Array (10);
   B : T_Mutable_Array (20);
begin
   Put_Line ("A'Size = "
             & A'Size'Image);
   Put_Line ("B'Size = "
             & B'Size'Image);

   A := B;  --  ERROR!
end Show_Mutable_Subtype_Error;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants.Mutable_Subtype_
 ↪Error
MD5: 95bc55e7a01c1160dd2f7139778d2d16
```

Build output

```
show_mutable_subtype_error.adb:7:04: warning: variable "B" is read but never␣
 ↪assigned [-gnatwv]
show_mutable_subtype_error.adb:14:09: warning: incorrect value for discriminant "L
 ↪" [enabled by default]
show_mutable_subtype_error.adb:14:09: warning: Constraint_Error will be raised at␣
 ↪run time [enabled by default]
mutability.ads:11:09: warning: creation of "T_Mutable_Array" object may raise␣
 ↪Storage_Error [enabled by default]
```

Runtime output

```
A'Size =  352
B'Size =  672

raised CONSTRAINT_ERROR : show_mutable_subtype_error.adb:14 discriminant check␣
 ↪failed
```

In this case, the assignment `A := B` raises the `Constraint_Error` exception at runtime. Here, the `Arr` component of each object has a different range: `1 .. 10` for object A and `1 .. 20` for object B. To prevent this situation, we should declare `T_Mutable_Array` as a limited type, so that assignments are not permitted.

Derived types and subtypes

As expected, we may derive types with discriminants or declare subtypes of it. However, there are a couple of details associated with this, which we discuss now.

Subtypes

When declaring a subtype of a type with discriminants, we have the choice to specify the value of the discriminants for the parent type, or specify no discriminants at all:

Listing 296: subtypes_with_discriminants.ads

```
package Subtypes_With_Discriminants is

   type T
     (L : Positive;
      M : Positive) is
     null record;

   subtype Sub_T is T;
   --  Discriminants are not specified:
   --  taking the ones from T.

   subtype Sub_T_2 is T
    (L => 3, M => 4);
   --  Discriminants are specified:
   --  taking the ones from Sub_T_2

end Subtypes_With_Discriminants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants.Derived_Subtypes
MD5: 6f02c295f295c81fd20d06f7c710994c
```

For the Sub_T subtype declaration in this example, we don't specify values for the parent type's discriminants. For Sub_T_2, in contrast, we set the discriminants to `(L => 3, M => 4)`.

When declaring objects of these subtypes, we need to take the constraints into account:

Listing 297: subtypes_with_discriminants.ads

```
package Subtypes_With_Discriminants is

   type T
     (L : Positive;
      M : Positive) is
     null record;

   subtype Sub_T is T;
   --  Discriminants are not specified:
   --  taking the ones from T.

   subtype Sub_T_2 is T
    (L => 3, M => 4);
```

(continues on next page)

(continued from previous page)

```
   --  Discriminants are specified:
   --  taking the ones from Sub_T_2

end Subtypes_With_Discriminants;
```

Listing 298: show_subtypes_with_discriminants.adb

```
with Subtypes_With_Discriminants;
use  Subtypes_With_Discriminants;

procedure Show_Subtypes_With_Discriminants is
   A1 : T (1, 2);
   A2 : T (3, 4);
   B1 : Sub_T (1, 2);
   B2 : Sub_T (3, 4);
   C2 : Sub_T_2;

   --  C1 : Sub_T_2 (1, 2);
   --               ^^^^
   --  ERROR: discriminants already
   --         constrained
begin
   B1 := A1;
   --  OK: discriminants match

   B2 := A1;
   --  CONSTRAINT_ERROR!

   B2 := A2;
   --  OK: discriminants match

   C2 := A1;
   --  CONSTRAINT_ERROR!

   C2 := A2;
   --  OK: discriminants match
end Show_Subtypes_With_Discriminants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants.Derived_Subtypes
MD5: 9a8516d70e7a53ae332e5c5b6df7f04e
```

Build output

```
show_subtypes_with_discriminants.adb:19:10: warning: incorrect value for␣
 ↪discriminant "L" [enabled by default]
show_subtypes_with_discriminants.adb:19:10: warning: Constraint_Error will be␣
 ↪raised at run time [enabled by default]
show_subtypes_with_discriminants.adb:25:10: warning: incorrect value for␣
 ↪discriminant "L" [enabled by default]
show_subtypes_with_discriminants.adb:25:10: warning: Constraint_Error will be␣
 ↪raised at run time [enabled by default]
```

Runtime output

```

raised CONSTRAINT_ERROR : show_subtypes_with_discriminants.adb:19 discriminant␣
 ↪check failed
```

For objects of Sub_T subtype, we *have to* specify the value of each discriminant. On the

other hand, for objects of Sub_T_2 type, we *cannot* specify the constraints because they have already been defined in the subtype's declaration — in this case, they're always set to (3, 4).

When assigning objects of different subtypes, the discriminant check will be performed — as we *mentioned before* (page 460). In this example, the assignments B2 := A1 and C2 := A1 fail because the objects have different constraints.

Derived types

The behavior for derived types is very similar to the one we've just described for subtypes. For example:

Listing 299: derived_with_discriminants.ads

```
package Derived_With_Discriminants is

   type T
     (L : Positive;
      M : Positive) is
     null record;

   type T_Derived is new T;
   --  Discriminants are not specified:
   --  taking the ones from T.

   type T_Derived_2 is new T
     (L => 3, M => 4);
   --  Discriminants are specified:
   --  taking the ones from T_Derived_2

end Derived_With_Discriminants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants.Derived_Types
MD5: 1e88f787bd9b568e43fc423c121f24f7
```

For the T_Derived type, we reuse the discriminants of the parent type T. For the T_Derived_2 type, we specify a value for each discriminant of T.

As you probably notice, this code looks very similar to the code using subtypes. The main difference between using subtypes and derived types is that, as expected, we have to perform a *type conversion* (page 317) in the assignments:

Listing 300: show_derived_with_discriminants.adb

```
with Derived_With_Discriminants;
use  Derived_With_Discriminants;

procedure Show_Derived_With_Discriminants is
   A1 : T (1, 2);
   A2 : T (3, 4);
   B1 : T_Derived (1, 2);
   B2 : T_Derived (3, 4);
   C2 : T_Derived_2;

   --  C1 : Sub_T_2 (1, 2);
   --               ^^^^
   --  ERROR: discriminants already
   --         constrained
begin
```

(continues on next page)

(continued from previous page)

```
   B1 := T_Derived (A1);
   --  OK: discriminants match

   B2 := T_Derived (A1);
   --  ERROR!

   C2 := T_Derived_2 (A1);
   --  CONSTRAINT_ERROR!

   C2 := T_Derived_2 (A2);
   --  OK: discriminants match
end Show_Derived_With_Discriminants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants.Derived_Types
MD5: 1b32807fcd3b343fbf8ab0d0287ca5bb
```

Build output

```
show_derived_with_discriminants.adb:22:23: warning: incorrect value for␣
↪discriminant "L" [enabled by default]
show_derived_with_discriminants.adb:22:23: warning: Constraint_Error will be␣
↪raised at run time [enabled by default]
```

Runtime output

```

raised CONSTRAINT_ERROR : show_derived_with_discriminants.adb:19 discriminant␣
↪check failed
```

Once again, a discriminant check is performed when assigning objects to ensure that the type discriminants match. In this code example, the assignments `B2 := A1` and `C2 := A1` fail because the objects have different constraints.

Derived types with renamed discriminants

We could rewrite a type declaration such as **`type T_Derived is new`** T by explicitly declaring the discriminants. We can do that for the previous code example:

Listing 301: derived_with_discriminants.ads

```
package Derived_With_Discriminants is

   type T
     (L : Positive;
      M : Positive) is
     null record;

   --  The declaration:
   --
   --     type T_Derived is new T;
   --
   --  is the same as:
   --
   type T_Derived
     (L : Positive;
      M : Positive) is
     new T (L => L, M => M);

end Derived_With_Discriminants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants.Derived_Types_Same_
 ↪Discriminants
MD5: 3ee4b3a70e8ab9ba2684c6a2c695f689
```

We may, however, rename the discriminants instead. For example, we could rename L and M to X and Y. For example:

Listing 302: derived_with_discriminants.ads

```
1  package Derived_With_Discriminants is
2
3     type T
4       (L : Positive;
5        M : Positive) is
6       null record;
7
8     type T_Derived
9       (X : Positive;
10       Y : Positive) is
11      new T (L => X, M => Y);
12
13 end Derived_With_Discriminants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants.Derived_Types_
 ↪Renamed_Discriminants
MD5: ec2954f538fa63b4d3c7c134527be35d
```

Of course, if we use named association when declaring objects, we have to use the correct discriminant names:

Listing 303: show_derived_with_discriminants.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  with Derived_With_Discriminants;
4  use  Derived_With_Discriminants;
5
6  procedure Show_Derived_With_Discriminants is
7     A : T (L => 1, M => 2);
8     B : T_Derived (X => 3, Y => 4);
9     --             ^^^^^^^^^^^^^^
10    --  Using correct discriminant names
11 begin
12    Put_Line ("A.L = "
13              & A.L'Image);
14    Put_Line ("A.M = "
15              & A.M'Image);
16    Put_Line ("B.X = "
17              & B.X'Image);
18    Put_Line ("B.Y = "
19              & B.Y'Image);
20 end Show_Derived_With_Discriminants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants.Derived_Types_
 ↪Renamed_Discriminants
MD5: cd3ca2d84c8b7d334b152ebab1955a5e
```

Runtime output

```
A.L =  1
A.M =  2
B.X =  3
B.Y =  4
```

In essence, the discriminants of both parent and derived types are the same: the only difference is that they are accessed by different names. This allows us to convert from a parent type to a derived type:

Listing 304: show_derived_with_discriminants.adb

```
with Derived_With_Discriminants;
use  Derived_With_Discriminants;

procedure Show_Derived_With_Discriminants is
   A : T (L => 1, M => 2);
   B : T_Derived (X => 1, Y => 2);
begin
   B := T_Derived (A);  --  OK
end Show_Derived_With_Discriminants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants.Derived_Types_
 ↪Renamed_Discriminants
MD5: d685f16bf3a9d64b4c1f182880455ad0
```

Here, even though objects A and B have discriminants with different names, the assignment `B := T_Derived (A)` is valid.

Derived types with more constrained discriminants

When deriving types with discriminants, we may use a more constrained type for the discriminants of derived type. For example, if the discriminant `D` of the parent type is of **`Integer`** type, the corresponding discriminant of the derived type may use a constrained subtype such as **`Natural`** or **`Positive`** — because both **`Natural`** and **`Positive`** are subtypes of type **`Integer`**. For example:

Listing 305: derived_with_discriminants.ads

```
package Derived_With_Discriminants is

   type T
     (L : Integer;
      M : Integer) is
     null record;

   type T_Derived_2
     (X : Natural;
      Y : Positive) is
     new T (L => X, M => Y);

end Derived_With_Discriminants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants.Derived_Types_More_
 ↪Constrained_Discriminants
MD5: 413f04f1f98dde2a6e0df3ee6955da7f
```

As expected, the constraints of each discriminant's type are taken into account when evaluating the value that is specified for each discriminant:

Listing 306: show_derived_with_discriminants.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Derived_With_Discriminants;
use  Derived_With_Discriminants;

procedure Show_Derived_With_Discriminants is
   A : T (L => -1, M => -2);
   B : T_Derived_2 (X => 0, Y => 1);
begin
   Put_Line ("A.L = "
             & A.L'Image);
   Put_Line ("A.M = "
             & A.M'Image);
   Put_Line ("B.X = "
             & B.X'Image);
   Put_Line ("B.Y = "
             & B.Y'Image);
end Show_Derived_With_Discriminants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants.Derived_Types_More_
 ↪Constrained_Discriminants
MD5: 508bb7a6eb93005f8f1e5a937b55473c
```

Runtime output

```
A.L = -1
A.M = -2
B.X =  0
B.Y =  1
```

Here, we can use `(L => -1, M => -2)` in the declaration of object A because both discriminants are of **Integer** type. However, in the declaration of object B, we can only use values for the discriminants that are in the range of the **Natural** and **Positive** subtypes, respectively. (If you change the code to use negative values instead, a `Constraint_Error` exception is raised at runtime.)

Extending the discriminant part

As we've seen, we can rename discriminants or use more constrained subtypes for discriminants in derived types. We might also want to add a new discriminant to the derived type — in addition to the discriminants of the parent's type. However, this is considered a type extension, as the new discriminant is part of the type definition.

As an example, we may want to add the A discriminant of **Boolean** type to a derived type. For non-tagged types, such a declaration will trigger a compilation error as expected:

Listing 307: derived_with_discriminants.ads

```
package Derived_With_Discriminants is

   type T
     (L : Positive;
      M : Positive) is
     null record;
```

(continues on next page)

(continued from previous page)

```
7
8     type T_Derived
9       (X : Positive;
10       Y : Positive;
11       A : Boolean) is
12    --  ^^^^^^^^^^^
13    --  ERROR: cannot extend type with new
14    --         Boolean discriminant A
15      new T (L => X, M => Y);
16
17  end Derived_With_Discriminants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants.Derived_Types_
 ↪Extension_Error
MD5: f9ba4ae1c344d63ed706005e30fe60c2
```

Build output

```
derived_with_discriminants.ads:11:07: error: new discriminants must constrain old␣
 ↪ones
gprbuild: *** compilation phase failed
```

To circumvent this issue, we could, of course, declare a component of T type instead of deriving from it:

Listing 308: derived_with_discriminants.ads

```
1  package Derived_With_Discriminants is
2
3     type T
4       (L : Positive;
5        M : Positive) is
6       null record;
7
8     type T_2
9       (X : Positive;
10       Y : Positive;
11       A : Boolean) is
12    record
13       A_Comp : T (L => X, M => Y);
14    end record;
15
16 end Derived_With_Discriminants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants.Derived_Types_
 ↪Extension_Error
MD5: 41e911cdc8486cd49931b2082586d8e7
```

In this case, A_Comp is a component of type T, and we're using the discriminant X and Y as the constraints of this component.

Naturally, using tagged types is another alternative:

Listing 309: derived_with_discriminants.ads

```
1  package Derived_With_Discriminants is
2
```

(continues on next page)

(continued from previous page)

```
   type T
     (L : Positive;
      M : Positive) is
     tagged null record;

   type T_Derived_Extended
     (X : Positive;
      Y : Positive;
      A : Boolean) is  --  New discriminant
     new T (L => X, M => Y)
       with null record;

   type T_Derived_Extended_2
     (A : Boolean;     --  New discriminant
      X : Positive;
      Y : Positive) is
     new T (L => X, M => Y)
       with null record;

   type T_Derived_Extended_3
     (A : Boolean) is  --  New discriminant
     new T (L => 1, M => 2)
       with null record;

   type T_Derived_Extended_4
     (A : Boolean;     --  New discriminant
      X : Positive) is
     new T (L => X, M => X)
       with null record;

end Derived_With_Discriminants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants.Derived_Tagged_Types
MD5: b8124d132a4b5066826980c8cc43a7ad
```

In this code example, we're adding the `A` discriminant when declaring `T_Derived_Extended`. Because `T` is a tagged type, such a new discriminant is fine.

Note that the order of the discriminants can be rearranged: when deriving a new type, we don't need to specify the discriminants of the parent type before any new discriminants. In fact, in the declaration of `T_Derived_Extended_2`, the additional discriminant `A` is declared before the discriminants that match the parent type's discriminants.

In addition, we may even use literals to specify the constraints for the parent type — as we're doing in the declaration of `T_Derived_Extended_3`. Also, we can use the same discriminant from the derived type for the constraints of the parent type — in the declaration of `T_Derived_Extended_4`, we use the `X` discriminant for both `L` and `M` discriminants of type `T`.

Deriving with defaults

If the discriminants of the parent type have default values, those default values are inherited by the derived type. Alternatively, we can set different default values.

Let's see a code example:

Listing 310: derived_with_discriminants.ads

```
package Derived_With_Discriminants is

   type T
     (L : Positive := 1;
      M : Positive := 2) is
     null record;

   type T_Derived is new T;

   type T_Derived_2
     (L : Positive := 1;
      M : Positive := 3) is
     new T (L => L, M => M);

end Derived_With_Discriminants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants.Derived_Types_
 ↪Defaults
MD5: 4ffa513c0cd8b6812359a2fc4d8325d2
```

In this example, the derived type T_Derived has the same default values as the parent type T, namely (L => 1, M => 2). For the derived type T_Derived_2, we're changing the value of M to 3 and keeping the same value for L.

As we've seen before, instead of setting default values, we can set the constraints of the parent type in the declaration of the derived type:

Listing 311: derived_with_discriminants.ads

```
package Derived_With_Discriminants is

   type T
     (L : Positive := 1;
      M : Positive := 2) is
     null record;

   type T_Derived_Constrainted is new T
     (L => 1, M => 3);

end Derived_With_Discriminants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants.Derived_Types_
 ↪Defaults_Constraints
MD5: d6053fc79a3e7010ec7b3ec73f51f4e5
```

In this case, we're constraining the discriminants of the parent type to (L => 1, M => 3). Note that L has the same value as the default value set for the parent type T.

For further reading...

In other contexts (such as *record aggregates* (page 515), which we discuss in another chapter), we could use the so-called *box notation* (page 518) to specify that we want to use the default value. This, however, isn't possible with type discriminants:

Listing 312: derived_with_discriminants.ads

```
package Derived_With_Discriminants is

   type T
     (L : Positive := 1;
      M : Positive := 2) is
     null record;

   type T_Derived_Constraint is new T
     (L => <>, M => 3);
   --   ^^^^^^^
   --  ERROR: cannot use default values
   --         via box notation
end Derived_With_Discriminants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants.Derived_Types_
 ↪Defaults_Constraints_Box_Notation
MD5: 18d755ec4de45164a47009ab25368452
```

Build output

```
derived_with_discriminants.ads:9:11: error: missing operand
gprbuild: *** compilation phase failed
```

Instead of using <>, we have to repeat the value explicitly.

25.4.5 Discriminant constraints and operations

In this section, we discuss some details about discriminant constraints and operations related to discriminants — more specifically, the `Constrained` attribute.

In the Ada Reference Manual

- 3.7.1 Discriminant Constraints[103]

Discriminant constraints

As we discussed before, when *declaring an object with a discriminant* (page 458), we have to specify the values of the all discriminants — unless, of course, those discriminants have a *default value* (page 464). The values we specify for the discriminants are called discriminant constraints.

Let's revisit the code example we've seen earlier on:

Listing 313: recs.ads

```
package Recs is

   type T (L : Positive;
           M : Positive) is
     null record;

end Recs;
```

[103] http://www.ada-auth.org/standards/12rm/html/RM-3-7-1.html

Listing 314: show_object_declaration.adb

```
with Recs;        use Recs;

procedure Show_Object_Declaration is
   A : T (L => 5, M => 6);
   B : T (7, 8);
   C : T (7, M => 8);
begin
   null;
end Show_Object_Declaration;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants_Constraints_
 ↪Operations.Discriminant_Constraint
MD5: 9e37a1cde73f27b99fd2a9eb57f23c44
```

Here, `L => 5, M => 6` (for object A) are named constraints, while `7, 8` (for object B) are positional constraints.

It's possible to use both positional and named constraints, as we do for object C: `7, M => 8`. In this case, the positional associations must precede the named associations.

In the case of named constraints, we can use multiple selector names:

Listing 315: show_object_declaration.adb

```
with Recs;        use Recs;

procedure Show_Object_Declaration is
   A : T (L | M => 5);
   --     ^^^^^
   --  multiple selector names
begin
   null;
end Show_Object_Declaration;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants_Constraints_
 ↪Operations.Discriminant_Constraint
MD5: b6fbe1d69bb520a7b6845536a1601978
```

This is only possible, however, if those named discriminants are all of the same type. (In this case, L and M are both of **Positive** subtype.)

In the Ada Reference Manual

- 3.7.1 Discriminant Constraints[104]

Discriminant constraint in subtypes

We can use discriminant constraints in the declaration of subtypes. For example:

[104] http://www.ada-auth.org/standards/22rm/html/RM-3-7-1.html

Listing 316: show_object_declaration.adb

```
with Recs;        use Recs;

procedure Show_Object_Declaration is
   subtype T_5_6 is T (L => 5, M => 6);
   --                  ^^^^^^^^^^^^^^
   --  discriminant constraints for subtype

   A : T_5_6;
begin
   null;
end Show_Object_Declaration;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants_Constraints_
 ↪Operations.Discriminant_Constraint
MD5: c6c4226073f4282d68d621519ca4d420
```

In this example, we use the named discriminant constraints `L => 5, M => 6` in the declaration of the subtype T_5_6.

Constrained Attribute

We can use the `Constrained` attribute to verify whether an object of discriminated type is constrained or not. Let's look at a simple example:

Listing 317: recs.ads

```
package Recs is

   type T (L : Positive := 1) is
     null record;

end Recs;
```

Listing 318: show_constrained_attribute.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Recs;        use Recs;

procedure Show_Constrained_Attribute is
   Constr   : T (L => 5);
   --             ^^^^^^ constrained.
   Unconstr : T;
   --          ^ unconstrained;
   --            using defaults.
begin
   Put_Line ("Constr'Constrained:   "
             & Constr'Constrained'Image);
   Put_Line ("Unconstr'Constrained: "
             & Unconstr'Constrained'Image);
end Show_Constrained_Attribute;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants_Constraints_
 ↪Operations.Simple_Constrained_Attribute
MD5: 6a9a807f5af132a07949d2887fa5bfe5
```

Runtime output

```
Constr'Constrained:   TRUE
Unconstr'Constrained: FALSE
```

As the `Constrained` attribute indicates, the `Constr` object is constrained (by the `L => 5` discriminant constraint), while the `Unconstr` object is unconstrained. Note that, even though `Unconstr` is using the default value for `L` — which would correspond to the discriminant constraint `L => 1` — the object itself hasn't been constraint at its declaration.

Let's continue our discussion with a more complex example by reusing the `Unconstrained_Types` package that we declared in a *previous section* (page 302). In this version of the package, we're adding a `Reset` procedure for the discriminated record type `Simple_Record`:

Listing 319: unconstrained_types.ads

```
1  package Unconstrained_Types is
2
3     type Simple_Record
4       (Extended : Boolean := False) is
5     record
6        V : Integer;
7        case Extended is
8           when False =>
9              null;
10          when True  =>
11             V_Float : Float;
12       end case;
13    end record;
14
15    procedure Reset (R : in out Simple_Record);
16
17 end Unconstrained_Types;
```

Listing 320: unconstrained_types.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  package body Unconstrained_Types is
4
5     procedure Reset (R : in out Simple_Record) is
6        Zero_Not_Extended : constant
7          Simple_Record := (Extended => False,
8                            V        => 0);
9
10       Zero_Extended : constant
11         Simple_Record := (Extended => True,
12                           V        => 0,
13                           V_Float  => 0.0);
14    begin
15       Put_Line ("---- Reset: R'Constrained => "
16                 & R'Constrained'Image);
17
18       if not R'Constrained then
19          R := Zero_Extended;
20       else
21          if R.Extended then
22             R := Zero_Extended;
23          else
24             R := Zero_Not_Extended;
25          end if;
```

(continues on next page)

(continued from previous page)

```
26       end if;
27    end Reset;
28
29 end Unconstrained_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants_Constraints_
 ↪Operations.Constrained_Attribute
MD5: b56e6d71fd4f05e8490412d7fe40b923
```

As the name indicates, the Reset procedure initializes all record components with zero. Note that we use the Constrained attribute to verify whether objects are constrained before assigning to them. For objects that are not constrained, we can simply assign another object to it — as we do with the R := Zero_Extended statement. When an object is constrained, however, the discriminants must match. If we assign an object to R, the discriminant of that object must match the discriminant of R. This is the kind of verification that we do in the **else** part of that procedure: we check the state of the Extended discriminant before assigning an object to the R parameter.

Note that the Simple_Record type has a *variant part* (page 494). We discuss this topic later on in this chapter.

Note as well that, in the initialization of the Zero_Not_Extended and Zero_Extended constants, we have to indicate the discriminant as a component of the aggregates (e.g.: (Extended => **False**, V => 0). We discuss this topic in another chapter when we learn more about *aggregates and record discriminants* (page 523).

The Using_Constrained_Attribute procedure below declares two objects of Simple_Record type: R1 and R2. Because the Simple_Record type has a default value for its discriminant, we can declare objects of this type without specifying a value for the discriminant. This is exactly what we do in the declaration of R1. Here, we don't specify any constraints, so that it takes the default value (Extended => **False**). In the declaration of R2, however, we explicitly set Extended to **False**:

Listing 321: using_constrained_attribute.adb

```
1  with Ada.Text_IO;         use Ada.Text_IO;
2
3  with Unconstrained_Types; use Unconstrained_Types;
4
5  procedure Using_Constrained_Attribute is
6     R1 : Simple_Record;
7     R2 : Simple_Record (Extended => False);
8
9     procedure Show_Rs is
10    begin
11       Put_Line ("R1'Constrained => "
12                 & R1'Constrained'Image);
13       Put_Line ("R1.Extended => "
14                 & R1.Extended'Image);
15       Put_Line ("--");
16       Put_Line ("R2'Constrained => "
17                 & R2'Constrained'Image);
18       Put_Line ("R2.Extended => "
19                 & R2.Extended'Image);
20       Put_Line ("----------------");
21    end Show_Rs;
22 begin
23    Show_Rs;
24
```

(continues on next page)

(continued from previous page)

```
25    Reset (R1);
26    Reset (R2);
27    Put_Line ("----------------");
28
29    Show_Rs;
30 end Using_Constrained_Attribute;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Discriminants_Constraints_
 ↪Operations.Constrained_Attribute
MD5: f7517fcd3c68a784f55064f188d4e7bb
```

Runtime output

```
R1'Constrained => FALSE
R1.Extended => FALSE
--
R2'Constrained => TRUE
R2.Extended => FALSE
----------------
---- Reset: R'Constrained => FALSE
---- Reset: R'Constrained => TRUE
----------------
R1'Constrained => FALSE
R1.Extended => TRUE
--
R2'Constrained => TRUE
R2.Extended => FALSE
----------------
```

When we run this code, the user messages from Show_Rs indicate to us that R1 is not constrained, while R2 is constrained. Because we declare R1 without specifying a value for the Extended discriminant, R1 is not constrained. In the declaration of R2, on the other hand, the explicit value for the Extended discriminant makes this object constrained. Note that, for both R1 and R2, the value of Extended is **False** in the declarations.

As we were just discussing, the Reset procedure includes checks to avoid mismatches in discriminants. When we don't have those checks, we might get exceptions at runtime. We can force this situation by replacing the implementation of the Reset procedure with the following lines:

```
--  [...]
begin
   Put_Line ("---- Reset: R'Constrained => "
             & R'Constrained'Image);
   R := Zero_Extended;
end Reset;
```

Running the code now generates a runtime exception:

```
raised CONSTRAINT_ERROR : unconstrained_types.adb:12 discriminant check failed
```

This exception is raised during the call to Reset (R2). As we see in the code, R2 is constrained. Also, its Extended discriminant is set to **False**, which means that it doesn't have the V_Float component. Therefore, R2 is not compatible with the constant Zero_Extended object, so we cannot assign Zero_Extended to R2. Also, because R2 is constrained, its Extended discriminant cannot be modified.

The behavior is different for the call to Reset (R1), which works fine. Here, when we pass R1 as an argument to the Reset procedure, its Extended discriminant is **False** by

default. Thus, R1 is also not compatible with the Zero_Extended object. However, because R1 is not constrained, the assignment modifies R1 (by changing the value of the Extended discriminant). Therefore, with the call to Reset, the Extended discriminant of R1 changes from **False** to **True**.

In the Ada Reference Manual

- 3.7.2 Operations of Discriminated Types[105]

25.4.6 Unknown discriminants

As we've seen *previously* (page 455), a type with discriminants can have known discriminants or unknown discriminants. In this section, we focus on unknown discriminants. Because the discriminants are unknown, this is an *indefinite type* (page 302). Let's start with a simple example:

Listing 322: unknown_discriminants.ads

```
1  package Unknown_Discriminants is
2
3     type T_Unknown_Discr (<>) is
4     --                    ^^^^
5     --   Unknown discriminant part
6       private;
7
8  private
9
10    type T_Unknown_Discr is
11      null record;
12
13 end Unknown_Discriminants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Unknown_Discriminants.Simple_
 ↪Example
MD5: 5f673c957132b1bca633c247f857e37b
```

Note that we can only use an unknown discriminant part in the *partial view* (page 310); we cannot use it in the full view of a type:

Listing 323: unknown_discriminants.ads

```
1  package Unknown_Discriminants is
2
3     type T_Unknown_Discr (<>) is
4       null record;
5
6  end Unknown_Discriminants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Unknown_Discriminants.Wrong_Full_
 ↪View
MD5: dfce1471556af87b6a99314b1ee32446
```

Build output

[105] http://www.ada-auth.org/standards/22rm/html/RM-3-7-2.html

```
unknown_discriminants.ads:3:25: error: full type declaration cannot have unknown␣
 ↪discriminants
gprbuild: *** compilation phase failed
```

To be more precise, an unknown discriminant part can only be used in the declaration of a private type, a private extension or an *incomplete type* (page 308). In addition, as we'll see in another chapter, it can also be used in the generic equivalents: generic private types, generic private extensions, generic incomplete types, and formal derived types.

For example:

Listing 324: unknown_discriminants.ads

```
1  package Unknown_Discriminants is
2
3     --   Private type
4     type Rec (<>) is
5       private;
6
7     --   Tagged private type
8     type Tagged_Rec (<>) is
9       tagged private;
10
11    --   Incomplete type
12    type T_Incomplete (<>);
13
14    type T_Incomplete (<>) is
15      private;
16
17 private
18
19    type Rec is
20      null record;
21
22    type Tagged_Rec is
23      tagged null record;
24
25    type T_Incomplete is
26      null record;
27
28 end Unknown_Discriminants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Unknown_Discriminants.Simple_
 ↪Example
MD5: e601ab326c43501e36e0d4656dc1629e
```

In this example, we have three forms of private types using an unknown discriminant part: an untagged private type (Rec), a tagged type (Tagged_Rec) and an incomplete type (T_Incomplete) that becomes an untagged private type.

In the Ada Reference Manual

- 3.7 Discriminants[106]

[106] http://www.ada-auth.org/standards/12rm/html/RM-3-7.html

Object declaration

Now, let's talk about objects of types with unknown discriminants. Consider the Rec type below:

Listing 325: unknown_discriminants.ads

```
package Unknown_Discriminants is

   type Rec (<>) is private;

private

   type Rec is
   record
      I : Integer;
   end record;

end Unknown_Discriminants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Unknown_Discriminants.Object_
 ↪Declaration
MD5: 9f588870ec70ea30c795a6a0a602f589
```

We cannot declare objects of type Rec *directly*, as this type is *indefinite* (page 302):

Listing 326: show_object_declaration.adb

```
with Unknown_Discriminants;
use  Unknown_Discriminants;

procedure Show_Object_Declaration is
   A : Rec;
begin
   null;
end Show_Object_Declaration;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Unknown_Discriminants.Object_
 ↪Declaration
MD5: 5f30773fc17096943939468faf50338b
```

Build output

```
show_object_declaration.adb:5:08: error: unconstrained subtype not allowed (need␣
 ↪initialization)
gprbuild: *** compilation phase failed
```

Because the type is indefinite, it requires explicit initialization — we can do this by introducing a subprogram that initializes the type. In our code example, we can implement a simple `Init` function for this type:

Listing 327: unknown_discriminants.ads

```
package Unknown_Discriminants is

   type Rec (<>) is private;

   function Init return Rec;
```

(continues on next page)

(continued from previous page)

```
6
7  private
8
9     type Rec is
10    record
11       I : Integer;
12    end record;
13
14    function Init return Rec is
15      ((I => 0));
16
17 end Unknown_Discriminants;
```

Listing 328: show_constructor_function.adb

```
1  with Unknown_Discriminants;
2  use  Unknown_Discriminants;
3
4  procedure Show_Constructor_Function is
5     R : Rec := Init;
6  begin
7     null;
8  end Show_Constructor_Function;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Discriminants.
 ↪Object_Declaration
MD5: 1cee0c4b883b3a0c25fae0a5111db2a8
```

In the `Show_Constructor_Function` procedure from this example, we call the `Init` function to initialize the R object in its declaration (of Rec type). Note that for this specific type, this is the only possible way to declare the R object. In fact, compilation fails if we write `R : Rec;`.

Using a private type with unknown discriminants is an important Ada idiom, as we gain extra control over its initialization. For example, if we have to ensure that certain components of the private record are initialized when an object is being declared, we can perform this initialization in the `Init` function — instead of just hoping that an initialization function is called for this object at some point. Also, if further information is needed to initialize an object, we can add parameters to the `Init` function, thereby forcing the user to provide this information.

For even more control over objects, we can use *limited types with unknown discriminants* (page 1058).

Partial and full view

As we've just seen, if we declare a type with an unknown discriminant part, we can only use it in the partial view. In the full view. we cannot use an unknown discriminant part, but have to use either no discriminants or known discriminants. For example:

Listing 329: unknown_discriminants.ads

```
1  package Unknown_Discriminants is
2
3     type Rec_No_Discr (<>) is private;
4
5     type Rec_Known_Discr (<>) is private;
6
```

(continues on next page)

(continued from previous page)

```
private

   type Rec_No_Discr is null record;

   type Rec_Known_Discr
     (L : Positive) is null record;

end Unknown_Discriminants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Unknown_Discriminants.Partial_
 ↪Full_View
MD5: 3d37dcc9d1b12bf9a189cf515b168430
```

In this example, `Rec_No_Discr` has no discriminants in its full view, while `Rec_Known_Discr` has the discriminant `L`.

In addition, the full view can be an (unconstrained) array type as well:

Listing 330: unknown_discriminants.ads

```
package Unknown_Discriminants is

   type Arr (<>) is private;

private

   type Arr is
     array (Positive range <>)
       of Integer;

end Unknown_Discriminants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Unknown_Discriminants.Partial_
 ↪Full_View
MD5: d1e0f60048c6ca6bcf863a8c0cf68314
```

Here, the full view of `Arr` is an array type.

In the Ada Reference Manual

- 3.7 Discriminants[107]

Derived types

As expected, we can derive from types with unknown discriminants. Consider the following package:

Listing 331: unknown_discriminants.ads

```
package Unknown_Discriminants is

   type Rec (<>) is private;

```

(continues on next page)

[107] http://www.ada-auth.org/standards/12rm/html/RM-3-7.html

(continued from previous page)

```
private

   type Rec is null record;

end Unknown_Discriminants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Unknown_Discriminants.Derived_Type
MD5: 948e7c7ecd00915fa23a98cbaf2bbcbe
```

We can then declare the Derived_Rec type:

Listing 332: unknown_discriminants-children.ads

```
package Unknown_Discriminants.Children is

   type Derived_Rec is
     new Rec;

end Unknown_Discriminants.Children;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Unknown_Discriminants.Derived_Type
MD5: 1fa7e905c794d48bf6c76ff51e1abd8d
```

Note that Derived_Rec has unknown discriminants, even though we're not explicitly using an unknown discriminant part ((<>)) in its declaration. (In fact, we're not allowed to use an unknown discriminant part in this case.) Therefore, declaring objects of this type directly isn't possible, just like the parent type Rec:

Listing 333: show_object_declaration.adb

```
with Unknown_Discriminants.Children;
use  Unknown_Discriminants.Children;

procedure Show_Object_Declaration is
   A : Derived_Rec;
begin
   null;
end Show_Object_Declaration;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Unknown_Discriminants.Derived_Type
MD5: 5d0b8980e6f60595b9de8a2ea8fa2132
```

Build output

```
show_object_declaration.adb:5:08: error: unconstrained subtype not allowed (need␣
 ↪initialization)
gprbuild: *** compilation phase failed
```

Deriving from tagged types

We can also derive from tagged types with unknown discriminants. Consider the following package:

Listing 334: unknown_discriminants.ads

```
package Unknown_Discriminants is

   type Rec (<>) is tagged private;

private

   type Rec is tagged null record;

end Unknown_Discriminants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Unknown_Discriminants.Derived_
 ↪Tagged_Type
MD5: ef66d098df1c93495bf5f6c6ac86f203
```

We can derive from the Rec type. In this case, however, we can use an unknown discriminant part, a known discriminant part, or no discriminants:

Listing 335: unknown_discriminants-children.ads

```
package Unknown_Discriminants.Children is

   type Derived_Rec_Unknown_Discr (<>) is
     new Rec with private;

   type Derived_Rec_Known_Discr (L : Positive) is
     new Rec with private;

   type Derived_Rec_No_Discr is
     new Rec with private;

private

   type Derived_Rec_Unknown_Discr is
     new Rec with null record;

   type Derived_Rec_Known_Discr (L : Positive) is
     new Rec with null record;

   type Derived_Rec_No_Discr is
     new Rec with null record;

end Unknown_Discriminants.Children;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Unknown_Discriminants.Derived_
 ↪Tagged_Type
MD5: 98583f0b39c6f8bea49d1781844bb33e
```

In this example, we declare `Derived_Rec_Unknown_Discr` with an unknown discriminant part, `Derived_Rec_Known_Discr` with a known discriminant part, and `Derived_Rec_No_Discr` with no discriminants.

As expected, `Derived_Rec_Unknown_Discr` has unknown discriminants because it has an unknown discriminant part. In the case of `Derived_Rec_No_Discr`, which has no discriminants, we're deriving the unknown discriminants of Rec, so it also has unknown discriminants. In contrast, because `Derived_Rec_Known_Discr` has a known discriminant part, those discriminants are overriding the unknown discriminants of the parent type Rec.

Therefore, we can declare objects of `Derived_Rec_Known_Discr` type without explicit initialization:

Listing 336: show_object_declaration.adb

```
with Unknown_Discriminants.Children;
use  Unknown_Discriminants.Children;

procedure Show_Object_Declaration is
   A : Derived_Rec_Unknown_Discr;
   --  ERROR: unknown discriminants
   --         because of the type's
   --         unknown discriminant part

   B : Derived_Rec_Known_Discr (1);
   --  OK: known discriminants

   C : Derived_Rec_No_Discr;
   --  ERROR: unknown discriminants
   --         because of parent type's
   --         unknown discriminant part
begin
   null;
end Show_Object_Declaration;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Unknown_Discriminants.Derived_
 ↪Tagged_Type
MD5: 91f6ae2abf88976833d0e4eff02d4c40
```

Build output

```
show_object_declaration.adb:5:08: error: unconstrained subtype not allowed (need␣
 ↪initialization)
show_object_declaration.adb:13:08: error: unconstrained subtype not allowed (need␣
 ↪initialization)
gprbuild: *** compilation phase failed
```

As we can see, we can only directly declare objects of type `Derived_Rec_Known_Discr` because it has known discriminants, while the other two derived types have unknown discriminants — which are explicitly specified (`Derived_Rec_Unknown_Discr`) or implicitly derived from the parent (`Derived_Rec_No_Discr`).

Note that the parent type Rec had a requirement for explicit initialization. By using known discriminants in the declaration of `Derived_Rec_Known_Discr`, we're removing this requirement for the derived type.

The contrary is also true: we can derive a type with known discriminants and use an unknown discriminant part:

Listing 337: unknown_discriminants-children-grand.ads

```
package Unknown_Discriminants.Children.Grand is

   type Grand_Rec_Unknown_Discr (<>) is
     new Derived_Rec_Known_Discr (1)
       with private;

private

   type Grand_Rec_Unknown_Discr is
     new Derived_Rec_Known_Discr (1)
```

(continues on next page)

(continued from previous page)

```
11       with null record;
12
13 end Unknown_Discriminants.Children.Grand;
```

Listing 338: show_object_declaration.adb

```
1  with Unknown_Discriminants.Children.Grand;
2  use  Unknown_Discriminants.Children.Grand;
3
4  procedure Show_Object_Declaration is
5     A : Grand_Rec_Unknown_Discr;
6     --  ERROR: unknown discriminants
7     --         because of the type's
8     --         unknown discriminant part
9  begin
10    null;
11 end Show_Object_Declaration;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Unknown_Discriminants.Derived_
 ↪Tagged_Type
MD5: 0e931df8294cee1f49b187c43614aa20
```

Build output

```
show_object_declaration.adb:5:08: error: unconstrained subtype not allowed (need␣
 ↪initialization)
show_object_declaration.adb:5:08: error: provide initial value or explicit␣
 ↪discriminant values
show_object_declaration.adb:5:08: error: or give default discriminant values for␣
 ↪type "Grand_Rec_Unknown_Discr"
gprbuild: *** compilation phase failed
```

In this example, `Grand_Rec_Unknown_Discr` has unknown discriminants and requires explicit initialization, even though its parent type `Derived_Rec_Known_Discr` has known discriminants.

In the Ada Reference Manual

- 3.7 Discriminants[108]

25.4.7 Unconstrained subtypes

A subtype is called an unconstrained subtype if its type has unknown discriminants. Consider a simple Rec type:

Listing 339: unknown_discriminants.ads

```
1  package Unknown_Discriminants is
2
3     type Rec (<>) is private;
4
5  private
6
7     type Rec is null record;
```

(continues on next page)

[108] http://www.ada-auth.org/standards/12rm/html/RM-3-7.html

(continued from previous page)

```
8
9  end Unknown_Discriminants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Unknown_Discriminants.
 ↪Unconstrained_Subtype
MD5: 948e7c7ecd00915fa23a98cbaf2bbcbe
```

A subtype of Rec type is unconstrained:

Listing 340: unknown_discriminants-children.ads

```
1  package Unknown_Discriminants.Children is
2
3     subtype Rec_Unconstrained is Rec;
4
5  end Unknown_Discriminants.Children;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Unknown_Discriminants.
 ↪Unconstrained_Subtype
MD5: 6b76b6a94d8c9487dbeea3256d5de01f
```

In this example, Rec_Unconstrained is an unconstrained subtype because it's derived from the Rec type. We can verify this by triggering a compilation error:

Listing 341: show_object_declaration.adb

```
1  with Unknown_Discriminants.Children;
2  use  Unknown_Discriminants.Children;
3
4  procedure Show_Object_Declaration is
5     A : Rec_Unconstrained;
6  begin
7     null;
8  end Show_Object_Declaration;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Unknown_Discriminants.Derived_Type
MD5: 442fab4d174de31f27d0de56bf9b8422
```

Build output

```
show_object_declaration.adb:5:08: error: "Rec_Unconstrained" is undefined
gprbuild: *** compilation phase failed
```

In addition, if we declare a subtype based on a type that allows range, index, or discriminant constraints, but we don't constraint the subtype, this subtype is also considered an unconstrained subtype. For example:

Listing 342: unconstrained_subtypes.ads

```
1  package Unconstrained_Subtypes is
2
3     type Arr is
4       array (Positive range <>) of
5         Integer;
6
```

(continues on next page)

(continued from previous page)

```
   type Rec (L : Positive) is
     null record;

   subtype Arr_Sub is Arr;
   --                 ^^^
   --  no constraints

   subtype Rec_Sub is Rec;
   --                 ^^^
   --  no constraints

end Unconstrained_Subtypes;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Unknown_Discriminants.Other_
↪Unconstrained_Subtypes
MD5: 3ebc2eb371472dc76eb543b4633e59b3
```

In this example, Arr_Sub and Rec_Sub are unconstrained subtypes.

In the Ada Reference Manual

- 3.2 Types and Subtypes[109]

25.4.8 Variant parts

We've introduced variant records back in the *Introduction to Ada course* (page 104). In simple terms, a variant record is a record with discriminants that allows for varying its structure. Basically, it's a record containing a **case** statement that specifies which record components exist for each discriminant value. For example:

Listing 343: devices.ads

```
package Devices is

   type Device_State is
     (Off, On);

   type Device_Info is
   record
      V : Float;
   end record;

   type Device (State : Device_State := Off) is
   record
      case State is
         when Off =>
            null;
         when On =>
            Info : Device_Info;
      end case;
   end record;

end Devices;
```

Code block metadata

[109] http://www.ada-auth.org/standards/12rm/html/RM-3-2.html

```
Project: Courses.Advanced_Ada.Data_Types.Records.Variant_Parts.Simple_Device
MD5: 3b63a63aef1d9cb00be870c831829158
```

The Device type from this example has a variant part. Depending on the value of the State discriminant, it can be either a null record (when State is Off) or have the Info component (when State is On).

Let's look at a test application for the Devices package:

Listing 344: show_device.adb

```
1  with Devices; use Devices;
2
3  procedure Show_Device is
4     D     : Device;
5     D_Off : Device (Off);
6     D_On  : Device (On);
7  begin
8     D := D_Off;
9     --  OK!
10
11    D := D_On;
12    --  OK!
13
14    D_Off := D_On;
15    --       ^^^^
16    --  CONSTRAINT_ERROR!
17
18    D_On  := D_Off;
19    --       ^^^^^
20    --  CONSTRAINT_ERROR!
21 end Show_Device;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Variant_Parts.Simple_Device
MD5: a11e2739131f435e8428a5e2a9a478e7
```

Build output

```
show_device.adb:11:09: warning: "D_On" may be referenced before it has a value␣
 ↪[enabled by default]
show_device.adb:14:13: warning: incorrect value for discriminant "State" [enabled␣
 ↪by default]
show_device.adb:14:13: warning: Constraint_Error will be raised at run time␣
 ↪[enabled by default]
show_device.adb:18:13: warning: incorrect value for discriminant "State" [enabled␣
 ↪by default]
show_device.adb:18:13: warning: Constraint_Error will be raised at run time␣
 ↪[enabled by default]
```

Runtime output

```

raised CONSTRAINT_ERROR : show_device.adb:14 discriminant check failed
```

As we've discussed *previously* (page 460), when we set the values for the discriminants of a type in the object declaration, we're constraining the objects. If the discriminants of two objects don't match, the Constraint_Error exception is raised at runtime because the *discriminant check* (page 771) fails. Therefore, in the Show_Device procedure, because D_Off and D_On are constrained and have different values for the State discriminant, we cannot assign them to each other. In contrast, because D wasn't constrained at its declaration, we

can assign objects with different discriminants (such as `D_Off` and `D_On`) to it.

Note that the variant part of a record can be more complex. For example, we could have an additional discriminant and use it in the variant part:

Listing 345: devices.ads

```
package Devices is

   type Device_State is
     (Off, On);

   type Device_Info is
   record
      V : Float;
   end record;

   type Device (State : Device_State;
                Boost : Boolean) is
   record
      case State is
         when Off =>
            null;
         when On =>
            Info : Device_Info;
            case Boost is
               when False =>
                  null;
               when True =>
                  Factor : Float;
            end case;
      end case;
   end record;

end Devices;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Variant_Parts.Device_Boost
MD5: 4c5e84ccebca9e4ef5e2d6d131ba0e6a
```

In this version of the `Devices` package, we introduced a *boost button* as a discriminant (`Boost`) and an associated boost factor component (`Factor`) in the variant part.

In the remaining parts of this section, we discuss a couple of details about variant records.

In the Ada Reference Manual

- 3.8.1 Variant Parts and Discrete Choices[110]

Discriminant type and value coverage

The subtype of discriminants used in the variant part must be of a discrete type — it cannot be of an access or a floating-point type, for example. Also, all possible values of the subtype of each discriminant must be covered in the case statement of the variant part. For example, consider the following variant record:

[110] http://www.ada-auth.org/standards/12rm/html/RM-3-8-1.html

Listing 346: subtype_coverage.ads

```
package Subtype_Coverage is

   type Var_Rec (Value : Integer) is
   record
      case Value is
         when 0 .. 100 =>
            I : Integer;

         --  ERROR: missing values!
      end case;
   end record;

end Subtype_Coverage;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Variant_Parts.Coverage
MD5: 084a468bc8d6f63d21f804c9ddc70622
```

Build output

```
subtype_coverage.ads:5:07: error: missing case values: -16#8000_0000# .. -1
subtype_coverage.ads:5:07: error: missing case values: 101 .. 16#7FFF_FFFF#
gprbuild: *** compilation phase failed
```

This package cannot be compiled because, in the variant part, we're only covering values for the `Value` discriminant in the range between 0 and 100. To fix this compilation error, we have to cover all values instead. For example:

Listing 347: subtype_coverage.ads

```
package Subtype_Coverage is

   type Var_Rec (Value : Integer) is
   record
      case Value is
         when Integer'First .. -1 =>
            null;
         when 0 .. 100 =>
            I : Integer;
         when 101 .. Integer'Last =>
            null;
      end case;
   end record;

end Subtype_Coverage;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Variant_Parts.Coverage
MD5: 9dfa0dfc3d3e11394a79b1ab6b61bafc
```

Of course, specifying all possible values can be difficult. As an alternative, we could simplify the case statement by just using **`others`** as a discrete choice that encompasses all values that haven't been specified earlier in the case statement:

Listing 348: subtype_coverage.ads

```
package Subtype_Coverage is

   type Var_Rec (Value : Integer) is
   record
      case Value is
         when 0 .. 100 =>
            I : Integer;
         when others =>
            null;
      end case;
   end record;

end Subtype_Coverage;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Variant_Parts.Coverage
MD5: 0b28038d5137de702cb5b8e875fadefa
```

By using `when others => ...` in this last example, we ensure that all values have been covered.

Record size

When declaring an object, the values we select for the discriminants related to the variant part have an impact on the overall size of that object — in fact, it may be smaller or bigger depending on this selection. Let's see an example:

Listing 349: variant_records.ads

```
package Variant_Records is

   type Simple_Record
     (Extended : Boolean := False) is
   record
      V : Integer;
      case Extended is
         when False =>
            null;
         when True  =>
            V_Float : Float;
      end case;
   end record;

end Variant_Records;
```

Listing 350: show_variant_rec_size.adb

```
with Ada.Text_IO;     use Ada.Text_IO;

with Variant_Records; use Variant_Records;

procedure Show_Variant_Rec_Size is
   SR_No_Ext : Simple_Record
                  (Extended => False);
   SR_Ext    : Simple_Record
                  (Extended => True);
   SR        : Simple_Record;
```

(continues on next page)

(continued from previous page)

```
begin
   Put_Line ("SR_No_Ext'Size : "
             & SR_No_Ext'Size'Image
             & " bits");
   Put_Line ("SR_Ext'Size : "
             & SR_Ext'Size'Image
             & " bits");
   Put_Line ("SR'Size : "
             & SR'Size'Image
             & " bits");
end Show_Variant_Rec_Size;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Variant_Parts.Size
MD5: 4aaf10924e7469d000cefeb70a69a2fa
```

Build output

```
show_variant_rec_size.adb:6:04: warning: variable "SR_No_Ext" is read but never␣
 ↪assigned [-gnatwv]
show_variant_rec_size.adb:8:04: warning: variable "SR_Ext" is read but never␣
 ↪assigned [-gnatwv]
show_variant_rec_size.adb:10:04: warning: variable "SR" is read but never assigned␣
 ↪[-gnatwv]
```

Runtime output

```
SR_No_Ext'Size :  64 bits
SR_Ext'Size :  96 bits
SR'Size :  96 bits
```

As we can confirm when we run this application, the choice for the discriminant has an impact on the size of the object. In the case of the SR_No_Ext object, setting the Extended discriminant to **False** excludes the V_Float component. For the SR_Ext object, on the other hand, we include the V_Float component. Therefore, on a typical PC, the size of SR_No_Ext is 8 bytes (4 bytes for the Extended discriminant and 4 bytes for the V component), while the size of SR_Ext is 12 bytes (i.e., additional 4 bytes for the V_Float component).

In the case of SR, because the object isn't constrained, the size of the object is 12 bytes on a typical PC — the same size as SR_Ext. This is because SR has to account for the case when all components must be available, even though the Extended discriminant is set to **False** by default. Remember that an assignment such as SR := SR_Ext is valid, so enough memory must be available to ensure that the assignment is performed correctly.

This principle applies to more complicated variant records. For example:

Listing 351: variant_records.ads

```
package Variant_Records is

   type Simple_Record
     (Extended   : Boolean := False;
      Extended_2 : Boolean := False) is
   record
      V : Integer;
      case Extended is
         when False =>
            case Extended_2 is
               when False =>
                  null;
```

(continues on next page)

(continued from previous page)

```
               when True  =>
                  V_Int_2 : Integer;
                  V_Int_3 : Integer;
            end case;
         when True  =>
            V_Float : Float;
            case Extended_2 is
               when False =>
                  null;
               when True  =>
                  V_Float_2 : Float;
            end case;
      end case;
   end record;

end Variant_Records;
```

Listing 352: show_variant_rec_size.adb

```
with Ada.Text_IO;     use Ada.Text_IO;

with Variant_Records; use Variant_Records;

procedure Show_Variant_Rec_Size is
   SR : Simple_Record;
begin
   Put_Line ("SR'Size : "
             & SR'Size'Image
             & " bits");
end Show_Variant_Rec_Size;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Variant_Parts.Size
MD5: 5f0ac936a5fee50cbe88a7b863a1a550
```

Build output

```
show_variant_rec_size.adb:6:04: warning: variable "SR" is read but never assigned␣
↪[-gnatwv]
```

Runtime output

```
SR'Size :  128 bits
```

In this example, the size of SR is 16 bytes on a typical PC. This accounts for 4 bytes for the discriminants Extended and Extended_2, and 4 bytes for each of the 3 components that are being taken into account for the worst case:

- components V, V_Int_2 and V_Int_3 when we set Extended => **False**, Extended_2 => **True**;
- components V, V_Float and V_Float_2 when we set Extended => **True**, Extended_2 => **True**.

Note that a memory block is shared between the V_Int_2 and V_Int_3 components from the first worst case, and V_Float and the V_Float_2 components from the second worst case. As we can see, the compiler will typically optimize the size of a record as much as possible by assessing which components are really needed for the worst case.

Also, as we discussed previously, we can use *unchecked unions* (page 387) in combination with variant records, which has an impact on the object size.

Ensuring valid information

We can use variant parts to prevent invalid information from being used. Let's look again at the `Device` type from the previous code example:

```
type Device (State : Device_State) is
record
   case State is
      when Off =>
         null;
      when On =>
         Info : Device_Info;
   end case;
end record;
```

For the sake of this example, we could say that a device that is turned off doesn't have any valuable information. Therefore, the device information stored in the `Info` component of the `Device` type is only valid if the device is turned on. Thus, if the device is turned off (i.e., `Device_State = Off`), we should prevent the application from processing device information that is probably incorrect. Let's extend the previous code example to accommodate this requirement:

Listing 353: devices.ads

```
package Devices is

   type Device_State is
     (Off, On);

   type Device
     (State : Device_State := Off) is
       private;

   procedure Turn_Off (D : in out Device);

   procedure Turn_On (D : in out Device);

   type Device_Info is
   record
      V : Float;
   end record;

   function Current_Info (D : Device)
                          return Device_Info;

private

   type Device (State : Device_State := Off) is
   record
      case State is
         when Off =>
            null;
         when On =>
            Info : Device_Info;
      end case;
   end record;

   Device_Off : constant Device :=
                  (State => Off);

   Device_On  : constant Device :=
                  (State => On,
```

(continues on next page)

(continued from previous page)

```
                    others => <>);

end Devices;
```

Listing 354: devices.adb

```
package body Devices is

   procedure Turn_Off (D : in out Device) is
   begin
      D := Device_Off;
   end Turn_Off;

   procedure Turn_On (D : in out Device) is
   begin
      D := Device_On;
   end Turn_On;

   function Current_Info (D : Device)
                          return Device_Info is
     (D.Info);

end Devices;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Variant_Parts.Device
MD5: e03db406de3550865dd99986d2c71145
```

Let's create a test application called Show_Device that makes use of this device by turning it on and off, and by retrieving information from it:

Listing 355: show_device.adb

```
with Devices; use Devices;

procedure Show_Device is
   D : Device;
   I : Device_Info;
begin
   Turn_On (D);
   I := Current_Info (D);

   Turn_Off (D);

   --  The following call raises
   --  an exception at runtime
   --  because D is turned off.
   I := Current_Info (D);
end Show_Device;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Variant_Parts.Device
MD5: cba0100ad5bbb2b6bf00d0847a700271
```

Runtime output

```
raised CONSTRAINT_ERROR : devices.adb:15 discriminant check failed
```

In this example, by using the variant part, we're preventing information retrieved by an inappropriate call to the `Current_Info` function from being used elsewhere in the application. In fact, if the device is turned off, a call to `Current_Info` raises the `Constraint_Error` exception because the `Info` component isn't accessible. We see that effect in the `Show_Device` procedure: the call to `Current_Info` *fails* (by raising an exception) when the device has just been turned off.

To avoid exceptions at runtime, we must check the device's state before calling `Current_Info`:

Listing 356: show_device.adb

```
with Devices; use Devices;

procedure Show_Device is
   D : Device;
   I : Device_Info;
begin
   Turn_On (D);

   if D.State = On then
      I := Current_Info (D);
   end if;

   Turn_Off (D);

   if D.State = On then
      I := Current_Info (D);
   end if;
end Show_Device;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Variant_Parts.Device
MD5: 62230848af720b156f22c96d59f772d2
```

Now, no exception is raised, as we only retrieve information from the device when it is turned on — that is, we only call the `Current_Info` function when the `State` discriminant of the object is set to `On`.

Extending record types

We can use variant parts as a means to extend record types. This can be viewed as a static approach to implement type extension — similar to type extension via tagged types, but with clear differences.

Let's say we have a sensor, and we implement a package called `Sensors` that interfaces with that sensor:

Listing 357: sensors.ads

```
package Sensors is

   type Sensor is private;

   type Sensor_Info is
   record
      Info_1 : Float := 0.0;
   end record;

   function Current_Info (S : Sensor)
                          return Sensor_Info;
```

(continues on next page)

(continued from previous page)

```
12
13    procedure Display (SI : Sensor_Info);
14
15 private
16
17    type Sensor is null record;
18
19 end Sensors;
```

Listing 358: sensors.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  package body Sensors is
4
5     function Current_Info (S : Sensor)
6                            return Sensor_Info is
7       ((Info_1 => 4.0));
8     --              ^^^^
9     --  NOTE: we're returning dummy
10    --        information!
11
12    procedure Display (SI : Sensor_Info) is
13    begin
14       Put_Line ("Info_1 : "
15                 & SI.Info_1'Image);
16    end Display;
17
18 end Sensors;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Variant_Parts.Sensors
MD5: 140a0d9cbca023de875417409c3f67d9
```

The `Sensor` type from the `Sensors` package has two subprograms: the `Current_Info` function and the `Display` procedure. We use those subprograms in the `Show_Sensors` procedure below:

Listing 359: show_sensors.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  with Sensors;     use Sensors;
4
5  procedure Show_Sensors is
6     S1 : Sensor;
7  begin
8     Display (Current_Info (S1));
9  end Show_Sensors;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Variant_Parts.Sensors
MD5: 93aa76da463fea9b4483ed97fa8bcf64
```

Runtime output

```
Info_1 :  4.00000E+00
```

Now, let's assume that a new model of this sensor is available, and it has additional fea-

tures — e.g., it provides additional information to the user. If we wanted to update the application to be able to handle this new model of the sensor without removing support for the original model, we could convert the `Sensor_Info` type to a tagged type and derive a `Sensor_Info_V2` type from it. (We would probably have to implement a `Sensor_V2` type derived from the `Sensor` type as well.)

Alternatively, we could add a variant part to the `Sensor_Info` type to store the additional information. For example:

Listing 360: sensors.ads

```
package Sensors is

   type Sensor_Model is (Sensor_V1,
                         Sensor_V2);

   type Sensor
     (Model : Sensor_Model := Sensor_V1) is
       private;

   type Sensor_Info
     (Model : Sensor_Model := Sensor_V1) is
   record
      Info_1 : Float := 0.0;
      case Model is
         when Sensor_V1 =>
            null;
         when Sensor_V2 =>
            Info_2 : Float := 0.0;
      end case;
   end record;

   function Current_Info (S : Sensor)
                          return Sensor_Info;

   procedure Display (SI : Sensor_Info);

private

   type Sensor
     (Model : Sensor_Model := Sensor_V1) is
       null record;

end Sensors;
```

Listing 361: sensors.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Sensors is

   function Current_Info (S : Sensor)
                          return Sensor_Info is
   begin
      --  Using dummy info for the information
      --  returned by the function
      case S.Model is
         when Sensor_V1 =>
            return ((Model  => Sensor_V1,
                     Info_1 => 4.0));
         when Sensor_V2 =>
            return ((Model  => Sensor_V2,
```

(continues on next page)

(continued from previous page)

```
                     Info_1 => 8.0,
                     Info_2 => 6.0));
      end case;
   end Current_Info;

   procedure Display (SI : Sensor_Info) is
   begin
      Put_Line ("Model  : "
                & SI.Model'Image);
      Put_Line ("Info_1 : "
                & SI.Info_1'Image);
      if SI.Model = Sensor_V2 then
         Put_Line ("Info_2 : "
                   & SI.Info_2'Image);
      end if;
   end Display;

end Sensors;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Variant_Parts.Sensors
MD5: 74198e928e3dfa3a7a7f2786971da8a7
```

In this new version of the `Sensors` package, the `Model` discriminant was added to the `Sensor_Info` type. If the model is set to version 2 for a specific sensor (i.e., `Model = Sensor_V2`), a new component (`Info_2`) is available.

The `Current_Info` and `Display` subprograms have been adapted to take this new model into account. In the `Current_Info` function, we return information for the newer model of the sensor. In the `Display` procedure, we display the additional information provided by the newer model.

Note that the original test application that makes use of the sensor (`Show_Sensors`) doesn't require any adaptation:

Listing 362: show_sensors.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Sensors;     use Sensors;

procedure Show_Sensors is
   S1 : Sensor;
begin
   Display (Current_Info (S1));
end Show_Sensors;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Variant_Parts.Sensors
MD5: 93aa76da463fea9b4483ed97fa8bcf64
```

Runtime output

```
Info_1 :  4.00000E+00
```

Because we have a default value for the discriminant of the `Sensor` type, we're essentially making the type *backwards-compatible*, so that users of this type don't have to adapt their code after the update to the `Sensors` package. Of course, we don't have *binary backwards-compatibility* because the size of the type (`Sensor_Info'Size`) increases.

Of course, in our test application, we can also use the new model of that sensor:

Listing 363: show_sensors.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Sensors;     use Sensors;

procedure Show_Sensors is
   S1 : Sensor;
   S2 : Sensor (Sensor_V2);
begin
   Display (Current_Info (S1));
   Display (Current_Info (S2));
end Show_Sensors;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Variant_Parts.Sensors
MD5: 347d272cddbacf7bf2987aa23014ff0b
```

Runtime output

```
Model  : SENSOR_V1
Info_1 :  4.00000E+00
Model  : SENSOR_V2
Info_1 :  8.00000E+00
Info_2 :  6.00000E+00
```

In the updated version of the Show_Sensors procedure, we're now using both old and new versions of the sensor.

25.4.9 Per-Object Expressions

In record type declarations, we might want to define a component that makes use of a *name* (page 277) that refers to a *discriminant* (page 454) of the record type, or to the record type itself. An expression where we use such a name is called a per-object expression.

The term "per-object" comes from the fact that, in the component definition, we're referring to a piece of information that will be known just when creating an object of that type. For example, if the per-object expression refers to a discriminant of a type T, the actual value of that discriminant will only be specified when we declare an object of type T. Therefore, the component definition is specific for that individual object — but not necessarily for other objects of the same type, as we might use different values for the discriminant.

The constraint that contains a per-object expression is called a per-object constraint. The actual constraint of that component isn't completely known when we declare the record type, but only later on when an object of that type is created. (Note that the syntax of a constraint includes the parentheses or the keyword **range**.)

In addition to referring to discriminants, per-object expressions can also refer to the record type itself, as we'll see later.

Let's start with a simple record declaration:

Listing 364: rec_per_object_expressions.ads

```
package Rec_Per_Object_Expressions is

   type Stack (S : Positive) is private;

private
```

(continues on next page)

(continued from previous page)

```
6
7     type Integer_Array is
8       array (Positive range <>) of Integer;
9
10    type Stack (S : Positive) is record
11       Arr : Integer_Array (1 .. S);
12       --                   ^^^^^^
13       --
14       --                        S
15       --                        ^
16       --    Per-object expression
17       --
18       --                  (1 .. S)
19       --                  ^^^^^^^^
20       --     Per-object constraint
21
22       Top : Natural := 0;
23    end record;
24
25 end Rec_Per_Object_Expressions;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Per_Object_Expressions.Per_Object_
↪Expression
MD5: e4012454ea886fd429d82159b8d344b7
```

In this example, we see the `Stack` record type with a discriminant `S`. In the declaration of the `Arr` component of the that type, `S` is a per-object expression, as it refers to the `S` discriminant. Also, `(1 .. S)` is a per-object constraint.

Let's look at another example using *anonymous access types* (page 959):

Listing 365: rec_per_object_expressions.ads

```
1  package Rec_Per_Object_Expressions is
2
3     type T is private;
4
5     type T_Processor (Selected_T : access T) is
6       private;
7
8  private
9
10    type T is null record;
11
12    type T_Container (Selected_T : access T) is
13      null record;
14
15    type T_Processor (Selected_T : access T) is
16    record
17       E : T_Container (Selected_T);
18       --
19       --               Selected_T
20       --               ^^^^^^^^^^
21       --    Per-object expression
22       --
23       --              (Selected_T)
24       --              ^^^^^^^^^^^^
25       --     Per-object constraint
26    end record;
```

(continues on next page)

(continued from previous page)

```
27
28 end Rec_Per_Object_Expressions;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Per_Object_Expressions.Per_Object_
↪Expression_Access_Discriminant
MD5: 8b404688be1e103773c28a6977785836
```

Let's focus on the `T_Processor` type from this example. The `Selected_T` discriminant is being used in the definition of the `E` component. The per-object constraint is `(Selected_T)`.

Finally, per-object expressions can also refer to the record type we're declaring. For example:

Listing 366: rec_per_object_expressions.ads

```
1  package Rec_Per_Object_Expressions is
2
3     type T is limited private;
4
5  private
6
7     type T_Processor (Selected_T : access T) is
8       null record;
9
10    type T is limited record
11       E : T_Processor (T'Access);
12       --
13       --                T'Access
14       --                ^^^^^^^^
15       --  Per-object expression
16       --
17       --               (T'Access)
18       --               ^^^^^^^^^^
19       --   Per-object constraint
20    end record;
21
22 end Rec_Per_Object_Expressions;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Per_Object_Expressions.Per_Object_
↪Expression_Access_Discriminant
MD5: a67b3034008fdf2a8c5fd1b6da769128
```

In this example, when we write `T'Access` within the declaration of the `T` record type, the actual value for the **`Access`** attribute will be known when an object of `T` type is created. In that sense, `T'Access` is a per-object expression — `(T'Access)` is the corresponding per-object constraint.

Note that `T'Access` is referring to the type within a type definition. This is generally treated as a reference to the object being created, the so-called *current instance*.

In the Ada Reference Manual

- 3.8 Record Types[111]

[111] http://www.ada-auth.org/standards/22rm/html/RM-3-8.html

Default value

We can also use per-object expressions to calculate the default value of a record component:

Listing 367: rec_per_object_expressions.ads

```
package Rec_Per_Object_Expressions is

   type T (D : Positive) is private;

private

   type T (D : Positive) is record
      V : Natural := D - 1;
      --             ^^^^^
      --    Per-object expression

      S : Natural := D'Size;
      --             ^^^^^^
      --    Per-object expression
   end record;

end Rec_Per_Object_Expressions;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Per_Object_Expressions.Per_Object_
↪Expression_Default_Value
MD5: 70454b0b116094a02b897d8d1d0080fb
```

Here, we calculate the default value of V using the per-object expression `D - 1`, and the default of value of S using the per-object `D'Size`.

The default expression for a component of a discriminated record can be an arbitrary per-object expression. (This contrasts with *important restrictions* (page 511) that exist for per-object constraints, as we discuss later on.) Such expressions might include function calls or uses of any defined operator. For this reason, the following code example is accepted by the compiler:

Listing 368: rec_per_object_expressions.ads

```
package Rec_Per_Object_Expressions is

   type Stack (S : Positive) is private;

private

   type Integer_Array is
     array (Positive range <>) of Integer;

   type Stack (S : Positive) is record
      Arr : Integer_Array (1 .. S);

      Top : Natural := 0;

      Overflow_Warning : Positive
        := S * 9 / 10;
      --   ^^^^^^^^^^
      --   Per-object expression
      --   using computation for
      --   the default expression.
   end record
     with
```

(continues on next page)

(continued from previous page)

```
       Dynamic_Predicate =>
         Overflow_Warning in
           (S + 1) / 2 .. S - 1;
      --
      --   (S + 1) / 2
      --   ^^^^^^^^^^^
      --   Per-object expression
      --   using computation.
      --
      --                  S - 1
      --                  ^^^^^
      --   Per-object expression
      --   using computation.

end Rec_Per_Object_Expressions;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Per_Object_Expressions.Per_Object_
 ↪Expression_Computation
MD5: 6783568fd3e76a85ca7c1cc65ba023c5
```

In this example, we can identify multiple per-object expressions that use a computation: `S * 9 / 10`, `(S + 1) / 2`, and `S - 1`.

Restrictions

There are some important restrictions on per-object constraints:

1. Per-object range constraints such as `1 .. T'Size` are not allowed.
   - For example, the following code example doesn't compile:

Listing 369: rec_per_object_expressions.ads

```
package Rec_Per_Object_Expressions is

   type Bit_Field is
     array (Positive range <>) of Boolean
       with Pack;

   type T is record
      Arr : Bit_Field (1 .. T'Size);
      --                    ^^^^^^
      --  ERROR: per-object range constraint
      --         using the Size attribute
      --         is illegal.
   end record;

end Rec_Per_Object_Expressions;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Per_Object_
 ↪Expressions.Per_Object_Expression_Range_Constraint
MD5: c2ac9588c1d1adac8c584a0e36a81342
```

Build output

```
rec_per_object_expressions.ads:8:30: error: in a constraint the␣
 ↪current instance can only be used with an access attribute
gprbuild: *** compilation phase failed
```

2. Within a per-object index constraint or discriminant constraint, each per-object expression must be the name of a discriminant directly, without any further computation.
   - Therefore, we're allowed to write `(1 .. S)` — as we've seen in a previous example —. However, writing `(1 .. S - 1)` would be illegal.
   - For example, the following adaptation to the previous code example doesn't compile:

Listing 370: rec_per_object_expressions.ads

```
package Rec_Per_Object_Expressions is

   type Stack (S : Positive) is private;

private

   type Integer_Array is
     array (Natural range <>) of Integer;

   type Stack (S : Positive) is record
      Arr : Integer_Array (0 .. S - 1);
      --                          ^^^^^
      --  ERROR: computation in per-object
      --         expression is illegal.

      Top : Integer := -1;
   end record;

end Rec_Per_Object_Expressions;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Records.Per_Object_
 ↪Expressions.Per_Object_Expression_Range_Computation
MD5: 1224bb63f7953743d84a258226c35c50
```

Build output

```
rec_per_object_expressions.ads:11:33: error: discriminant in␣
 ↪constraint must appear alone
gprbuild: *** compilation phase failed
```

   In this example, using the computation `S - 1` to specify the range of `Arr` isn't permitted. (Note that, *as we've seen before* (page 510), this restriction doesn't apply when the computation is used in a per-object expression that calculates the default value of a component.)

3. We can only use access attributes (`T'Access` and `T'Unchecked_Access`) in per-object constraints.

25.5 Aggregates

25.5.1 Container Aggregates

Note

This feature was introduced in Ada 2022.

A container aggregate is a list of elements — such as `[1, 2, 3]` — that we use to initialize or assign to a container. For example:

Listing 371: show_container_aggregate.adb

```
with Ada.Containers.Vectors;

procedure Show_Container_Aggregate is

   package Float_Vec is new
     Ada.Containers.Vectors (Positive, Float);

   V : constant Float_Vec.Vector :=
         [1.0, 2.0, 3.0];

   pragma Unreferenced (V);
begin
   null;
end Show_Container_Aggregate;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Container_Aggregates.Simple_
 ↪Container_Aggregate
MD5: b54cd5800179d4016bbce5a9b10734f2
```

In this example, `[1.0, 2.0, 3.0]` is a container aggregate that we use to initialize a vector V.

We can specify container aggregates in three forms:

- as a null container aggregate, which indicates a container without any elements and is represented by the `[]` syntax;
- as a positional container aggregate, where the elements are simply listed in a sequence (such as `[1, 2]`);
- as a named container aggregate, where a key is indicated for each element of the list (such as `[1 => 10, 2 => 15]`).

Let's look at a complete example:

Listing 372: show_container_aggregate.adb

```
with Ada.Containers.Vectors;

procedure Show_Container_Aggregate is

   package Float_Vec is new
     Ada.Containers.Vectors (Positive, Float);

   --  Null container aggregate
   Null_V  : constant Float_Vec.Vector :=
               [];

   --  Positional container aggregate
   Pos_V   : constant Float_Vec.Vector :=
               [1.0, 2.0, 3.0];

   --  Named container aggregate
   Named_V : constant Float_Vec.Vector :=
               [1 => 1.0,
                2 => 2.0,
                3 => 3.0];
```

(continues on next page)

(continued from previous page)

```
21
22    pragma Unreferenced (Null_V, Pos_V, Named_V);
23 begin
24    null;
25 end Show_Container_Aggregate;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Container_Aggregates.Simple_
 ↪Container_Aggregate
MD5: f00b21da1722669ae92bd5fe4a9a3966
```

In this example, we see the three forms of container aggregates. The difference between positional and named container aggregates is that:

- for positional container aggregates, the vector index is implied by its position;

while

- for named container aggregates, the index (or key) of each element is explicitly indicated.

Also, the named container aggregate in this example (Named_V) is using an index as the name (i.e. it's an indexed aggregate). Another option is to use non-indexed aggregates, where we use actual keys — as we do in maps. For example:

Listing 373: show_named_container_aggregate.adb

```
1  with Ada.Containers.Vectors;
2  with Ada.Containers.Indefinite_Hashed_Maps;
3  with Ada.Strings.Hash;
4
5  procedure Show_Named_Container_Aggregate is
6
7     package Float_Vec is new
8       Ada.Containers.Vectors (Positive, Float);
9
10    package Float_Hashed_Maps is new
11      Ada.Containers.Indefinite_Hashed_Maps
12        (Key_Type        => String,
13         Element_Type    => Float,
14         Hash            => Ada.Strings.Hash,
15         Equivalent_Keys => "=");
16
17    --  Named container aggregate
18    --  using an index
19    Indexed_Named_V : constant Float_Vec.Vector :=
20                        [1 => 1.0,
21                         2 => 2.0,
22                         3 => 3.0];
23
24    --  Named container aggregate
25    --  using a key
26    Keyed_Named_V : constant
27      Float_Hashed_Maps.Map :=
28        ["Key_1" => 1.0,
29         "Key_2" => 2.0,
30         "Key_3" => 3.0];
31
32    pragma Unreferenced (Indexed_Named_V,
33                         Keyed_Named_V);
34 begin
```

(continues on next page)

(continued from previous page)

```
35    null;
36 end Show_Named_Container_Aggregate;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Container_Aggregates.Named_
 ↪Container_Aggregate
MD5: 9d117543135e75e66801628ca29e32ef
```

In this example, Indexed_Named_V and Keyed_Named_V are both initialized with a named container aggregate. However:

- the container aggregate for Indexed_Named_V is an indexed aggregate, so we use an index for each element;

while

- the container aggregate for Keyed_Named_V has a key for each element.

Later on, we'll talk about the Aggregate aspect, which allows for defining custom container aggregates for any record type.

In the Ada Reference Manual

- 4.3.5 Container Aggregates[112]

25.5.2 Record aggregates

We've already seen record aggregates in the *Introduction to Ada* (page 66) course, so this is just a brief overview on the topic.

As we already know, record aggregates can have positional and named component associations. For example, consider this package:

Listing 374: points.ads

```
1  package Points is
2
3     type Point_3D is record
4        X, Y, Z : Integer;
5     end record;
6
7     procedure Display (P : Point_3D);
8
9  end Points;
```

Listing 375: points.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  package body Points is
4
5     procedure Display (P : Point_3D) is
6     begin
7        Put_Line ("(X => "
8                  & Integer'Image (P.X)
9                  & ",");
10       Put_Line (" Y => "
```

(continues on next page)

[112] http://www.ada-auth.org/standards/22rm/html/RM-4-3-5.html

(continued from previous page)

```
                & Integer'Image (P.Y)
                & ",");
      Put_Line (" Z => "
                & Integer'Image (P.Z)
                & ")");
   end Display;

end Points;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Record_Aggregates.Pos_Named_
 ↪Rec_Aggregates
MD5: fd01961cf1da9b48d2a6150da30f7377
```

We can use positional or named record aggregates when assigning to an object P of Point_3D type:

Listing 376: show_record_aggregates.adb

```
with Points; use Points;

procedure Show_Record_Aggregates is
   P : Point_3D;
begin
   --  Positional component association
   P := (0, 1, 2);

   Display (P);

   --  Named component association
   P := (X => 3,
         Y => 4,
         Z => 5);

   Display (P);
end Show_Record_Aggregates;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Record_Aggregates.Pos_Named_
 ↪Rec_Aggregates
MD5: fc4cff950e31a633ab4e2ae3d21ddc7b
```

Runtime output

```
(X =>  0,
 Y =>  1,
 Z =>  2)
(X =>  3,
 Y =>  4,
 Z =>  5)
```

Also, we can have a mixture of both:

Listing 377: show_record_aggregates.adb

```
with Points; use Points;

procedure Show_Record_Aggregates is
   P : Point_3D;
```

(continues on next page)

(continued from previous page)

```
begin
   --  Positional and named component associations
   P := (3, 4,
         Z => 5);

   Display (P);
end Show_Record_Aggregates;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Record_Aggregates.Pos_Named_
↪Rec_Aggregates
MD5: 493a2a87b4b28dfb0882ad73acf84710
```

Runtime output

```
(X =>  3,
 Y =>  4,
 Z =>  5)
```

In this case, only the Z component has a named association, while the other components have a positional association.

Note that a positional association cannot follow a named association, so we cannot write `P := (3, Y => 4, 5);`, for example. Once we start using a named association for a component, we have to continue using it for the remaining components.

In addition, we can choose multiple components at once and assign the same value to them. For that, we use the | syntax:

Listing 378: show_record_aggregates.adb

```
with Points; use Points;

procedure Show_Record_Aggregates is
   P : Point_3D;
begin
   --  Multiple component selection
   P := (X | Y => 5,
         Z     => 6);

   Display (P);
end Show_Record_Aggregates;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Record_Aggregates.Pos_Named_
↪Rec_Aggregates
MD5: a4fde562fb60d290caf46d86b13e694b
```

Runtime output

```
(X =>  5,
 Y =>  5,
 Z =>  6)
```

Here, we assign 5 to both X and Y.

In the Ada Reference Manual

- 4.3.1 Record Aggregates[113]

<>

We can use the <> syntax to tell the compiler to use the default value for specific components. However, if there's no default value for specific components, that component isn't initialized to a known value. For example:

Listing 379: show_record_aggregates.adb

```
with Points; use Points;

procedure Show_Record_Aggregates is
   P : Point_3D;
begin
   P := (0, 1, 2);
   Display (P);

   --  Specifying X component.
   P := (X => 42,
         Y => <>,
         Z => <>);
   Display (P);

   --  Specifying Y and Z components.
   P := (X => <>,
         Y => 10,
         Z => 20);
   Display (P);
end Show_Record_Aggregates;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Record_Aggregates.Pos_Named_
↪Rec_Aggregates
MD5: 25145e7cba5a566c518ac4218e550899
```

Runtime output

```
(X =>  0,
 Y =>  1,
 Z =>  2)
(X =>  42,
 Y =>  1,
 Z =>  2)
(X =>  42,
 Y =>  10,
 Z =>  20)
```

Here, as the components of `Point_3D` don't have a default value, those components that have <> are not initialized:

- when we write `(X => 42, Y => <>, Z => <>)`, only X is initialized;
- when we write `(X => <>, Y => 10, Z => 20)` instead, only X is uninitialized.

For further reading...

As we've just seen, all components that get a <> are uninitialized because the components of `Point_3D` don't have a default value. As no initialization is taking place for

[113] http://www.ada-auth.org/standards/22rm/html/RM-4-3-1.html

those components of the aggregate, the actual value that is assigned to the record is undefined. In other words, the resulting behavior might dependent on the compiler's implementation.

When using GNAT, writing `(X => 42, Y => <>, Z => <>)` keeps the value of Y and Z intact, while `(X => <>, Y => 10, Z => 20)` keeps the value of X intact.

If the components of `Point_3D` had default values, those would have been used. For example, we may change the type declaration of `Point_3D` and use default values for each component:

Listing 380: points.ads

```
package Points is

   type Point_3D is record
      X : Integer := 10;
      Y : Integer := 20;
      Z : Integer := 30;
   end record;

   procedure Display (P : Point_3D);

end Points;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Record_Aggregates.Pos_Named_
 ↪Rec_Aggregates
MD5: 8a716db129e6f231c4003b77d8b61ea3
```

Then, writing <> makes use of those default values we've just specified:

Listing 381: show_record_aggregates.adb

```
with Points; use Points;

procedure Show_Record_Aggregates is
   P : Point_3D := (0, 0, 0);
begin
   --  Using default value for
   --  all components
   P := (X => <>,
         Y => <>,
         Z => <>);
   Display (P);
end Show_Record_Aggregates;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Record_Aggregates.Pos_Named_
 ↪Rec_Aggregates
MD5: e64c6fe4e4b3dbaa084d9b97b4fb971f
```

Runtime output

```
(X =>  10,
 Y =>  20,
 Z =>  30)
```

Now, as expected, the default values of each component (10, 20 and 30) are used when we write <>.

Similarly, we can specify a default value for the type of each component. For example, let's declare a `Point_Value` type with a default value — using the `Default_Value` aspect — and use it in the `Point_3D` record type:

Listing 382: points.ads

```
package Points is

   type Point_Value is new Float
     with Default_Value => 99.9;

   type Point_3D is record
      X : Point_Value;
      Y : Point_Value;
      Z : Point_Value;
   end record;

   procedure Display (P : Point_3D);

end Points;
```

Listing 383: points.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Points is

   procedure Display (P : Point_3D) is
   begin
      Put_Line ("(X => "
                & Point_Value'Image (P.X)
                & ",");
      Put_Line (" Y => "
                & Point_Value'Image (P.Y)
                & ",");
      Put_Line (" Z => "
                & Point_Value'Image (P.Z)
                & ")");
   end Display;

end Points;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Record_Aggregates.Rec_
 ↪Aggregate_Default_Value
MD5: 508d7f5e7d02da1677485f7d588847f6
```

Then, writing <> makes use of the default value of the `Point_Value` type:

Listing 384: show_record_aggregates.adb

```
with Points; use Points;

procedure Show_Record_Aggregates is
   P : Point_3D := (0.0, 0.0, 0.0);
begin
   --  Using default value of Point_Value
   --  for all components
   P := (X => <>,
         Y => <>,
         Z => <>);
```

(continues on next page)

(continued from previous page)

```
11    Display (P);
12 end Show_Record_Aggregates;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Record_Aggregates.Rec_
 ↪Aggregate_Default_Value
MD5: 895799077af4a295c250480c32954a2c
```

Runtime output

```
(X =>  9.99000E+01,
 Y =>  9.99000E+01,
 Z =>  9.99000E+01)
```

In this case, the default value of the `Point_Value` type (99.9) is used for all components when we write <>.

`others`

Also, we can use the **`others`** selector to assign a value to all components that aren't explicitly mentioned in the aggregate. For example:

Listing 385: show_record_aggregates.adb

```
1  with Points; use Points;
2
3  procedure Show_Record_Aggregates is
4     P : Point_3D;
5  begin
6     --  Specifying X component;
7     --  using 42 for all
8     --  other components.
9     P := (X      => 42,
10          others => 100);
11    Display (P);
12
13    --  Specifying all components
14    P := (others => 256);
15    Display (P);
16 end Show_Record_Aggregates;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Record_Aggregates.Pos_Named_
 ↪Rec_Aggregates
MD5: 3146363eb36ab4485c7755794fb78bbc
```

Runtime output

```
(X =>  42,
 Y =>  100,
 Z =>  100)
(X =>  256,
 Y =>  256,
 Z =>  256)
```

When we write `P := (X => 42, others => 100)`, we're assigning 42 to X and 100 to all other components (Y and Z in this case). Also, when we write `P := (others => 256)`, all components have the same value (256).

Note that writing a specific value in **others** — such as (**others** => 256) — only works when all components have the same type. In this example, all components of Point_3D have the same type: **Integer**. If we had components with different types in the components selected by **others**, say **Integer** and **Float**, then (**others** => 256) would trigger a compilation error. For example, consider this package:

Listing 386: custom_records.ads

```
package Custom_Records is

   type Integer_Float is record
     A, B : Integer := 0;
     Y, Z : Float   := 0.0;
   end record;

end Custom_Records;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Record_Aggregates.Rec_
 ↪Aggregates_Others
MD5: 875e470aa2cbc5fcfefae649ed5528f6
```

If we had written an aggregate such as (**others** => 256) for an object of type Integer_Float, the value (256) would be OK for components A and B, but not for components Y and Z:

Listing 387: show_record_aggregates_others.adb

```
with Custom_Records; use Custom_Records;

procedure Show_Record_Aggregates_Others is
   Dummy : Integer_Float;
begin
   --  ERROR: components selected by
   --         others must be of same
   --         type.
   Dummy := (others => 256);
end Show_Record_Aggregates_Others;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Record_Aggregates.Rec_
 ↪Aggregates_Others
MD5: d543ee07e24caf63384ab0d140054be2
```

Build output

```
show_record_aggregates_others.adb:9:14: error: components in "others" choice must␣
 ↪have same type
show_record_aggregates_others.adb:9:24: error: expected type "Standard.Float"
show_record_aggregates_others.adb:9:24: error: found type universal integer
gprbuild: *** compilation phase failed
```

We can fix this compilation error by making sure that **others** only refers to components of the same type:

Listing 388: show_record_aggregates_others.adb

```
with Custom_Records; use Custom_Records;

procedure Show_Record_Aggregates_Others is
```

(continues on next page)

(continued from previous page)

```
   Dummy : Integer_Float;
begin
   --  OK: components selected by
   --      others have Integer type.
   Dummy := (Y | Z  => 256.0,
             others => 256);
end Show_Record_Aggregates_Others;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Record_Aggregates.Rec_
 ↪Aggregates_Others
MD5: d01977a49e08d2c6cb6b7788581ed56f
```

In any case, writing (`others => <>`) is always accepted by the compiler because it simply selects the default value of each component, so the type of those values is unambiguous:

Listing 389: show_record_aggregates_others.adb

```
with Custom_Records; use Custom_Records;

procedure Show_Record_Aggregates_Others is
   Dummy : Integer_Float;
begin
   Dummy := (others => <>);
end Show_Record_Aggregates_Others;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Record_Aggregates.Rec_
 ↪Aggregates_Others
MD5: db9b72ffc933436e76305887276eeafd
```

This code compiles because <> uses the appropriate default value of each component.

Record discriminants

When a record type has discriminants, they must appear as components of an aggregate of that type. For example, consider this package:

Listing 390: points.ads

```
package Points is

   type Point_Dimension is (Dim_1, Dim_2, Dim_3);

   type Point (D : Point_Dimension) is record
      case D is
      when Dim_1 =>
         X1         : Integer;
      when Dim_2 =>
         X2, Y2     : Integer;
      when Dim_3 =>
         X3, Y3, Z3 : Integer;
      end case;
   end record;

   procedure Display (P : Point);

end Points;
```

Listing 391: points.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Points is

   procedure Display (P : Point) is
   begin
      Put_Line (Point_Dimension'Image (P.D));

      case P.D is
      when Dim_1 =>
         Put_Line ("  (X => "
                   & Integer'Image (P.X1)
                   & ")");
      when Dim_2 =>
         Put_Line ("  (X => "
                   & Integer'Image (P.X2)
                   & ",");
         Put_Line ("   Y => "
                   & Integer'Image (P.Y2)
                  & ")");
      when Dim_3 =>
         Put_Line ("  (X => "
                   & Integer'Image (P.X3)
                   & ",");
         Put_Line ("   Y => "
                   & Integer'Image (P.Y3)
                   & ",");
         Put_Line ("   Z => "
                   & Integer'Image (P.Z3)
                   & ")");
      end case;
   end Display;

end Points;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Record_Aggregates.Rec_
 ↪Aggregate_Discriminant
MD5: bd71322a65ca50e1eefa0aedd407931a
```

To write aggregates of the `Point` type, we have to specify the `D` discriminant as a component of the aggregate. The discriminant must be included in the aggregate — and must be static — because the compiler must be able to examine the aggregate to determine if it is both complete and consistent. All components must be accounted for one way or another, as usual — but, in addition, references to those components whose existence depends on the discriminant's values must be consistent with the actual discriminant value used in the aggregate. For example, for type `Point`, an aggregate can only reference the `X3`, `Y3`, and `Z3` components when `Dim_3` is specified for the discriminant `D`; otherwise, those three components don't exist in that aggregate. Also, the discriminant `D` must be the first one if we use positional component association. For example:

Listing 392: show_rec_aggregate_discriminant.adb

```
with Points; use Points;

procedure Show_Rec_Aggregate_Discriminant is
   --  Positional component association
   P1 : constant Point := (Dim_1, 0);
```

(continues on next page)

(continued from previous page)

```
6
7     --  Named component association
8     P2 : constant Point := (D  => Dim_2,
9                             X2 => 3,
10                            Y2 => 4);
11
12    --  Positional / named component association
13    P3 : constant Point := (Dim_3,
14                            X3 => 3,
15                            Y3 => 4,
16                            Z3 => 5);
17 begin
18    Display (P1);
19    Display (P2);
20    Display (P3);
21 end Show_Rec_Aggregate_Discriminant;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Record_Aggregates.Rec_
 ↪Aggregate_Discriminant
MD5: d487e0c68ea69c3e0f2adb8ac958e31d
```

Runtime output

```
DIM_1
  (X =>  0)
DIM_2
  (X =>  3,
   Y =>  4)
DIM_3
  (X =>  3,
   Y =>  4,
   Z =>  5)
```

As we see in this example, we can use any component association in the aggregate, as long as we make sure that the discriminants of the type appear as components — and are the first components in the case of positional component association.

25.5.3 Full coverage rules for Aggregates

> **Note**
>
> This section was originally written by Robert A. Duff and published as Gem #1: Limited Types in Ada 2005[114].

One interesting feature of Ada are the *full coverage rules* for aggregates. For example, suppose we have a record type:

Listing 393: persons.ads

```
1  with Ada.Strings.Unbounded;
2  use  Ada.Strings.Unbounded;
3
4  package Persons is
5     type Years is new Natural;
```

(continues on next page)

[114] https://www.adacore.com/gems/gem-1

(continued from previous page)

```
6
7     type Person is record
8        Name : Unbounded_String;
9        Age  : Years;
10    end record;
11 end Persons;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Full_Coverage_Rules_Aggregates.
 ↪Full_Coverage_Rules
MD5: 7755bffa8b4473c425ae5075e9c478e9
```

We can create an object of the type using an aggregate:

Listing 394: show_aggregate_init.adb

```
1  with Ada.Strings.Unbounded;
2  use  Ada.Strings.Unbounded;
3
4  with Persons; use Persons;
5
6  procedure Show_Aggregate_Init is
7
8     X : constant Person :=
9           (Name =>
10             To_Unbounded_String ("John Doe"),
11           Age  => 25);
12 begin
13    null;
14 end Show_Aggregate_Init;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Full_Coverage_Rules_Aggregates.
 ↪Full_Coverage_Rules
MD5: 681e665b76265eff4c4d870ec011ba37
```

The full coverage rules say that every component of Person must be accounted for in the aggregate. If we later modify type Person by adding a component:

Listing 395: persons.ads

```
1  with Ada.Strings.Unbounded;
2  use  Ada.Strings.Unbounded;
3
4  package Persons is
5     type Years is new Natural;
6
7     type Person is record
8        Name      : Unbounded_String;
9        Age       : Natural;
10       Shoe_Size : Positive;
11    end record;
12 end Persons;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Full_Coverage_Rules_Aggregates.
 ↪Full_Coverage_Rules
MD5: 5fc5b93748d92932bfc9e0f15c0228b7
```

and we forget to modify X accordingly, the compiler will remind us. Case statements also have full coverage rules, which serve a similar purpose.

Of course, we can defeat the full coverage rules by using **others** (usually for *array aggregates* (page 527) and case statements, but occasionally useful for *record aggregates* (page 515)):

Listing 396: show_aggregate_init_others.adb

```
with Ada.Strings.Unbounded;
use  Ada.Strings.Unbounded;

with Persons; use Persons;

procedure Show_Aggregate_Init_Others is

   X : constant Person :=
         (Name   =>
            To_Unbounded_String ("John Doe"),
          others => 25);
begin
   null;
end Show_Aggregate_Init_Others;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Full_Coverage_Rules_Aggregates.
↪Full_Coverage_Rules
MD5: 6d26de8dd6820682cb9150dcbb40f106
```

According to the Ada RM, **others** here means precisely the same thing as `Age | Shoe_Size`. But that's wrong: what **others** really means is "all the other components, including the ones we might add next week or next year". That means you shouldn't use **others** unless you're pretty sure it should apply to all the cases that haven't been invented yet.

Later on, we'll discuss *full coverage rules for limited types* (page 1061).

25.5.4 Array aggregates

We've already discussed array aggregates in the *Introduction to Ada* (page 71) course. Therefore, this section just presents some details about this topic.

In the Ada Reference Manual

- 4.3.3 Array Aggregates[115]

Positional and named array aggregates

Note

The array aggregate syntax using brackets (e.g.: `[1, 2, 3]`), which we mention in this section, was introduced in Ada 2022.

Similar to *record aggregates* (page 515), array aggregates can be positional or named. Consider this package:

[115] http://www.ada-auth.org/standards/22rm/html/RM-4-3-3.html

Listing 397: points.ads

```
package Points is

   type Point_3D is array (1 .. 3) of Integer;

   procedure Display (P : Point_3D);

end Points;
```

Listing 398: points.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Points is

   procedure Display (P : Point_3D) is
   begin
      Put_Line ("(X => "
                & Integer'Image (P (1))
                & ",");
      Put_Line (" Y => "
                & Integer'Image (P (2))
                & ",");
      Put_Line (" Z => "
                & Integer'Image (P (3))
                & ")");
   end Display;

end Points;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Array_Aggregates.Array_
 ↪Aggregates
MD5: d4b3becacc321d20810c3c90f4d8b7ff
```

We can write positional or named aggregates when assigning to an object P of Point_3D type:

Listing 399: show_array_aggregates.adb

```
with Points; use Points;

procedure Show_Array_Aggregates is
   P : Point_3D;
begin
   --  Positional component association
   P := [0, 1, 2];

   Display (P);

   --  Named component association
   P := [1 => 3,
         2 => 4,
         3 => 5];

   Display (P);
end Show_Array_Aggregates;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Array_Aggregates.Array_
 ↪Aggregates
MD5: 2d65c026639d990e7f6a99f7616d7eb4
```

Runtime output

```
(X =>  0,
 Y =>  1,
 Z =>  2)
(X =>  3,
 Y =>  4,
 Z =>  5)
```

In this example, we assign a positional array aggregate (`[1, 2, 3]`) to P. Then, we assign a named array aggregate (`[1 => 3, 2 => 4, 3 => 5]`) to P. In this case, the *names* are the indices of the components we're assigning to.

We can also assign array aggregates to slices:

Listing 400: show_array_aggregates.adb

```
1  with Points; use Points;
2
3  procedure Show_Array_Aggregates is
4     P : Point_3D := [others => 0];
5  begin
6     --  Positional component association
7     P (2 .. 3) := [1, 2];
8
9     Display (P);
10
11    --  Named component association
12    P (2 .. 3) := [1 => 3,
13                   2 => 4];
14
15    Display (P);
16 end Show_Array_Aggregates;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Array_Aggregates.Array_
 ↪Aggregates
MD5: d4e4d3ab4b7d538fc4ef1e92d28e47d9
```

Runtime output

```
(X =>  0,
 Y =>  1,
 Z =>  2)
(X =>  0,
 Y =>  3,
 Z =>  4)
```

Note that, when using a named array aggregate, the index (*name*) that we use in the aggregate doesn't have to match the slice. In this example, we're assigning the component from index 1 of the aggregate to the component of index 2 of the array P (and so on).

Historically

In the first versions of Ada, we could only write array aggregates using parentheses.

Listing 401: show_array_aggregates.adb

```
with Points; use Points;

procedure Show_Array_Aggregates is
   P : Point_3D;
begin
   --  Positional component association
   P := (0, 1, 2);

   Display (P);

   --  Named component association
   P := (1 => 3,
         2 => 4,
         3 => 5);

   Display (P);
end Show_Array_Aggregates;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Array_Aggregates.
 ↪Array_Aggregates
MD5: 16df9c01e46623ca735b84167a11a0fd
```

Runtime output

```
(X =>  0,
 Y =>  1,
 Z =>  2)
(X =>  3,
 Y =>  4,
 Z =>  5)
```

This syntax is considered obsolescent since Ada 2022: brackets ([1, 2, 3]) should be used instead.

Null array aggregate

Note

This feature was introduced in Ada 2022.

We can also write null array aggregates: `[]`. As the name implies, this kind of array aggregate doesn't have any components.

Consider this package:

Listing 402: integer_arrays.ads

```
package Integer_Arrays is

   type Integer_Array is
     array (Positive range <>) of Integer;

   procedure Display (A : Integer_Array);

end Integer_Arrays;
```

Listing 403: integer_arrays.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Integer_Arrays is

   procedure Display (A : Integer_Array) is
   begin
      Put_Line ("Length = "
                & A'Length'Image);

      Put_Line ("(");
      for I in A'Range loop
         Put ("  "
              & I'Image
              & " => "
              & A (I)'Image);
         if I /= A'Last then
            Put_Line (",");
         else
            New_Line;
         end if;
      end loop;
      Put_Line (")");
   end Display;

end Integer_Arrays;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Array_Aggregates.Array_
 ↪Aggregates_2
MD5: 8e6e4951c14dcc6e8dea9b6a76064930
```

We can initialize an object `N` of `Integer_Array` type with a null array aggregate:

Listing 404: show_array_aggregates.adb

```
with Integer_Arrays; use Integer_Arrays;

procedure Show_Array_Aggregates is
   N : constant Integer_Array := [];
begin
   Display (N);
end Show_Array_Aggregates;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Array_Aggregates.Array_
 ↪Aggregates_2
MD5: 188f7b006c08927f8cad83557a5e1cd9
```

Runtime output

```
Length =  0
(
)
```

In this example, when we call the `Display` procedure, we confirm that `N` doesn't have any components.

`|`, `<>`, `others`

We've seen the following syntactic elements when we were discussing *record aggregates* (page 515): `|`, `<>` and **`others`**. We can apply them to array aggregates as well:

Listing 405: show_array_aggregates.adb

```
with Points; use Points;

procedure Show_Array_Aggregates is
   P : Point_3D;
begin
   --  All components have a value of zero.
   P := [others => 0];

   Display (P);

   --  Both first and second components have
   --  a value of three.
   P := [1 | 2 => 3,
         3     => 4];

   Display (P);

   --  The default value is used for the first
   --  component, and all other components
   --  have a value of five.
   P := [1      => <>,
         others => 5];

   Display (P);
end Show_Array_Aggregates;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Array_Aggregates.Array_
 ↪Aggregates
MD5: 648d68f393107b138c6390c599d3d247
```

Runtime output

```
(X =>  0,
 Y =>  0,
 Z =>  0)
(X =>  3,
 Y =>  3,
 Z =>  4)
(X =>  1361556240,
 Y =>  5,
 Z =>  5)
```

In this example, we use the `|`, `<>` and **`others`** elements in a very similar way as we did with record aggregates. (See the comments in the code example for more details.)

Note that, as for record aggregates, the `<>` makes use of the default value (if it is available). We discuss this topic in more details *later on* (page 541).

`..`

We can also use the range syntax (`..`) with array aggregates:

Listing 406: show_array_aggregates.adb

```
with Points; use Points;

procedure Show_Array_Aggregates is
   P : Point_3D;
begin
   --  All components have a value of zero.
   P := [1 .. 3 => 0];

   Display (P);

   --  Both first and second components have
   --  a value of three.
   P := [1 .. 2 => 3,
         3      => 4];

   Display (P);

   --  The default value is used for the first
   --  component, and all other components
   --  have a value of five.
   P := [1      => <>,
         2 .. 3 => 5];

   Display (P);
end Show_Array_Aggregates;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Array_Aggregates.Array_
 ↪Aggregates
MD5: 656f44d37ce676b24e9d512639fd0adc
```

Runtime output

```
(X =>  0,
 Y =>  0,
 Z =>  0)
(X =>  3,
 Y =>  3,
 Z =>  4)
(X => -2098248944,
 Y =>  5,
 Z =>  5)
```

This example is a variation of the previous one. However, in this case, we're using ranges instead of the | and **others** syntax.

Missing components

All aggregate components must have an associated value. If we don't specify a value for a certain component, an exception is raised:

Listing 407: show_array_aggregates.adb

```
with Points; use Points;

procedure Show_Array_Aggregates is
   P : Point_3D;
begin
```

(continues on next page)

(continued from previous page)

```
   P := [1 => 4];
   --  ERROR: value of components at indices
   --         2 and 3 are missing

   Display (P);
end Show_Array_Aggregates;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Array_Aggregates.Array_
 ↪Aggregates
MD5: 34bbc8e8bd0bd3f8b63d07fa881233bd
```

Build output

```
show_array_aggregates.adb:6:09: warning: too few elements for type "Point_3D"␣
 ↪defined at points.ads:3 [enabled by default]
show_array_aggregates.adb:6:09: warning: expected 3 elements; found 1 element␣
 ↪[enabled by default]
show_array_aggregates.adb:6:09: warning: Constraint_Error will be raised at run␣
 ↪time [enabled by default]
```

Runtime output

```

raised CONSTRAINT_ERROR : show_array_aggregates.adb:6 length check failed
```

We can use **others** to specify a value to all components that haven't been explicitly mentioned in the aggregate:

Listing 408: show_array_aggregates.adb

```
with Points; use Points;

procedure Show_Array_Aggregates is
   P : Point_3D;
begin
   P := [1 => 4, others => 0];
   --  OK: unspecified components have a
   --      value of zero

   Display (P);
end Show_Array_Aggregates;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Array_Aggregates.Array_
 ↪Aggregates
MD5: 5f1b7e3778b7d5ec990fba9558495758
```

Runtime output

```
(X =>  4,
 Y =>  0,
 Z =>  0)
```

However, **others** can only be used when the range is known — compilation fails otherwise:

Listing 409: show_array_aggregates.adb

```
with Integer_Arrays; use Integer_Arrays;

procedure Show_Array_Aggregates is
   N1 : Integer_Array := [others => 0];
   --  ERROR: range is unknown

   N2 : Integer_Array (1 .. 3) := [others => 0];
   --  OK: range is known
begin
   Display (N1);
   Display (N2);
end Show_Array_Aggregates;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Array_Aggregates.Array_
 ↪Aggregates_2
MD5: e185c823ca68e9193a0b12270ffebe61
```

Build output

```
show_array_aggregates.adb:4:27: error: "others" choice not allowed here
show_array_aggregates.adb:4:27: error: qualify the aggregate with a constrained␣
 ↪subtype to provide bounds for it
gprbuild: *** compilation phase failed
```

Of course, we could fix the declaration of N1 by specifying a range — e.g. `N1 : Integer_Array (1 .. 10) := [others => 0];`.

Iterated component association

> **Note**
>
> This feature was introduced in Ada 2022.

We can use an iterated component association to specify an aggregate. This is the general syntax:

```
--  All components have a value of zero
P := [for I in 1 .. 3 => 0];
```

Let's see a complete example:

Listing 410: show_array_aggregates.adb

```
with Points; use Points;

procedure Show_Array_Aggregates is
   P : Point_3D;
begin
   --  All components have a value of zero
   P := [for I in 1 .. 3 => 0];

   Display (P);

   --  Both first and second components have
   --  a value of three
```

(continues on next page)

(continued from previous page)

```
   P := [for I in 1 .. 3 =>
           (if I = 1 or I = 2
            then 3
            else 4)];

   Display (P);

   --  The first component has a value of 99
   --  and all other components have a value
   --  that corresponds to its index
   P := [1 => 99,
         for I in 2 .. 3 => I];

   Display (P);
end Show_Array_Aggregates;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Array_Aggregates.Array_
 ↪Aggregates
MD5: 68bddcec76f8431b16d1c090b74c2500
```

Runtime output

```
(X =>  0,
 Y =>  0,
 Z =>  0)
(X =>  3,
 Y =>  3,
 Z =>  4)
(X =>  99,
 Y =>  2,
 Z =>  3)
```

In this example, we use iterated component associations in different ways:

1. We write a simple iteration (`[for I in 1 .. 3 => 0]`).
2. We use a conditional expression in the iteration: `[for I in 1 .. 3 => (if I = 1 or I = 2 then 3 else 4)]`.
3. We use a named association for the first element, and then iterated component association for the remaining components: `[1 => 99, for I in 2 .. 3 => I]`.

So far, we've used a discrete choice list (in the `for I in Range` form) in the iterated component association. We could use an iterator (in the `for E of` form) instead. For example:

Listing 411: show_array_aggregates.adb

```
with Points; use Points;

procedure Show_Array_Aggregates is
   P : Point_3D := [for I in Point_3D'Range => I];
begin
   --  Each component is doubled
   P := [for E of P => E * 2];

   Display (P);

   --  Each component is increased
   --  by one
```

(continues on next page)

(continued from previous page)

```
   P := [for E of P => E + 1];

   Display (P);
end Show_Array_Aggregates;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Array_Aggregates.Array_
 ↪Aggregates
MD5: 932ebc6e51c2146a726bad68b7f2cad0
```

Runtime output

```
(X =>  2,
 Y =>  4,
 Z =>  6)
(X =>  3,
 Y =>  5,
 Z =>  7)
```

In this example, we use iterators in different ways:

1. We write [for E of P => E * 2] to double the value of each component.
2. We write [for E of P => E + 1] to increase the value of each component by one.

Of course, we could write more complex operations on E in the iterators.

Multidimensional array aggregates

So far, we've discussed one-dimensional array aggregates. We can also use the same constructs when dealing with multidimensional arrays. Consider, for example, this package:

Listing 412: matrices.ads

```
package Matrices is

   type Matrix is array (Positive range <>,
                         Positive range <>)
                         of Integer;

   procedure Display (M : Matrix);

end Matrices;
```

Listing 413: matrices.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Matrices is

   procedure Display (M : Matrix) is

      procedure Display_Row (M : Matrix;
                             I : Integer) is
      begin
         Put_Line ("  (");
         for J in M'Range (2) loop
            Put ("    "
                 & J'Image
                 & " => "
```

(continues on next page)

(continued from previous page)

```
                & M (I, J)'Image);
            if J /= M'Last (2) then
               Put_Line (",");
            else
               New_Line;
            end if;
         end loop;
         Put ("  )");
      end Display_Row;

   begin
      Put_Line ("Length (1) = "
                & M'Length (1)'Image);
      Put_Line ("Length (2) = "
                & M'Length (2)'Image);

      Put_Line ("(");
      for I in M'Range (1) loop
         Display_Row (M, I);
         if I /= M'Last (1) then
            Put_Line (",");
         else
            New_Line;
         end if;
      end loop;
      Put_Line (")");

   end Display;

end Matrices;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Array_Aggregates.Matrix_
 ↪Aggregates
MD5: 55573272f8cc0621eef7c924cfd6366a
```

We can assign multidimensional aggregates to a matrix M using positional or named component association:

Listing 414: show_array_aggregates.adb

```
with Matrices; use Matrices;

procedure Show_Array_Aggregates is
   M : Matrix (1 .. 2, 1 .. 3);
begin
   --  Positional component association
   M := [[0, 1, 2],
         [3, 4, 5]];

   Display (M);

   --  Named component association
   M := [[1 => 3,
          2 => 4,
          3 => 5],
         [1 => 6,
          2 => 7,
          3 => 8]];

```

(continues on next page)

(continued from previous page)

```
20    Display (M);
21
22 end Show_Array_Aggregates;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Array_Aggregates.Matrix_
 ↪Aggregates
MD5: fe3cb6ee62422991b444c32239f72d05
```

Runtime output

```
Length (1) =  2
Length (2) =  3
(
  (
     1 =>  0,
     2 =>  1,
     3 =>  2
  ),
  (
     1 =>  3,
     2 =>  4,
     3 =>  5
  )
)
Length (1) =  2
Length (2) =  3
(
  (
     1 =>  3,
     2 =>  4,
     3 =>  5
  ),
  (
     1 =>  6,
     2 =>  7,
     3 =>  8
  )
)
```

The first aggregate we use in this example is `[[0, 1, 2], [3, 4, 5]]`. Here, `[0, 1, 2]` and `[3, 4, 5]` are subaggregates of the multidimensional aggregate. Subaggregates don't have a type themselves, but are rather just considered part of a multidimensional aggregate (which, of course, has an array type). In this sense, a subaggregate such as `[0, 1, 2]` is different from a one-dimensional aggregate (such as `[0, 1, 2]`), even though they are written in the same way.

Strings in subaggregates

In the case of matrices using characters, we can use strings in the corresponding array aggregates. Consider this package:

Listing 415: string_lists.ads

```
1  package String_Lists is
2
3     type String_List is array (Positive range <>,
4                                Positive range <>)
5                                of Character;
```

(continues on next page)

(continued from previous page)

```
6
7     procedure Display (SL : String_List);
8
9  end String_Lists;
```

Listing 416: string_lists.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  package body String_Lists is
4
5     procedure Display (SL : String_List) is
6
7        procedure Display_Row (SL : String_List;
8                               I  : Integer) is
9        begin
10          Put ("  (");
11          for J in SL'Range (2) loop
12             Put (SL (I, J));
13          end loop;
14          Put (")");
15       end Display_Row;
16
17    begin
18       Put_Line ("Length (1) = "
19                 & SL'Length (1)'Image);
20       Put_Line ("Length (2) = "
21                 & SL'Length (2)'Image);
22
23       Put_Line ("(");
24       for I in SL'Range (1) loop
25          Display_Row (SL, I);
26          if I /= SL'Last (1) then
27             Put_Line (",");
28          else
29             New_Line;
30          end if;
31       end loop;
32       Put_Line (")");
33    end Display;
34
35 end String_Lists;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Array_Aggregates.String_
 ↪Aggregates
MD5: aacdbb9aa2f3b6146d8a36ca7581fd18
```

Then, when assigning to an object SL of `String_List` type, we can use strings in the aggregates:

Listing 417: show_array_aggregates.adb

```
1  with String_Lists; use String_Lists;
2
3  procedure Show_Array_Aggregates is
4     SL : String_List (1 .. 2, 1 .. 3);
5  begin
6     --  Positional component association
7     SL := ["ABC",
```

(continues on next page)

(continued from previous page)

```
8           "DEF"];
9
10    Display (SL);
11
12    --  Named component associations
13    SL := [[1 => 'A',
14            2 => 'B',
15            3 => 'C'],
16           [1 => 'D',
17            2 => 'E',
18            3 => 'F']];
19
20    Display (SL);
21
22    SL := [[1 => 'X',
23            2 => 'Y',
24            3 => 'Z'],
25           [others => ' ']];
26
27    Display (SL);
28 end Show_Array_Aggregates;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Array_Aggregates.String_
 ↪Aggregates
MD5: 82c28e5d8e592403d8909b8eaa1fe356
```

Runtime output

```
Length (1) =  2
Length (2) =  3
(
  (ABC),
  (DEF)
)
Length (1) =  2
Length (2) =  3
(
  (ABC),
  (DEF)
)
Length (1) =  2
Length (2) =  3
(
  (XYZ),
  (   )
)
```

In the first assignment to SL, we have the aggregate `["ABC", "DEF"]`, which uses strings as subaggregates. (Of course, we can use a named aggregate and assign characters to the individual components.)

<> and default values

As we indicated earlier, the <> syntax sets a component to its default value — if such a default value is available. If a default value isn't defined, however, the component will remain uninitialized, so that the behavior is undefined. Let's look at more complex example to illustrate this situation. Consider this package, for example:

Listing 418: points.ads

```
package Points is

   subtype Point_Value is Integer;

   type Point_3D is record
      X, Y, Z : Point_Value;
   end record;

   procedure Display (P : Point_3D);

   type Point_3D_Array is
     array (Positive range <>) of Point_3D;

   procedure Display (PA : Point_3D_Array);

end Points;
```

Listing 419: points.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Points is

   procedure Display (P : Point_3D) is
   begin
      Put ("      (X => "
           & Point_Value'Image (P.X)
           & ",");
      New_Line;
      Put ("       Y => "
           & Point_Value'Image (P.Y)
           & ",");
      New_Line;
      Put ("       Z => "
           & Point_Value'Image (P.Z)
           & ")");
   end Display;

   procedure Display (PA : Point_3D_Array) is
   begin
      Put_Line ("(");
      for I in PA'Range (1) loop
         Put_Line ("  "
                   & Integer'Image (I)
                   & " =>");
         Display (PA (I));
         if I /= PA'Last (1) then
            Put_Line (",");
         else
            New_Line;
         end if;
      end loop;
      Put_Line (")");
   end Display;

end Points;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Array_Aggregates.Rec_Array_
 ↪Aggregates
MD5: ffaf3745621a30362c6aadaec2c3cef2
```

Then, let's use <> for the array components:

Listing 420: show_record_aggregates.adb

```
with Points; use Points;

procedure Show_Record_Aggregates is
   PA : Point_3D_Array (1 .. 2);
begin
   PA := [ (X => 3,
            Y => 4,
            Z => 5),
           (X => 6,
            Y => 7,
            Z => 8) ];
   Display (PA);

   --  Array components are
   --  uninitialized.
   PA := [1 => <>,
          2 => <>];
   Display (PA);
end Show_Record_Aggregates;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Array_Aggregates.Rec_Array_
 ↪Aggregates
MD5: 4575fead51e24b1a06faf4581efad112
```

Runtime output

```
(
   1 =>
      (X =>  3,
       Y =>  4,
       Z =>  5),
   2 =>
      (X =>  6,
       Y =>  7,
       Z =>  8)
)
(
   1 =>
      (X =>  1741940728,
       Y =>  23587,
       Z =>  1741715113),
   2 =>
      (X =>  23587,
       Y =>  1,
       Z =>  0)
)
```

Because the record components (of the `Point_3D` type) don't have default values, they remain uninitialized when we write `[1 => <>, 2 => <>]`. (In fact, you may see *garbage* in the values displayed by the `Display` procedure.)

When a default value is specified, it is used whenever <> is specified. For example, we could use a type that has the `Default_Value` aspect in its specification:

Listing 421: integer_arrays.ads

```
package Integer_Arrays is

   type Value is new Integer
     with Default_Value => 99;

   type Integer_Array is
     array (Positive range <>) of Value;

   procedure Display (A : Integer_Array);

end Integer_Arrays;
```

Listing 422: show_array_aggregates.adb

```
with Integer_Arrays; use Integer_Arrays;

procedure Show_Array_Aggregates is
   N : Integer_Array (1 .. 4);
begin
   N := [for I in N'Range => Value (I)];
   Display (N);

   N := [others => <>];
   Display (N);
end Show_Array_Aggregates;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Array_Aggregates.Array_
 ↪Aggregates_2
MD5: 8007fb4af578397d1f07ad85e09ab354
```

Runtime output

```
Length =  4
(
   1 =>  1,
   2 =>  2,
   3 =>  3,
   4 =>  4
)
Length =  4
(
   1 =>  99,
   2 =>  99,
   3 =>  99,
   4 =>  99
)
```

When writing an aggregate for the `Point_3D` type, any component that has <> gets the default value of the `Point` type (99):

For further reading...

Similarly, we could specify the `Default_Component_Value` aspect (which we discussed *earlier on* (page 338)) in the declaration of the array type:

Listing 423: integer_arrays.ads

```
package Integer_Arrays is

   type Value is new Integer;

   type Integer_Array is
     array (Positive range <>) of Value
       with Default_Component_Value => 9999;

   procedure Display (A : Integer_Array);

end Integer_Arrays;
```

Listing 424: show_array_aggregates.adb

```
with Integer_Arrays; use Integer_Arrays;

procedure Show_Array_Aggregates is
   N : Integer_Array (1 .. 4);
begin
   N := [for I in N'Range => Value (I)];
   Display (N);

   N := [others => <>];
   Display (N);
end Show_Array_Aggregates;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Array_Aggregates.Array_
↪Aggregates_2
MD5: 3f535bc5ce7f74ab0f0f48098a82c98a
```

Runtime output

```
Length =  4
(
   1 =>  1,
   2 =>  2,
   3 =>  3,
   4 =>  4
)
Length =  4
(
   1 =>  9999,
   2 =>  9999,
   3 =>  9999,
   4 =>  9999
)
```

In this case, when writing <> for a component, the value specified in the Default_Component_Value aspect is used.

Finally, we might want to use both Default_Value (which we discussed *previously* (page 337)) and Default_Component_Value aspects at the same time. In this case, the value specified in the Default_Component_Value aspect has higher priority:

Listing 425: integer_arrays.ads

```
package Integer_Arrays is

   type Value is new Integer
     with Default_Value => 99;

   type Integer_Array is
     array (Positive range <>) of Value
```

```
8        with Default_Component_Value => 9999;
9
10    procedure Display (A : Integer_Array);
11
12 end Integer_Arrays;
```

Listing 426: show_array_aggregates.adb

```
1  with Integer_Arrays; use Integer_Arrays;
2
3  procedure Show_Array_Aggregates is
4     N : Integer_Array (1 .. 4);
5  begin
6     N := [for I in N'Range => Value (I)];
7     Display (N);
8
9     N := [others => <>];
10    Display (N);
11 end Show_Array_Aggregates;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Array_Aggregates.Array_
↪Aggregates_2
MD5: e58618b565874acaa99c5d494c2acaa4
```

Runtime output

```
Length =  4
(
   1 =>  1,
   2 =>  2,
   3 =>  3,
   4 =>  4
)
Length =  4
(
   1 =>  9999,
   2 =>  9999,
   3 =>  9999,
   4 =>  9999
)
```

Here, 9999 is used when we specify <> for a component.

25.5.5 Extension Aggregates

Extension aggregates provide a convenient way to express an aggregate for a type that extends — adds components to — some existing type (the "ancestor"). Although mainly a matter of convenience, an extension aggregate is essential when we want to express an aggregate for an extension of a private ancestor type, that is, when we don't have compile-time visibility to the ancestor type's components.

In the Ada Reference Manual

- 4.3.2 Extension Aggregates[116]

[116] http://www.ada-auth.org/standards/22rm/html/RM-4-3-2.html

Assignments to objects of derived types

Before we discuss extension aggregates in more detail, though, let's start with a simple use-case. Let's say we have:

- an object A of tagged type T1, and
- an object B of tagged type T2, which extends T1.

We can initialize object B by:

- copying the T1 specific information from A to B, and
- initializing the T2 specific components of B.

We can translate the description above to the following code:

```
   A : T1;
   B : T2;
begin
   T1 (B) := A;

   B.Extended_Component_1 := Some_Value;
   --  [...]
```

Here, we use `T1 (B)` to select the ancestor view of object B, and we copy all the information from A to this part of B. Then, we initialize the remaining components of B. We'll elaborate on this kind of assignments later on.

Example: `Points`

To present a more concrete example, let's start with a package that defines one, two and three-dimensional point types:

Listing 427: points.ads

```
1  package Points is
2
3     type Point_1D is tagged record
4        X : Float;
5     end record;
6
7     procedure Display (P : Point_1D);
8
9     type Point_2D is new Point_1D with record
10       Y : Float;
11    end record;
12
13    procedure Display (P : Point_2D);
14
15    type Point_3D is new Point_2D with record
16       Z : Float;
17    end record;
18
19    procedure Display (P : Point_3D);
20
21 end Points;
```

Listing 428: points.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  package body Points is
4
```

(continues on next page)

(continued from previous page)

```
   procedure Display (P : Point_1D) is
   begin
      Put_Line ("(X => " & P.X'Image & ")");
   end Display;

   procedure Display (P : Point_2D) is
   begin
      Put_Line ("(X => " & P.X'Image
                & ", Y => " & P.Y'Image & ")");
   end Display;

   procedure Display (P : Point_3D) is
   begin
      Put_Line ("(X => " & P.X'Image
                & ", Y => " & P.Y'Image
                & ", Z => " & P.Z'Image & ")");
   end Display;

end Points;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Extension_Aggregates.Extension_
 ↪Aggregate_Points
MD5: 0acc05ae2310ab4ba038dfdb6bae0495
```

Let's now focus on the Show_Points procedure below, where we initialize a two-dimensional point using a one-dimensional point.

Listing 429: show_points.adb

```
with Points; use Points;

procedure Show_Points is
   P_1D : Point_1D;
   P_2D : Point_2D;
begin
   P_1D := (X => 0.5);
   Display (P_1D);

   Point_1D (P_2D) := P_1D;
   --  Equivalent to: "P_2D.X := P_1D.X;"

   P_2D.Y := 0.7;

   Display (P_2D);
end Show_Points;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Extension_Aggregates.Extension_
 ↪Aggregate_Points
MD5: 68ae6fa8e6f779aebea97085bd75e082
```

Runtime output

```
(X =>  5.00000E-01)
(X =>  5.00000E-01, Y =>  7.00000E-01)
```

In this example, we're initializing P_2D using the information stored in P_1D. By writing Point_1D (P_2D) on the left side of the assignment, we specify that we want to limit our focus on the Point_1D view of the P_2D object. Then, we assign P_1D to the Point_1D

view of the P_2D object. This assignment initializes the X component of the P_2D object. The Point_2D specific components are not changed by this assignment. (In other words, this is equivalent to just writing P_2D.X := P_1D.X, as the Point_1D type only has the X component.) Finally, in the next line, we initialize the Y component with 0.7.

Using extension aggregates

Note that, in the assignment to P_1D, we use a record aggregate. Extension aggregates are similar to record aggregates, but they include the **with** keyword — for example: (Obj1 **with** Y => 0.5). This allows us to assign to an object with information from another object Obj1 of a parent type and, in the same expression, set the value of the Y component of the type extension.

Let's rewrite the previous Show_Points procedure using extension aggregates:

Listing 430: show_points.adb

```
with Points; use Points;

procedure Show_Points is
   P_1D : Point_1D;
   P_2D : Point_2D;
begin
   P_1D := (X => 0.5);
   Display (P_1D);

   P_2D := (P_1D with Y => 0.7);
   Display (P_2D);
end Show_Points;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Extension_Aggregates.Extension_
 ↪Aggregate_Points
MD5: 4d03f6a565126b602d6f21fe5ee6dd27
```

Runtime output

```
(X =>  5.00000E-01)
(X =>  5.00000E-01, Y =>  7.00000E-01)
```

When we write P_2D := (P_1D **with** Y => 0.7), we're initializing P_2D using:

- the information from the P_1D object — of Point_1D type, which is an ancestor of the Point_2D type —, and
- the information from the record component association list for the remaining components of the Point_2D type. (In this case, the only remaining component of the Point_2D type is Y.)

We could also specify the type of the extension aggregate. For example, in the previous assignment to P_2D, we could write Point_2D'(...) to indicate that we expect the Point_2D type for the extension aggregate.

```
--  Explicitly state that the type of the
--  extension aggregate is Point_2D:

P_2D := Point_2D'(P_1D with Y => 0.7);
```

Also, we don't have to use named association in extension aggregates. We could just use positional association instead. Therefore, we could simplify the assignment to P_2D in the previous example by just writing:

```
P_2D := (P_1D with 0.7);
```

More extension aggregates

We can use extension aggregates for descendants of the `Point_2D` type as well. For example, let's extend our previous code example by declaring an object of `Point_3D` type (called P_3D) and use extension aggregates in assignments to this object:

Listing 431: show_points.adb

```
with Points; use Points;

procedure Show_Points is
   P_1D : Point_1D;
   P_2D : Point_2D;
   P_3D : Point_3D;
begin
   P_1D := (X => 0.5);
   Display (P_1D);

   P_2D := (P_1D with Y => 0.7);
   Display (P_2D);

   P_3D := (P_2D with Z => 0.3);
   Display (P_3D);

   P_3D := (P_1D with Y | Z => 0.1);
   Display (P_3D);
end Show_Points;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Extension_Aggregates.Extension_
↪Aggregate_Points
MD5: 2ec6831557c43f697bffce8496962b53
```

Runtime output

```
(X =>  5.00000E-01)
(X =>  5.00000E-01, Y =>  7.00000E-01)
(X =>  5.00000E-01, Y =>  7.00000E-01, Z =>  3.00000E-01)
(X =>  5.00000E-01, Y =>  1.00000E-01, Z =>  1.00000E-01)
```

In the first assignment to P_3D in the example above, we're initializing this object with information from P_2D and specifying the value of the Z component. Then, in the next assignment to the P_3D object, we're using an aggregate with information from P_1 and specifying values for the Y and Z components. (Just as a reminder, we can write `Y | Z => 0.1` to assign 0.1 to both Y and Z components.)

with others

Other versions of extension aggregates are possible as well. For example, we can combine keywords and write `with others` to focus on all remaining components of an extension aggregate.

Listing 432: show_points.adb

```
with Points; use Points;

procedure Show_Points is
```

(continues on next page)

(continued from previous page)

```
   P_1D : Point_1D;
   P_2D : Point_2D;
   P_3D : Point_3D;
begin
   P_1D := (X => 0.5);
   P_2D := (P_1D with Y => 0.7);

   --  Initialize P_3D with P_1D and set other
   --  components to 0.6.
   --
   P_3D := (P_1D with others => 0.6);
   Display (P_3D);

   --  Initialize P_3D with P_2D, and other
   --  components with their default value.
   --
   P_3D := (P_2D with others => <>);
   Display (P_3D);
end Show_Points;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Extension_Aggregates.Extension_
 ↪Aggregate_Points
MD5: 0594586fc59ead106258cef8682927e9
```

Runtime output

```
(X =>  5.00000E-01, Y =>  6.00000E-01, Z =>  6.00000E-01)
(X =>  5.00000E-01, Y =>  7.00000E-01, Z =>  4.91785E+25)
```

In this example, the first assignment to P_3D has an aggregate with information from P_1D, while the remaining components — in this case, Y and Z — are just set to 0.6.

Continuing with this example, in the next assignment to P_3D, we're using information from P_2 in the extension aggregate. This covers the `Point_2D` part of the P_3D object — components X and Y, to be more specific. The `Point_3D` specific components of P_3D — component Z in this case — receive their corresponding default value. In this specific case, however, we haven't specified a default value for component Z in the declaration of the `Point_3D` type, so we cannot rely on any specific value being assigned to that component when using `others => <>`.

with null record

We can also use extension aggregates with null records. Let's focus on the `P_3D_Ext` object of `Point_3D_Ext` type. This object is declared in the `Show_Points` procedure of the next code example.

Listing 433: points-extensions.ads

```
package Points.Extensions is

   type Point_3D_Ext is new
     Point_3D with null record;

end Points.Extensions;
```

Listing 434: show_points.adb

```
with Points;            use Points;
with Points.Extensions; use Points.Extensions;

procedure Show_Points is
   P_3D     : Point_3D;
   P_3D_Ext : Point_3D_Ext;
begin
   P_3D := (X => 0.0, Y => 0.5, Z => 0.4);

   P_3D_Ext := (P_3D with null record);
   Display (P_3D_Ext);
end Show_Points;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Extension_Aggregates.Extension_
 ↪Aggregate_Points
MD5: 8ec3ddb3a1f2a6e550ac4d622e97124c
```

Runtime output

```
(X =>  0.00000E+00, Y =>  5.00000E-01, Z =>  4.00000E-01)
```

The `P_3D_Ext` object is of `Point_3D_Ext` type, which is declared in the `Points.Extensions` package and derived from the `Point_3D` type. Note that we're not extending `Point_3D_Ext` with new components, but using a null record instead in the declaration. Therefore, as the `Point_3D_Ext` type doesn't own any new components, we just write (`P_3D with null record`) to initialize the `P_3D_Ext` object.

Extension aggregates and descendent types

In the examples above, we've been initializing objects of descendent types by using objects of ascending types in extension aggregates. We could, however, do the opposite and initialize objects of ascending types using objects of descendent type in extension aggregates. Consider this code example:

Listing 435: show_points.adb

```
with Points; use Points;

procedure Show_Points is
   P_2D : Point_2D;
   P_3D : Point_3D;
begin
   P_3D := (X => 0.5, Y => 0.7, Z => 0.3);
   Display (P_3D);

   P_2D := (Point_1D (P_3D) with Y => 0.3);
   Display (P_2D);
end Show_Points;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Extension_Aggregates.Extension_
 ↪Aggregate_Points
MD5: ae5e88a36c58b1eb495d5ba8752e50e7
```

Runtime output

```
(X =>  5.00000E-01, Y =>  7.00000E-01, Z =>  3.00000E-01)
(X =>  5.00000E-01, Y =>  3.00000E-01)
```

Here, we're using `Point_1D (P_3D)` to select the `Point_1D` view of an object of `Point_3D` type. At this point, we have specified the `Point_1D` part of the aggregate, so we still have to specify the remaining components of the `Point_2D` type — the `Y` component, to be more specific. When we do that, we get the appropriate aggregate for the `Point_2D` type. In summary, by carefully selecting the appropriate view, we're able to initialize an object of ascending type (`Point_2D`), which contains less components, using an object of a descendent type (`Point_3D`), which contains more components.

25.5.6 Delta Aggregates

> **Note**
>
> This feature was introduced in Ada 2022.

Previously, we've discussed *extension aggregates* (page 549), which are used to assign an object `Obj_From` of a tagged type to an object `Obj_To` of a descendent type.

We may want also to assign an object `Obj_From` of to an object `Obj_To` of the same type, but change some of the components in this assignment. To do this, we use delta aggregates.

Delta Aggregates for Tagged Records

Let's reuse the `Points` package from a previous example:

Listing 436: points.ads

```
1  package Points is
2
3     type Point_1D is tagged record
4        X : Float;
5     end record;
6
7     type Point_2D is new Point_1D with record
8        Y : Float;
9     end record;
10
11    type Point_3D is new Point_2D with record
12       Z : Float;
13    end record;
14
15    procedure Display (P : Point_3D);
16
17 end Points;
```

Listing 437: points.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  package body Points is
4
5     procedure Display (P : Point_3D) is
6     begin
7        Put_Line ("(X => " & P.X'Image
8                  & ", Y => " & P.Y'Image
9                  & ", Z => " & P.Z'Image & ")");
```

(continues on next page)

(continued from previous page)

```
   end Display;

end Points;
```

Listing 438: show_points.adb

```
with Points; use Points;

procedure Show_Points is
   P1, P2, P3 : Point_3D;
begin
   P1 := (X => 0.5, Y => 0.7, Z => 0.3);
   Display (P1);

   P2 := (P1 with delta X => 1.0);
   Display (P2);

   P3 := (P1 with delta X => 0.2, Y => 0.3);
   Display (P3);
end Show_Points;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Delta_Aggregates.Delta_
 ↪Aggregates_Tagged
MD5: 23e9f53d626e32fc0524abfa0a437dbf
```

Runtime output

```
(X =>  5.00000E-01, Y =>  7.00000E-01, Z =>  3.00000E-01)
(X =>  1.00000E+00, Y =>  7.00000E-01, Z =>  3.00000E-01)
(X =>  2.00000E-01, Y =>  3.00000E-01, Z =>  3.00000E-01)
```

Here, we assign P1 to P2, but change the X component. Also, we assign P1 to P3, but change the X and Y components.

We can use class-wide types with delta aggregates. Consider this example:

Listing 439: show_points.adb

```
with Points; use Points;

procedure Show_Points is

   P_3D : Point_3D;

   function Reset (P_2D : Point_2D'Class)
                   return Point_2D'Class is
     ((P_2D with delta X | Y => 0.0));

begin
   P_3D := (X => 0.1, Y => 0.2, Z => 0.3);
   Display (P_3D);

   P_3D := Point_3D (Reset (P_3D));
   Display (P_3D);

end Show_Points;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Delta_Aggregates.Delta_
 ↪Aggregates_Tagged
MD5: dca144fe420dd37e224d089458f9e8a8
```

Runtime output

```
(X =>  1.00000E-01, Y =>  2.00000E-01, Z =>  3.00000E-01)
(X =>  0.00000E+00, Y =>  0.00000E+00, Z =>  3.00000E-01)
```

In this example, the Reset function returns an object of `Point_2D'Class` where all components of `Point_2D'Class` type are zero. We call the Reset function for the P_3D object of `Point_3D` type, so that only the Z component remains untouched.

Note that we use the syntax `X | Y` in the body of the Reset function and assign the same value to both components.

For further reading...

We could have implemented Reset as a procedure — in this case, without using delta aggregates:

Listing 440: show_points.adb

```
with Points; use Points;

procedure Show_Points is

   P_3D : Point_3D;

   procedure Reset
     (P_2D : in out Point_2D'Class) is
   begin
      Point_2D (P_2D) := (others => 0.0);
   end Reset;

begin
   P_3D := (X => 0.1, Y => 0.2, Z => 0.3);
   Display (P_3D);

   Reset (P_3D);
   Display (P_3D);

end Show_Points;
```

Delta Aggregates for Non-Tagged Records

The examples above use tagged types. We can also use delta aggregates with non-tagged types. Let's rewrite the `Points` package and convert `Point_3D` to a non-tagged record type.

Listing 441: points.ads

```
package Points is

   type Point_3D is record
      X : Float;
      Y : Float;
      Z : Float;
   end record;

   procedure Display (P : Point_3D);
```

(continues on next page)

(continued from previous page)

```
10
11 end Points;
```

Listing 442: points.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  package body Points is
4
5     procedure Display (P : Point_3D) is
6     begin
7        Put_Line ("(X => " & P.X'Image
8                  & ", Y => " & P.Y'Image
9                  & ", Z => " & P.Z'Image & ")");
10    end Display;
11
12 end Points;
```

Listing 443: show_points.adb

```
1  with Points; use Points;
2
3  procedure Show_Points is
4     P1, P2, P3 : Point_3D;
5  begin
6     P1 := (X => 0.5, Y => 0.7, Z => 0.3);
7     Display (P1);
8
9     P2 := (P1 with delta X => 1.0);
10    Display (P2);
11
12    P3 := (P1 with delta X => 0.2, Y => 0.3);
13    Display (P3);
14 end Show_Points;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Delta_Aggregates.Delta_
 ↪Aggregates_Non_Tagged
MD5: 1f12f33ac0a84919978c56d04f479e35
```

Runtime output

```
(X =>  5.00000E-01, Y =>  7.00000E-01, Z =>  3.00000E-01)
(X =>  1.00000E+00, Y =>  7.00000E-01, Z =>  3.00000E-01)
(X =>  2.00000E-01, Y =>  3.00000E-01, Z =>  3.00000E-01)
```

In this example, `Point_3D` is a non-tagged type. Note that we haven't changed anything in the `Show_Points` procedure: it still works as it did with tagged types.

Delta Aggregates for Arrays

We can use delta aggregates for arrays. Let's change the declaration of `Point_3D` and use an array to represent a 3-dimensional point:

Listing 444: points.ads

```
1  package Points is
2
3     type Float_Array is
```

(continues on next page)

(continued from previous page)

```
     array (Positive range <>) of Float;

   type Point_3D is new Float_Array (1 .. 3);

   procedure Display (P : Point_3D);

end Points;
```

Listing 445: points.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Points is

   procedure Display (P : Point_3D) is
   begin
      Put ("(");
      for I in P'Range loop
         Put (I'Image
              & " => "
              & P (I)'Image);
      end loop;
      Put_Line (")");
   end Display;

end Points;
```

Listing 446: show_points.adb

```
with Points; use Points;

procedure Show_Points is
   P1, P2, P3 : Point_3D;
begin
   P1 := [0.5, 0.7, 0.3];
   Display (P1);

   P2 := [P1 with delta 1 => 1.0];
   Display (P2);

   P3 := [P1 with delta 1 => 0.2, 2 => 0.3];
   --  Alternatively:
   --  P3 := [P1 with delta 1 .. 2 => 0.2, 0.3];

   Display (P3);
end Show_Points;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Delta_Aggregates.Delta_
 ↪Aggregates_Array
MD5: 06293882e5dd020f56fbced6bc03ccf0
```

Runtime output

```
( 1 =>  5.00000E-01 2 =>  7.00000E-01 3 =>  3.00000E-01)
( 1 =>  1.00000E+00 2 =>  7.00000E-01 3 =>  3.00000E-01)
( 1 =>  2.00000E-01 2 =>  3.00000E-01 3 =>  3.00000E-01)
```

The implementation of Show_Points in this example is very similar to the version where use a record type. In this case, we:

- assign P1 to P2, but change the first component, and
- we assign P1 to P3, but change the first and second components.

Using slices

In the assignment to P3, we can either specify each component of the delta individually or use a slice: both forms are equivalent. Also, we can use slices to assign the same number to multiple components:

Listing 447: show_points.adb

```
with Points; use Points;

procedure Show_Points is
   P1, P3 : Point_3D;
begin
   P1 := [0.5, 0.7, 0.3];
   Display (P1);

   P3 := [P1 with delta
             P3'First + 1 .. P3'Last => 0.0];
   Display (P3);
end Show_Points;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Delta_Aggregates.Delta_
 ↪Aggregates_Array
MD5: 0a00e17b2d803f23edc728969d663c59
```

Runtime output

```
( 1 =>  5.00000E-01 2 =>  7.00000E-01 3 =>  3.00000E-01)
( 1 =>  5.00000E-01 2 =>  0.00000E+00 3 =>  0.00000E+00)
```

In this example, we're assigning P1 to P3, but resetting all components of the array starting by the second one.

Multiple components

We can also assign multiple components or slices:

Listing 448: float_arrays.ads

```
package Float_Arrays is

   type Float_Array is
     array (Positive range <>) of Float;

   procedure Display (P : Float_Array);

end Float_Arrays;
```

Listing 449: float_arrays.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Float_Arrays is

   procedure Display (P : Float_Array) is
```

(continues on next page)

(continued from previous page)

```
   begin

      Put ("(");
      for I in P'Range loop
         Put (I'Image
              & " => "
              & P (I)'Image);
      end loop;
      Put_Line (")");

   end Display;

end Float_Arrays;
```

Listing 450: show_multiple_delta_slices.adb

```
with Float_Arrays; use Float_Arrays;

procedure Show_Multiple_Delta_Slices is

   P1, P2 : Float_Array (1 .. 5);

begin
   P1 := [1.0, 2.0, 3.0, 4.0, 5.0];
   Display (P1);

   P2 := [P1 with delta
            P2'First + 1 .. P2'Last - 2 => 0.0,
            P2'Last - 1  .. P2'Last => 0.2];
   Display (P2);
end Show_Multiple_Delta_Slices;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Aggregates.Delta_Aggregates.Delta_
 ↪Aggregates_Array
MD5: 37063cd1c6cd46522d8e5b0df7b5741b
```

Runtime output

```
( 1 =>  1.00000E+00 2 =>  2.00000E+00 3 =>  3.00000E+00 4 =>  4.00000E+00 5 =>  5.
 ↪00000E+00)
( 1 =>  1.00000E+00 2 =>  0.00000E+00 3 =>  0.00000E+00 4 =>  2.00000E-01 5 =>  2.
 ↪00000E-01)
```

In this example, we have two arrays P1 and P2 of `Float_Array` type. We assign P1 to P2, but change:

- the second to the last-but-two components to 0.0, and
- the last-but-one and last components to 0.2.

In the Ada Reference Manual

- Delta Aggregates[117]

[117] http://www.ada-auth.org/standards/22rm/html/RM-4-3-4.html

25.6 Arrays

25.6.1 Array constraints

Array constraints are important in the declaration of an array because they define the total size of the array. In fact, arrays must always be constrained. In this section, we start our discussion with unconstrained array types, and then continue with constrained arrays and arrays types. Finally, we discuss the differences between unconstrained arrays and vectors.

In the Ada Reference Manual

- 3.6 Array Types[118]

Unconstrained array types

In the *Introduction to Ada course* (page 78), we've seen that we can declare array types whose bounds are not fixed: in that case, the bounds are provided when creating objects of those types. For example:

Listing 451: measurement_defs.ads

```
package Measurement_Defs is

   type Measurements is
     array (Positive range <>) of Float;
   --       ^ Bounds are of type Positive,
   --         but not known at this point.

end Measurement_Defs;
```

Listing 452: show_measurements.adb

```
with Ada.Text_IO;      use Ada.Text_IO;

with Measurement_Defs; use Measurement_Defs;

procedure Show_Measurements is
   M : Measurements (1 .. 10);
   --                ^ Providing bounds here!
begin
   Put_Line ("First index: " & M'First'Image);
   Put_Line ("Last index:  " & M'Last'Image);
end Show_Measurements;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Arrays.Array_Constraints.Unconstrained_
 ↪Array_Type
MD5: a5cdc74dd61e36476431cf675452d1d5
```

Build output

```
show_measurements.adb:6:04: warning: variable "M" is read but never assigned [-
 ↪gnatwv]
```

Runtime output

[118] http://www.ada-auth.org/standards/22rm/html/RM-3-6.html

```
First index:  1
Last index:   10
```

In this example, the `Measurements` array type from the `Measurement_Defs` package is unconstrained. In the `Show_Measurements` procedure, we declare a constrained object (`M`) of this type.

Constrained arrays

The *Introduction to Ada course* (page 79) highlights the fact that the bounds are fixed once an object is declared:

> Although different instances of the same unconstrained array type can have different bounds, a specific instance has the same bounds throughout its lifetime. This allows Ada to implement unconstrained arrays efficiently; instances can be stored on the stack and do not require heap allocation as in languages like Java.

In the `Show_Measurements` procedure above, once we declare `M`, its bounds are fixed for the whole lifetime of `M`. We cannot *add* another component to this array. In other words, `M` will have 10 components for its whole lifetime:

```
M : Measurements (1 .. 10);
--                ^^^^^^^
--  Bounds cannot be changed!
```

Constrained array types

Note that we could declare constrained array types. Let's rework the previous example:

Listing 453: measurement_defs.ads

```
1  package Measurement_Defs is
2
3     type Measurements is
4       array (1 .. 10) of Float;
5     --       ^ Bounds are of known and fixed.
6
7  end Measurement_Defs;
```

Listing 454: show_measurements.adb

```
1  with Ada.Text_IO;      use Ada.Text_IO;
2
3  with Measurement_Defs; use Measurement_Defs;
4
5  procedure Show_Measurements is
6     M : Measurements;
7     --              ^ We cannot change the
8     --                bounds here!
9  begin
10    Put_Line ("First index: " & M'First'Image);
11    Put_Line ("Last index:  " & M'Last'Image);
12 end Show_Measurements;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Arrays.Array_Constraints.Constrained_
 ↪Array_Type
MD5: 4741986fdf4dab731baa001b6e60c345
```

Build output

```
show_measurements.adb:6:04: warning: variable "M" is read but never assigned [-
↪gnatwv]
```

Runtime output

```
First index:  1
Last index:   10
```

In this case, the bounds of the `Measurements` type are fixed. Now, we cannot specify the bounds (or change them) in the declaration of the `M` array, as they have already been defined in the type declaration.

Unconstrained Arrays vs. Vectors

If you need, however, the flexibility of increasing the length of an array, you could use the language-defined `Vector` type instead. This is how we could rewrite the previous example using vectors:

Listing 455: measurement_defs.ads

```
with Ada.Containers; use Ada.Containers;
with Ada.Containers.Vectors;

package Measurement_Defs is

   package Vectors is new Ada.Containers.Vectors
     (Index_Type   => Positive,
      Element_Type => Float);

   subtype Measurements is Vectors.Vector;

end Measurement_Defs;
```

Listing 456: show_measurements.adb

```
with Ada.Text_IO;      use Ada.Text_IO;

with Measurement_Defs; use Measurement_Defs;

procedure Show_Measurements is
   use Measurement_Defs.Vectors;

   M : Measurements := To_Vector (10);
   --                  ^ Creating 10-element
   --                    vector.
begin
   Put_Line ("First index: "
             & M.First_Index'Image);
   Put_Line ("Last index:  "
             & M.Last_Index'Image);

   Put_Line ("Adding element...");
   M.Append (1.0);

   Put_Line ("First index: "
             & M.First_Index'Image);
   Put_Line ("Last index:  "
             & M.Last_Index'Image);
end Show_Measurements;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Arrays.Array_Constraints.Unconstrained_
↪Array_Type_Vs_Vector
MD5: afec7a4b898392be4dd1f60e1519da88
```

Runtime output

```
First index:  1
Last index:   10
Adding element...
First index:  1
Last index:   11
```

In the declaration of `M` in this example, we're creating a 10-element vector by calling `To_Vector` and specifying the element count. Later on, with the call to `Append`, we're increasing the length of the `M` to 11 elements.

As you might expect, the flexibility of vectors comes with a price: every time we add an element that doesn't fit in the current capacity of the vector, the container has to reallocate memory in the background due to that new element. Therefore, arrays are more efficient, as the memory allocation only happens once for each object.

In the Ada Reference Manual

- 3.6 Array Types[119]
- A.18.2 The Generic Package Containers.Vectors[120]

25.6.2 Multidimensional Arrays

So far, we've discussed unidimensional arrays, since they are very common in Ada. However, Ada also supports multidimensional arrays using the same facilities as for unidimensional arrays. For example, we can use the `First`, `Last`, **`Range`** and `Length` attributes for each dimension of a multidimensional array. This section presents more details on this topic.

To create a multidimensional array, we simply separate the ranges of each dimension with a comma. The following example presents the one-dimensional array `A1`, the two-dimensional array `A2` and the three-dimensional array `A3`:

Listing 457: multidimensional_arrays_decl.ads

```
1  package Multidimensional_Arrays_Decl is
2
3     A1 : array (1 .. 10) of Float;
4     A2 : array (1 .. 5, 1 .. 10) of Float;
5     --           ^ first dimension
6     --                 ^ second dimension
7     A3 : array (1 .. 2, 1 .. 5, 1 .. 10) of Float;
8     --           ^ first dimension
9     --                 ^ second dimension
10    --                       ^ third dimension
11 end Multidimensional_Arrays_Decl;
```

Code block metadata

[119] http://www.ada-auth.org/standards/22rm/html/RM-3-6.html
[120] http://www.ada-auth.org/standards/22rm/html/RM-A-18-2.html

```
Project: Courses.Advanced_Ada.Data_Types.Arrays.Multidimensional_Arrays.
 ↪Multidimensional_Arrays
MD5: 928243b293c67a078d729c3cac68bb92
```

The two-dimensional array A2 has 5 components in the first dimension and 10 components in the second dimension. The three-dimensional array A3 has 2 components in the first dimension, 5 components in the second dimension, and 10 components in the third dimension. Note that the ranges we've selected for A1, A2 and A3 are completely arbitrary. You may select ranges for each dimension that are the most appropriate in the context of your application. Also, the number of dimensions is not limited to three, so you could declare higher-dimensional arrays if needed.

We can use the `Length` attribute to retrieve the length of each dimension. We use an integer value in parentheses to specify which dimension we're referring to. For example, if we write `A'Length (2)`, we're referring to the length of the second dimension of a multidimensional array A. Note that `A'Length` is equivalent to `A'Length (1)`. The same equivalence applies to other array-related attributes such as `First`, `Last` and **`Range`**.

Let's use the `Length` attribute for the arrays we declared in the `Multidimensional_Arrays_Decl` package:

Listing 458: show_multidimensional_arrays.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  with Multidimensional_Arrays_Decl;
4  use Multidimensional_Arrays_Decl;
5
6  procedure Show_Multidimensional_Arrays is
7  begin
8     Put_Line ("A1'Length:     "
9               & A1'Length'Image);
10    Put_Line ("A1'Length (1): "
11              & A1'Length (1)'Image);
12    Put_Line ("A2'Length (1): "
13              & A2'Length (1)'Image);
14    Put_Line ("A2'Length (2): "
15              & A2'Length (2)'Image);
16    Put_Line ("A3'Length (1): "
17              & A3'Length (1)'Image);
18    Put_Line ("A3'Length (2): "
19              & A3'Length (2)'Image);
20    Put_Line ("A3'Length (3): "
21              & A3'Length (3)'Image);
22 end Show_Multidimensional_Arrays;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Arrays.Multidimensional_Arrays.
 ↪Multidimensional_Arrays
MD5: 70b9b8df7e46302b92613fa484ef71ca
```

Runtime output

```
A1'Length:      10
A1'Length (1):  10
A2'Length (1):  5
A2'Length (2):  10
A3'Length (1):  2
A3'Length (2):  5
A3'Length (3):  10
```

As this simple example shows, we can easily retrieve the length of each dimension. Also, as we've just mentioned, `A1'Length` is equal to `A1'Length (1)`.

Let's consider an application where we make hourly measurements for the first 12 hours of the day, on each day of the week. We can create a two-dimensional array type called `Measurements` to store this data. Also, we can have three procedures for this array:

- `Show_Indices`, which presents the indices (days and hours) of the two-dimensional array;
- `Show_Values`, which presents the values stored in the array; and
- `Reset`, which resets each value of the array.

This is the complete code for this application:

Listing 459: measurement_defs.ads

```
package Measurement_Defs is

   type Days is
     (Mon, Tue, Wed, Thu, Fri, Sat, Sun);

   type Hours is range 0 .. 11;

   subtype Measurement is Float;

   type Measurements is
     array (Days, Hours) of Measurement;

   procedure Show_Indices (M : Measurements);

   procedure Show_Values (M : Measurements);

   procedure Reset (M : out Measurements);

end Measurement_Defs;
```

Listing 460: measurement_defs.adb

```
with Ada.Text_IO;      use Ada.Text_IO;

package body Measurement_Defs is

   procedure Show_Indices (M : Measurements) is
   begin
      Put_Line ("---- Indices ----");

      for D in M'Range (1) loop
         Put (D'Image & " ");

         for H in M'First (2) ..
                  M'Last (2) - 1
         loop
            Put (H'Image & " ");
         end loop;
         Put_Line (M'Last (2)'Image);
      end loop;
   end Show_Indices;

   procedure Show_Values (M : Measurements) is
      package H_IO is
        new Ada.Text_IO.Integer_IO (Hours);
      package M_IO is
```

(continues on next page)

(continued from previous page)

```
        new Ada.Text_IO.Float_IO (Measurement);

        procedure Set_IO_Defaults is
        begin
           H_IO.Default_Width := 5;

           M_IO.Default_Fore  := 1;
           M_IO.Default_Aft   := 2;
           M_IO.Default_Exp   := 0;
        end Set_IO_Defaults;
   begin
      Set_IO_Defaults;

      Put_Line ("---- Values ----");
      Put ("   ");
      for H in M'Range (2) loop
         H_IO.Put (H);
      end loop;
      New_Line;

      for D in M'Range (1) loop
         Put (D'Image & " ");

         for H in M'Range (2) loop
            M_IO.Put (M (D, H));
            Put (" ");
         end loop;
         New_Line;
      end loop;
   end Show_Values;

   procedure Reset (M : out Measurements) is
   begin
      M := (others => (others => 0.0));
   end Reset;

end Measurement_Defs;
```

Listing 461: show_measurements.adb

```
with Measurement_Defs; use Measurement_Defs;

procedure Show_Measurements is
   M : Measurements;
begin
   Reset (M);
   Show_Indices (M);
   Show_Values (M);
end Show_Measurements;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Arrays.Multidimensional_Arrays.
 ↪Multidimensional_Measurements
MD5: bcffa3913007bd9152149ad9616842b8
```

Runtime output

```
---- Indices ----
MON  0  1  2  3  4  5  6  7  8  9  10  11
TUE  0  1  2  3  4  5  6  7  8  9  10  11
```

(continues on next page)

(continued from previous page)

```
WED  0  1  2  3  4  5  6  7  8  9  10  11
THU  0  1  2  3  4  5  6  7  8  9  10  11
FRI  0  1  2  3  4  5  6  7  8  9  10  11
SAT  0  1  2  3  4  5  6  7  8  9  10  11
SUN  0  1  2  3  4  5  6  7  8  9  10  11
---- Values ----
       0    1    2    3    4    5    6    7    8    9   10   11
MON 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00
TUE 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00
WED 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00
THU 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00
FRI 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00
SAT 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00
SUN 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00
```

We recommend that you spend some time analyzing this example. Also, we'd like to highlight the following aspects:

- We access a value from a multidimensional array by using commas to separate the index values within the parentheses. For example: `M (D, H)` allows us to access the value on day `D` and hour `H` from the multidimensional array `M`.
- To loop over the multidimensional array `M`, we write `for D in M'Range (1) loop` and `for H in M'Range (2) loop` for the first and second dimensions, respectively.
- To reset all values of the multidimensional array, we use an aggregate with this form: `(others => (others => 0.0))`.

In the Ada Reference Manual

- 3.6 Array Types[121]
- 3.6.2 Operations of Array Types[122]

Unconstrained Multidimensional Arrays

Previously, we've discussed unconstrained arrays for the unidimensional case. It's possible to declare unconstrained multidimensional arrays as well. For example:

Listing 462: multidimensional_arrays_decl.ads

```
1  package Multidimensional_Arrays_Decl is
2
3     type F1 is array (Positive range <>) of Float;
4     type F2 is array (Positive range <>,
5                       Positive range <>) of Float;
6     type F3 is array (Positive range <>,
7                       Positive range <>,
8                       Positive range <>) of Float;
9
10 end Multidimensional_Arrays_Decl;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Arrays.Multidimensional_Arrays.
 ↪Unconstrained_Multidimensional_Arrays
MD5: 8637e93db355fddafa3ffa5ce453a0e1
```

[121] http://www.ada-auth.org/standards/22rm/html/RM-3-6.html
[122] http://www.ada-auth.org/standards/22rm/html/RM-3-6-2.html

Here, we're declaring the one-dimensional type F1, the two-dimensional type F2 and the three-dimensional type F3.

As is the case with unidimensional arrays, we must specify the bounds when declaring objects of unconstrained multidimensional array types:

Listing 463: show_multidimensional_arrays.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Multidimensional_Arrays_Decl;
use  Multidimensional_Arrays_Decl;

procedure Show_Multidimensional_Arrays is
   A1 : F1 (1 .. 2);
   A2 : F2 (1 .. 4, 10 .. 20);
   A3 : F3 (2 .. 3, 1 .. 5, 1 .. 2);
begin
   Put_Line ("A1'Length (1): "
             & A1'Length (1)'Image);
   Put_Line ("A2'Length (1): "
             & A2'Length (1)'Image);
   Put_Line ("A2'Length (2): "
             & A2'Length (2)'Image);
   Put_Line ("A3'Length (1): "
             & A3'Length (1)'Image);
   Put_Line ("A3'Length (2): "
             & A3'Length (2)'Image);
   Put_Line ("A3'Length (3): "
             & A3'Length (3)'Image);
end Show_Multidimensional_Arrays;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Arrays.Multidimensional_Arrays.
 ↪Unconstrained_Multidimensional_Arrays
MD5: 9fb007abbfe238345d80cb315bb834c9
```

Build output

```
show_multidimensional_arrays.adb:7:04: warning: variable "A1" is read but never␣
 ↪assigned [-gnatwv]
show_multidimensional_arrays.adb:8:04: warning: variable "A2" is read but never␣
 ↪assigned [-gnatwv]
show_multidimensional_arrays.adb:9:04: warning: variable "A3" is read but never␣
 ↪assigned [-gnatwv]
```

Runtime output

```
A1'Length (1):  2
A2'Length (1):  4
A2'Length (2):  11
A3'Length (1):  2
A3'Length (2):  5
A3'Length (3):  2
```

Arrays of arrays

It's important to distinguish between multidimensional arrays and arrays of arrays. Both are supported in Ada, but they're very distinct from each other. We can create an array of an array by first specifying a one-dimensional array type T1, and then specifying another one-dimensional array type T2 where each component of T2 is of T1 type:

Listing 464: array_of_arrays_decl.ads

```
package Array_Of_Arrays_Decl is

   type T1 is
     array (Positive range <>) of Float;

   type T2 is
     array (Positive range <>) of T1 (1 .. 10);
   --                                 ^^^^^^^
   --                           bounds must be set!

end Array_Of_Arrays_Decl;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Arrays.Array_Of_Arrays.Array_Of_Arrays
MD5: fd67739bb21f202615180aa02f5284aa
```

Note that, in the declaration of T2, we must set the bounds for the T1 type. This is a major difference to multidimensional arrays, which allow for unconstrained ranges in multiple dimensions.

We can rewrite the previous application for measurements using arrays of arrays. This is the adapted code:

Listing 465: measurement_defs.ads

```
package Measurement_Defs is

   type Days is
     (Mon, Tue, Wed, Thu, Fri, Sat, Sun);

   type Hours is range 0 .. 11;

   subtype Measurement is Float;

   type Hourly_Measurements is
     array (Hours) of Measurement;

   type Measurements is
     array (Days) of Hourly_Measurements;

   procedure Show_Indices (M : Measurements);

   procedure Show_Values (M : Measurements);

   procedure Reset (M : out Measurements);

end Measurement_Defs;
```

Listing 466: measurement_defs.adb

```
with Ada.Text_IO;      use Ada.Text_IO;

package body Measurement_Defs is

   procedure Show_Indices (M : Measurements) is
   begin
      Put_Line ("---- Indices ----");

```

(continues on next page)

(continued from previous page)

```
      for D in M'Range loop
         Put (D'Image & " ");

         for H in M (D)'First ..
                  M (D)'Last - 1
         loop
            Put (H'Image & " ");
         end loop;
         Put_Line (M (D)'Last'Image);
      end loop;
   end Show_Indices;

   procedure Show_Values (M : Measurements) is
      package H_IO is
        new Ada.Text_IO.Integer_IO (Hours);
      package M_IO is
        new Ada.Text_IO.Float_IO (Measurement);

        procedure Set_IO_Defaults is
        begin
           H_IO.Default_Width := 5;

           M_IO.Default_Fore  := 1;
           M_IO.Default_Aft   := 2;
           M_IO.Default_Exp   := 0;
        end Set_IO_Defaults;
   begin
      Set_IO_Defaults;

      Put_Line ("---- Values ----");
      Put ("   ");
      for H in M (M'First)'Range loop
         H_IO.Put (H);
      end loop;
      New_Line;

      for D in M'Range loop
         Put (D'Image & " ");

         for H in M (D)'Range loop
            M_IO.Put (M (D) (H));
            Put (" ");
         end loop;
         New_Line;
      end loop;
   end Show_Values;

   procedure Reset (M : out Measurements) is
   begin
      M := (others => (others => 0.0));
   end Reset;

end Measurement_Defs;
```

Listing 467: show_measurements.adb

```
with Measurement_Defs; use Measurement_Defs;

procedure Show_Measurements is
   M : Measurements;
begin
```

(continues on next page)

(continued from previous page)

```
   Reset (M);
   Show_Indices (M);
   Show_Values (M);
end Show_Measurements;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Arrays.Array_Of_Arrays.Multidimensional_
 ↪Measurements
MD5: 5cb66bbb1890787b7c023406b2cafb4d
```

Runtime output

```
---- Indices ----
MON  0  1  2  3  4  5  6  7  8  9  10  11
TUE  0  1  2  3  4  5  6  7  8  9  10  11
WED  0  1  2  3  4  5  6  7  8  9  10  11
THU  0  1  2  3  4  5  6  7  8  9  10  11
FRI  0  1  2  3  4  5  6  7  8  9  10  11
SAT  0  1  2  3  4  5  6  7  8  9  10  11
SUN  0  1  2  3  4  5  6  7  8  9  10  11
---- Values ----
       0    1    2    3    4    5    6    7    8    9   10   11
MON 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00
TUE 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00
WED 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00
THU 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00
FRI 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00
SAT 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00
SUN 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00
```

Again, we recommend that you spend some time analyzing this example and comparing it to the previous version that uses multidimensional arrays. Also, we'd like to highlight the following aspects:

- We access a value from an array of arrays by specifying the index of each array separately. For example: `M (D) (H)` allows us to access the value on day `D` and hour `H` from the array of arrays `M`.
- To loop over an array of arrays `M`, we write `for D in M'Range loop` for the first level of `M` and `for H in M (D)'Range loop` for the second level of `M`.
- Resetting all values of an array of arrays is very similar to how we do it for multidimensional arrays. In fact, we can still use an aggregate with this form: `(others => (others => 0.0))`.

25.6.3 Derived array types and array subtypes

Derived array types

As expected, we can derive from array types by declaring a new type. Let's see a couple of examples based on the `Measurement_Defs` package from previous sections:

Listing 468: measurement_defs.ads

```
package Measurement_Defs is

   type Measurements is
     array (Positive range <>) of Float;

   --
```

(continues on next page)

(continued from previous page)

```
   --  New array type:
   --
   type Measurements_Derived is
     new Measurements;

   --
   --  New array type with
   --  default component value:
   --
   type Measurements_Def30 is
     new Measurements
       with Default_Component_Value => 30.0;

   --
   --  New array type with constraints:
   --
   type Measurements_10 is
     new Measurements (1 .. 10);

end Measurement_Defs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Arrays.Derived_Arrays_And_Subtypes.
 ↪Derived_Arrays
MD5: aefef9b9a844ad820d7f16546b8ffa64
```

In this example, we're deriving `Measurements_Derived` from the `Measurements` type. In the case of the `Measurements_Def30` type, we're not only deriving from the `Measurements` type, but also setting the *default component value* (page 338) to 30.0. Finally, in the case of the `Measurements_10`, we're deriving from the `Measurements` type and *constraining the array type* (page 561) in the range from 1 to 10.

Let's use these types in a test application:

Listing 469: show_measurements.adb

```
with Measurement_Defs; use Measurement_Defs;

procedure Show_Measurements is
   M1, M2  : Measurements (1 .. 10)
               := (others => 0.0);

   MD      : Measurements_Derived (1 .. 10);
   MD2     : Measurements_Derived (1 .. 40);
   MD10    : Measurements_10;
begin
   M1   := M2;
   --  ^^^^^^
   --  Assignment of arrays of
   --  same type.

   MD   := Measurements_Derived (M1);
   --      ^^^^^^^^^^^^^^^^^^^^^^^^^
   --  Conversion to derived type for
   --  the assignment.

   MD10 := Measurements_10 (M1);
   --      ^^^^^^^^^^^^^^^^^^^^
   --  Conversion to derived type for
   --  the assignment.
```

(continues on next page)

(continued from previous page)

```
25
26    MD10 := Measurements_10 (MD);
27    MD10 := Measurements_10 (MD2 (1 .. 10));
28 end Show_Measurements;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Arrays.Derived_Arrays_And_Subtypes.
 ↪Derived_Arrays
MD5: ce37a9c17eb9e1bb3931cca82852b54a
```

Build output

```
show_measurements.adb:8:04: warning: variable "MD2" is read but never assigned [-
 ↪gnatwv]
```

As illustrated by this example, we can assign objects of different array types, provided that we perform the appropriate type conversions and make sure that the bounds match.

Array subtypes

Naturally, we can also declare subtypes of array types. For example:

Listing 470: measurement_defs.ads

```
1  package Measurement_Defs is
2
3     type Measurements is
4       array (Positive range <>) of Float;
5
6     --
7     --  Simple subtype declaration:
8     --
9     subtype Measurements_Sub is Measurements;
10
11    --
12    --  Subtype with constraints:
13    --
14    subtype Measurements_10 is
15      Measurements (1 .. 10);
16
17    --
18    --  Subtype with dynamic predicate
19    --  (array can only have 20 components
20    --  at most):
21    --
22    subtype Measurements_Max_20 is Measurements
23        with Dynamic_Predicate =>
24               Measurements_Max_20'Length <= 20;
25
26    --
27    --  Subtype with constraints and
28    --  dynamic predicate (first element
29    --  must be 2.0).
30    --
31    subtype Measurements_First_Two is
32      Measurements (1 .. 10)
33        with Dynamic_Predicate =>
34               Measurements_First_Two (1) = 2.0;
35
36 end Measurement_Defs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Arrays.Derived_Arrays_And_Subtypes.Array_
 ↪Subtypes
MD5: fa03c836111aa2df223a38a5d04d18bc
```

Here, we're declaring subtypes of the `Measurements` type. For example, `Measurements_Sub` is a *simple* subtype of `Measurements` type. In the case of the `Measurements_10` subtype, we're constraining the type to a range from 1 to 10.

For the `Measurements_Max_20` subtype, we're specifying — via a dynamic predicate — that arrays of this subtype can only have 20 components at most. Finally, for the `Measurements_First_Two` subtype, we're constraining the type to a range from 1 to 10 and requiring that the first component must have a value of 2.0.

Note that we cannot set the default component value for array subtypes — only type declarations are allowed to use that facility.

Let's use these subtypes in a test application:

Listing 471: show_measurements.adb

```
1  with Measurement_Defs; use Measurement_Defs;
2
3  procedure Show_Measurements is
4     M1, M2  : Measurements (1 .. 10)
5                 := (others => 0.0);
6     MS      : Measurements_Sub (1 .. 10);
7     MD10    : Measurements_10;
8     M_Max20 : Measurements_Max_20 (1 .. 40);
9     M_F2    : Measurements_First_Two;
10 begin
11    MS       := M1;
12    MD10     := M1;
13
14    M_Max20  := (others => 0.0);  --  ERROR!
15
16    MD10 (1) := 4.0;
17    M_F2     := MD10;             --  ERROR!
18 end Show_Measurements;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Arrays.Derived_Arrays_And_Subtypes.Array_
 ↪Subtypes
MD5: 003ddaab65d8c163302811abd7889745
```

Runtime output

```
raised ADA.ASSERTIONS.ASSERTION_ERROR : Dynamic_Predicate failed at show_
 ↪measurements.adb:14
```

As expected, assignments to objects with different subtypes — but with the same parent type — work fine without conversion. The assignment to `M_Max_20` fails because of the predicate failure: the predicate requires that the length be 20 at most, and it's 40 in this case. Also, the assignment to `M_F2` fails because the predicate requires that the first element must be set to `2.0`, and `MD10 (1)` has the value 4.0.

25.7 Strings

25.7.1 Character and String Literals

So far, we're already seen many examples of string literals — both in the *Introduction to Ada* (page 5) course and in the present course. In this section, we define them once more and discuss a couple of details about them.

Character Literals

A character literal is simply a character between apostrophes (or *single quotation marks*). For example:

Listing 472: show_character_literals.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Character_Literals is
   C   : Character := 'a';
   --                 ^^^
   --           Character literal
begin
   Put_Line ("Character : " & C);
end Show_Character_Literals;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.Character_String_Literals.
↪Character_Literals
MD5: e9bf0dee97b4c6d52937316e7f285f48
```

Runtime output

```
Character : a
```

In this example, we initialize the character variable `C` with the character literal `'a'`.

String Literals

A string literal is simply a collection of characters between quotation marks. For example:

Listing 473: show_simple_string_literals.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Simple_String_Literals is
   S1 : String := "Hello";
   --             ^^^^^^^
   --         String literal

   S2 : String := "World";
   --             ^^^^^^^
   --           String literal
begin
   Put_Line (S1 & " " & S2);
end Show_Simple_String_Literals;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.Character_String_Literals.Simple_
 ↪String_Literals
MD5: a19bfa1ab6048f8cad9858d57b9f21e1
```

Runtime output

```
Hello World
```

In this example, `"Hello"` and `"World"` are string literals.

String literals with quotation

If you want to include a quotation mark in a string literal, you have to write `""` (inside that string literal):

Listing 474: show_string_literals_with_quotes.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_String_Literals_With_Quotes is
   S1 : String := "Hello";
   S2 : String := "World";
begin
   Put_Line ("  "" " & S1
   --           ^^
   --       Quotation marks
             & " " & S2 & " ""  ");
   --                      ^^
   --       Quotation marks

   Put_Line ("""Hello World!""");
   --          ^^            ^^
   --            Quotation marks

   Put_Line ("""""");
   --          ^^^^
   --    Quotation marks
end Show_String_Literals_With_Quotes;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.Character_String_Literals.String_
 ↪Literals_With_Quotes
MD5: 97752e289b5f58f98920407f5dedc1fb
```

Runtime output

```
  " Hello World "
"Hello World!"
""
```

In this example, we display `" Hello World "` to the user by adding quotation marks to the concatenated strings in the call to `Put_Line`.

Note that the three quotation marks at the beginning of `"""Hello World!"""` consist of the quotation mark that indicate the beginning of the string literal and the two quotation marks that represent a single quotation mark inside the string literal. (The same thing happens at the end of this string literal, but in reverse.) This string literal is displayed as `"Hello World!"` to the user.

Finally, the string literal `""""""` is displayed as `""` to the user.

Empty string literals

An empty string is represented by quotation marks without characters in between: `""`. For example:

Listing 475: show_empty_string_literals.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Empty_String_Literals is
   S1 : String          := "";
   S2 : String (1 .. 0) := "";
begin
   Put_Line (S1);
   Put_Line (S2);
   Put_Line ("");
end Show_Empty_String_Literals;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.Character_String_Literals.Empty_
↪String_Literals
MD5: f2f7c47784f1053665db9499cb6b53d8
```

Runtime output

Note that an empty string is an array of characters without any components. This is made explicit by the declaration of S2. Here, by using the range `1 .. 0`, we're declaring an empty array.

In other languages

In C, an empty string still contains a single character: the null character (`\0`). In Ada, however, an empty string doesn't have any characters.

In the Ada Reference Manual

- 2.5 Character Literals[123]
- 2.6 String Literals[124]

25.7.2 Wide and Wide-Wide Strings

We've seen many source-code examples so far that includes strings. In most of them, we were using the standard string type: `String`. This type is useful for the common use-case of displaying messages or dealing with information in plain English. Here, we define "plain English" as the use of the language that avoids French accents or German umlaut, for example, and doesn't make use of any characters in non-Latin alphabets.

There are two additional string types in Ada: `Wide_String`, and `Wide_Wide_String`. These types are particularly important when dealing with textual information in non-standard English, or in various other languages, non-Latin alphabets and special symbols.

[123] http://www.ada-auth.org/standards/22rm/html/RM-2-5.html
[124] http://www.ada-auth.org/standards/22rm/html/RM-2-6.html

These string types use different bit widths for their characters. This becomes more apparent when looking at the type definitions:

```
type String is
  array (Positive range <>) of Character;

type Wide_String is
  array (Positive range <>) of Wide_Character;

type Wide_Wide_String is
  array (Positive range <>) of
    Wide_Wide_Character;
```

The following table shows the typical bit-width of each character of the string types:

Character Type	Width
Character	8 bits
Wide_Character	16 bits
Wide_Wide_Character	32 bits

We can see that when running this example:

Listing 476: show_wide_char_types.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Wide_Char_Types is
begin
   Put_Line ("Character'Size:           "
             & Integer'Image
                 (Character'Size));
   Put_Line ("Wide_Character'Size:      "
             & Integer'Image
                 (Wide_Character'Size));
   Put_Line ("Wide_Wide_Character'Size: "
             & Integer'Image
                 (Wide_Wide_Character'Size));
end Show_Wide_Char_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.Wide_Wide-Wide_Strings.Wide_Char_
 ↪Types
MD5: a0e9fb9e8d43e9fa707dc8c57f7562f8
```

Runtime output

```
Character'Size:           8
Wide_Character'Size:      16
Wide_Wide_Character'Size:  32
```

Let's look at another example, this time using wide strings:

Listing 477: show_wide_string_types.adb

```
with Ada.Text_IO;
with Ada.Wide_Text_IO;
with Ada.Wide_Wide_Text_IO;

```

(continues on next page)

(continued from previous page)

```
procedure Show_Wide_String_Types is
   package TI   renames Ada.Text_IO;
   package WTI  renames Ada.Wide_Text_IO;
   package WWTI renames Ada.Wide_Wide_Text_IO;

   S   : constant String           := "hello";
   WS  : constant Wide_String      := "hello";
   WWS : constant Wide_Wide_String := "hello";
begin
   TI.Put_Line ("String:           " & S);
   TI.Put_Line ("Length:           "
                & Integer'Image (S'Length));
   TI.Put_Line ("Size:             "
                & Integer'Image (S'Size));
   TI.Put_Line ("Component_Size:   "
                & Integer'Image
                    (S'Component_Size));
   TI.Put_Line ("------------------------");

   WTI.Put_Line ("Wide string:      " & WS);
   TI.Put_Line ("Length:           "
                & Integer'Image (WS'Length));
   TI.Put_Line ("Size:             "
                & Integer'Image (WS'Size));
   TI.Put_Line ("Component_Size:   "
                & Integer'Image
                    (WS'Component_Size));
   TI.Put_Line ("------------------------");

   WWTI.Put_Line ("Wide-wide string: " & WWS);
   TI.Put_Line ("Length:           "
                & Integer'Image (WWS'Length));
   TI.Put_Line ("Size:             "
                & Integer'Image (WWS'Size));
   TI.Put_Line ("Component_Size:   "
                & Integer'Image
                    (WWS'Component_Size));
   TI.Put_Line ("------------------------");
end Show_Wide_String_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.Wide_Wide-Wide_Strings.Wide_
 ↪String_Types
MD5: 137816c6fd78add34287a72e45cf4fb7
```

Runtime output

```
String:           hello
Length:            5
Size:              40
Component_Size:    8
------------------------
Wide string:      hello
Length:            5
Size:              80
Component_Size:    16
------------------------
Wide-wide string: hello
Length:            5
Size:              160
```

(continues on next page)

(continued from previous page)

```
Component_Size:    32
------------------------
```

Here, all strings (`S`, `WS` and `WWS`) have the same length of 5 characters. However, the size of each character is different — thus, each string has a different overall size.

The recommendation is to use the **`String`** type when the textual information you're processing is in standard English. In case any kind of internationalization is needed, using `Wide_Wide_String` is probably the best choice, as it covers all possible use-cases.

In the Ada Reference Manual

- 3.6.3 String Types[125]

Text I/O

Note that, in the previous example, we were using different versions of the `Ada.Text_IO` package depending on the string type we were using:

- `Ada.Text_IO` for objects of **`String`** type,
- `Ada.Wide_Text_IO` for objects of **`Wide_String`** type,
- `Ada.Wide_Wide_Text_IO` for objects of `Wide_Wide_String` type.

In that example, we were also using package renaming to differentiate among those packages.

Similarly, there are different versions of text I/O packages for individual types. For example, if we want to display the value of a **`Long_Integer`** variable based on the `Wide_Wide_String` type, we can select the `Ada.Long_Integer_Wide_Wide_Text_IO` package. In fact, the list of packages resulting from the combination of those types is quite long:

[125] http://www.ada-auth.org/standards/22rm/html/RM-3-6-3.html

Scalar Type	Text I/O Packages
Integer	• Ada.Integer_Text_IO • Ada.Integer_Wide_Text_IO • Ada.Integer_Wide_Wide_Text_IO
Long_Integer	• Ada.Long_Integer_Text_IO • Ada.Long_Integer_Wide_Text_IO • Ada.Long_Integer_Wide_Wide_Text_IO
Long_Long_Integer	• Ada.Long_Long_Integer_Text_IO • Ada.Long_Long_Integer_Wide_Text_IO • Ada.Long_Long_Integer_Wide_Wide_Text_IO
Float	• Ada.Float_Text_IO • Ada.Float_Wide_Text_IO • Ada.Float_Wide_Wide_Text_IO
Long_Float	• Ada.Long_Float_Text_IO • Ada.Long_Float_Wide_Text_IO • Ada.Long_Float_Wide_Wide_Text_IO
Long_Long_Float	• Ada.Long_Long_Float_Text_IO • Ada.Long_Long_Float_Wide_Text_IO • Ada.Long_Long_Float_Wide_Wide_Text_IO

Also, there are different versions of the generic packages `Integer_IO` and `Float_IO`:

Scalar Type	Text I/O Packages
Integer types	• Ada.Text_IO.Integer_IO • Ada.Wide_Text_IO.Integer_IO • Ada.Wide_Wide_Text_IO. Integer_IO
Real types	• Ada.Text_IO.Float_IO • Ada.Wide_Text_IO.Float_IO • Ada.Wide_Wide_Text_IO.Float_IO

In the Ada Reference Manual

- A.10 Text Input-Output[126]
- A.10.1 The Package Text_IO[127]
- A.10.8 Input-Output for Integer Types[128]

- A.10.9 Input-Output for Real Types[129]
- A.11 Wide Text Input-Output and Wide Wide Text Input-Output[130]

Wide and Wide-Wide String Handling

As we've just seen, we have different versions of the `Ada.Text_IO` package. The same applies to string handling packages. As we've seen in the *Introduction to Ada course* (page 239), we can use the `Ada.Strings.Fixed` and `Ada.Strings.Maps` packages for string handling. For other formats, we have these packages:

- `Ada.Strings.Wide_Fixed`,
- `Ada.Strings.Wide_Wide_Fixed`,
- `Ada.Strings.Wide_Maps`,
- `Ada.Strings.Wide_Wide_Maps`.

Let's look at *this example* (page 240) from the Introduction to Ada course, which we adapted for wide-wide strings:

Listing 478: show_find_words.adb

```
1  with Ada.Strings; use Ada.Strings;
2
3  with Ada.Strings.Wide_Wide_Fixed;
4  use  Ada.Strings.Wide_Wide_Fixed;
5
6  with Ada.Strings.Wide_Wide_Maps;
7  use  Ada.Strings.Wide_Wide_Maps;
8
9  with Ada.Wide_Wide_Text_IO;
10 use  Ada.Wide_Wide_Text_IO;
11
12 procedure Show_Find_Words is
13
14    S   : constant Wide_Wide_String :=
15            "Hello" & 3 * " World";
16    F   : Positive;
17    L   : Natural;
18    I   : Natural := 1;
19
20    Whitespace : constant
21      Wide_Wide_Character_Set :=
22        To_Set (' ');
23 begin
24    Put_Line ("String: " & S);
25    Put_Line ("String length: "
26              & Integer'Wide_Wide_Image
27                  (S'Length));
28
29    while I in S'Range loop
30       Find_Token
31         (Source  => S,
32          Set     => Whitespace,
33          From    => I,
```

(continues on next page)

[126] http://www.ada-auth.org/standards/22rm/html/RM-A-10.html
[127] http://www.ada-auth.org/standards/22rm/html/RM-A-10-1.html
[128] http://www.ada-auth.org/standards/22rm/html/RM-A-10-8.html
[129] http://www.ada-auth.org/standards/22rm/html/RM-A-10-9.html
[130] http://www.ada-auth.org/standards/22rm/html/RM-A-11.html

(continued from previous page)

```
34          Test    => Outside,
35          First   => F,
36          Last    => L);
37
38       exit when L = 0;
39
40       Put_Line ("Found word instance at position "
41                 & F'Wide_Wide_Image
42                 & ": '" & S (F .. L) & "'");
43
44       I := L + 1;
45    end loop;
46
47 end Show_Find_Words;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.Wide_Wide-Wide_Strings.Wide_Wide_
 ↪String_Handling
MD5: 3b5a4d61e6dc5bd16e85f85580ad82ae
```

Runtime output

```
String: Hello World World World
String length:  23
Found word instance at position  1: 'Hello'
Found word instance at position  7: 'World'
Found word instance at position  13: 'World'
Found word instance at position  19: 'World'
```

In this example, we're using the `Find_Token` procedure to find the words from the phrase stored in the `S` constant. All the operations we're using here are similar to the ones for **`String`** type, but making use of the `Wide_Wide_String` type instead. (We talk about the `Wide_Wide_Image` attribute *later on* (page 603).)

In the Ada Reference Manual

- A.4.6 String-Handling Sets and Mappings[131]
- A.4.7 Wide_String Handling[132]
- A.4.8 Wide_Wide_String Handling[133]

Bounded and Unbounded Wide and Wide-Wide Strings

We've seen in the Introduction to Ada course that other kinds of **`String`** types are available. For example, we can use *bounded* (page 244) and *unbounded strings* (page 247) — those correspond to the `Bounded_String` and `Unbounded_String` types.

Those kinds of string types are available for **`Wide_String`**, and `Wide_Wide_String`. The following table shows the available types and corresponding packages:

[131] http://www.ada-auth.org/standards/22rm/html/RM-A-4-6.html
[132] http://www.ada-auth.org/standards/22rm/html/RM-A-4-7.html
[133] http://www.ada-auth.org/standards/22rm/html/RM-A-4-8.html

Type	Package
Bounded_Wide_String	Ada.Strings.Wide_Bounded
Bounded_Wide_Wide_String	Ada.Strings.Wide_Wide_Bounded
Unbounded_Wide_String	Ada.Strings.Wide_Unbounded
Unbounded_Wide_Wide_String	Ada.Strings.Wide_Wide_Unbounded

The same applies to text I/O for those strings. For the standard case, we have Ada.Text_IO.Bounded_IO for the Bounded_String type and Ada.Text_IO.Unbounded_IO for the Unbounded_String type.

For wider string types, we have:

Type	Text I/O Package
Bounded_Wide_String	Ada.Wide_Text_IO.Wide_Bounded_IO
Bounded_Wide_Wide_String	Ada.Wide_Wide_Text_IO.Wide_Wide_Bounded_IO
Unbounded_Wide_String	Ada.Wide_Text_IO.Wide_Unbounded_IO
Unbounded_Wide_Wide_String	Ada.Wide_Wide_Text_IO.Wide_Wide_Unbounded_IO

Let's look at a simple example:

Listing 479: show_unbounded_wide_wide_string.adb

```
with Ada.Strings.Wide_Wide_Unbounded;
use  Ada.Strings.Wide_Wide_Unbounded;

with Ada.Wide_Wide_Text_IO.Wide_Wide_Unbounded_IO;
use  Ada.Wide_Wide_Text_IO.Wide_Wide_Unbounded_IO;

procedure Show_Unbounded_Wide_Wide_String is
   S : Unbounded_Wide_Wide_String
     := To_Unbounded_Wide_Wide_String ("Hello");
begin
   S := S & Wide_Wide_String'(" hello");
   Put_Line ("Unbounded wide-wide string: " & S);
end Show_Unbounded_Wide_Wide_String;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.Wide_Wide-Wide_Strings.Unbounded_
 ↪Wide_Wide_String
MD5: 0d369270e2408b3f1cc8284c13fca806
```

Runtime output

```
Unbounded wide-wide string: Hello hello
```

In this example, we're declaring a variable S and initializing it with the word "Hello." Then, we're concatenating it with " hello" and displaying it. All the operations we're using here are similar to the ones for Unbounded_String type, but they've been adapted for the Unbounded_Wide_Wide_String type.

In the Ada Reference Manual

- A.4.7 Wide_String Handling[134]

- A.4.8 Wide_Wide_String Handling[135]
- A.11 Wide Text Input-Output and Wide Wide Text Input-Output[136]

25.7.3 String Encoding

Unicode is one of the most widespread standards for encoding writing systems other than the Latin alphabet. It defines a format called Unicode Transformation Format (UTF)[137] in various versions, which vary according to the underlying precision, support for backwards-compatibility and other requirements.

In the Ada Reference Manual

- A.4.11 String Encoding[138]

UTF-8 encoding and decoding

A common UTF format is UTF-8, which encodes strings using up to four (8-bit) bytes and is backwards-compatible with the ASCII format. While encoding of ASCII characters requires only one byte, Chinese characters require three bytes, for example.

In Ada applications, UTF-8 strings are indicated by using the `UTF_8_String` from the `Ada.Strings.UTF_Encoding` package. In order to encode from and to UTF-8 strings, we can use the `Encode` and `Decode` functions. Those functions are specified in the child packages of the *Ada.Strings.UTF_Encoding* package. We select the appropriate child package depending on the string type we're using, as you can see in the following table:

Child Package of `Ada.Strings.UTF_Encoding`	Convert from / to
`.Strings`	`String` type
`.Wide_Strings`	`Wide_String` type
`.Wide_Wide_Strings`	`Wide_Wide_String` type

Let's look at an example:

Listing 480: show_ww_utf_string.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  with Ada.Strings.UTF_Encoding;
4  use  Ada.Strings.UTF_Encoding;
5
6  with Ada.Strings.UTF_Encoding.Wide_Wide_Strings;
7  use  Ada.Strings.UTF_Encoding.Wide_Wide_Strings;
8
9  with Ada.Strings.Wide_Wide_Unbounded;
10 use  Ada.Strings.Wide_Wide_Unbounded;
11
12 procedure Show_WW_UTF_String is
13
14    function To_UWWS
```

(continues on next page)

[134] http://www.ada-auth.org/standards/22rm/html/RM-A-4-7.html
[135] http://www.ada-auth.org/standards/22rm/html/RM-A-4-8.html
[136] http://www.ada-auth.org/standards/22rm/html/RM-A-11.html
[137] https://unicode.org/faq/utf_bom.html#gen2
[138] http://www.ada-auth.org/standards/22rm/html/RM-A-4-11.html

(continued from previous page)

```
      (Source : Wide_Wide_String)
       return Unbounded_Wide_Wide_String
         renames To_Unbounded_Wide_Wide_String;

   function To_WWS
     (Source : Unbounded_Wide_Wide_String)
      return Wide_Wide_String
        renames To_Wide_Wide_String;

   Hello_World_Arabic : constant
     UTF_8_String := "عالم ايا مرحبا";
   WWS_Hello_World_Arabic : constant
     Wide_Wide_String :=
       Decode (Hello_World_Arabic);

   UWWS : Unbounded_Wide_Wide_String;
begin
   UWWS := "Hello World: "
           & To_UWWS (WWS_Hello_World_Arabic);

   Show_WW_String : declare
      WWS : constant Wide_Wide_String :=
              To_WWS (UWWS);
   begin
      Put_Line ("Wide_Wide_String Length: "
                & WWS'Length'Image);
      Put_Line ("Wide_Wide_String Size:   "
                & WWS'Size'Image);
   end Show_WW_String;

   Put_Line
     ("----------------------------------------");
   Put_Line
     ("Converting Wide_Wide_String to UTF-8...");

   Show_UTF_8_String : declare
      S_UTF_8 : constant UTF_8_String :=
                  Encode (To_WWS (UWWS));
   begin
      Put_Line ("UTF-8 String:        "
                & S_UTF_8);
      Put_Line ("UTF-8 String Length: "
                & S_UTF_8'Length'Image);
      Put_Line ("UTF-8 String Size:   "
                & S_UTF_8'Size'Image);
   end Show_UTF_8_String;

end Show_WW_UTF_String;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.String_Encoding.WW_UTF_String
MD5: cecfb420bb804f42e7a65b793abcbef5
```

Runtime output

```
Wide_Wide_String Length:  26
Wide_Wide_String Size:    832
----------------------------------------
Converting Wide_Wide_String to UTF-8...
UTF-8 String:        Hello World: عالم ايا مرحبا
```

(continues on next page)

(continued from previous page)

```
UTF-8 String Length:  37
UTF-8 String Size:    296
```

In this application, we start by storing a string in Arabic in the `Hello_World_Arabic` constant. We then use the `Decode` function to convert that string from `UTF_8_String` type to `Wide_Wide_String` type — we store it in the `WWS_Hello_World_Arabic` constant.

We use a variable of type `Unbounded_Wide_Wide_String` (`UWWS`) to manipulate strings: we append the string in Arabic to the "Hello World: " string and store it in `UWWS`.

In the `Show_WW_String` block, we convert the string — stored in `UWWS` — from the `Unbounded_Wide_Wide_String` type to the `Wide_Wide_String` type and display the length and size of the string. We do something similar in the `Show_UTF_8_String` block, but there, we convert to the `UTF_8_String` type.

Also, in the `Show_UTF_8_String` block, we use the `Encode` function to convert that string from `Wide_Wide_String` type to then `UTF_8_String` type — we store it in the `S_UTF_8` constant.

UTF-8 size and length

As you can see when running the last code example from the previous subsection, we have different sizes and lengths depending on the string type:

String type	Size	Length
`Wide_Wide_String`	832	26
`UTF_8_String`	296	37

The size needed for storing the string when using the `Wide_Wide_String` type is bigger than the one when using the `UTF_8_String` type. This is expected, as the `Wide_Wide_String` uses 32-bit characters, while the `UTF_8_String` type uses 8-bit codes to store the string in a more efficient way (memory-wise).

The length of the string using the `Wide_Wide_String` type is equivalent to the number of symbols we have in the original string: 26 characters / symbols. When using UTF-8, however, we may need more 8-bit codes to represent one symbol from the original string, so we may end up with a length value that is bigger than the actual number of symbols from the original string — as it is the case in this source-code example.

This difference in sizes might not always be the case. In fact, the sizes match when encoding a symbol in UTF-8 that requires four 8-bit codes. For example:

Listing 481: show_utf_8.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  with Ada.Strings.UTF_Encoding;
4  use  Ada.Strings.UTF_Encoding;
5
6  with Ada.Strings.UTF_Encoding.Wide_Wide_Strings;
7  use  Ada.Strings.UTF_Encoding.Wide_Wide_Strings;
8
9  procedure Show_UTF_8 is
10
11    Symbol_UTF_8 : constant UTF_8_String := "x";
12    Symbol_WWS   : constant Wide_Wide_String :=
13                     Decode (Symbol_UTF_8);
14
15 begin
```

(continues on next page)

(continued from previous page)

```
16    Put_Line ("Wide_Wide_String Length: "
17              & Symbol_WWS'Length'Image);
18    Put_Line ("Wide_Wide_String Size:   "
19              & Symbol_WWS'Size'Image);
20    Put_Line ("UTF-8 String Length:     "
21              & Symbol_UTF_8'Length'Image);
22    Put_Line ("UTF-8 String Size:       "
23              & Symbol_UTF_8'Size'Image);
24    New_Line;
25    Put_Line ("UTF-8 String:            "
26              & Symbol_UTF_8);
27 end Show_UTF_8;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.String_Encoding.UTF_8
MD5: 67653dfd377f04b32421cf09b25939fe
```

Runtime output

```
Wide_Wide_String Length:  1
Wide_Wide_String Size:    32
UTF-8 String Length:      4
UTF-8 String Size:        32

UTF-8 String:            x
```

In this case, both strings — using the `Wide_Wide_String` type or the `UTF_8_String` type — have the same size: 32 bits. (Here, we're using the x symbol from the Mathematical Alphanumeric Symbols block[139], not the standard "x" from the Basic Latin block[140].)

UTF-16 encoding and decoding

So far, we've discussed the UTF-8 encoding scheme. However, other encoding schemes exist and are supported as well. In fact, the `Ada.Strings.UTF_Encoding` package defines three encoding schemes:

```
type Encoding_Scheme is (UTF_8,
                         UTF_16BE,
                         UTF_16LE);
```

For example, instead of using UTF-8 encoding, we can use UTF-16 encoding — either in the big-endian or in the little-endian version. To convert between UTF-8 and UTF-16 encoding schemes, we can make use of the conversion functions from the `Ada.Strings.UTF_Encoding.Conversions` package.

To declare a UTF-16 encoded string, we can use one of the following data types:

- the 8-bit-character based `UTF_String` type, or
- the 16-bit-character based `UTF_16_Wide_String` type.

When using the 8-bit version, though, we have to specify the input and output schemes when converting between UTF-8 and UTF-16 encoding schemes.

Let's see a code example that makes use of both `UTF_String` and `UTF_16_Wide_String` types:

[139] https://en.wikipedia.org/wiki/Mathematical_Alphanumeric_Symbols
[140] https://en.wikipedia.org/wiki/Basic_Latin_(Unicode_block)

Listing 482: show_utf16_types.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Ada.Strings.UTF_Encoding;
use  Ada.Strings.UTF_Encoding;

with Ada.Strings.UTF_Encoding.Conversions;
use  Ada.Strings.UTF_Encoding.Conversions;

procedure Show_UTF16_Types is
   Symbols_UTF_8  : constant
     UTF_8_String := "♥♫";

   Symbols_UTF_16 : constant
     UTF_16_Wide_String :=
       Convert (Symbols_UTF_8);
   --  ^ Calling Convert for UTF_8_String
   --    to UTF_16_Wide_String conversion.

   Symbols_UTF_16BE : constant
     UTF_String :=
       Convert (Item          => Symbols_UTF_8,
                Input_Scheme  => UTF_8,
                Output_Scheme => UTF_16BE);
   --  ^ Calling Convert for UTF_8_String
   --    to UTF_String conversion in UTF-16BE
   --    encoding.
begin
   Put_Line ("UTF_8_String:          "
             & Symbols_UTF_8);

   Put_Line ("UTF_16_Wide_String:    "
             & Convert (Symbols_UTF_16));
   --          ^ Calling Convert for
   --            the UTF_16_Wide_String to
   --            UTF_8_String conversion.

   Put_Line
     ("UTF_String / UTF_16BE: "
      & Convert
          (Item          => Symbols_UTF_16BE,
           Input_Scheme  => UTF_16BE,
           Output_Scheme => UTF_8));
end Show_UTF16_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.String_Encoding.UTF_16_Types
MD5: 905e20e83a6199fdc91a6b15bb71bb01
```

Runtime output

```
UTF_8_String:          ♥♫
UTF_16_Wide_String:    ♥♫
UTF_String / UTF_16BE: ♥♫
```

In this example, we're declaring a UTF-8 encoded string and storing it in the `Symbols_UTF_8` constant. Then, we're calling the `Convert` functions to convert between UTF-8 and UTF-16 encoding schemes. We're using two versions of this function:

- the `Convert` function that returns an object of `UTF_16_Wide_String` type for an input

of UTF_8_String type, and

- the Convert function that returns an object of UTF_String type for an input of UTF_8_String type.
  - In this case, we need to specify the input and output schemes (see Input_Scheme and Output_Scheme parameters in the code example).

Previously, we've seen that the Ada.Strings.UTF_Encoding.Wide_Wide_Strings package offers functions to convert between UTF-8 and the Wide_Wide_String type. The same kind of conversion functions exist for UTF-16 strings as well. Let's look at this code example:

Listing 483: show_ww_utf16_string.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Ada.Strings.UTF_Encoding;
use  Ada.Strings.UTF_Encoding;

with Ada.Strings.UTF_Encoding.Wide_Wide_Strings;
use  Ada.Strings.UTF_Encoding.Wide_Wide_Strings;

with Ada.Strings.UTF_Encoding.Conversions;
use  Ada.Strings.UTF_Encoding.Conversions;

procedure Show_WW_UTF16_String is
   Symbols_UTF_16 : constant
     UTF_16_Wide_String :=
       Wide_Character'Val (16#2665#) &
       Wide_Character'Val (16#266B#);
   --  ^ Calling Wide_Character'Val
   --    to specify the UTF-16 BE code
   --    for "♥" and "♫".

   Symbols_WWS : constant
     Wide_Wide_String :=
       Decode (Symbols_UTF_16);
   --  ^ Calling Decode for UTF_16_Wide_String
   --    to Wide_Wide_String conversion.
begin
   Put_Line ("UTF_16_Wide_String: "
             & Convert (Symbols_UTF_16));
   --          ^ Calling Convert for the
   --            UTF_16_Wide_String to
   --            UTF_8_String conversion.

   Put_Line ("Wide_Wide_String:   "
             & Encode (Symbols_WWS));
   --          ^ Calling Encode for the
   --            Wide_Wide_String to
   --            UTF_8_String conversion.
end Show_WW_UTF16_String;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.String_Encoding.WW_UTF_16_String
MD5: 900af8f5c6aad7303c3e49c1c4a68d73
```

Runtime output

```
UTF_16_Wide_String: ♥♫
Wide_Wide_String:   ♥♫
```

In this example, we're calling the `Wide_Character'Val` function to specify the UTF-16 BE

code of the "♥" and "♫" symbols. We're then using the Decode function to convert between the UTF_16_Wide_String and the Wide_Wide_String types.

25.7.4 UTF-8 applications

In this section, we take a further look into UTF-8 encoding and some real-world applications. First, we discuss the use of UTF-8 encoding in source-code files. Then, we talk about parsing UTF-8 files using *wide-wide* strings.

UTF-8 encoding in source-code files

In the past, it was common to use different character sets in text files when writing in different (human) languages. By default, Ada source-code files are expected to use the Latin-1 coding, which is a 8-bit character set.

Nowadays, however, using UTF-8 coding for text files — including source-code files — is very common. If your Ada code only uses standard ASCII characters, but you're saving it in a UTF-8 coded file, there's no need to worry about character sets, as UTF-8 is backwards compatible with ASCII.

However, you might want to use Unicode symbols in your Ada source code to declare constants — as we did in the previous sections — and store the source code in a UTF-8 coded file. In this case, you need be careful about how this file is parsed by the compiler.

Let's look at this source-code example:

Listing 484: show_utf_8_strings.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Ada.Strings.UTF_Encoding;
use  Ada.Strings.UTF_Encoding;

procedure Show_UTF_8_Strings is

    Symbols_UTF_8 : constant
      UTF_8_String := "♥♫";

begin
    Put_Line ("UTF_8_String: "
              & Symbols_UTF_8);

    Put_Line ("Length:       "
              & Symbols_UTF_8'Length'Image);

end Show_UTF_8_Strings;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.String_Encoding.UTF_8_Strings
MD5: fd1aaff161a33365d15adca5bea7b277
```

Runtime output

```
UTF_8_String: ♥♫
Length:        6
```

Here, we're using Unicode symbols to initialize the Symbols_UTF_8 constant of UTF_8_String type.

Now, let's assume this source-code example is stored in a UTF-8 coded file. Because the "♥♫" string makes use of non-ASCII Unicode symbols, representing this string in UTF-8 for-

mat will require more than 2 bytes. In fact, each one of those Unicode symbols requires 2 bytes to be encoded in UTF-8. (Keep in mind that Unicode symbols may require between 1 to 4 bytes[141] to be encoded in UTF-8 format.) Also, in this case, the UTF-8 encoding process is using two additional bytes. Therefore, the total length of the string is six, which matches what we see when running the `Show_UTF_8_Strings` procedure. In other words, the length of the `Symbols_UTF_8` string doesn't refer to those two characters (`"♥♫"`) that we were using in the constant declaration, but the length of the encoded bytes in its UTF-8 representation.

The UTF-8 format is very useful for storing and transmitting texts. However, if we want to process Unicode symbols, it's probably better to use string types with 32-bit characters — such as `Wide_Wide_String`. For example, let's say we want to use the `"♥♫"` string again to initialize a constant of `Wide_Wide_String` type:

Listing 485: show_wws_strings.adb

```
with Ada.Text_IO;
with Ada.Wide_Wide_Text_IO;

procedure Show_WWS_Strings is

   package TIO   renames Ada.Text_IO;
   package WWTIO renames Ada.Wide_Wide_Text_IO;

   Symbols_WWS : constant
     Wide_Wide_String := "♥♫";

begin
   WWTIO.Put_Line ("Wide_Wide_String: "
                   & Symbols_WWS);

   TIO.Put_Line ("Length:           "
                 & Symbols_WWS'Length'Image);

end Show_WWS_Strings;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.String_Encoding.WWS_Strings_W8
MD5: 1e5e38e62b412de48d3fa4271bb48bf1
```

Runtime output

```
Wide_Wide_String: ♥♫
Length:            2
```

In this case, as mentioned above, if we store this source code in a text file using UTF-8 format, we need to ensure that the UTF-8 coded symbols are correctly interpreted by the compiler when it parses the text file. Otherwise, we might get unexpected behavior. (Interpreting the characters in UTF-8 format as Latin-1 format is certainly an example of what we want to avoid here.)

In the GNAT toolchain

You can use UTF-8 coding in your source-code file and initialize strings of 32-bit characters. However, as we just mentioned, you need to make sure that the UTF-8 coded symbols are correctly interpreted by the compiler when dealing with types such as `Wide_Wide_String`. For this case, GNAT offers the `-gnatW8` switch. Let's run the previous example using this switch:

[141] https://en.wikipedia.org/wiki/UTF-8

Listing 486: show_wws_strings.adb

```
with Ada.Text_IO;
with Ada.Wide_Wide_Text_IO;

procedure Show_WWS_Strings is

   package TIO   renames Ada.Text_IO;
   package WWTIO renames Ada.Wide_Wide_Text_IO;

   Symbols_WWS : constant
     Wide_Wide_String := "♥♫";

begin
   WWTIO.Put_Line ("Wide_Wide_String: "
                   & Symbols_WWS);

   TIO.Put_Line ("Length:           "
                 & Symbols_WWS'Length'Image);

end Show_WWS_Strings;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.String_Encoding.WWS_Strings_W8
MD5: 1e5e38e62b412de48d3fa4271bb48bf1
```

Runtime output

```
Wide_Wide_String: ♥♫
Length:            2
```

Because the `Wide_Wide_String` type has 32-bit characters. we expect the length of the string to match the number of symbols that we're using. Indeed, when running the `Show_WWS_Strings` procedure, we see that the `Symbols_WWS` string has a length of two characters, which matches the number of characters of the `"♥♫"` string.

When we use the `-gnatW8` switch, GNAT converts the UTF-8-coded string (`"♥♫"`) to UTF-32 format, so we get two 32-bit characters. It then uses the UTF-32-coded string to initialize the `Symbols_WWS` string.

If we don't use the `-gnatW8` switch, however, we get wrong results. Let's look at the same example again without the switch:

Listing 487: show_wws_strings.adb

```
with Ada.Text_IO;
with Ada.Wide_Wide_Text_IO;

procedure Show_WWS_Strings is

   package TIO   renames Ada.Text_IO;
   package WWTIO renames Ada.Wide_Wide_Text_IO;

   Symbols_WWS : constant
     Wide_Wide_String := "♥♫";

begin
   WWTIO.Put_Line ("Wide_Wide_String: "
                   & Symbols_WWS);

   TIO.Put_Line ("Length:           "
                 & Symbols_WWS'Length'Image);

end Show_WWS_Strings;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.String_Encoding.WWS_Strings_No_
↪W8
MD5: 1e5e38e62b412de48d3fa4271bb48bf1
```

Runtime output

```
Wide_Wide_String: ♥♫
Length:            6
```

Now, the "♥♫" string is being interpreted as a string of six 8-bit characters. (In other words, the UTF-8-coded string isn't converted to the UTF-32 format.) Each of those 8-bit characters is then stored in a 32-bit character of the `Wide_Wide_String` type. This explains why the `Show_WWS_Strings` procedure reports a length of 6 components for the `Symbols_WWS` string.

Portability of UTF-8 in source-code files

In a previous code example, we were assuming that the format that we use for the source-code file is UTF-8. This allows us to simply use Unicode symbols directly in strings:

```
Symbol_UTF_8 : constant UTF_8_String := "★";
```

This approach, however, might not be portable. For example, if the compiler uses a different string encoding for source-code files, it might interpret that Unicode character as something else — or just throw a compilation error.

If you're afraid that format mismatches might happen in your compilation environment, you may want to write strings in your code in a completely portable fashion, which consists in entering the exact sequence of codes in bytes — using the `Character'Val` function — for the symbols you want to use.

We can reuse parts of the previous example and replace the UTF-8 character with the corresponding UTF-8 code:

Listing 488: show_utf_8.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  with Ada.Strings.UTF_Encoding;
4  use  Ada.Strings.UTF_Encoding;
5
6  procedure Show_UTF_8 is
7
8     Symbol_UTF_8 : constant
9       UTF_8_String :=
10        Character'Val (16#e2#)
11        & Character'Val (16#98#)
12        & Character'Val (16#85#);
13
14 begin
15    Put_Line ("UTF-8 String: "
16              & Symbol_UTF_8);
17 end Show_UTF_8;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.String_Encoding.UTF_8
MD5: 8ff02bc1793c0c5ac1ff24f62941af73
```

Runtime output

```
UTF-8 String: ★
```

Here, we use a sequence of three calls to the `Character'Val(code)` function for the UTF-8 code that corresponds to the "★" symbol.

Parsing UTF-8 files for Wide-Wide-String processing

A typical use-case is to parse a text file in UTF-8 format and use *wide-wide* strings to process the lines of that file. Before we look at the implementation that does that, let's first write a procedure that generate a text file in UTF-8 format:

Listing 489: generate_utf_8_file.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Ada.Strings.UTF_Encoding;
use  Ada.Strings.UTF_Encoding;

procedure Generate_UTF_8_File
  (Output_File_Name : String)
is
   F : File_Type;
begin
   Create (F, Out_File, Output_File_Name);
   Put_Line (F, UTF_8_String'("♥♫"));
   Put_Line
     (F,
      UTF_8_String'("مرحبا يا "عالم"));
   Close (F);
end Generate_UTF_8_File;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.String_Encoding.UTF_8_File_
↪Processing
MD5: 58c7591796bc1348796afa6db6f64d22
```

Procedure `Generate_UTF_8_File` writes two strings with non-Latin characters into the UTF-8 file indicated by the `Output_File_Name` parameter.

In addition, let's implement an auxiliary procedure to display the individual characters of a *wide-wide* string:

Listing 490: put_line_utf_8_characters.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Ada.Strings.UTF_Encoding;
use  Ada.Strings.UTF_Encoding;

with Ada.Strings.UTF_Encoding.Wide_Wide_Strings;
use  Ada.Strings.UTF_Encoding.Wide_Wide_Strings;

procedure Put_Line_UTF_8_Characters
  (WSS : Wide_Wide_String)
is
   procedure Put_Complete_UTF_8_String
     (WSS : Wide_Wide_String)
   is
      S_UTF_8 : constant UTF_8_String :=
                  Encode (WSS);
```

(continues on next page)

(continued from previous page)

```
   begin
      Put_Line ("STRING: " & S_UTF_8);
      Put_Line ("Length: "
                & WSS'Length'Image
                & " characters");
      New_Line;
   end Put_Complete_UTF_8_String;

   --  This is a wrapper function of the
   --  Encode function for the
   --  Wide_Wide_Character type:
   function Encode (Item : Wide_Wide_Character)
                    return UTF_8_String
    is
       SC : constant Wide_Wide_String (1 .. 1)
              := (1 => Item);
       --  We need a 1-character string
       --  for the call to Encode.
   begin
       return Encode (SC);
   end Encode;

   procedure Put_UTF_8_Characters
     (WSS : Wide_Wide_String) is
   begin
      for I in WSS'Range loop
         Put (I'Image & ": ");
         Put (Encode (WSS (I)));
         New_Line;
      end loop;
   end Put_UTF_8_Characters;

begin
    Put_Complete_UTF_8_String (WSS);
    Put_UTF_8_Characters (WSS);
    Put_Line ("--------------------");
end Put_Line_UTF_8_Characters;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.String_Encoding.UTF_8_File_
 ↪Processing
MD5: 14fae1f2b1d3795f3cef244f60082fcc
```

Finally, let's look at a code example that parses an UTF-8 file:

Listing 491: show_utf_8.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Ada.Strings.UTF_Encoding;
use  Ada.Strings.UTF_Encoding;

with Ada.Strings.UTF_Encoding.Wide_Wide_Strings;
use  Ada.Strings.UTF_Encoding.Wide_Wide_Strings;

with Generate_UTF_8_File;
with Put_Line_UTF_8_Characters;

procedure Show_UTF_8 is

```

(continues on next page)

(continued from previous page)

```
   File_Name : constant String :=
                 "utf-8_test.txt";

   procedure Read_UTF_8_File
     (Input_File_Name : String)
   is
      F : File_Type;
   begin
      Open (F, In_File, Input_File_Name);

      while not End_Of_File (F) loop
         declare
            S_UTF8 : constant UTF_8_String
                       := Get_Line (F);
            S      : constant Wide_Wide_String
                       := Decode (S_UTF8);
         begin
            Put_Line_UTF_8_Characters (S);
         end;
      end loop;
      Close (F);
   end Read_UTF_8_File;

begin
   Generate_UTF_8_File (File_Name);
   Read_UTF_8_File (File_Name);
end Show_UTF_8;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.String_Encoding.UTF_8_File_
↪Processing
MD5: 512ad5ac7c6d5936735f017bfe629aa3
```

Runtime output

```
STRING: ♥♫
Length:  2 characters

 1: ♥
 2: ♫
--------------------
STRING: ا‌بحرم ا‌ي م‌ال‌ع
Length:  13 characters

 1: م
 2: ر
 3: ح
 4: ب
 5: ا
 6:
 7: ي
 8: ا
 9:
 10: ع
 11: ا
 12: ل
 13: م
--------------------
```

The Show_UTF_8 procedure first calls the Generate_UTF_8_File procedure to generate a text file in UTF-8 format, and then calls the nested Read_UTF_8_File procedure to read

from that file — this is done by reading the 8-bit UTF-8 encoded string and decoding it into a string of `Wide_Wide_String` type.

(Note that we call the auxiliary `Put_Line_UTF_8_Characters` procedure to display the characters of each line we read from the UTF-8 file.)

For completeness, we include the nested `Read_Write_UTF_8_File` procedure, which not only reads each line from a UTF-8 file, but also writes it into another UTF-8 file:

Listing 492: show_utf_8.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Ada.Strings.UTF_Encoding;
use  Ada.Strings.UTF_Encoding;

with Ada.Strings.UTF_Encoding.Wide_Wide_Strings;
use  Ada.Strings.UTF_Encoding.Wide_Wide_Strings;

with Generate_UTF_8_File;
with Put_Line_UTF_8_Characters;

procedure Show_UTF_8 is

   File_Name_In  : constant String :=
                     "utf-8_test.txt";
   File_Name_Out : constant String :=
                     "utf-8_copy.txt";

   procedure Read_Write_UTF_8_File
     (Input_File_Name,
      Output_File_Name : String)
   is
      F_In, F_Out : File_Type;
   begin
      Open (F_In, In_File, Input_File_Name);
      Create (F_Out, Out_File, Output_File_Name);

      while not End_Of_File (F_In) loop
         declare
            S : constant Wide_Wide_String :=
                  Decode (Get_Line (F_In));
         begin
            Put_Line_UTF_8_Characters (S);
            Put_Line (F_Out, Encode (S));
         end;
      end loop;

      Close (F_In);
      Close (F_Out);
   end Read_Write_UTF_8_File;

begin
   Generate_UTF_8_File (File_Name_In);

   Read_Write_UTF_8_File
     (Input_File_Name  => File_Name_In,
      Output_File_Name => File_Name_Out);
end Show_UTF_8;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.String_Encoding.UTF_8_File_
```

(continues on next page)

(continued from previous page)

```
↪Processing
MD5: 8cd13e8a565266fa5dd854ff6a34524c
```

Runtime output

```
STRING: ♥♫
Length:  2 characters

 1: ♥
 2: ♫
--------------------
STRING: ابحرم ي ملاع
Length:  13 characters

 1: م
 2: ر
 3: ح
 4: ب
 5: ا
 6:
 7: ي
 8: ا
 9:
 10: ع
 11: ا
 12: ل
 13: م
--------------------
```

In the nested Read_Write_UTF_8_File procedure, we see both Decode and Encode functions being called to convert from and to the UTF_8_String type, respectively.

In the GNAT toolchain

If we use the -gnatW8 switch, which we mentioned *in a previous section* (page 592), the implementation of Generate_UTF_8_File and Put_Line_UTF_8_Characters must be adapted. In addition, we can simplify the implementation of the Show_UTF_8 procedure, too. (Note, however, that the previous implementation, which makes use of the Decode and Encode functions, would work fine as well.)

Listing 493: put_line_utf_8_characters.adb

```
1  with Ada.Wide_Wide_Text_IO;
2  use  Ada.Wide_Wide_Text_IO;
3
4  procedure Put_Line_UTF_8_Characters
5    (WSS : Wide_Wide_String)
6  is
7     procedure Put_Complete_UTF_8_String
8       (WSS : Wide_Wide_String)
9     is
10    begin
11       Put_Line ("STRING: " & WSS);
12       Put_Line ("Length: "
13                 & WSS'Length'Wide_Wide_Image
14                 & " characters");
15       New_Line;
16    end Put_Complete_UTF_8_String;
17
18    procedure Put_UTF_8_Characters
19      (WSS : Wide_Wide_String)
```

```
   is
   begin
      for I in WSS'Range loop
         Put (I'Wide_Wide_Image & ": ");
         Put (WSS (I));
         New_Line;
      end loop;
   end Put_UTF_8_Characters;

begin
    Put_Complete_UTF_8_String (WSS);
    Put_UTF_8_Characters (WSS);
    Put_Line ("--------------------");
end Put_Line_UTF_8_Characters;
```

Listing 494: generate_utf_8_file.adb

```
with Ada.Wide_Wide_Text_IO;
use  Ada.Wide_Wide_Text_IO;

procedure Generate_UTF_8_File
  (Output_File_Name : String)
is
   F : File_Type;
begin
   Create (F, Out_File, Output_File_Name);
   Put_Line (F, "♥♫");
   Put_Line (F, "مرحبا يا عالم");
   Close (F);
end Generate_UTF_8_File;
```

Listing 495: show_utf_8.adb

```
with Ada.Wide_Wide_Text_IO;
use  Ada.Wide_Wide_Text_IO;

with Generate_UTF_8_File;
with Put_Line_UTF_8_Characters;

procedure Show_UTF_8 is

   File_Name_In  : constant String :=
                     "utf-8_test.txt";
   File_Name_Out : constant String :=
                     "utf-8_copy.txt";

   procedure Read_Write_UTF_8_File
     (Input_File_Name,
      Output_File_Name : String)
   is
      F_In, F_Out : File_Type;
   begin
      Open (F_In, In_File, Input_File_Name);
      Create (F_Out, Out_File, Output_File_Name);

      while not End_Of_File (F_In) loop
         declare
            S : constant Wide_Wide_String :=
                  Get_Line (F_In);
         begin
            Put_Line_UTF_8_Characters (S);
            Put_Line (F_Out, S);
         end;
```

```
      end loop;

      Close (F_In);
      Close (F_Out);
   end Read_Write_UTF_8_File;

begin
   Generate_UTF_8_File (File_Name_In);

   Read_Write_UTF_8_File
     (Input_File_Name  => File_Name_In,
      Output_File_Name => File_Name_Out);
end Show_UTF_8;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.String_Encoding.UTF_8_File_
↪Processing
MD5: 8eeed924f6d661a0a62ecb4d94be7027
```

Runtime output

```
STRING: ♥♫
Length:  2 characters

 1: ♥
 2: ♫
--------------------
STRING: اجرم ا ي مالع
Length:  13 characters

 1: م
 2: ر
 3: ج
 4: ب
 5: ا
 6:
 7: ي
 8: ا
 9:
 10: ع
 11: ا
 12: ل
 13: م
--------------------
```

In this version of the code, we've removed all references to the `UTF_8_String` type — as well as the `Decode` and `Encode` functions that we were using to convert from and to this type. In this case, all UTF-8 processing happens directly using strings of `Wide_Wide_Strings` type.

25.7.5 Image attribute

Overview

In the *Introduction to Ada* (page 13) course, we've seen that the `Image` attribute returns a string that contains a textual representation of an object. For example, we write `Integer'Image (V)` to get a string for the integer variable `V`:

Listing 496: show_simple_image.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Simple_Image is
   V : Integer;
begin
   V := 10;
   Put_Line ("V: " & Integer'Image (V));
end Show_Simple_Image;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.Image_Attribute.Simple_Image
MD5: e38f6f1a0808f12bd53c1f3cf4983353
```

Runtime output

```
V:  10
```

Naturally, we can use the Image attribute with other scalar types. For example:

Listing 497: show_simple_image.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Simple_Image is
   type Status is (Unknown, Off, On);

   V : Float;
   S : Status;
begin
   V := 10.0;
   S := Unknown;

   Put_Line ("V: " & Float'Image (V));
   Put_Line ("S: " & Status'Image (S));
end Show_Simple_Image;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.Image_Attribute.Simple_Image
MD5: d3369518b610b7bf6c8dcefdecdb0c44
```

Runtime output

```
V:  1.00000E+01
S: UNKNOWN
```

In this example, we retrieve a string representing the floating-point variable V. Also, we use `Status'Image (V)` to retrieve a string representing the textual version of the Status.

In the Ada Reference Manual

- Image Attributes[142]

[142] http://www.ada-auth.org/standards/22rm/html/RM-4-10.html

Type'Image and Obj'Image

We can also apply the Image attribute to an object directly:

Listing 498: show_simple_image.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Simple_Image is
   V : Integer;
begin
   V := 10;
   Put_Line ("V: " & V'Image);

   --  Equivalent to:
   --  Put_Line ("V: " & Integer'Image (V));
end Show_Simple_Image;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.Image_Attribute.Simple_Image
MD5: c8b2e458de47b403568dd795b3d3fc24
```

Runtime output

```
V:  10
```

In this example, the `Integer'Image (V)` and `V'Image` forms are equivalent.

Wider versions of Image

Although we've been talking only about the Image attribute, it's important to mention that each of the wider versions of the string types also has a corresponding Image attribute. In fact, this is the attribute for each string type:

Attribute	Type of Returned String
Image	String
Wide_Image	Wide_String
Wide_Wide_Image	Wide_Wide_String

Let's see a simple example:

Listing 499: show_wide_wide_image.adb

```
with Ada.Wide_Wide_Text_IO;
use  Ada.Wide_Wide_Text_IO;

procedure Show_Wide_Wide_Image is
   F : Float;
begin
   F := 100.0;
   Put_Line ("F = "
             & F'Wide_Wide_Image);
end Show_Wide_Wide_Image;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.Image_Attribute.Wide_Wide_Image
MD5: ff542ef93286529343466c27935d5c21
```

Runtime output

```
F =  1.00000E+02
```

In this example, we use the `Wide_Wide_Image` attribute to retrieve a string of `Wide_Wide_String` type for the floating-point variable F.

Image attribute for non-scalar types

> **Note**
>
> This feature was introduced in Ada 2022.

In the previous code examples, we were using the `Image` attribute with scalar types, but it isn't restricted to those types. In fact, we can also use this attribute when dealing with non-scalar types. For example:

Listing 500: simple_records.ads

```
1  package Simple_Records is
2
3     type Rec is limited private;
4
5     type Rec_Access is access Rec;
6
7     function Init return Rec;
8
9     type Null_Rec is null record;
10
11 private
12
13    type Rec is limited record
14       F : Float;
15       I : Integer;
16    end record;
17
18    function Init return Rec is
19       ((F => 10.0, I => 4));
20
21 end Simple_Records;
```

Listing 501: show_non_scalar_image.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2  with Ada.Unchecked_Deallocation;
3
4  with Simple_Records;
5  use  Simple_Records;
6
7  procedure Show_Non_Scalar_Image is
8
9     procedure Free is
10      new Ada.Unchecked_Deallocation
11        (Object => Rec,
12         Name   => Rec_Access);
13
14    R_A : Rec_Access :=
15      new Rec'(Init);
16
```

(continues on next page)

(continued from previous page)

```
   N_R : Null_Rec :=
     (null record);
begin
   R_A := new Rec'(Init);
   N_R := (null record);

   Put_Line ("R_A:     " & R_A'Image);
   Put_Line ("R_A.all: " & R_A.all'Image);
   Put_Line ("N_R:     " & N_R'Image);

   Free (R_A);
   Put_Line ("R_A:     " & R_A'Image);
end Show_Non_Scalar_Image;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.Image_Attribute.Non_Scalar_Image
MD5: eb48f3fbe69b70258bc26f467918717c
```

Runtime output

```
R_A:     (access 5ec824f6f3f0)
R_A.all:
(F =>  1.00000E+01,
 I =>  4)
N_R:     (NULL RECORD)
R_A:     null
```

In the Show_Non_Scalar_Image procedure from this example, we display the access value of R_A and the contents of the dereferenced access object (R_A.**all**). Also, we see the indication that N_R is a null record and R_A is null after the call to Free.

Historically

Since Ada 2022, the Image attribute is available for all types. Prior to this version of the language, it was only available for scalar types. (For other kind of types, programmers had to use the Image attribute for each component of a record, for example.)

In fact, prior to Ada 2022, the Image attribute was described in the 3.5 Scalar Types[143] section of the Ada Reference Manual, as it was only applied to those types. Now, it is part of the new Image Attributes[144] section.

Let's see another example, this time with arrays:

Listing 502: show_array_image.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Array_Image is

   type Float_Array is
     array (Positive range <>) of Float;

   FA_3C   : Float_Array (1 .. 3);
   FA_Null : Float_Array (1 .. 0);

begin
```

(continues on next page)

[143] http://www.ada-auth.org/standards/22rm/html/RM-3-5.html
[144] http://www.ada-auth.org/standards/22rm/html/RM-4-10.html

(continued from previous page)

```
12    FA_3C   := [1.0, 3.0, 2.0];
13    FA_Null := [];
14
15    Put_Line ("FA_3C:   " & FA_3C'Image);
16    Put_Line ("FA_Null: " & FA_Null'Image);
17 end Show_Array_Image;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.Image_Attribute.Array_Image
MD5: a24daba1d92a139ae8995bba5a81e0d6
```

Runtime output

```
FA_3C:
[ 1.00000E+00,  3.00000E+00,  2.00000E+00]
FA_Null:
[]
```

In this example, we display the values of the three components of the FA_3C array. Also, we display the null array FA_Null.

Image attribute for tagged types

In addition to untagged types, we can also use the Image attribute with tagged types. For example:

Listing 503: simple_records.ads

```
1  package Simple_Records is
2
3     type Rec is tagged limited private;
4
5     function Init return Rec;
6
7     type Rec_Child is new Rec with private;
8
9     overriding function Init return Rec_Child;
10
11 private
12
13    type Status is (Unknown, Off, On);
14
15    type Rec is tagged limited record
16       F : Float;
17       I : Integer;
18    end record;
19
20    function Init return Rec is
21       ((F => 10.0, I => 4));
22
23    type Rec_Child is new Rec with record
24       Z : Status;
25    end record;
26
27    function Init return Rec_Child is
28       (Rec'(Init) with Z => Off);
29
30 end Simple_Records;
```

Listing 504: show_tagged_image.adb

```
with Ada.Text_IO;    use Ada.Text_IO;

with Simple_Records; use Simple_Records;

procedure Show_Tagged_Image is
   R       : constant Rec       := Init;
   R_Class : constant Rec'Class := Rec'(Init);
   R_C     : constant Rec_Child := Init;
begin
   Put_Line ("R:       " & R'Image);
   Put_Line ("R_Class: " & R_Class'Image);
   Put_Line ("R_A:     " & R_C'Image);
end Show_Tagged_Image;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.Image_Attribute.Tagged_Image
MD5: 496827d5f81f8b7bec3b1d4a104f550e
```

Runtime output

```
R:
(F =>  1.00000E+01,
 I =>  4)
R_Class: SIMPLE_RECORDS.REC'
(F =>  1.00000E+01,
 I =>  4)
R_A:
(F =>  1.00000E+01,
 I =>  4,
 Z => OFF)
```

In the Show_Tagged_Image procedure from this example, we display the contents of the R object of Rec type and the R_Class object of Rec'Class type. Also, we display the contents of the R_C object of the Rec_Child type, which is derived from the Rec type.

Image attribute for task and protected types

We can also apply the Image attribute to protected objects and tasks:

Listing 505: simple_tasking.ads

```
package Simple_Tasking is

   protected type Protected_Float (I : Integer) is

   private
      V : Float := Float (I);
   end Protected_Float;

   protected type Protected_Null is
   private
   end Protected_Null;

   task type T is
      entry Start;
   end T;

end Simple_Tasking;
```

Listing 506: simple_tasking.adb

```
package body Simple_Tasking is

   protected body Protected_Float is

   end Protected_Float;

   protected body Protected_Null is

   end Protected_Null;

   task body T is
   begin
      accept Start;
   end T;

end Simple_Tasking;
```

Listing 507: show_protected_task_image.adb

```
with Ada.Text_IO;    use Ada.Text_IO;

with Simple_Tasking; use Simple_Tasking;

procedure Show_Protected_Task_Image is

   PF : Protected_Float (0);
   PN : Protected_Null;
   T1 : T;

begin
   Put_Line ("PF: " & PF'Image);
   Put_Line ("PN: " & PN'Image);
   Put_Line ("T1: " & T1'Image);

   T1.Start;
end Show_Protected_Task_Image;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.Image_Attribute.Protected_Task_
 ↪Image
MD5: feb14f17ba1cca0311420272ef91ab38
```

Runtime output

```
PF: (protected object)
PN: (protected object)
T1: (task t1_00005AD5F7E90470)
```

In this example, we display information about the protected object PF, the componentless protected object PN and the task T1.

25.7.6 Put_Image aspect

Note

This feature was introduced in Ada 2022.

Overview

In the previous section, we discussed many details about the Image attribute. In the code examples from that section, we've seen the default behavior of this attribute: the string returned by the calls to Image was always in the format defined by the Ada standard.

In some situations, however, we might want to customize the string that is returned by the Image attribute of a type T. Ada allows us to do that via the Put_Image aspect. This is what we have to do:

1. Specify the Put_Image aspect for the type T and indicate a procedure with a specific parameter profile — let's say, for example, a procedure named P.
2. Implement the procedure P and write the information we want to use into a buffer (by calling the routines defined for Root_Buffer_Type, such as the Put procedure).

We can see these steps performed in the code example below:

Listing 508: show_put_image.ads

```
with Ada.Strings.Text_Buffers;

package Show_Put_Image is

   type T is null record
     with Put_Image => Put_Image_T;
   --     ^ Custom version of Put_Image

   use Ada.Strings.Text_Buffers;

   procedure Put_Image_T
     (Buffer : in out Root_Buffer_Type'Class;
      Arg    :        T);

end Show_Put_Image;
```

Listing 509: show_put_image.adb

```
package body Show_Put_Image is

   procedure Put_Image_T
     (Buffer : in out Root_Buffer_Type'Class;
      Arg    :        T) is
      pragma Unreferenced (Arg);
   begin
      --  Call Put with customized
      --  information
      Buffer.Put ("<custom info>");
   end Put_Image_T;

end Show_Put_Image;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.Put_Image.Simple_Put_Image
MD5: 45c55444f0e1825312b5eafe307ca58d
```

In the Show_Put_Image package, we use the Put_Image aspect in the declaration of the T type. There, we indicate that the Image attribute shall use the Put_Image_T procedure instead of the default version.

In the body of the Put_Image_T procedure, we implement our custom version of the Image attribute. We do that by calling the Put procedure with the information we want to provide in the Image attribute. Here, we access a buffer of Root_Buffer_Type type, which is defined

in the Ada.Strings.Text_Buffers package. (We discuss more about this package *later on* (page 615).)

In the Ada Reference Manual

- Image Attributes[145]

Complete Example of Put_Image

Let's see a complete example in which we use the Put_Image aspect and write useful information to the buffer:

Listing 510: custom_numerics.ads

```
with Ada.Strings.Text_Buffers;

package Custom_Numerics is

   type Float_Integer is record
     F : Float   := 0.0;
     I : Integer := 0;
   end record
     with Dynamic_Predicate =>
            Integer (Float_Integer.F) =
              Float_Integer.I,
          Put_Image         => Put_Float_Integer;
   --     ^ Custom version of Put_Image

   use Ada.Strings.Text_Buffers;

   procedure Put_Float_Integer
     (Buffer : in out Root_Buffer_Type'Class;
      Arg    :        Float_Integer);

end Custom_Numerics;
```

Listing 511: custom_numerics.adb

```
package body Custom_Numerics is

   procedure Put_Float_Integer
     (Buffer : in out Root_Buffer_Type'Class;
      Arg    :        Float_Integer) is
   begin
      --  Call Wide_Wide_Put with customized
      --  information
      Buffer.Wide_Wide_Put
        ("(F : "  & Arg.F'Wide_Wide_Image & ", "
         & "I : " & Arg.I'Wide_Wide_Image & ")");
   end Put_Float_Integer;

end Custom_Numerics;
```

Listing 512: show_put_image.adb

```
with Ada.Text_IO;     use Ada.Text_IO;

with Custom_Numerics; use Custom_Numerics;
```

(continues on next page)

[145] http://www.ada-auth.org/standards/22rm/html/RM-4-10.html

(continued from previous page)

```
4
5  procedure Show_Put_Image is
6     V : Float_Integer;
7  begin
8     V := (F => 100.2,
9           I => 100);
10    Put_Line ("V = "
11              & V'Image);
12 end Show_Put_Image;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.Put_Image.Put_Image_Custom_
 ↪Numerics
MD5: 1dbb5fa612b5ca86facc3e93b47977e0
```

Runtime output

```
V = (F :  1.00200E+02, I :  100)
```

In the `Custom_Numerics` package of this example, we specify the `Put_Image` aspect and indicate the `Put_Float_Integer` procedure. In that procedure, we display the information of components `F` and `I`. Then, in the `Show_Put_Image` procedure, we use the `Image` attribute for the `V` variable and see the information in the exact format we specified. (If you like to see the default version of the `Put_Image` instead, you may comment out the `Put_Image` aspect part in the declaration of `Float_Integer`.)

Relation to the `Image` attribute

Note that we cannot override the `Image` attribute directly — there's no `Image` *aspect* that we could specify. However, as we've just seen, we can do this indirectly by using our own version of the `Put_Image` procedure for a type `T`.

The `Image` attribute of a type `T` makes use of the procedure indicated in the `Put_Image` aspect. Let's say we have the following declaration:

```
type T is null record
  with Put_Image => Put_Image_T;
```

When we then use the `T'Image` attribute in our code, the custom `Put_Image_T` procedure is automatically called. This is a simplified example of how the `Image` function is implemented:

```
function Image (V : T)
                return String is
   Buffer : Custom_Buffer;
   --       ^ of Root_Buffer_Type'Class
begin
   --  Calling Put_Image procedure
   --  for type T
   Put_Image_T (Buffer, V);

   --  Retrieving the text from the
   --  buffer as a string
   return Buffer.Get;
end Image;
```

In other words, the `Image` attribute basically:

- calls the `Put_Image` procedure specified in the `Put_Image` aspect of type T's declaration and passes a buffer;

and

- retrieves the contents of the buffer as a string and returns it.

If the Put_Image aspect of type T isn't specified, the default version is used. (We've seen the default version of various types *in the previous section* (page 601) about the Image attribute.)

Put_Image and derived types

Types that were derived from untagged types (or null extensions) make use of the Put_Image procedure that was specified for their parent type — either a custom procedure indicated in the Put_Image aspect or the default one. Naturally, if a derived type has the Put_Image aspect, the procedure indicated in the aspect is used instead. For example:

Listing 513: untagged_put_image.ads

```
with Ada.Strings.Text_Buffers;

package Untagged_Put_Image is

   use Ada.Strings.Text_Buffers;

   type T is null record
     with Put_Image => Put_Image_T;

   procedure Put_Image_T
     (Buffer : in out Root_Buffer_Type'Class;
      Arg    :        T);

   type T_Derived_1 is new T;

   type T_Derived_2 is new T
     with Put_Image => Put_Image_T_Derived_2;

   procedure Put_Image_T_Derived_2
     (Buffer : in out Root_Buffer_Type'Class;
      Arg    :        T_Derived_2);

end Untagged_Put_Image;
```

Listing 514: untagged_put_image.adb

```
package body Untagged_Put_Image is

   procedure Put_Image_T
     (Buffer : in out Root_Buffer_Type'Class;
      Arg    :        T) is
      pragma Unreferenced (Arg);
   begin
      Buffer.Wide_Wide_Put ("Put_Image_T");
   end Put_Image_T;

   procedure Put_Image_T_Derived_2
     (Buffer : in out Root_Buffer_Type'Class;
      Arg    :        T_Derived_2) is
      pragma Unreferenced (Arg);
   begin
      Buffer.Wide_Wide_Put
        ("Put_Image_T_Derived_2");
   end Put_Image_T_Derived_2;

```

(continues on next page)

(continued from previous page)

```
20 end Untagged_Put_Image;
```

Listing 515: show_untagged_put_image.adb

```
1  with Ada.Text_IO;        use Ada.Text_IO;
2
3  with Untagged_Put_Image; use Untagged_Put_Image;
4
5  procedure Show_Untagged_Put_Image is
6     Obj_T           : T;
7     Obj_T_Derived_1 : T_Derived_1;
8     Obj_T_Derived_2 : T_Derived_2;
9  begin
10    Put_Line ("T'Image :           "
11              & Obj_T'Image);
12    Put_Line ("T_Derived_1'Image : "
13              & Obj_T_Derived_1'Image);
14    Put_Line ("T_Derived_2'Image : "
15              & Obj_T_Derived_2'Image);
16 end Show_Untagged_Put_Image;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.Put_Image.Untagged_Put_Image
MD5: acc0c17d45e6271cb582e65bfc8a2a98
```

Runtime output

```
T'Image :           Put_Image_T
T_Derived_1'Image : Put_Image_T
T_Derived_2'Image : Put_Image_T_Derived_2
```

In this example, we declare the type T and its derived types T_Derived_1 and T_Derived_2. When running this code, we see that:

- T_Derived_1 makes use of the Put_Image_T procedure from its parent.
  - Note that, if we remove the Put_Image aspect from the declaration of T, the default version of the Put_Image procedure is used for both T and T_Derived_1 types.
- T_Derived_2 makes use of the Put_Image_T_Derived_2 procedure, which was indicated in the Put_Image aspect of that type, instead of its parent's procedure.

Put_Image and tagged types

Types that are derived from a tagged type may also inherit the Put_Image aspect. However, there are a couple of small differences in comparison to untagged types, as we can see in the following example:

Listing 516: tagged_put_image.ads

```
1  with Ada.Strings.Text_Buffers;
2
3  package Tagged_Put_Image is
4
5     use Ada.Strings.Text_Buffers;
6
7     type T is tagged record
8        I : Integer := 0;
9     end record
```

(continues on next page)

(continued from previous page)

```
     with Put_Image => Put_Image_T;

   procedure Put_Image_T
     (Buffer : in out Root_Buffer_Type'Class;
      Arg    :        T);

   type T_Child_1 is new T with record
      I1 : Integer;
   end record;

   type T_Child_2 is new T with null record;

   type T_Child_3 is new T with record
      I3 : Integer := 0;
   end record
     with Put_Image => Put_Image_T_Child_3;

   procedure Put_Image_T_Child_3
     (Buffer : in out Root_Buffer_Type'Class;
      Arg    :        T_Child_3);

end Tagged_Put_Image;
```

Listing 517: tagged_put_image.adb

```
package body Tagged_Put_Image is

   procedure Put_Image_T
     (Buffer : in out Root_Buffer_Type'Class;
      Arg    :        T) is
      pragma Unreferenced (Arg);
   begin
      Buffer.Wide_Wide_Put ("Put_Image_T");
   end Put_Image_T;

   procedure Put_Image_T_Child_3
     (Buffer : in out Root_Buffer_Type'Class;
      Arg    :        T_Child_3) is
      pragma Unreferenced (Arg);
   begin
      Buffer.Wide_Wide_Put
        ("Put_Image_T_Child_3");
   end Put_Image_T_Child_3;

end Tagged_Put_Image;
```

Listing 518: show_tagged_put_image.adb

```
with Ada.Text_IO;      use Ada.Text_IO;

with Tagged_Put_Image; use Tagged_Put_Image;

procedure Show_Tagged_Put_Image is
   Obj_T         : T;
   Obj_T_Child_1 : T_Child_1;
   Obj_T_Child_2 : T_Child_2;
   Obj_T_Child_3 : T_Child_3;
begin
   Put_Line ("T'Image :         "
             & Obj_T'Image);
```

(continues on next page)

(continued from previous page)

```
13    Put_Line ("--------------------");
14    Put_Line ("T_Child_1'Image : "
15              & Obj_T_Child_1'Image);
16    Put_Line ("--------------------");
17    Put_Line ("T_Child_2'Image : "
18              & Obj_T_Child_2'Image);
19    Put_Line ("--------------------");
20    Put_Line ("T_Child_3'Image : "
21              & Obj_T_Child_3'Image);
22    Put_Line ("--------------------");
23    Put_Line ("T'Class'Image :   "
24              & T'Class (Obj_T_Child_1)'Image);
25 end Show_Tagged_Put_Image;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.Put_Image.Tagged_Put_Image
MD5: b19214bbcbc8c0339ead744afffcdd68
```

Runtime output

```
T'Image :         Put_Image_T
--------------------
T_Child_1'Image :
(Put_Image_T with I1 =>  0)
--------------------
T_Child_2'Image : Put_Image_T
--------------------
T_Child_3'Image : Put_Image_T_Child_3
--------------------
T'Class'Image :   TAGGED_PUT_IMAGE.T_CHILD_1'
(Put_Image_T with I1 =>  0)
```

In this example, we declare the type T and its derived types T_Child_1, T_Child_2 and T_Child_3. When running this code, we see that:

- for both T_Child_1 and T_Child_2, the parent's Put_Image aspect (the Put_Image_T procedure) is called and its information is combined with the information from the type extension;
  - For the T_Child_1 type, the I1 component of the type extension is displayed by calling a default version of the Put_Image procedure for that component — (Put_Image_T with I1 => 0) is displayed.
  - For the T_Child_2 type, no additional information is displayed because this type has a null extension.
- for the T_Child_3 type, the Put_Image_T_Child_3 procedure, which was indicated in the Put_Image aspect of the type, is used.

Finally, class-wide types (such as T'Class) include additional information. Here, the tag of the specific derived type is displayed first — in this case, the tag of the T_Child_1 type — and then the actual information for the derived type is displayed.

25.7.7 Universal text buffer

In the *previous section* (page 608), we've seen that the first parameter of the procedure indicated in the Put_Image aspect has the Root_Buffer_Type'Class type, which is defined in the Ada.Strings.Text_Buffers package. In this section, we talk more about this type and additional procedures associated with this type.

Note

This feature was introduced in Ada 2022.

Overview

We use the `Root_Buffer_Type'Class` type to implement a universal text buffer that is used to store and retrieve information about data types. Because this text buffer isn't associated with specific data types, it is universal — in the sense that we can really use it for any data type, regardless of the characteristics of this type.

In theory, we could use Ada's universal text buffer to implement applications that actually process text in some form — for example, when implementing a text editor. However, in general, Ada programmers are only expected to make use of the `Root_Buffer_Type'Class` type when implementing a procedure for the `Put_Image` aspect. For this reason, we won't discuss any kind of type derivation — or any other kind of usages of this type — in this section. Instead, we'll just focus on additional subprograms from the `Ada.Strings.Text_Buffers` package.

In the Ada Reference Manual

- Universal Text Buffers[146]

Additional procedures

In the previous section, we used the `Put` procedure — and the related `Wide_Put` and `Wide_Wide_Put` procedures — from the `Ada.Strings.Text_Buffers` package. In addition to these procedures, the package also includes:

- the `New_Line` procedure, which writes a new line marker to the text buffer;
- the `Increase_Indent` procedure, which increases the indentation in the text buffer; and
- the `Decrease_Indent` procedure, which decreases the indentation in the text buffer.

The `Ada.Strings.Text_Buffers` package also includes the `Current_Indent` function, which retrieves the current indentation counter.

Let's revisit an example from the previous section and use the procedures mentioned above:

Listing 519: custom_numerics.ads

```
with Ada.Strings.Text_Buffers;

package Custom_Numerics is

   type Float_Integer is record
     F : Float;
     I : Integer;
   end record
     with Dynamic_Predicate =>
            Integer (Float_Integer.F) =
              Float_Integer.I,
          Put_Image         => Put_Float_Integer;
   --      ^ Custom version of Put_Image

   use Ada.Strings.Text_Buffers;
```

(continues on next page)

[146] http://www.ada-auth.org/standards/22rm/html/RM-A-4-12.html

(continued from previous page)

```
16
17    procedure Put_Float_Integer
18      (Buffer : in out Root_Buffer_Type'Class;
19       Arg    :        Float_Integer);
20
21 end Custom_Numerics;
```

Listing 520: custom_numerics.adb

```
1  package body Custom_Numerics is
2
3     procedure Put_Float_Integer
4       (Buffer : in out Root_Buffer_Type'Class;
5        Arg    :        Float_Integer) is
6     begin
7        Buffer.Wide_Wide_Put ("(");
8        Buffer.New_Line;
9
10       Buffer.Increase_Indent;
11
12       Buffer.Wide_Wide_Put
13         ("F : "
14          & Arg.F'Wide_Wide_Image);
15       Buffer.New_Line;
16
17       Buffer.Wide_Wide_Put
18         ("I : "
19         & Arg.I'Wide_Wide_Image);
20
21       Buffer.Decrease_Indent;
22       Buffer.New_Line;
23
24       Buffer.Wide_Wide_Put (")");
25    end Put_Float_Integer;
26
27 end Custom_Numerics;
```

Listing 521: show_put_image.adb

```
1  with Ada.Text_IO;     use Ada.Text_IO;
2
3  with Custom_Numerics; use Custom_Numerics;
4
5  procedure Show_Put_Image is
6     V : Float_Integer;
7  begin
8     V := (F => 100.2,
9           I => 100);
10    Put_Line ("V = "
11              & V'Image);
12 end Show_Put_Image;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Strings.Universal_Text_Buffer.Put_Image_
 ↪Custom_Numerics
MD5: e976a2ade2ad4a10033924e19bc84159
```

Runtime output

```
V = (
   F :  1.00200E+02
   I :  100
)
```

In the body of the Put_Float_Integer procedure, we're using the New_Line, Increase_Indent and Decrease_Indent procedures to improve the format of the string returned by the Float_Integer'Image attribute. Using these procedures, you can create any kind of output format for your custom type.

25.8 Numerics

25.8.1 Numeric Literals

Classification

We've already discussed basic characteristics of numeric literals in the Introduction to Ada course — although we haven't used this terminology there. There are two kinds of numeric literals in Ada: integer literals and real literals. They are distinguished by the absence or presence of a radix point. For example:

Listing 522: real_integer_literals.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Real_Integer_Literals is
   Integer_Literal : constant := 365;
   Real_Literal    : constant := 365.2564;
begin
   Put_Line ("Integer Literal: "
             & Integer_Literal'Image);
   Put_Line ("Real Literal:    "
             & Real_Literal'Image);
end Real_Integer_Literals;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Numeric_Literals.Real_Integer_
↪Literals
MD5: ba1cc348cad054f3ab86c05e051b40fa
```

Runtime output

```
Integer Literal:  365
Real Literal:     3.652564000000000E+02
```

Another classification takes the use of a base indicator into account. (Remember that, when writing a literal such as 2#1011#, the base is the element before the first # sign.) So here we distinguish between decimal literals and based literals. For example:

Listing 523: decimal_based_literals.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Decimal_Based_Literals is

   package F_IO is new
     Ada.Text_IO.Float_IO (Float);

```

(continues on next page)

(continued from previous page)

```
   --
   --  DECIMAL LITERALS
   --

   Dec_Integer  : constant := 365;

   Dec_Real     : constant := 365.2564;
   Dec_Real_Exp : constant := 0.365_256_4e3;

   --
   --  BASED LITERALS
   --

   Based_Integer     : constant := 16#16D#;
   Based_Integer_Exp : constant := 5#243#e1;

   Based_Real        : constant :=
     2#1_0110_1101.0100_0001_1010_0011_0111#;
   Based_Real_Exp    : constant :=
     7#1.031_153_643#e3;
begin
   F_IO.Default_Fore := 3;
   F_IO.Default_Aft  := 4;
   F_IO.Default_Exp  := 0;

   Put_Line ("Dec_Integer:       "
             & Dec_Integer'Image);

   Put ("Dec_Real:           ");
   F_IO.Put (Item => Dec_Real);
   New_Line;

   Put ("Dec_Real_Exp:       ");
   F_IO.Put (Item => Dec_Real_Exp);
   New_Line;

   Put_Line ("Based_Integer:     "
             & Based_Integer'Image);
   Put_Line ("Based_Integer_Exp: "
             & Based_Integer_Exp'Image);

   Put ("Based_Real:         ");
   F_IO.Put (Item => Based_Real);
   New_Line;

   Put ("Based_Real_Exp:     ");
   F_IO.Put (Item => Based_Real_Exp);
   New_Line;
end Decimal_Based_Literals;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Numeric_Literals.Decimal_Based_
 ↪Literals
MD5: bde8f422c3844826819348d18fb48a33
```

Runtime output

```
Dec_Integer:        365
Dec_Real:           365.2564
Dec_Real_Exp:       365.2564
```

(continues on next page)

(continued from previous page)

```
Based_Integer:      365
Based_Integer_Exp:  365
Based_Real:         365.2564
Based_Real_Exp:     365.2564
```

Based literals use the base#number# format. Also, they aren't limited to simple integer literals such as 16#16D#. In fact, we can use a radix point or an exponent in based literals, as well as underscores. In addition, we can use any base from 2 up to 16. We discuss these aspects further in the next section.

Features and Flexibility

> **Note**
>
> This section was originally written by Franco Gasperoni and published as Gem #7: The Beauty of Numeric Literals in Ada[147].

Ada provides a simple and elegant way of expressing numeric literals. One of those simple, yet powerful aspects is the ability to use underscores to separate groups of digits. For example, 3.14159_26535_89793_23846_26433_83279_50288_41971_69399_37510 is more readable and less error prone to type than 3.14159265358979323846264338327950288419716939937510. Here's the complete code:

Listing 524: ada_numeric_literals.adb

```
with Ada.Text_IO;

 procedure Ada_Numeric_Literals is
    Pi   : constant :=
      3.14159_26535_89793_23846_26433_83279_50288_41971_69399_37510;

    Pi2  : constant :=
      3.14159265358979323846264338327950288419716939937510;

    Z    : constant := Pi - Pi2;
    pragma Assert (Z = 0.0);

    use Ada.Text_IO;
 begin
    Put_Line ("Z = " & Float'Image (Z));
 end Ada_Numeric_Literals;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Numeric_Literals.Pi_Literals
MD5: 8f6516730fa98f08234b159488431aaf
```

Runtime output

```
Z =  0.00000E+00
```

Also, when using based literals, Ada allows any base from 2 to 16. Thus, we can write the decimal number 136 in any one of the following notations:

[147] https://www.adacore.com/gems/ada-gem-7

Listing 525: ada_numeric_literals.adb

```
with Ada.Text_IO;

procedure Ada_Numeric_Literals is
   Bin_136 : constant := 2#1000_1000#;
   Oct_136 : constant := 8#210#;
   Dec_136 : constant := 10#136#;
   Hex_136 : constant := 16#88#;
   pragma Assert (Bin_136 = 136);
   pragma Assert (Oct_136 = 136);
   pragma Assert (Dec_136 = 136);
   pragma Assert (Hex_136 = 136);

   use Ada.Text_IO;

begin
   Put_Line ("Bin_136 = "
             & Integer'Image (Bin_136));
   Put_Line ("Oct_136 = "
             & Integer'Image (Oct_136));
   Put_Line ("Dec_136 = "
             & Integer'Image (Dec_136));
   Put_Line ("Hex_136 = "
             & Integer'Image (Hex_136));
end Ada_Numeric_Literals;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Numeric_Literals.Based_Literals
MD5: 0959ec5e4aafcde245c5a15597ac9b7e
```

Runtime output

```
Bin_136 =  136
Oct_136 =  136
Dec_136 =  136
Hex_136 =  136
```

In other languages

The rationale behind the method to specify based literals in the C programming language is strange and unintuitive. Here, you have only three possible bases: 8, 10, and 16 (why no base 2?). Furthermore, requiring that numbers in base 8 be preceded by a zero feels like a bad joke on us programmers. For example, what values do `0210` and `210` represent in C?

When dealing with microcontrollers, we might encounter I/O devices that are memory mapped. Here, we have the ability to write:

```
Lights_On  : constant := 2#1000_1000#;
Lights_Off : constant := 2#0111_0111#;
```

and have the ability to turn on/off the lights as follows:

```
Output_Devices := Output_Devices or  Lights_On;
Output_Devices := Output_Devices and Lights_Off;
```

Here's the complete example:

Listing 526: ada_numeric_literals.adb

```
with Ada.Text_IO;

procedure Ada_Numeric_Literals is
   Lights_On  : constant := 2#1000_1000#;
   Lights_Off : constant := 2#0111_0111#;

   type Byte is mod 256;
   Output_Devices : Byte := 0;

   --  for Output_Devices'Address
   --    use 16#DEAD_BEEF#;
   --  ^^^^^^^^^^^^^^^^^^^^^^^^^
   --  Memory mapped Output

   use Ada.Text_IO;
begin
   Output_Devices := Output_Devices or
                     Lights_On;

   Put_Line ("Output_Devices (lights on ) = "
             & Byte'Image (Output_Devices));

   Output_Devices := Output_Devices and
                     Lights_Off;

   Put_Line ("Output_Devices (lights off) = "
             & Byte'Image (Output_Devices));
end Ada_Numeric_Literals;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Numeric_Literals.Literal_Lights
MD5: c3e72b25366d8d815a1f425f2695ad0b
```

Runtime output

```
Output_Devices (lights on ) =  136
Output_Devices (lights off) =  0
```

Of course, we can also use *records with representation clauses* (page 369) to do the above, which is even more elegant.

The notion of base in Ada allows for exponents, which is particularly pleasant. For instance, we can write:

Listing 527: literal_binaries.ads

```
package Literal_Binaries is
   Kilobyte  : constant := 2#1#e+10;
   Megabyte  : constant := 2#1#e+20;
   Gigabyte  : constant := 2#1#e+30;
   Terabyte  : constant := 2#1#e+40;
   Petabyte  : constant := 2#1#e+50;
   Exabyte   : constant := 2#1#e+60;
   Zettabyte : constant := 2#1#e+70;
   Yottabyte : constant := 2#1#e+80;
end Literal_Binaries;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Numeric_Literals.Literal_Binary
MD5: 98d971e0f170db570069f8868e442d6d
```

In based literals, the exponent — like the base — uses the regular decimal notation and specifies the power of the base that the based literal should be multiplied with to obtain the final value. For instance `2#1#e+10` = 1 x 2^{10} = `1_024` (in base 10), whereas `16#F#e+2` = 15 x 16^2 = 15 x 256 = `3_840` (in base 10).

Based numbers apply equally well to real literals. We can, for instance, write:

```
One_Third : constant := 3#0.1#;
--                      ^^^^^^
--                  same as 1.0/3
```

Whether we write `3#0.1#` or `1.0 / 3`, or even `3#1.0#e-1`, Ada allows us to specify exactly rational numbers for which decimal literals cannot be written.

The last nice feature is that Ada has an open-ended set of integer and real types. As a result, numeric literals in Ada do not carry with them their type as, for example, in C. The actual type of the literal is determined from the context. This is particularly helpful in avoiding overflows, underflows, and loss of precision.

In other languages

In C, a source of confusion can be the distinction between `32l` and `321`. Although both look similar, they're actually very different from each other.

And this is not all: all constant computations done at compile time are done in infinite precision, be they integer or real. This allows us to write constants with whatever size and precision without having to worry about overflow or underflow. We can for instance write:

```
Zero : constant := 1.0 - 3.0 * One_Third;
```

and be guaranteed that constant `Zero` has indeed value zero. This is very different from writing:

```
One_Third_Approx : constant :=
  0.33333333333333333333333333333;
Zero_Approx      : constant :=
  1.0 - 3.0 * One_Third_Approx;
```

where `Zero_Approx` is really `1.0e-29` — and that will show up in your numerical computations. The above is quite handy when we want to write fractions without any loss of precision. Here's the complete code:

Listing 528: ada_numeric_literals.adb

```
1  with Ada.Text_IO;
2
3  procedure Ada_Numeric_Literals is
4     One_Third : constant := 3#1.0#e-1;
5     --  same as 1.0/3.0
6
7     Zero      : constant := 1.0 - 3.0 * One_Third;
8     pragma Assert (Zero = 0.0);
9
10    One_Third_Approx : constant :=
11      0.33333333333333333333333333333;
12    Zero_Approx      : constant :=
13      1.0 - 3.0 * One_Third_Approx;
```

(continues on next page)

(continued from previous page)

```
14
15    use Ada.Text_IO;
16
17 begin
18    Put_Line ("Zero        = "
19              & Float'Image (Zero));
20    Put_Line ("Zero_Approx = "
21              & Float'Image (Zero_Approx));
22 end Ada_Numeric_Literals;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Numeric_Literals.Literals
MD5: ee604245b34e8cb878a8ebdb21cd564e
```

Runtime output

```
Zero        =  0.00000E+00
Zero_Approx =  1.00000E-29
```

Along these same lines, we can write:

Listing 529: ada_numeric_literals.adb

```
1  with Ada.Text_IO;
2
3  with Literal_Binaries; use Literal_Binaries;
4
5  procedure Ada_Numeric_Literals is
6
7     Big_Sum : constant := 1         +
8                           Kilobyte  +
9                           Megabyte  +
10                          Gigabyte  +
11                          Terabyte  +
12                          Petabyte  +
13                          Exabyte   +
14                          Zettabyte;
15
16    Result : constant := (Yottabyte - 1) /
17                         (Kilobyte - 1);
18
19    Nil    : constant := Result - Big_Sum;
20    pragma Assert (Nil = 0);
21
22    use Ada.Text_IO;
23
24 begin
25    Put_Line ("Nil         = "
26              & Integer'Image (Nil));
27 end Ada_Numeric_Literals;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Numeric_Literals.Literal_Binary
MD5: 7bda6442e68271d12bdb827b63f0d702
```

Runtime output

```
Nil         =  0
```

and be guaranteed that `Nil` is equal to zero.

25.8.2 Universal Numeric Types

Previously, we introduced the concept of *universal types* (page 300). Three of them are numeric types: universal real, universal integer and universal fixed types. In this section, we discuss these universal numeric types in more detail.

Universal Real and Integer

Universal real and integer types are mainly used in the declaration of *named numbers* (page 285):

Listing 530: show_universal_real_integer.ads

```
1  package Show_Universal_Real_Integer is
2
3     Pi : constant := 3.1415926535;
4     --               ^^^^^^^^^^^
5     --            universal real type
6
7     N  : constant := 10;
8     --               ^^
9     --        universal integer type
10
11 end Show_Universal_Real_Integer;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Universal_Numeric_Types.
 ↪Universal_Real_Integer
MD5: 3cfa52af66185c693ede07f3b0e689e6
```

The type of a named number is implied by the type of the *numeric literal* (page 618) and the type of any named numbers that we use in the *static expression* (page 625). (We discuss static expressions next.) In this specific example, we declare `Pi` using a real literal, which implies that it's a named number of universal real type. Likewise, `N` is of universal integer type because we use an integer literal in its declaration.

In the Ada Reference Manual

- 3.3.2 Number Declarations[148]

Static expressions

As we've just seen, we can use an expression in the declaration of a named number. This expression is static, as it's always evaluated at compile time. Therefore, we must use the keyword **`constant`** in the declaration of named numbers.

If all components of the static expression are of universal integer type, then the named number is of universal integer type. Otherwise, the static expression is of universal real type. For example, if the first element of a static expression is of universal integer type, but we have a constant of universal real type in the same expression, then the type of the whole static expression is universal real:

Listing 531: static_expressions.ads

```
1  package Static_Expressions is
2
```

(continues on next page)

[148] http://www.ada-auth.org/standards/22rm/html/RM-3-3-2.html

(continued from previous page)

```
   Two_Pi : constant := 2 * 3.1415926535;
   --                   ^
   --               universal integer type
   --
   --                           ^^^^^^^^^^^^
   --                  universal real type
   --
   --      => result: universal real type

end Static_Expressions;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Universal_Numeric_Types.Static_
 ↪Expressions
MD5: 3429db9e1a7c4d4fe7d94e82159c3cb8
```

In this example, the static expression is of universal real type because of the real literal (`3.1415926535`) — even though we have the universal integer `2` in the expression.

Likewise, if we use a constant of universal real type in the static expression, the result is of universal real type:

Listing 532: static_expressions.ads

```
package Static_Expressions is

   Pi     : constant := 3.1415926535;
   --                   ^^^^^^^^^^^^
   --                universal real type

   Two_Pi : constant := 2 * Pi;
   --                   ^
   --               universal integer type
   --
   --                           ^^
   --                  universal real type
   --
   --      => result: universal real type

end Static_Expressions;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Universal_Numeric_Types.Static_
 ↪Expressions
MD5: 599494102c4e5e5979a6e0071412da78
```

In this example, the result of the static expression is of universal real type because of we're using the named number `Pi`, which is of universal real type.

Complexity of static expressions

The operations that we use in static expressions may be arbitrarily complex. For example:

Listing 533: static_expressions.ads

```
package Static_Expressions is

   C1 : constant := 300_453.5;
```

(continues on next page)

(continued from previous page)

```
   C2 : constant := 455_233.5 * C1;
   C3 : constant := 872_922.5 * C2;
   C4 : constant := 155_277.5 * C1 + C2 / C3;
   C5 : constant := 2.0 * C1 +
                    3.0 * (C2 / (C4 * C3)) +
                    4.0 * (C1 / (C2 * C2)) +
                    5.0 * (C3 / (C1 * C1));

end Static_Expressions;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Universal_Numeric_Types.Static_
 ↪Expressions
MD5: ebdd5b1c64ad1944931a962756e72291
```

As we can see in this example, we may create a chain of dependencies, where the result of a static expression depends on the result of previously evaluated static expressions. For instance, C5 depends on the evaluation of C1, C2, C3, C4.

Accuracy of static expressions

The accuracy and range of numeric literals used in static expressions may be arbitrarily high as well:

Listing 534: static_expressions.ads

```
package Static_Expressions is

   Pi : constant :=
      3.14159_26535_89793_23846_26433_83279_50288;

   Seed : constant :=
      143_574_786_272_784_656_928_283_872_972_764;

   Super_Seed : constant :=
      Seed * Seed * Seed * Seed * Seed * Seed;

end Static_Expressions;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Universal_Numeric_Types.Static_
 ↪Expressions
MD5: 777574a29ffa6da8bffb4287dee45be8
```

In this example, Super_Seed has a value that is above the typical range of integer constants. This might become challenging when using such named numbers in actual computations, as we *discuss soon* (page 631).

Another example is when the result of the expression is a repeating decimal[149]:

Listing 535: repeating_decimals.ads

```
package Repeating_Decimals is

   One_Over_Three : constant :=
      1.0 / 3.0;
```

(continues on next page)

[149] https://en.wikipedia.org/wiki/Repeating_decimal

(continued from previous page)

```
5
6  end Repeating_Decimals;
```

Listing 536: show_repeating_decimals.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  with Repeating_Decimals;
4  use  Repeating_Decimals;
5
6  procedure Show_Repeating_Decimals is
7     F_1_3    : constant Float           :=
8                   One_Over_Three;
9     LF_1_3   : constant Long_Float      :=
10                  One_Over_Three;
11    LLF_1_3  : constant Long_Long_Float :=
12                  One_Over_Three;
13 begin
14    Put_Line (F_1_3'Image);
15    Put_Line (LF_1_3'Image);
16    Put_Line (LLF_1_3'Image);
17 end Show_Repeating_Decimals;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Universal_Numeric_Types.
 ↪Repeating_Decimal
MD5: 4fc38ef6482e403d655b4662d4199abb
```

Runtime output

```
 3.33333E-01
 3.33333333333333E-01
 3.33333333333333333E-01
```

In this example, as expected, we see that the accuracy of the value we display increases if we use a type with higher precision. This wouldn't be possible if we had used a floating-point type with limited precision for the One_Over_Three constant:

Listing 537: repeating_decimals.ads

```
1  package Repeating_Decimals is
2
3     One_Over_Three : constant Long_Float :=
4        1.0 / 3.0;
5     --                          ^^^^^^^^^^
6     --          using Long_Float instead of
7     --              universal real type
8
9  end Repeating_Decimals;
```

Listing 538: show_repeating_decimals.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  with Repeating_Decimals;
4  use  Repeating_Decimals;
5
6  procedure Show_Repeating_Decimals is
7     F_1_3    : constant Float           :=
```

(continues on next page)

(continued from previous page)

```
                Float (One_Over_Three);
   LF_1_3   : constant Long_Float      :=
                Long_Float (One_Over_Three);
   LLF_1_3  : constant Long_Long_Float :=
                Long_Long_Float (One_Over_Three);
begin
   Put_Line (F_1_3'Image);
   Put_Line (LF_1_3'Image);
   Put_Line (LLF_1_3'Image);
end Show_Repeating_Decimals;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Universal_Numeric_Types.
 ↪Repeating_Decimal
MD5: d0fa105d679cc246e2e8baf37cbe48c4
```

Runtime output

```
 3.33333E-01
 3.33333333333333E-01
 3.33333333333333315E-01
```

Because we're using the **Long_Float** type for the One_Over_Three constant instead of the universal real type, the accuracy doesn't increase when we use the **Long_Long_Float** type — as we see in the value of the LLF_1_3 constant — even though this type has a higher precision.

For further reading...

When using *big numbers* (page 644), you could simply assign the named number One_Over_Three to a big real:

Listing 539: repeating_decimals.ads

```
package Repeating_Decimals is

   One_Over_Three : constant :=
      1.0 / 3.0;

end Repeating_Decimals;
```

Listing 540: show_repeating_decimals.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Ada.Numerics.Big_Numbers.Big_Reals;
use  Ada.Numerics.Big_Numbers.Big_Reals;

with Repeating_Decimals;
use  Repeating_Decimals;

procedure Show_Repeating_Decimals is
   BR_1_3 : constant Big_Real := One_Over_Three;
begin
   Put_Line ("BR: "
             & To_String (Arg   => BR_1_3,
                          Fore  => 2,
                          Aft   => 31,
                          Exp   => 0));
end Show_Repeating_Decimals;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Universal_Numeric_Types.
↪Repeating_Decimal
MD5: 4f1981b785baa35704c85e7e688c8ce4
```

Runtime output

```
BR:  0.3333333333333333333333333333333
```

Another approach is to use the division operation directly:

Listing 541: show_repeating_decimals.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Ada.Numerics.Big_Numbers.Big_Reals;
use  Ada.Numerics.Big_Numbers.Big_Reals;

with Repeating_Decimals;
use  Repeating_Decimals;

procedure Show_Repeating_Decimals is
   BR_1_3   : constant Big_Real := 1 / 3;
begin
   Put_Line ("BR: "
             & To_String (Arg   => BR_1_3,
                          Fore  => 2,
                          Aft   => 31,
                          Exp   => 0));
end Show_Repeating_Decimals;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Universal_Numeric_Types.
↪Repeating_Decimal
MD5: 5fc195f9fbab3b1ec74c507780a44ec8
```

Runtime output

```
BR:  0.3333333333333333333333333333333
```

We talk more about *big real and quotients* (page 657) later on.

Conversion of universal real and integer

Although a named number exists as an numeric representation form in Ada, the value it represents cannot be used directly at runtime — even if we *just* display the value of the constant at runtime, for example. In fact, a conversion to a non-universal type is required in order to use the named number anywhere else other than a static expression:

Listing 542: static_expressions.ads

```
package Static_Expressions is

   Pi : constant :=
      3.14159_26535_89793_23846_26433_83279_50288;

   Seed : constant :=
      143_574_786_272_784_656_928_283_872_972_764;

   Super_Seed : constant :=
      Seed * Seed * Seed * Seed * Seed * Seed;

end Static_Expressions;
```

Listing 543: show_static_expressions.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Static_Expressions;
use  Static_Expressions;

procedure Show_Static_Expressions is
begin
   Put_Line (Pi'Image);
   --  Same as:
   --  Put_Line (Float (Pi)'Image);

   Put_Line (Seed'Image);
   --  Same as:
   --  Put_Line (
   --    Long_Long_Long_Integer (Seed)'Image);
end Show_Static_Expressions;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Universal_Numeric_Types.
 ↪Conversion_To_Non_Universal_Types
MD5: e50641737f970b935e853ac249dd83d8
```

Runtime output

```
 3.14159265358979324E+00
 143574786272784656928283872972764
```

As we see in this example, the named number Pi is converted to **Float** before being used as an actual parameter in the call to Put_Line. Similarly, Seed is converted to Long_Long_Long_Integer.

When we use the Image attribute, the compiler automatically selects a numeric type which has a suitable range for the named number. In the example above, we wouldn't be able to represent the value of Seed with **Integer**, so the compiler selected Long_Long_Long_Integer. Of course, we could have also specified the type by using explicit *type conversions* (page 317) or a *qualified expressions* (page 336):

Listing 544: show_static_expressions.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Static_Expressions;
use  Static_Expressions;

procedure Show_Static_Expressions is
begin
   Put_Line (Long_Long_Float (Pi)'Image);
   Put_Line (Long_Long_Float'(Pi)'Image);
end Show_Static_Expressions;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Universal_Numeric_Types.
 ↪Conversion_To_Non_Universal_Types
MD5: 18bcc3bffd51ebc1bc98976ed1597f01
```

Runtime output

```
 3.14159265358979324E+00
 3.14159265358979324E+00
```

Now, we're explicitly converting to **Long_Long_Float** in the first call to Put_Line and using a qualified expression in the second call to Put_Line.

A conversion is also performed when we use a named number in an object declaration:

Listing 545: show_static_expressions.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Static_Expressions;
use  Static_Expressions;

procedure Show_Static_Expressions is
   Two_Pi : constant Float := 2.0 * Pi;
   --  Same as:
   --  Two_Pi: constant Float :=
   --            2.0 * Float (Pi);

   Two_Pi_More_Precise :
     constant Long_Long_Float := 2.0 * Pi;
   --  Same as:
   --  Two_Pi_More_Precise :
   --    constant Long_Long_Float :=
   --      2.0 * Long_Long_Float (Pi);
begin
   Put_Line (Two_Pi'Image);
   Put_Line (Two_Pi_More_Precise'Image);
end Show_Static_Expressions;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Universal_Numeric_Types.
 ↪Conversion_To_Non_Universal_Types
MD5: c918cdcb4e927cfbc1fbe6ffb0277178
```

Runtime output

```
6.28319E+00
6.28318530717958648E+00
```

In this example, Pi is converted to **Float** in the declaration of Two_Pi because we use the **Float** type in its declaration. Likewise, Pi is converted to **Long_Long_Float** in the declaration of Two_Pi_More_Precise because we use the **Long_Long_Float** type in its declaration. (Actually, the same conversion is performed for each instance of the real literal 2.0 in this example.)

Note that the range of the type we select might not be suitable for the named number we want to use. For example:

Listing 546: show_static_expressions.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Static_Expressions;
use  Static_Expressions;

procedure Show_Static_Expressions is
   Initial_Seed : constant
     Long_Long_Long_Integer :=
       Super_Seed;
begin
   Put_Line (Initial_Seed'Image);
end Show_Static_Expressions;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Universal_Numeric_Types.
 ↪Conversion_To_Non_Universal_Types
MD5: 2f8e26fbcd0b5defd94ffef570c0f087
```

Build output

```
show_static_expressions.adb:9:08: error: value not in range of type "Standard.Long_
 ↪Long_Long_Integer"
show_static_expressions.adb:9:08: error: static expression fails Constraint_Check
gprbuild: *** compilation phase failed
```

In this example, we get a compilation error because the range of the Long_Long_Long_Integer type isn't enough to store the value of the Super_Seed.

For further reading...

To circumvent the compilation error in the code example we've just seen, the best alternative to use *big numbers* (page 644) — we discuss this topic later on in this chapter:

Listing 547: show_static_expressions.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Ada.Numerics.Big_Numbers.Big_Integers;
use  Ada.Numerics.Big_Numbers.Big_Integers;

with Static_Expressions;
use  Static_Expressions;

procedure Show_Static_Expressions is
   Initial_Seed : constant
     Big_Integer :=
       Super_Seed;
```

```
begin
   Put_Line (Initial_Seed'Image);
end Show_Static_Expressions;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Universal_Numeric_Types.
 ↪Conversion_To_Non_Universal_Types
MD5: bf1511f1b8bf3965baa86b953c56c406
```

Runtime output

```
␣
 ↪875929334140942197322254642884166058556995648205079468601338759565501436645446643560818669877
```

By changing the type from `Long_Long_Long_Integer` to `Big_Integer`, we get rid of the compilation error. (The value of `Super_Seed` — stored in `Initial_Seed` — is displayed at runtime.)

Universal Fixed

For fixed-point types, we also have a corresponding universal type. However, in contrast to the universal real and integer types, universal fixed types aren't an abstraction used in static expressions, but rather a concept that permeates actual fixed-point types. In fact, for *fixed-point types* (page 678), some operations are accomplished via universal fixed types — for example, the conversion between fixed-point types and the multiplication and division operations.

Let's start by analyzing how floating-point and integer types associate their operations to the specific type of an object. For example, if we have an object `A` of type **`Float`** in a multiplication, we cannot just write `A * B` if we want to multiply `A` by an object `B` of another floating-point type — if `B` is of type **`Long_Float`**, for example, writing `A * B` triggers a compilation error. (Otherwise, which precision should be used for the result?) Therefore, we have to convert one of the objects to have matching types:

Listing 548: show_float_multiplication_mismatch.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Float_Multiplication_Mismatch is
   F  : Float      := 0.25;
   LF : Long_Float := 0.50;
begin
   F := F * LF;
   Put_Line ("F = " & F'Image);
end Show_Float_Multiplication_Mismatch;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Universal_Types.Float_
 ↪Multiplication
MD5: 88ce3a0f29e2bd31ddfc491557d7f0e3
```

Build output

```
show_float_multiplication_mismatch.adb:7:11: error: invalid operand types for␣
 ↪operator "*"
show_float_multiplication_mismatch.adb:7:11: error: left operand has type
 ↪"Standard.Float"
show_float_multiplication_mismatch.adb:7:11: error: right operand has type
 ↪"Standard.Long_Float"
gprbuild: *** compilation phase failed
```

This code example fails to compile because of the F * LF operation. (We could correct the code by writing F * **Float** (LF), for example.)

In contrast, for fixed-point types, we can mix objects of different types in a multiplication or division. (In this case, mixing is allowed for the convenience of the programmer.) For example:

Listing 549: normalized_fixed_point_types.ads

```
package Normalized_Fixed_Point_Types is

   type TQ31 is
     delta 2.0 ** (-31)
     range -1.0 .. 1.0 - 2.0 ** (-31);

   type TQ15 is
     delta 2.0 ** (-15)
     range -1.0 .. 1.0 - 2.0 ** (-15);

end Normalized_Fixed_Point_Types;
```

Listing 550: show_fixed_multiplication.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Normalized_Fixed_Point_Types;
use  Normalized_Fixed_Point_Types;

procedure Show_Fixed_Multiplication is
   A : TQ15 := 0.25;
   B : TQ31 := 0.50;
begin
   A := A * B;
   Put_Line ("A = " & A'Image);
end Show_Fixed_Multiplication;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Universal_Types.Fixed_Point_
 ↪Multiplication
MD5: a4cefdc29a562fbec30b6864b6ec2602
```

Runtime output

```
A =  0.12500
```

In this example, the A * B is accepted by the compiler, even though A and B have different types. This is only possible because the multiplication operation of fixed-point types makes use of the universal fixed type. In other words, the multiplication operation in this code example doesn't operate directly on the fixed-point type TQ31. Instead, it converts A and B to the universal fixed type, performs the operation using this type, and converts back to the original type — TQ15 in this case.

In addition to the multiplication operation, other operations such as the conversion between fixed-point types and the division operations make use of universal fixed types:

Listing 551: custom_decimal_types.ads

```
package Custom_Decimal_Types is

  type T3_D3 is delta 10.0 ** (-3) digits 3;
  type T3_D6 is delta 10.0 ** (-3) digits 6;
```

(continues on next page)

(continued from previous page)

```
  type T6_D6 is delta 10.0 ** (-6) digits 6;

end Custom_Decimal_Types;
```

Listing 552: show_universal_fixed.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Custom_Decimal_Types;
use  Custom_Decimal_Types;

procedure Show_Universal_Fixed is
  Val_T3_D3 : T3_D3;
  Val_T3_D6 : T3_D6;
  Val_T6_D6 : T6_D6;
begin
   Val_T3_D3 := 0.65;

   Val_T3_D6 := T3_D6 (Val_T3_D3);
   --           ^^^^^^^^^^^^^^^^^
   --      type conversion using
   --       universal fixed type

   Val_T6_D6 := T6_D6 (Val_T3_D6);
   --           ^^^^^^^^^^^^^^^^^
   --      type conversion using
   --       universal fixed type

   Put_Line ("Val_T3_D3 = "
             & Val_T3_D3'Image);
   Put_Line ("Val_T3_D6 = "
             & Val_T3_D6'Image);
   Put_Line ("Val_T6_D6 = "
             & Val_T3_D6'Image);
   Put_Line ("-----------------");

   Val_T3_D6 := Val_T6_D6 * 2.0;
   --           ^^^^^^^^^^^^^^^
   --    using universal fixed type for
   --      the multiplication operation
   Put_Line ("Val_T3_D6 = "
             & Val_T3_D6'Image);

   Val_T3_D6 := Val_T6_D6 / Val_T3_D3;
   --           ^^^^^^^^^^^^^^^^^^^^
   --      different fixed-point types:
   --    using universal fixed type for
   --           the division operation
   Put_Line ("Val_T3_D6 = "
             & Val_T3_D6'Image);

end Show_Universal_Fixed;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Universal_Types.Universal_Fixed
MD5: 1e253d8a39576f817b2130aa35929d96
```

Runtime output

```
Val_T3_D3 =  0.650
Val_T3_D6 =  0.650
Val_T6_D6 =  0.650
-----------------
Val_T3_D6 =  1.300
Val_T3_D6 =  1.000
```

In this example, the conversion from the fixed-point type `T3_D3` to the `T3_D6` and `T6_D6` types is performed via universal fixed types.

Similarly, the multiplication operation `Val_T6_D6 * 2.0` uses universal fixed types. Here, we're actually multiplying a variable of type `T6_D6` by two and assigning it to a variable of type `Val_T3_D6`. Although these variable have different fixed-point types, no explicit conversion (e.g.: `Val_T3_D6 := T3_D6 (Val_T6_D6 * 2.0);`) is required in this case because the result of the operation is of universal fixed type, so that it can be assigned to a variable of any fixed-point type.

Finally, in the `Val_T3_D6 := Val_T6_D6 / Val_T3_D3` statement, we're using three fixed-point types: we're dividing a variable of type `T6_D6` by a variable of type `T3_D3`, and assigning it to a variable of type `T3_D6`. All these operations are only possible without explicit type conversions because the underlying types for the fixed-point division operation are universal fixed types.

For further reading...

It's possible to implement custom `*` and `/` operators for fixed-point types. However, those operators do **not** override the corresponding operators for universal fixed-point types. For example:

Listing 553: normalized_fixed_point_types.ads

```
1  package Normalized_Fixed_Point_Types is
2
3     type TQ63 is
4       delta 2.0 ** (-63)
5       range -1.0 .. 1.0 - 2.0 ** (-63);
6
7     type TQ31 is
8       delta 2.0 ** (-31)
9       range -1.0 .. 1.0 - 2.0 ** (-31);
10
11    overriding
12    --  ^^^^^^
13    --  "+" operator is overriding!
14    function "+" (L, R : TQ31)
15                  return TQ31;
16
17    not overriding
18    --  ^^^^^^^^^^
19    --  "*" operator is NOT overriding!
20    function "*" (L, R : TQ31)
21                  return TQ31;
22
23    type TQ15 is
24      delta 2.0 ** (-15)
25      range -1.0 .. 1.0 - 2.0 ** (-15);
26
27 end Normalized_Fixed_Point_Types;
```

Listing 554: normalized_fixed_point_types.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Normalized_Fixed_Point_Types is

   function "+" (L, R : TQ31)
                 return TQ31 is
   begin
      Put_Line
        ("=> Overriding '+'");
      return TQ31 (TQ63 (L) + TQ63 (R));
   end "+";

   function "*" (L, R : TQ31)
                 return TQ31 is
   begin
      Put_Line
        ("=> Custom "
         & "non-overriding '*'");
      return TQ31 (TQ63 (L) * TQ63 (R));
   end "*";

end Normalized_Fixed_Point_Types;
```

Listing 555: show_fixed_multiplication.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Normalized_Fixed_Point_Types;
use  Normalized_Fixed_Point_Types;

procedure Show_Fixed_Multiplication is
   Q31_A : TQ31 := 0.25;
   Q31_B : TQ31 := 0.50;
   Q15_A : TQ15 := 0.25;
   Q15_B : TQ15 := 0.50;
begin
   Q31_A := Q31_A * Q31_B;
   Put_Line ("Q31_A = " & Q31_A'Image);

   Q15_A := Q15_A * Q15_B;
   Put_Line ("Q15_A = " & Q31_A'Image);

   Q15_A := TQ15 (Q31_A) * Q15_B;
   --       ^^^^^^^^^^^^
   --  A conversion is required because of
   --  the multiplication operator of
   --  TQ15.
   Put_Line ("Q31_A = " & Q31_A'Image);
end Show_Fixed_Multiplication;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Universal_Types.Fixed_Point_
 ↪Custom_Multiplication
MD5: 954ada297ac676ab1f11447083d87882
```

Runtime output

```
=> Custom non-overriding '*'
Q31_A =  0.1250000000
Q15_A =  0.1250000000
Q31_A =  0.1250000000
```

In this example, we're declaring a custom multiplication operator for the TQ31 type. As we can see in the declaration, we specify that it's `not overriding` the * operator. (Removing the `not` keyword triggers a compilation error.) In contrast, for the + operator, we're indeed overriding the default + operator of the TQ31 type in the Normalized_Fixed_Point_Types because the addition operator is associated with its corresponding fixed-point type, not with the universal fixed-point type. In the `Q31_A := Q31_A * Q31_B` statement, we see at runtime (through the "=> Custom non-overriding '*'" message) that the custom multiplication is being used.

However, because of this custom * operator, we cannot mix objects of this type with objects of other fixed-point types in multiplication or division operations. Therefore, for a statement such as `Q15_A := Q31_A * Q15_B`, we have to convert Q31_A to the TQ15 type before multiplying it by Q15_B.

In the Ada Reference Manual

- 4.5.5 Multiplying Operators[150]

25.8.3 Base types

You might remember our discussion on *root types* (page 301) and the corresponding numeric root types.

Ada also has the concept of base types, which *sounds* similar to the concept of the root type. However, the focus of each one is different: while the the root type refers to the derivation tree of a type, the base type refers to the constraints of a type.

In fact, the base type denotes the unconstrained underlying hardware representation selected for a given numeric type. For example, if we were making use of a constrained type T, the compiler would select a type based on the hardware characteristics that has sufficient precision to represent T on the target platform. Of course, that type — the base type — would necessarily be unconstrained.

Let's discuss the `Integer` type as an example. The Ada standard specifies that the minimum range of the `Integer` type is `-2**15 + 1 .. 2**15 - 1`. In modern 64-bit systems — where wider types such as `Long_Integer` are defined — the range is at least `-2**31 + 1 .. 2**31 - 1`. Therefore, we could think of the `Integer` type as having the following declaration:

```
type Integer is
  range -2 ** 31 .. 2 ** 31 - 1;
```

However, even though `Integer` is a predefined Ada type, it's actually a subtype of an anonymous type. That anonymous "type" is the hardware's representation for the numeric type as chosen by the compiler based on the requested range (for the signed integer types) or digits of precision (for floating-point types). In other words, these types are actually subtypes of something that does not have a specific name in Ada, and that is not constrained.

In effect,

```
type Integer is
  range -2 ** 31 .. 2 ** 31 - 1;
```

is really as if we said this:

[150] http://www.ada-auth.org/standards/22rm/html/RM-4-5-5.html

```
subtype Integer is
  Some_Hardware_Type_With_Sufficient_Range
  range -2 ** 31 .. 2 ** 31 - 1;
```

Since the Some_Hardware_Type_With_Sufficient_Range type is anonymous and we therefore cannot refer to it in the code, we just say that **Integer** is a type rather than a subtype.

Let's focus on signed integers — as the other numerics work the same way. When we declare a signed integer type, we have to specify the required range, statically. If the compiler cannot find a hardware-defined or supported signed integer type with at least the range requested, the compilation is rejected. For example, in current architectures, the code below most likely won't compile:

Listing 556: int_def.ads

```
1  package Int_Def is
2
3      type Too_Big_To_Fail is
4        range -2 ** 255 .. 2 ** 255 - 1;
5
6  end Int_Def;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Base_Type.Very_Big_Range
MD5: 60c2b9219a0cf080997707a99a0b162b
```

Build output

```
int_def.ads:4:07: error: integer type definition bounds out of range
gprbuild: *** compilation phase failed
```

Otherwise, the compiler maps the named Ada type to the hardware "type", presumably choosing the smallest one that supports the requested range. (That's why the range has to be static in the source code, unlike for explicit subtypes.)

Base

The Base attribute gives us the unconstrained underlying hardware representation selected for a given numeric type. As an example, let's say we declared a subtype of the **Integer** type named One_To_Ten:

Listing 557: my_integers.ads

```
1  package My_Integers is
2
3     subtype One_To_Ten is Integer
4       range 1 .. 10;
5
6  end My_Integers;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Base_Type.Base_Attr
MD5: e3f8310ed742e61a65728fecb6caa557
```

If we then use the Base attribute — by writing One_To_Ten'Base —, we're actually referring to the unconstrained underlying hardware representation selected for One_To_Ten. As One_To_Ten is a subtype of the **Integer** type, this also means that One_To_Ten'Base is equivalent to **Integer**'Base, i.e. they refer to the same base type. (This base type is the

underlying hardware type representing the **Integer** type — but is not the **Integer** type itself.)

The following example shows how the Base attribute affects the bounds of a variable:

Listing 558: show_base.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with My_Integers; use My_Integers;

procedure Show_Base is
   C : constant One_To_Ten := One_To_Ten'Last;
begin
   Using_Constrained_Subtype : declare
      V : One_To_Ten := C;
   begin
      Put_Line
        ("Increasing value for One_To_Ten...");

      V := One_To_Ten'Succ (V);
   exception
      when others =>
         Put_Line ("Exception raised!");
   end Using_Constrained_Subtype;

   Using_Base : declare
      V : One_To_Ten'Base := C;
   begin
      Put_Line
      ("Increasing value for One_To_Ten'Base...");

      V := One_To_Ten'Succ (V);
   exception
      when others =>
         Put_Line ("Exception raised!");
   end Using_Base;

   Put_Line ("One_To_Ten'Last: "
             & One_To_Ten'Last'Image);
   Put_Line ("One_To_Ten'Base'Last: "
             & One_To_Ten'Base'Last'Image);
end Show_Base;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Base_Type.Base_Attr
MD5: ce3e9fb3ff1619e835e9108ae0a787e7
```

Build output

```
show_base.adb:13:22: warning: value not in range of type "One_To_Ten" defined at␣
 ↪my_integers.ads:3 [enabled by default]
show_base.adb:13:22: warning: Constraint_Error will be raised at run time [enabled␣
 ↪by default]
```

Runtime output

```
Increasing value for One_To_Ten...
Exception raised!
Increasing value for One_To_Ten'Base...
One_To_Ten'Last:  10
One_To_Ten'Base'Last:  2147483647
```

In the first block of the example (`Using_Constrained_Subtype`), we're asking for the next

value after the last value of a range — in this case, `One_To_Ten'Succ (One_To_Ten'Last)`. As expected, since the last value of the range doesn't have a successor, a constraint exception is raised.

In the `Using_Base` block, we're declaring a variable `V` of `One_To_Ten'Base` subtype. In this case, the next value exists — because the condition `One_To_Ten'Last + 1 <= One_To_Ten'Base'Last` is true —, so we can use the `Succ` attribute without having an exception being raised.

In the following example, we adjust the result of additions and subtractions to avoid constraint errors:

Listing 559: my_integers.ads

```
package My_Integers is

   subtype One_To_Ten is Integer range 1 .. 10;

   function Sat_Add (V1, V2 : One_To_Ten'Base)
                     return One_To_Ten;

   function Sat_Sub (V1, V2 : One_To_Ten'Base)
                     return One_To_Ten;

end My_Integers;
```

Listing 560: my_integers.adb

```
--  with Ada.Text_IO; use Ada.Text_IO;

package body My_Integers is

   function Saturate (V : One_To_Ten'Base)
                      return One_To_Ten is
   begin
      --  Put_Line ("SATURATE " & V'Image);

      if V < One_To_Ten'First then
         return One_To_Ten'First;
      elsif V > One_To_Ten'Last then
         return One_To_Ten'Last;
      else
         return V;
      end if;
   end Saturate;

   function Sat_Add (V1, V2 : One_To_Ten'Base)
                     return One_To_Ten is
   begin
      return Saturate (V1 + V2);
   end Sat_Add;

   function Sat_Sub (V1, V2 : One_To_Ten'Base)
                     return One_To_Ten is
   begin
      return Saturate (V1 - V2);
   end Sat_Sub;

end My_Integers;
```

Listing 561: show_base.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with My_Integers; use My_Integers;

procedure Show_Base is

   type Display_Saturate_Op is (Add, Sub);

   procedure Display_Saturate
     (V1, V2 : One_To_Ten;
      Op     : Display_Saturate_Op)
   is
      Res : One_To_Ten;
   begin
      case Op is
      when Add =>
         Res := Sat_Add (V1, V2);
      when Sub =>
         Res := Sat_Sub (V1, V2);
      end case;
      Put_Line ("SATURATE " & Op'Image
                & " (" & V1'Image
                & ", " & V2'Image
                & ") = " & Res'Image);
   end Display_Saturate;

begin
   Display_Saturate (1,  1, Add);
   Display_Saturate (10, 8, Add);
   Display_Saturate (1,  8, Sub);
end Show_Base;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Base_Type.Base_Attr_Sat
MD5: e9b31345c2efc056bdb71824072852d0
```

Runtime output

```
SATURATE ADD ( 1,  1) =  2
SATURATE ADD ( 10,  8) =  10
SATURATE SUB ( 1,  8) =  1
```

In this example, we're using the Base attribute to declare the parameters of the Sat_Add, Sat_Sub and Saturate functions. Note that the parameters of the Display_Saturate procedure are of One_To_Ten type, while the parameters of the Sat_Add, Sat_Sub and Saturate functions are of the (unconstrained) base subtype (One_To_Ten'Base). In those functions, we perform operations using the parameters of unconstrained subtype and adjust the result — in the Saturate function — before returning it as a constrained value of One_To_Ten subtype.

The code in the body of the My_Integers package contains lines that were commented out — to be more precise, a call to Put_Line call in the Saturate function. If you uncomment them, you'll see the value of the input parameter V (of One_To_Ten'Base type) in the runtime output of the program before it's adapted to fit the constraints of the One_To_Ten subtype.

25.8.4 Big Numbers

As we've seen before, we can define numeric types in Ada with a high degree of precision. However, these normal numeric types in Ada are limited to what the underlying hardware actually supports. For example, any signed integer type — whether defined by the language or the user — cannot have a range greater than that of `System.Min_Int .. System.Max_Int` because those constants reflect the actual hardware's signed integer types. In certain applications, that precision might not be enough, so we have to rely on arbitrary-precision arithmetic[151]. These so-called "big numbers" are limited conceptually only by available memory, in contrast to the underlying hardware-defined numeric types.

Ada supports two categories of big numbers: big integers and big reals — both are specified in child packages of the `Ada.Numerics.Big_Numbers` package:

Category	Package
Big Integers	`Ada.Numerics.Big_Numbers.Big_Integers`
Big Reals	`Ada.Numerics.Big_Numbers.Big_Real`

In the Ada Reference Manual

- Big Numbers[152]
- Big Integers[153]
- Big Reals[154]

Overview

Let's start with a simple declaration of big numbers:

Listing 562: show_simple_big_numbers.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  with Ada.Numerics.Big_Numbers.Big_Integers;
4  use  Ada.Numerics.Big_Numbers.Big_Integers;
5
6  with Ada.Numerics.Big_Numbers.Big_Reals;
7  use  Ada.Numerics.Big_Numbers.Big_Reals;
8
9  procedure Show_Simple_Big_Numbers is
10    BI : Big_Integer;
11    BR : Big_Real;
12 begin
13    BI := 12345678901234567890;
14    BR := 2.0 ** 1234;
15
16    Put_Line ("BI: " & BI'Image);
17    Put_Line ("BR: " & BR'Image);
18
19    BI := BI + 1;
20    BR := BR + 1.0;
21
22    Put_Line ("BI: " & BI'Image);
```

(continues on next page)

[151] https://en.wikipedia.org/wiki/arbitrary-precision_arithmetic
[152] http://www.ada-auth.org/standards/22rm/html/RM-A-5-5.html
[153] http://www.ada-auth.org/standards/22rm/html/RM-A-5-6.html
[154] http://www.ada-auth.org/standards/22rm/html/RM-A-5-7.html

(continued from previous page)

```
23    Put_Line ("BR: " & BR'Image);
24 end Show_Simple_Big_Numbers;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Big_Numbers.Simple_Big_Numbers
MD5: b6a5e9ad170b09cbbabeb3ce06cc958c
```

Runtime output

```
BI:  12345678901234567890
BR:␣
↪29581122460809862906004469571610359078633968713537299223955620705065735079623892426105383724837
↪000
BI:  12345678901234567891
BR:␣
↪29581122460809862906004469571610359078633968713537299223955620705065735079623892426105383724837
↪000
```

In this example, we're declaring the big integer BI and the big real BR, and we're incrementing them by one.

Naturally, we're not limited to using the + operator (such as in this example). We can use the same operators on big numbers that we can use with normal numeric types. In fact, the common unary operators (+, -, **abs**) and binary operators (+, -, *, /, **, Min and Max) are available to us. For example:

Listing 563: show_simple_big_numbers_operators.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  with Ada.Numerics.Big_Numbers.Big_Integers;
4  use  Ada.Numerics.Big_Numbers.Big_Integers;
5
6  procedure Show_Simple_Big_Numbers_Operators is
7     BI : Big_Integer;
8  begin
9     BI := 12345678901234567890;
10
11    Put_Line ("BI: " & BI'Image);
12
13    BI := -BI + BI / 2;
14    BI :=  BI - BI * 2;
15
16    Put_Line ("BI: " & BI'Image);
17 end Show_Simple_Big_Numbers_Operators;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Big_Numbers.Simple_Big_Numbers_
↪Operators
MD5: 198708787bfcd6e16ec4fba718706af6
```

Runtime output

```
BI:  12345678901234567890
BI:  6172839450617283945
```

In this example, we're applying the four basic operators (+, -, *, /) on big integers.

Factorial

A typical example is the factorial[155]: a sequence of the factorial of consecutive small numbers can quickly lead to big numbers. Let's take this implementation as an example:

Listing 564: factorial.ads

```
function Factorial (N : Integer)
                    return Long_Long_Integer;
```

Listing 565: factorial.adb

```
function Factorial (N : Integer)
                    return Long_Long_Integer is
   Fact : Long_Long_Integer := 1;
begin
   for I in 2 .. N loop
      Fact := Fact * Long_Long_Integer (I);
   end loop;

   return Fact;
end Factorial;
```

Listing 566: show_factorial.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Factorial;

procedure Show_Factorial is
begin
   for I in 1 .. 50 loop
      Put_Line (I'Image & "! = "
                & Factorial (I)'Image);
   end loop;
end Show_Factorial;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Big_Numbers.Factorial_Integer
MD5: 9b20469533706ef025a03b506a07b920
```

Runtime output

```
 1! =  1
 2! =  2
 3! =  6
 4! =  24
 5! =  120
 6! =  720
 7! =  5040
 8! =  40320
 9! =  362880
 10! =  3628800
 11! =  39916800
 12! =  479001600
 13! =  6227020800
 14! =  87178291200
 15! =  1307674368000
 16! =  20922789888000
```

(continues on next page)

[155] https://en.wikipedia.org/wiki/Factorial

(continued from previous page)

```
 17! =  355687428096000
 18! =  6402373705728000
 19! =  121645100408832000
 20! =  2432902008176640000

raised CONSTRAINT_ERROR : factorial.adb:6 overflow check failed
```

Here, we're using **Long_Long_Integer** for the computation and return type of the Factorial function. (We're using **Long_Long_Integer** because its range is probably the biggest possible on the machine, although that is not necessarily so.) The last number we're able to calculate before getting an exception is *20!*, which basically shows the limitation of standard integers for this kind of algorithm. If we use big integers instead, we can easily display all numbers up to *50!* (and more!):

Listing 567: factorial.ads

```
with Ada.Numerics.Big_Numbers.Big_Integers;
use  Ada.Numerics.Big_Numbers.Big_Integers;

function Factorial (N : Integer)
                    return Big_Integer;
```

Listing 568: factorial.adb

```
function Factorial (N : Integer)
                    return Big_Integer is
   Fact : Big_Integer := 1;
begin
   for I in 2 .. N loop
      Fact := Fact * To_Big_Integer (I);
   end loop;

   return Fact;
end Factorial;
```

Listing 569: show_big_number_factorial.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Factorial;

procedure Show_Big_Number_Factorial is
begin
   for I in 1 .. 50 loop
      Put_Line (I'Image & "! = "
                & Factorial (I)'Image);
   end loop;
end Show_Big_Number_Factorial;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Big_Numbers.Factorial_Big_Numbers
MD5: d1f6464a3232d574d01f7ac14b822731
```

Runtime output

```
 1! =  1
 2! =  2
 3! =  6
 4! =  24
```

(continues on next page)

(continued from previous page)

```
5! =  120
6! =  720
7! =  5040
8! =  40320
9! =  362880
10! =  3628800
11! =  39916800
12! =  479001600
13! =  6227020800
14! =  87178291200
15! =  1307674368000
16! =  20922789888000
17! =  355687428096000
18! =  6402373705728000
19! =  121645100408832000
20! =  2432902008176640000
21! =  51090942171709440000
22! =  1124000727777607680000
23! =  25852016738884976640000
24! =  620448401733239439360000
25! =  15511210043330985984000000
26! =  403291461126605635584000000
27! =  10888869450418352160768000000
28! =  304888344611713860501504000000
29! =  8841761993739701954543616000000
30! =  265252859812191058636308480000000
31! =  8222838654177922817725562880000000
32! =  263130836933693530167218012160000000
33! =  8683317618811886495518194401280000000
34! =  295232799039604140847618609643520000000
35! =  10333147966386144929666651337523200000000
36! =  371993326789901217467999448150835200000000
37! =  13763753091226345046315979581580902400000000
38! =  523022617466601111760007224100074291200000000
39! =  20397882081197443358640281739902897356800000000
40! =  815915283247897734345611269596115894272000000000
41! =  33452526613163807108170062053440751665152000000000
42! =  1405006117752879898543142606244511569936384000000000
43! =  60415263063373835637355132068513997507264512000000000
44! =  2658271574788448768043625811014615890319638528000000000
45! =  119622220865480194561963161495657715064383733760000000000
46! =  5502622159812088949850305428800254892961651752960000000000
47! =  258623241511168180642964355153611979969197632389120000000000
48! =  12413915592536072670862289047373375038521486354677760000000000
49! =  608281864034267560872252163321295376887552831379210240000000000
50! =  30414093201713378043612608166064768844377641568960512000000000000
```

As we can see in this example, replacing the **Long_Long_Integer** type by the Big_Integer type fixes the problem (the runtime exception) that we had in the previous version. (Note that we're using the To_Big_Integer function to convert from **Integer** to Big_Integer: we discuss these conversions next.)

Note that there is a limit to the upper bounds for big integers. However, this limit isn't dependent on the hardware types — as it's the case for normal numeric types —, but rather compiler specific. In other words, the compiler can decide how much memory it wants to use to represent big integers.

Conversions

Most probably, we want to mix big numbers and *standard* numbers (i.e. integer and real numbers) in our application. In this section, we talk about the conversion between big numbers and standard types.

Validity

The package specifications of big numbers include subtypes that *ensure* that a actual value of a big number is valid:

Type	Subtype for valid values
Big Integers	`Valid_Big_Integer`
Big Reals	`Valid_Big_Real`

These subtypes include a contract for this check. For example, this is the definition of the `Valid_Big_Integer` subtype:

```
subtype Valid_Big_Integer is Big_Integer
  with Dynamic_Predicate =>
           Is_Valid (Valid_Big_Integer),
       Predicate_Failure =>
           (raise Program_Error);
```

Any operation on big numbers is actually performing this validity check (via a call to the `Is_Valid` function). For example, this is the addition operator for big integers:

```
function "+" (L, R : Valid_Big_Integer)
              return Valid_Big_Integer;
```

As we can see, both the input values to the operator as well as the return value are expected to be valid — the `Valid_Big_Integer` subtype triggers this check, so to say. This approach ensures that an algorithm operating on big numbers won't be using invalid values.

Conversion functions

These are the most important functions to convert between big number and *standard* types:

Category	To big number	From big number
Big Integers	• `To_Big_Integer`	• `To_Integer` (**`Integer`**) • `From_Big_Integer` (other integer types)
Big Reals	• `To_Big_Real` (floating-point types or fixed-point types)	• `From_Big_Real`
	• `To_Big_Real` (`Valid_Big_Integer`) • `To_Real` (**`Integer`**)	• `Numerator`, `Denominator` (**`Integer`**)

In the following sections, we discuss these functions in more detail.

Big integer to integer

We use the To_Big_Integer and To_Integer functions to convert back and forth between Big_Integer and **Integer** types:

Listing 570: show_simple_big_integer_conversion.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Ada.Numerics.Big_Numbers.Big_Integers;
use  Ada.Numerics.Big_Numbers.Big_Integers;

procedure Show_Simple_Big_Integer_Conversion is
   BI : Big_Integer;
   I  : Integer := 10000;
begin
   BI := To_Big_Integer (I);
   Put_Line ("BI: " & BI'Image);

   I := To_Integer (BI + 1);
   Put_Line ("I:  " & I'Image);
end Show_Simple_Big_Integer_Conversion;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Big_Numbers.Simple_Big_Integer_
↪Conversion
MD5: 83effc9da9835d92f4c49ed03d7ed84a
```

Runtime output

```
BI:  10000
I:   10001
```

In addition, we can use the generic Signed_Conversions and Unsigned_Conversions packages to convert between Big_Integer and any signed or unsigned integer types:

Listing 571: show_arbitrary_big_integer_conversion.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Ada.Numerics.Big_Numbers.Big_Integers;
use  Ada.Numerics.Big_Numbers.Big_Integers;

procedure Show_Arbitrary_Big_Integer_Conversion is

   type Mod_32_Bit is mod 2 ** 32;

   package Long_Long_Integer_Conversions is new
     Signed_Conversions (Long_Long_Integer);
   use Long_Long_Integer_Conversions;

   package Mod_32_Bit_Conversions is new
     Unsigned_Conversions (Mod_32_Bit);
   use Mod_32_Bit_Conversions;

   BI   : Big_Integer;
   LLI  : Long_Long_Integer := 10000;
   U_32 : Mod_32_Bit        := 2 ** 32 + 1;

begin
   BI := To_Big_Integer (LLI);
```

(continues on next page)

(continued from previous page)

```
24    Put_Line ("BI:   " & BI'Image);
25
26    LLI := From_Big_Integer (BI + 1);
27    Put_Line ("LLI:  " & LLI'Image);
28
29    BI := To_Big_Integer (U_32);
30    Put_Line ("BI:   " & BI'Image);
31
32    U_32 := From_Big_Integer (BI + 1);
33    Put_Line ("U_32: " & U_32'Image);
34
35 end Show_Arbitrary_Big_Integer_Conversion;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Big_Numbers.Arbitrary_Big_
 ↪Integer_Conversion
MD5: a89b42ff012c8729770eefa2d2b1f6c1
```

Runtime output

```
BI:    10000
LLI:   10001
BI:    1
U_32:  2
```

In this examples, we declare the `Long_Long_Integer_Conversions` and the `Mod_32_Bit_Conversions` to be able to convert between big integers and the **`Long_Long_Integer`** and the `Mod_32_Bit` types, respectively.

Note that, when converting from big integer to integer, we used the `To_Integer` function, while, when using the instances of the generic packages, the function is named `From_Big_Integer`.

Big real to floating-point types

When converting between big real and floating-point types, we have to instantiate the generic `Float_Conversions` package:

Listing 572: show_big_real_floating_point_conversion.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  with Ada.Numerics.Big_Numbers.Big_Reals;
4  use  Ada.Numerics.Big_Numbers.Big_Reals;
5
6  procedure Show_Big_Real_Floating_Point_Conversion
7  is
8     type D10 is digits 10;
9
10    package D10_Conversions is new
11      Float_Conversions (D10);
12    use D10_Conversions;
13
14    package Long_Float_Conversions is new
15      Float_Conversions (Long_Float);
16    use Long_Float_Conversions;
17
18    BR  : Big_Real;
19    LF  : Long_Float := 2.0;
```

(continues on next page)

(continued from previous page)

```
   F10 : D10        := 1.999;

begin
   BR := To_Big_Real (LF);
   Put_Line ("BR:   " & BR'Image);

   LF := From_Big_Real (BR + 1.0);
   Put_Line ("LF:   " & LF'Image);

   BR := To_Big_Real (F10);
   Put_Line ("BR:   " & BR'Image);

   F10 := From_Big_Real (BR + 0.1);
   Put_Line ("F10:  " & F10'Image);

end Show_Big_Real_Floating_Point_Conversion;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Big_Numbers.Big_Real_Floating_
 ↪Point_Conversion
MD5: 4ccb570b964d11d215660f5929f2709c
```

Runtime output

```
BR:    2.000
LF:    3.00000000000000E+00
BR:    1.999
F10:   2.099000000E+00
```

In this example, we declare the `D10_Conversions` and the `Long_Float_Conversions` to be able to convert between big reals and the custom floating-point type `D10` and the **`Long_Float`** type, respectively. To do that, we use the `To_Big_Real` and the `From_Big_Real` functions.

Big real to fixed-point types

When converting between big real and ordinary fixed-point types, we have to instantiate the generic `Fixed_Conversions` package:

Listing 573: show_big_real_fixed_point_conversion.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Ada.Numerics.Big_Numbers.Big_Reals;
use  Ada.Numerics.Big_Numbers.Big_Reals;

procedure Show_Big_Real_Fixed_Point_Conversion
is
   D : constant := 2.0 ** (-31);
   type TQ31 is delta D range -1.0 .. 1.0 - D;

   package TQ31_Conversions is new
     Fixed_Conversions (TQ31);
   use TQ31_Conversions;

   BR   : Big_Real;
   FQ31 : TQ31 := 0.25;

begin
```

(continues on next page)

(continued from previous page)

```
19    BR := To_Big_Real (FQ31);
20    Put_Line ("BR:    " & BR'Image);
21
22    FQ31 := From_Big_Real (BR * 2.0);
23    Put_Line ("FQ31: " & FQ31'Image);
24
25 end Show_Big_Real_Fixed_Point_Conversion;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Big_Numbers.Big_Real_Fixed_Point_
 ↪Conversion
MD5: 49f03e130ec34842cbac7a728a280821
```

Runtime output

```
BR:    0.250
FQ31:  0.5000000000
```

In this example, we declare the `TQ31_Conversions` to be able to convert between big reals and the custom fixed-point type `TQ31` type. Again, we use the `To_Big_Real` and the `From_Big_Real` functions for the conversions.

Note that there's no direct way to convert between decimal fixed-point types and big real types. (Of course, you could perform this conversion indirectly by using a floating-point or an ordinary fixed-point type in between.)

Big reals to (big) integers

We can also convert between big reals and big integers (or standard integers):

Listing 574: show_big_real_big_integer_conversion.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  with Ada.Numerics.Big_Numbers.Big_Integers;
4  use  Ada.Numerics.Big_Numbers.Big_Integers;
5
6  with Ada.Numerics.Big_Numbers.Big_Reals;
7  use  Ada.Numerics.Big_Numbers.Big_Reals;
8
9  procedure Show_Big_Real_Big_Integer_Conversion
10 is
11    I  : Integer;
12    BI : Big_Integer;
13    BR : Big_Real;
14
15 begin
16    I  := 12345;
17    BR := To_Real (I);
18    Put_Line ("BR (from I):  " & BR'Image);
19
20    BI := 123456;
21    BR := To_Big_Real (BI);
22    Put_Line ("BR (from BI): " & BR'Image);
23
24 end Show_Big_Real_Big_Integer_Conversion;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Big_Numbers.Big_Real_Big_Integer_
 ↪Conversion
MD5: 26bf2a4704ce98709587eedab3391119
```

Runtime output

```
BR (from I):  12345.000
BR (from BI): 123456.000
```

Here, we use the To_Real and the To_Big_Real and functions for the conversions.

String conversions

In addition to that, we can use string conversions:

Listing 575: show_big_number_string_conversion.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Ada.Numerics.Big_Numbers.Big_Integers;
use  Ada.Numerics.Big_Numbers.Big_Integers;

with Ada.Numerics.Big_Numbers.Big_Reals;
use  Ada.Numerics.Big_Numbers.Big_Reals;

procedure Show_Big_Number_String_Conversion
is
   BI : Big_Integer;
   BR : Big_Real;
begin
   BI := From_String ("12345678901234567890");
   BR := From_String ("12345678901234567890.0");

   Put_Line ("BI: "
             & To_String (Arg   => BI,
                          Width => 5,
                          Base => 2));
   Put_Line ("BR: "
             & To_String (Arg   => BR,
                          Fore  => 2,
                          Aft   => 6,
                          Exp   => 18));
end Show_Big_Number_String_Conversion;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Big_Numbers.Big_Number_String_
 ↪Conversion
MD5: aa1f19af04b0b901a086ac86151693a7
```

Runtime output

```
BI:  2#10101011010101001010100110001100111010110001111100001010110100 10#
BR: 12.345678E+18
```

In this example, we use the From_String to convert a string to a big number. Note that the From_String function is actually called when converting a literal — because of the corresponding aspect for user-defined literals in the definitions of the Big_Integer and the Big_Real types.

For further reading...

Big numbers are implemented using *user-defined literals* (page 342), which we discussed previously. In fact, these are the corresponding type declarations:

```
--  Declaration from
--  Ada.Numerics.Big_Numbers.Big_Integers;

type Big_Integer is private
  with Integer_Literal => From_Universal_Image,
       Put_Image       => Put_Image;

function From_Universal_Image
  (Arg : String)
  return Valid_Big_Integer
    renames From_String;

--  Declaration from
--  Ada.Numerics.Big_Numbers.Big_Reals;

type Big_Real is private
  with Real_Literal => From_Universal_Image,
       Put_Image    => Put_Image;

function From_Universal_Image
  (Arg : String)
   return Valid_Big_Real
     renames From_String;
```

As we can see in these declarations, the `From_String` function renames the `From_Universal_Image` function, which is being used for the user-defined literals.

Also, we call the `To_String` function to get a string for the big numbers. Naturally, using the `To_String` function instead of the `Image` attribute — as we did in previous examples — allows us to customize the format of the string that we display in the user message.

Other features of big integers

Now, let's look at two additional features of big integers:

- the natural and positive subtypes, and
- other available operators and functions.

Big positive and natural subtypes

Similar to integer types, big integers have the `Big_Natural` and `Big_Positive` subtypes to indicate natural and positive numbers. However, in contrast to the **`Natural`** and **`Positive`** subtypes, the `Big_Natural` and `Big_Positive` subtypes are defined via predicates rather than the simple ranges of normal (ordinary) numeric types:

```
subtype Natural  is
  Integer range 0 .. Integer'Last;

subtype Positive is
  Integer range 1 .. Integer'Last;

subtype Big_Natural is Big_Integer
  with Dynamic_Predicate =>
         (if Is_Valid (Big_Natural)
```

(continues on next page)

(continued from previous page)

```
            then Big_Natural >= 0),
       Predicate_Failure =>
         (raise Constraint_Error);

subtype Big_Positive is Big_Integer
  with Dynamic_Predicate =>
         (if Is_Valid (Big_Positive)
            then Big_Positive > 0),
       Predicate_Failure =>
         (raise Constraint_Error);
```

Therefore, we cannot simply use attributes such as `Big_Natural'First`. However, we can use the subtypes to ensure that a big integer is in the expected (natural or positive) range:

Listing 576: show_big_positive_natural.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Ada.Numerics.Big_Numbers.Big_Integers;
use  Ada.Numerics.Big_Numbers.Big_Integers;

procedure Show_Big_Positive_Natural is
   BI, D, N : Big_Integer;
begin
   D  := 3;
   N  := 2;
   BI := Big_Natural (D / Big_Positive (N));

   Put_Line ("BI: " & BI'Image);
end Show_Big_Positive_Natural;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Big_Numbers.Big_Positive_Natural
MD5: 844b41f001c9aed9cb99decb221d93fd
```

Runtime output

```
BI:  1
```

By using the `Big_Natural` and `Big_Positive` subtypes in the calculation above (in the assignment to `BI`), we ensure that we don't perform a division by zero, and that the result of the calculation is a natural number.

Other operators for big integers

We can use the **`mod`** and **`rem`** operators with big integers:

Listing 577: show_big_integer_rem_mod.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Ada.Numerics.Big_Numbers.Big_Integers;
use  Ada.Numerics.Big_Numbers.Big_Integers;

procedure Show_Big_Integer_Rem_Mod is
   BI : Big_Integer;
begin
   BI := 145 mod (-4);
   Put_Line ("BI (mod): " & BI'Image);
```

(continues on next page)

(continued from previous page)

```
11
12    BI := 145 rem (-4);
13    Put_Line ("BI (rem): " & BI'Image);
14 end Show_Big_Integer_Rem_Mod;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Big_Numbers.Big_Integer_Rem_Mod
MD5: 7347b617c51a3782921d997b3cfd5d37
```

Runtime output

```
BI (mod): -5
BI (rem):  1
```

In this example, we use the **mod** and **rem** operators in the assignments to BI.

Moreover, there's a Greatest_Common_Divisor function for big integers which, as the name suggests, calculates the greatest common divisor of two big integer values:

Listing 578: show_big_integer_greatest_common_divisor.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  with Ada.Numerics.Big_Numbers.Big_Integers;
4  use  Ada.Numerics.Big_Numbers.Big_Integers;
5
6  procedure Show_Big_Integer_Greatest_Common_Divisor
7  is
8     BI : Big_Integer;
9  begin
10    BI := Greatest_Common_Divisor (145, 25);
11    Put_Line ("BI: " & BI'Image);
12
13 end Show_Big_Integer_Greatest_Common_Divisor;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Big_Numbers.Big_Integer_Greatest_
 ↪Common_Divisor
MD5: 27e2f7b4cbe20ec979b672f3e7edfdb7
```

Runtime output

```
BI:  5
```

In this example, we retrieve the greatest common divisor of 145 and 25 (i.e.: 5).

Big real and quotients

An interesting feature of big reals is that they support quotients. In fact, we can simply assign *2/3* to a big real variable. (Note that we're able to omit the decimal points, as we write 2/3 instead of 2.0 / 3.0.) For example:

Listing 579: show_big_real_quotient_conversion.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  with Ada.Numerics.Big_Numbers.Big_Reals;
4  use  Ada.Numerics.Big_Numbers.Big_Reals;
```

(continues on next page)

(continued from previous page)

```
5
6  procedure Show_Big_Real_Quotient_Conversion
7  is
8     BR   : Big_Real;
9  begin
10    BR := 2 / 3;
11    --  Same as:
12    --  BR := From_Quotient_String ("2 / 3");
13
14    Put_Line ("BR:   " & BR'Image);
15
16    Put_Line ("Q:    "
17              & To_Quotient_String (BR));
18
19    Put_Line ("Q numerator:    "
20              & Numerator (BR)'Image);
21    Put_Line ("Q denominator:  "
22              & Denominator (BR)'Image);
23 end Show_Big_Real_Quotient_Conversion;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Big_Numbers.Big_Real_Quotient_
 ↪Conversion
MD5: 97d78457d3f6d5e1810e461c2c7cd172
```

Runtime output

```
BR:    0.666
Q:     2 /  3
Q numerator:     2
Q denominator:   3
```

In this example, we assign `2 / 3` to BR — we could have used the `From_Quotient_String` function as well. Also, we use the `To_Quotient_String` to get a string that represents the quotient. Finally, we use the `Numerator` and `Denominator` functions to retrieve the values, respectively, of the numerator and denominator of the quotient (as big integers) of the big real variable.

Range checks

Previously, we've talked about the `Big_Natural` and `Big_Positive` subtypes. In addition to those subtypes, we have the `In_Range` function for big numbers:

Listing 580: show_big_numbers_in_range.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  with Ada.Numerics.Big_Numbers.Big_Integers;
4  use  Ada.Numerics.Big_Numbers.Big_Integers;
5
6  with Ada.Numerics.Big_Numbers.Big_Reals;
7  use  Ada.Numerics.Big_Numbers.Big_Reals;
8
9  procedure Show_Big_Numbers_In_Range is
10
11    BI : Big_Integer;
12    BR : Big_Real;
13
14    BI_From : constant Big_Integer := 0;
```

(continues on next page)

(continued from previous page)

```
15    BI_To   : constant Big_Integer := 1024;
16
17    BR_From : constant Big_Real := 0.0;
18    BR_To   : constant Big_Real := 1024.0;
19
20 begin
21    BI := 1023;
22    BR := 1023.9;
23
24    if In_Range (BI, BI_From, BI_To) then
25       Put_Line ("BI ("
26                 & BI'Image
27                 & ") is in the "
28                 & BI_From'Image
29                 & " .. "
30                 & BI_To'Image
31                 & " range");
32    end if;
33
34    if In_Range (BR, BR_From, BR_To) then
35       Put_Line ("BR ("
36                 & BR'Image
37                 & ") is in the "
38                 & BR_From'Image
39                 & " .. "
40                 & BR_To'Image
41                 & " range");
42    end if;
43
44 end Show_Big_Numbers_In_Range;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Big_Numbers.Big_Numbers_In_Range
MD5: ded52ef7e9ef13a83264940ff9d8bcb3
```

Runtime output

```
BI ( 1023) is in the  0 ..  1024 range
BR (1023.900) is in the  0.000 .. 1024.000 range
```

In this example, we call the In_Range function to check whether the big integer number (BI) and the big real number (BR) are in the range between 0 and 1024.

25.9 Numeric Attributes

25.9.1 Attributes of Modular Types

In the Introduction to Ada course, we've seen that Ada has two kinds of integer type: *signed* (page 47) and *modular* (page 50) types. For example:

Listing 581: num_types.ads

```
1  package Num_Types is
2
3     type Signed_Integer is range 1 .. 1_000_000;
4     type Modular is mod 2**32;
5
6  end Num_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Modular_Types.Modular_1
MD5: 2dff9fe22c6bbe52f964befccf68debf
```

In this section, we discuss two attributes of modular types: `Modulus` and **`Mod`**. We also discuss operations on modular types.

In the Ada Reference Manual

- 3.5.4 Integer Types[156]

`Modulus` Attribute

The `Modulus` attribute returns the modulus of the modular type as a universal integer value. Let's get the modulus of the 32-bit `Modular` type that we've declared in the `Num_Types` package of the previous example:

Listing 582: show_modular.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Num_Types;   use Num_Types;

procedure Show_Modular is
   Modulus_Value : constant := Modular'Modulus;
begin
   Put_Line (Modulus_Value'Image);
end Show_Modular;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Modular_Types.Modular_1
MD5: 336254ebc8c09ee9921633f6919994fe
```

Runtime output

```
 4294967296
```

When we run this example, we get 4294967296, which is equal to `2**32`.

`Mod` Attribute

Note

This section was originally written by Robert A. Duff and published as Gem #26: The Mod Attribute[157].

Operations on signed integers can overflow: if the result is outside the base range, `Constraint_Error` will be raised. In our previous example, we declared the `Signed_Integer` type:

```
type Signed_Integer is range 1 .. 1_000_000;
```

[156] http://www.ada-auth.org/standards/22rm/html/RM-3-5-4.html
[157] https://www.adacore.com/gems/gem-26

The base range of Signed_Integer is the range of Signed_Integer'Base, which is chosen by the compiler, but is likely to be something like -2**31 .. 2**31 - 1. (Note: we discussed the Base attribute *in this section* (page 640).)

Operations on modular integers use modular (wraparound) arithmetic. For example:

Listing 583: show_modular.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Num_Types;   use Num_Types;

procedure Show_Modular is
   X : Modular;
begin
   X := 1;
   Put_Line (X'Image);

   X := -X;
   Put_Line (X'Image);
end Show_Modular;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Modular_Types.Modular_1
MD5: e9ac61d2e43585f002fe2b79544ef9d7
```

Runtime output

```
 1
 4294967295
```

Negating X gives -1, which wraps around to 2**32 - 1, i.e. all-one-bits.

But what about a type conversion from signed to modular? Is that a signed operation (so it should overflow) or is it a modular operation (so it should wrap around)? The answer in Ada is the former — that is, if you try to convert, say, **Integer**'(-1) to Modular, you will get Constraint_Error:

Listing 584: show_modular.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Num_Types;   use Num_Types;

procedure Show_Modular is
   I : Integer := -1;
   X : Modular := 1;
begin
   X := Modular (I);  --  raises Constraint_Error
   Put_Line (X'Image);
end Show_Modular;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Modular_Types.Modular_1
MD5: e8e1a1924efcbe770c719c29547bb863
```

Build output

```
show_modular.adb:9:09: warning: value not in range of type "Modular" defined at␣
 ↪num_types.ads:4 [enabled by default]
```

(continues on next page)

(continued from previous page)

```
show_modular.adb:9:09: warning: Constraint_Error will be raised at run time␣
↪[enabled by default]
```

Runtime output

```
raised CONSTRAINT_ERROR : show_modular.adb:9 range check failed
```

To solve this problem, we can use the **Mod** attribute:

Listing 585: show_modular.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Num_Types;   use Num_Types;

procedure Show_Modular is
   I : constant Integer := -1;
   X : Modular := 1;
begin
   X := Modular'Mod (I);
   Put_Line (X'Image);
end Show_Modular;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Modular_Types.Modular_1
MD5: 572a753de946b7578c5f1b6a795ede98
```

Runtime output

```
4294967295
```

The **Mod** attribute will correctly convert from any integer type to a given modular type, using wraparound semantics.

Historically

In older versions of Ada — such as Ada 95 —, the only way to do this conversion is to use `Unchecked_Conversion`, which is somewhat uncomfortable. Furthermore, if you're trying to convert to a generic formal modular type, how do you know what size of signed integer type to use? Note that `Unchecked_Conversion` might malfunction if the source and target types are of different sizes.

The **Mod** attribute was added to Ada 2005 to solve this problem. Also, we can now safely use this attribute in generics. For example:

Listing 586: mod_attribute.ads

```
generic
   type Formal_Modular is mod <>;
package Mod_Attribute is
   function F return Formal_Modular;
end Mod_Attribute;
```

Listing 587: mod_attribute.adb

```
package body Mod_Attribute is

   A_Signed_Integer : Integer := -1;

   function F return Formal_Modular is
   begin
      return Formal_Modular'Mod
               (A_Signed_Integer);
   end F;

end Mod_Attribute;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Modular_Types.Mod_Attribute
MD5: b2f227b8d4f14cd36508bf33c403f751
```

In this example, F will return the all-ones bit pattern, for whatever modular type is passed to `Formal_Modular`.

Operations on modular types

Modular types are particularly useful for bit manipulation. For example, we can use the **and**, **or**, **xor** and **not** operators for modular types.

Also, we can perform bit-shifting by multiplying or dividing a modular object with a power of two. For example, if `M` is a variable of modular type, then `M := M * 2 ** 3;` shifts the bits to the left by three bits. Likewise, `M := M / 2 ** 3` shifts the bits to the right. Note that the compiler selects the appropriate shifting operator when translating these operations to machine code — no actual multiplication or division will be performed.

Let's see a simple implementation of the CRC-CCITT (0x1D0F) algorithm:

Listing 588: crc_defs.ads

```
package Crc_Defs is

    type Byte is mod 2 ** 8;
    type Crc  is mod 2 ** 16;

    type Byte_Array is
      array (Positive range <>) of Byte;

    function Crc_CCITT (A : Byte_Array)
                        return Crc;

    procedure Display (Crc_A : Crc);

    procedure Display (A : Byte_Array);

end Crc_Defs;
```

Listing 589: crc_defs.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Crc_Defs is

    package Byte_IO is new Modular_IO (Byte);
```

(continues on next page)

(continued from previous page)

```
   package Crc_IO  is new Modular_IO (Crc);

   function Crc_CCITT (A : Byte_Array)
                       return Crc
   is
      X     : Byte;
      Crc_A : Crc := 16#1d0f#;
   begin
      for I in A'Range loop
         X := Byte (Crc_A / 2 ** 8) xor A (I);
         X := X xor (X / 2 ** 4);
         declare
            Crc_X : constant Crc := Crc (X);
         begin
            Crc_A := Crc_A * 2 ** 8  xor
                     Crc_X * 2 ** 12 xor
                     Crc_X * 2 ** 5  xor
                     Crc_X;
         end;
      end loop;

      return Crc_A;
   end Crc_CCITT;

   procedure Display (Crc_A : Crc) is
   begin
      Crc_IO.Put (Crc_A);
      New_Line;
   end Display;

   procedure Display (A : Byte_Array) is
   begin
      for E of A loop
         Byte_IO.Put (E);
         Put (", ");
      end loop;
      New_Line;
   end Display;

begin
   Byte_IO.Default_Width := 1;
   Byte_IO.Default_Base  := 16;
   Crc_IO.Default_Width  := 1;
   Crc_IO.Default_Base   := 16;
end Crc_Defs;
```

Listing 590: show_crc.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Crc_Defs;    use Crc_Defs;

procedure Show_Crc is
   AA    : constant Byte_Array :=
              (16#0#, 16#20#, 16#30#);
   Crc_A : Crc;
begin
   Crc_A := Crc_CCITT (AA);

   Put ("Input array: ");
   Display (AA);

```

(continues on next page)

(continued from previous page)

```
   Put ("CRC-CCITT: ");
   Display (Crc_A);
end Show_Crc;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Modular_Types.Mod_Crc_CCITT_Ada
MD5: 9c66abfadcce92231295cbccad087912
```

Runtime output

```
Input array: 16#0#, 16#20#, 16#30#,
CRC-CCITT: 16#21B9#
```

In this example, the core of the algorithm is implemented in the `Crc_CCITT` function. There, we use bit shifting — for instance, `* 2 ** 8` and `/ 2 ** 8`, which shift left and right, respectively, by eight bits. We also use the **`xor`** operator.

25.9.2 Attributes of Floating-Point Types

In this section, we discuss various attributes related to floating-point types.

In the Ada Reference Manual

- 3.5.8 Operations of Floating Point Types[158]
- A.5.3 Attributes of Floating Point Types[159]

Representation-oriented attributes

In this section, we discuss attributes related to the representation of floating-point types.

Attribute: `Machine_Radix`

`Machine_Radix` is an attribute that returns the radix of the hardware representation of a type. For example:

Listing 591: show_machine_radix.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Machine_Radix is
begin
   Put_Line
     ("Float'Machine_Radix:           "
      & Float'Machine_Radix'Image);
   Put_Line
     ("Long_Float'Machine_Radix:      "
      & Long_Float'Machine_Radix'Image);
   Put_Line
     ("Long_Long_Float'Machine_Radix: "
      & Long_Long_Float'Machine_Radix'Image);
end Show_Machine_Radix;
```

Code block metadata

[158] http://www.ada-auth.org/standards/22rm/html/RM-3-5-8.html
[159] http://www.ada-auth.org/standards/22rm/html/RM-A-5-3.html

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Floating_Point_Types.Machine_
 ↪Radix
MD5: 88680df680f1db4ff803912850370551
```

Runtime output

```
Float'Machine_Radix:            2
Long_Float'Machine_Radix:       2
Long_Long_Float'Machine_Radix:  2
```

Usually, this value is two, as the radix is based on a binary system.

Attributes: Machine_Mantissa

Machine_Mantissa is an attribute that returns the number of bits reserved for the mantissa of the floating-point type. For example:

Listing 592: show_machine_mantissa.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Machine_Mantissa is
begin
   Put_Line
     ("Float'Machine_Mantissa:           "
      & Float'Machine_Mantissa'Image);
   Put_Line
     ("Long_Float'Machine_Mantissa:      "
      & Long_Float'Machine_Mantissa'Image);
   Put_Line
     ("Long_Long_Float'Machine_Mantissa: "
      & Long_Long_Float'Machine_Mantissa'Image);
end Show_Machine_Mantissa;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Floating_Point_Types.Machine_
 ↪Mantissa
MD5: da946a90a454c6e8f68cbff1ec54c7d3
```

Runtime output

```
Float'Machine_Mantissa:            24
Long_Float'Machine_Mantissa:       53
Long_Long_Float'Machine_Mantissa:  64
```

On a typical desktop PC, as indicated by Machine_Mantissa, we have 24 bits for the floating-point mantissa of the **Float** type.

Machine_Emin and Machine_Emax

The Machine_Emin and Machine_Emax attributes return the minimum and maximum value, respectively, of the machine exponent the floating-point type. Note that, in all cases, the returned value is a universal integer. For example:

Listing 593: show_machine_emin_emax.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Machine_Emin_Emax is
```

(continues on next page)

(continued from previous page)

```
begin
   Put_Line
     ("Float'Machine_Emin:               "
      & Float'Machine_Emin'Image);
   Put_Line
     ("Float'Machine_Emax:               "
      & Float'Machine_Emax'Image);
   Put_Line
     ("Long_Float'Machine_Emin:          "
      & Long_Float'Machine_Emin'Image);
   Put_Line
     ("Long_Float'Machine_Emax:          "
      & Long_Float'Machine_Emax'Image);
   Put_Line
     ("Long_Long_Float'Machine_Emin:     "
      & Long_Long_Float'Machine_Emin'Image);
   Put_Line
     ("Long_Long_Float'Machine_Emax:     "
      & Long_Long_Float'Machine_Emax'Image);
end Show_Machine_Emin_Emax;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Floating_Point_Types.Machine_
 ↪Emin_Emax
MD5: 9766e06faaf1fc2ca48dd0bc0461b247
```

Runtime output

```
Float'Machine_Emin:               -125
Float'Machine_Emax:                128
Long_Float'Machine_Emin:          -1021
Long_Float'Machine_Emax:           1024
Long_Long_Float'Machine_Emin:     -16381
Long_Long_Float'Machine_Emax:      16384
```

On a typical desktop PC, the value of `Float'Machine_Emin` and `Float'Machine_Emax` is -125 and 128, respectively.

To get the actual minimum and maximum value of the exponent for a specific type, we need to use the `Machine_Radix` attribute that we've seen previously. Let's calculate the minimum and maximum value of the exponent for the `Float` type on a typical PC:

- Value of minimum exponent: `Float'Machine_Radix ** Float'Machine_Emin`.
  - In our target platform, this is 2^{-125} = 2.35098870164457501594 x 10^{-38}.
- Value of maximum exponent: `Float'Machine_Radix ** Float'Machine_Emax`.
  - In our target platform, this is 2^{128} = 3.40282366920938463463 x 10^{38}.

Attribute: Digits

`Digits` is an attribute that returns the requested decimal precision of a floating-point subtype. Let's see an example:

Listing 594: show_digits.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Digits is
begin
```

(continues on next page)

(continued from previous page)

```
   Put_Line ("Float'Digits:           "
             & Float'Digits'Image);
   Put_Line ("Long_Float'Digits:      "
             & Long_Float'Digits'Image);
   Put_Line ("Long_Long_Float'Digits: "
             & Long_Long_Float'Digits'Image);
end Show_Digits;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Floating_Point_Types.Digits
MD5: cd1c88054f7d54703760a852d08acb6d
```

Runtime output

```
Float'Digits:           6
Long_Float'Digits:      15
Long_Long_Float'Digits: 18
```

Here, the requested decimal precision of the **Float** type is six digits.

Note that we said that **Digits** is the *requested* level of precision, which is specified as part of declaring a floating point type. We can retrieve the actual decimal precision with Base'Digits. For example:

Listing 595: show_base_digits.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Base_Digits is
   type Float_D3 is new Float digits 3;
begin
   Put_Line ("Float_D3'Digits:           "
             & Float_D3'Digits'Image);
   Put_Line ("Float_D3'Base'Digits:      "
             & Float_D3'Base'Digits'Image);
end Show_Base_Digits;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Floating_Point_Types.Base_Digits
MD5: a2deb352f93511ab2a39d41f0b3f9512
```

Runtime output

```
Float_D3'Digits:           3
Float_D3'Base'Digits:      6
```

The requested decimal precision of the Float_D3 type is three digits, while the actual decimal precision is six digits (on a typical desktop PC).

Attributes: Denorm, Signed_Zeros, Machine_Rounds, Machine_Overflows

In this section, we discuss attributes that return **Boolean** values indicating whether a feature is available or not in the target architecture:

- Denorm is an attribute that indicates whether the target architecture uses denormalized numbers[160].

[160] https://en.wikipedia.org/wiki/Subnormal_number

- `Signed_Zeros` is an attribute that indicates whether the type uses a sign for zero values, so it can represent both -0.0 and 0.0.
- `Machine_Rounds` is an attribute that indicates whether rounding-to-nearest is used, rather than some other choice (such as rounding-toward-zero).
- `Machine_Overflows` is an attribute that indicates whether a `Constraint_Error` exception is (or is not) guaranteed to be raised when an operation with that type produces an overflow or divide-by-zero.

Listing 596: show_boolean_attributes.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Boolean_Attributes is
begin
   Put_Line
     ("Float'Denorm:           "
      & Float'Denorm'Image);
   Put_Line
     ("Long_Float'Denorm:      "
      & Long_Float'Denorm'Image);
   Put_Line
     ("Long_Long_Float'Denorm: "
      & Long_Long_Float'Denorm'Image);
   Put_Line
     ("Float'Signed_Zeros:           "
      & Float'Signed_Zeros'Image);
   Put_Line
     ("Long_Float'Signed_Zeros:      "
      & Long_Float'Signed_Zeros'Image);
   Put_Line
     ("Long_Long_Float'Signed_Zeros: "
      & Long_Long_Float'Signed_Zeros'Image);
   Put_Line
     ("Float'Machine_Rounds:           "
      & Float'Machine_Rounds'Image);
   Put_Line
     ("Long_Float'Machine_Rounds:      "
      & Long_Float'Machine_Rounds'Image);
   Put_Line
     ("Long_Long_Float'Machine_Rounds: "
      & Long_Long_Float'Machine_Rounds'Image);
   Put_Line
     ("Float'Machine_Overflows:           "
      & Float'Machine_Overflows'Image);
   Put_Line
     ("Long_Float'Machine_Overflows:      "
      & Long_Float'Machine_Overflows'Image);
   Put_Line
     ("Long_Long_Float'Machine_Overflows: "
      & Long_Long_Float'Machine_Overflows'Image);
end Show_Boolean_Attributes;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Floating_Point_Types.Machine_
 ↪Rounds_Overflows
MD5: b3f72c212cf00e697fe144a87eb72339
```

Runtime output

```
Float'Denorm:           TRUE
Long_Float'Denorm:      TRUE
Long_Long_Float'Denorm: TRUE
Float'Signed_Zeros:           TRUE
Long_Float'Signed_Zeros:      TRUE
Long_Long_Float'Signed_Zeros: TRUE
Float'Machine_Rounds:           TRUE
Long_Float'Machine_Rounds:      TRUE
Long_Long_Float'Machine_Rounds: TRUE
Float'Machine_Overflows:           FALSE
Long_Float'Machine_Overflows:      FALSE
Long_Long_Float'Machine_Overflows: FALSE
```

On a typical PC, we have the following information:

- `Denorm` is true (i.e. the architecture uses denormalized numbers);
- `Signed_Zeros` is true (i.e. the standard floating-point types use a sign for zero values);
- `Machine_Rounds` is true (i.e. rounding-to-nearest is used for floating-point types);
- `Machine_Overflows` is false (i.e. there's no guarantee that a `Constraint_Error` exception is raised when an operation with a floating-point type produces an overflow or divide-by-zero).

Primitive function attributes

In this section, we discuss attributes that we can use to manipulate floating-point values.

Attributes: `Fraction`, `Exponent` and `Compose`

The `Exponent` and `Fraction` attributes return "parts" of a floating-point value:

- `Exponent` returns the machine exponent, and
- `Fraction` returns the mantissa part.

`Compose` is used to return a floating-point value based on a fraction (the mantissa part) and the machine exponent.

Let's see some examples:

Listing 597: show_exponent_fraction_compose.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Exponent_Fraction_Compose is
begin
   Put_Line
     ("Float'Fraction (1.0):     "
      & Float'Fraction (1.0)'Image);
   Put_Line
     ("Float'Fraction (0.25):    "
      & Float'Fraction (0.25)'Image);
   Put_Line
     ("Float'Fraction (1.0e-25): "
      & Float'Fraction (1.0e-25)'Image);
   Put_Line
     ("Float'Exponent (1.0):     "
      & Float'Exponent (1.0)'Image);
   Put_Line
     ("Float'Exponent (0.25):    "
      & Float'Exponent (0.25)'Image);
```

(continues on next page)

(continued from previous page)

```
   Put_Line
     ("Float'Exponent (1.0e-25): "
      & Float'Exponent (1.0e-25)'Image);
   Put_Line
     ("Float'Compose (5.00000e-01, 1):   "
      & Float'Compose (5.00000e-01, 1)'Image);
   Put_Line
     ("Float'Compose (5.00000e-01, -1):  "
      & Float'Compose (5.00000e-01, -1)'Image);
   Put_Line
     ("Float'Compose (9.67141E-01, -83): "
      & Float'Compose (9.67141E-01, -83)'Image);
end Show_Exponent_Fraction_Compose;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Floating_Point_Types.Exponent_
↪Fraction
MD5: d2e61b6b9a7a50861145f6b65e9fac39
```

Runtime output

```
Float'Fraction (1.0):      5.00000E-01
Float'Fraction (0.25):     5.00000E-01
Float'Fraction (1.0e-25):  9.67141E-01
Float'Exponent (1.0):      1
Float'Exponent (0.25):    -1
Float'Exponent (1.0e-25): -83
Float'Compose (5.00000e-01, 1):    1.00000E+00
Float'Compose (5.00000e-01, -1):   2.50000E-01
Float'Compose (9.67141E-01, -83):  1.00000E-25
```

To understand this code example, we have to take this formula into account:

$$\text{Value} = \text{Fraction} \times \text{Machine\_Radix}^{\text{Exponent}}$$

Considering that the value of `Float'Machine_Radix` on a typical PC is two, we see that the value 1.0 is composed by a fraction of 0.5 and a machine exponent of one. In other words:

$$0.5 \times 2^{1} = 1.0$$

For the value 0.25, we get a fraction of 0.5 and a machine exponent of -1, which is the result of $0.5 \times 2^{-1} = 0.25$. We can use the `Compose` attribute to perform this calculation. For example, `Float'Compose (0.5, -1) = 0.25`.

Note that `Fraction` is always between 0.5 and 0.999999 (i.e < 1.0), except for denormalized numbers, where it can be < 0.5.

Attribute: `Scaling`

`Scaling` is an attribute that scales a floating-point value based on the machine radix and a machine exponent passed to the function. For example:

Listing 598: show_scaling.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Scaling is
begin
   Put_Line ("Float'Scaling (0.25, 1): "
             & Float'Scaling (0.25, 1)'Image);
   Put_Line ("Float'Scaling (0.25, 2): "
```

(continues on next page)

(continued from previous page)

```
            & Float'Scaling (0.25, 2)'Image);
   Put_Line ("Float'Scaling (0.25, 3): "
            & Float'Scaling (0.25, 3)'Image);
end Show_Scaling;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Floating_Point_Types.Scaling
MD5: 9fa821d32911b74ee4b4fde3f3adafd8
```

Runtime output

```
Float'Scaling (0.25, 1):  5.00000E-01
Float'Scaling (0.25, 2):  1.00000E+00
Float'Scaling (0.25, 3):  2.00000E+00
```

The scaling is calculated with this formula:

$$\text{scaling} = \text{value} \times \text{Machine\_Radix}^{\text{machine exponent}}$$

For example, on a typical PC with a machine radix of two, `Float'Scaling (0.25, 3) = 2.0` corresponds to

$$0.25 \times 2^3 = 2.0$$

Round-up and round-down attributes

`Floor` and `Ceiling` are attributes that returned the rounded-down or rounded-up value, respectively, of a floating-point value. For example:

Listing 599: show_floor_ceiling.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Floor_Ceiling is
begin
   Put_Line ("Float'Floor (0.25):   "
            & Float'Floor (0.25)'Image);
   Put_Line ("Float'Ceiling (0.25): "
            & Float'Ceiling (0.25)'Image);
end Show_Floor_Ceiling;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Floating_Point_Types.Floor_
↪Ceiling
MD5: 1344d54ae86b9fd4831d5f078eb655d4
```

Runtime output

```
Float'Floor (0.25):    0.00000E+00
Float'Ceiling (0.25):  1.00000E+00
```

As we can see in this example, the rounded-down value (floor) of 0.25 is 0.0, while the rounded-up value (ceiling) of 0.25 is 1.0.

Round-to-nearest attributes

In this section, we discuss three attributes used for rounding: Rounding, Unbiased_Rounding, Machine_Rounding In all cases, the rounding attributes return the nearest integer value (as a floating-point value). For example, the rounded value for 4.8 is 5.0 because 5 is the closest integer value.

Let's see a code example:

Listing 600: show_roundings.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Roundings is
begin
   Put_Line
     ("Float'Rounding (0.5):  "
      & Float'Rounding (0.5)'Image);
   Put_Line
     ("Float'Rounding (1.5):  "
      & Float'Rounding (1.5)'Image);
   Put_Line
     ("Float'Rounding (4.5):  "
      & Float'Rounding (4.5)'Image);
   Put_Line
     ("Float'Rounding (-4.5): "
      & Float'Rounding (-4.5)'Image);
   Put_Line
     ("Float'Unbiased_Rounding (0.5): "
      & Float'Unbiased_Rounding (0.5)'Image);
   Put_Line
     ("Float'Unbiased_Rounding (1.5): "
      & Float'Unbiased_Rounding (1.5)'Image);
   Put_Line
     ("Float'Machine_Rounding (0.5): "
      & Float'Machine_Rounding (0.5)'Image);
   Put_Line
     ("Float'Machine_Rounding (1.5): "
      & Float'Machine_Rounding (1.5)'Image);
end Show_Roundings;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Floating_Point_Types.Rounding
MD5: 3f78165f092a163339cb9593ff15a50d
```

Runtime output

```
Float'Rounding (0.5):   1.00000E+00
Float'Rounding (1.5):   2.00000E+00
Float'Rounding (4.5):   5.00000E+00
Float'Rounding (-4.5): -5.00000E+00
Float'Unbiased_Rounding (0.5):  0.00000E+00
Float'Unbiased_Rounding (1.5):  2.00000E+00
Float'Machine_Rounding (0.5):  1.00000E+00
Float'Machine_Rounding (1.5):  2.00000E+00
```

The difference between these attributes is the way they handle the case when a value is exactly in between two integer values. For example, 4.5 could be rounded up to 5.0 or rounded down to 4.0. This is the way each rounding attribute works in this case:

- Rounding rounds away from zero. Positive floating-point values are rounded up, while negative floating-point values are rounded down when the value is between two inte-

ger values. For example:

  - 4.5 is rounded-up to 5.0, i.e. `Float'Rounding (4.5) = Float'Ceiling (4.5) = 5.0`.
  - -4.5 is rounded-down to -5.0, i.e. `Float'Rounding (-4.5) = Float'Floor (-4.5) = -5.0`.

- `Unbiased_Rounding` rounds toward the even integer. For example,
  - `Float'Unbiased_Rounding (0.5) = 0.0` because zero is the closest even integer, while
  - `Float'Unbiased_Rounding (1.5) = 2.0` because two is the closest even integer.
- `Machine_Rounding` uses the most appropriate rounding instruction available on the target platform. While this rounding attribute can potentially have the best performance, its result may be non-portable. For example, whether the rounding of 4.5 becomes 4.0 or 5.0 depends on the target platform.
  - If an algorithm depends on a specific rounding behavior, it's best to avoid the `Machine_Rounding` attribute. On the other hand, if the rounding behavior won't have a significant impact on the results, we can safely use this attribute.

Attributes: `Truncation`, `Remainder`, `Adjacent`

The `Truncation` attribute returns the *truncated* value of a floating-point value, i.e. the value corresponding to the integer part of a number rounded toward zero. This corresponds to the number before the radix point. For example, the truncation of 1.55 is 1.0 because the integer part of 1.55 is 1.

The `Remainder` attribute returns the remainder part of a division. For example, `Float'Remainder (1.25, 0.5) = 0.25`. Let's briefly discuss the details of this operations. The result of the division 1.25 / 0.5 is 2.5. Here, 1.25 is the dividend and 0.5 is the divisor. The quotient and remainder of this division are 2 and 0.25, respectively. (Here, the quotient is an integer number, and the remainder is the floating-point part that remains.)

Note that the relation between quotient and remainder is defined in such a way that we get the original dividend back when we use the formula: "quotient x divisor + remainder = dividend". For the previous example, this means 2 x 0.5 + 0.25 = 1.25.

The `Adjacent` attribute is the next machine value towards another value. For example, on a typical PC, the adjacent value of a small value — say, 1.0×10^{-83} — towards zero is +0.0, while the adjacent value of this small value towards 1.0 is another small, but greater value — in fact, it's 1.40130×10^{-45}. Note that the first parameter of the `Adjacent` attribute is the value we want to analyze and the second parameter is the `Towards` value.

Let's see a code example:

Listing 601: show_truncation_remainder_adjacent.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Truncation_Remainder_Adjacent is
begin
   Put_Line
     ("Float'Truncation (1.55):  "
      & Float'Truncation (1.55)'Image);
   Put_Line
     ("Float'Truncation (-1.55): "
      & Float'Truncation (-1.55)'Image);
   Put_Line
     ("Float'Remainder (1.25, 0.25): "
      & Float'Remainder (1.25, 0.25)'Image);
```

(continues on next page)

(continued from previous page)

```
   Put_Line
     ("Float'Remainder (1.25, 0.5):  "
      & Float'Remainder (1.25, 0.5)'Image);
   Put_Line
     ("Float'Remainder (1.25, 1.0):  "
      & Float'Remainder (1.25, 1.0)'Image);
   Put_Line
     ("Float'Remainder (1.25, 2.0):  "
      & Float'Remainder (1.25, 2.0)'Image);
   Put_Line
     ("Float'Adjacent (1.0e-83, 0.0): "
      & Float'Adjacent (1.0e-83, 0.0)'Image);
   Put_Line
     ("Float'Adjacent (1.0e-83, 1.0): "
      & Float'Adjacent (1.0e-83, 1.0)'Image);
end Show_Truncation_Remainder_Adjacent;
```

Attributes: `Copy_Sign` and `Leading_Part`

`Copy_Sign` is an attribute that returns a value where the sign of the second floating-point argument is multiplied by the magnitude of the first floating-point argument. For example, `Float'Copy_Sign (1.0, -10.0)` is -1.0. Here, the sign of the second argument (-10.0) is multiplied by the magnitude of the first argument (1.0), so the result is -1.0.

`Leading_Part` is an attribute that returns the *approximated* version of the mantissa of a value based on the specified number of leading bits for the mantissa. Let's see some examples:

- `Float'Leading_Part (3.1416, 1)` is 2.0 because that's the value we can represent with one leading bit.
  - Note that `Float'Fraction (2.0) = 0.5` — which can be represented with one leading bit in the mantissa — and `Float'Exponent (2.0) = 2`.)
- If we increase the number of leading bits of the mantissa to two — by writing `Float'Leading_Part (3.1416, 2)` —, we get 3.0 because that's the value we can represent with two leading bits.
- If we increase again the number of leading bits to five — `Float'Leading_Part (3.1416, 5)` —, we get 3.125.
  - Note that, in this case `Float'Fraction (3.125) = 0.78125` and `Float'Exponent (3.125) = 2`.
  - The binary mantissa is actually `2#110_0100_0000_0000_0000_0000#`, which can be represented with five leading bits as expected: `2#110_01#`.
    * We can get the binary mantissa by calculating `Float'Fraction (3.125) * Float (Float'Machine_Radix) ** (Float'Machine_Mantissa - 1)` and converting the result to binary format. The -1 value in the formula corresponds to the sign bit.

Attention

In this explanation about the `Leading_Part` attribute, we're talking about leading bits. Strictly speaking, however, this is actually a simplification, and it's only correct if `Machine_Radix` is equal to two — which is the case for most machines. Therefore, in most cases, the explanation above is perfectly acceptable.

However, if `Machine_Radix` is *not* equal to two, we cannot use the term "bits" anymore, but rather digits of the `Machine_Radix`.

Let's see some examples:

Listing 602: show_copy_sign_leading_part_machine.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Copy_Sign_Leading_Part_Machine is
begin
   Put_Line
     ("Float'Copy_Sign (1.0, -10.0): "
      & Float'Copy_Sign (1.0, -10.0)'Image);
   Put_Line
     ("Float'Copy_Sign (-1.0, -10.0): "
      & Float'Copy_Sign (-1.0, -10.0)'Image);
   Put_Line
     ("Float'Copy_Sign (1.0,  10.0): "
      & Float'Copy_Sign (1.0,  10.0)'Image);
   Put_Line
     ("Float'Copy_Sign (1.0, -0.0):  "
      & Float'Copy_Sign (1.0, -0.0)'Image);
   Put_Line
     ("Float'Copy_Sign (1.0,  0.0):  "
      & Float'Copy_Sign (1.0,  0.0)'Image);
   Put_Line
     ("Float'Leading_Part (1.75, 1): "
      & Float'Leading_Part (1.75, 1)'Image);
   Put_Line
     ("Float'Leading_Part (1.75, 2): "
      & Float'Leading_Part (1.75, 2)'Image);
   Put_Line
     ("Float'Leading_Part (1.75, 3): "
      & Float'Leading_Part (1.75, 3)'Image);
end Show_Copy_Sign_Leading_Part_Machine;
```

Attribute: Machine

Not every real number is directly representable as a floating-point value on a specific machine. For example, let's take a value such as 1.0 x 10^{15} (or 1,000,000,000,000,000):

Listing 603: show_float_value.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Float_Value is
   package F_IO is new
     Ada.Text_IO.Float_IO (Float);

   V : Float;
begin
   F_IO.Default_Fore := 3;
   F_IO.Default_Aft  := 1;
   F_IO.Default_Exp  := 0;

   V := 1.0E+15;
   Put ("1.0E+15 = ");
   F_IO.Put (Item => V);
   New_Line;

end Show_Float_Value;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Floating_Point_Types.Float_Value
MD5: a7f80f7584ebaf39f2d5f9564c9c7d64
```

Runtime output

```
1.0E+15 = 999999986991000.0
```

If we run this example on a typical PC, we see that the expected value `1_000_000_000_000_000.0` was displayed as `999_999_986_991_000.0`. This is because 1.0 x 10^{15} isn't directly representable on this machine, so it has to be modified to a value that is actually representable (on the machine).

This *automatic* modification we've just described is actually hidden, so to say, in the assignment. However, we can make it more visible by using the `Machine (X)` attribute, which returns a version of X that is representable on the target machine. The `Machine (X)` attribute rounds (or truncates) X to either one of the adjacent machine numbers for the specific floating-point type of X. (Of course, if the real value of X is directly representable on the target machine, no modification is performed.)

In fact, we could rewrite the `V := 1.0E+15` assignment of the code example as `V := Float'Machine (1.0E+15)`, as we're never assigning a real value directly to a floating-pointing variable — instead, we're first converting it to a version of the real value that is representable on the target machine. In this case, 999999986991000.0 is a representable version of the real value 1.0 x 10^{15}. Of course, writing `V := 1.0E+15` or `V := Float'Machine (1.0E+15)` doesn't make any difference to the actual value that is assigned to V (in the case of this specific target architecture), as the conversion to a representable value happens automatically during the assignment to V.

There are, however, instances where using the `Machine` attribute does make a difference in the result. For example, let's say we want to calculate the difference between the original real value in our example (1.0 x 10^{15}) and the actual value that is assigned to V. We can do this by using the `Machine` attribute in the calculation:

Listing 604: show_machine_attribute.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Machine_Attribute is
   package F_IO is new
     Ada.Text_IO.Float_IO (Float);

   V : Float;
begin
   F_IO.Default_Fore := 3;
   F_IO.Default_Aft  := 1;
   F_IO.Default_Exp  := 0;

   Put_Line
     ("Original value: 1_000_000_000_000_000.0");

   V := 1.0E+15;
   Put ("Machine value:  ");
   F_IO.Put (Item => V);
   New_Line;

   V := 1.0E+15 - Float'Machine (1.0E+15);
   Put ("Difference:     ");
   F_IO.Put (Item => V);
   New_Line;

end Show_Machine_Attribute;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Floating_Point_Types.Machine_
 ↪Attribute
MD5: c2db2cca028dc5811068f9b7f1bc209d
```

Runtime output

```
Original value: 1_000_000_000_000_000.0
Machine value:  999999986991000.0
Difference:     13008896.0
```

When we run this example on a typical PC, we see that the difference is roughly 1.3009 x 10^7. (Actually, the value that we might see is 1.3008896 x 10^7, which is a version of 1.3009 x 10^7 that is representable on the target machine.)

When we write `1.0E+15 - Float'Machine (1.0E+15)`:

- the first value in the operation is the universal real value 1.0 x 10^{15}, while
- the second value in the operation is a version of the universal real value 1.0 x 10^{15} that is representable on the target machine.

This also means that, in the assignment to V, we're actually writing `V := Float'Machine (1.0E+15 - Float'Machine (1.0E+15))`, so that:

1. we first get the intermediate real value that represents the difference between these values; and then
2. we get a version of this intermediate real value that is representable on the target machine.

This is the reason why we see 1.3008896 x 10^7 instead of 1.3009 x 10^7 when we run this application.

25.9.3 Attributes of Fixed-Point types

In this section, we discuss various attributes and operations related to fixed-point types.

In the Ada Reference Manual

- 3.5.10 Operations of Fixed Point Types[161]
- A.5.4 Attributes of Fixed Point Types[162]

Attributes of ordinary and decimal fixed-point types

Attribute: Machine_Radix

Machine_Radix is an attribute that returns the radix of the hardware representation of a type. For example:

Listing 605: show_fixed_machine_radix.adb

```
1 with Ada.Text_IO; use Ada.Text_IO;
2
3 procedure Show_Fixed_Machine_Radix is
4    type T3_D3 is delta 10.0 ** (-3) digits 3;
5
```

(continues on next page)

[161] http://www.ada-auth.org/standards/22rm/html/RM-3-5-10.html
[162] http://www.ada-auth.org/standards/22rm/html/RM-A-5-4.html

(continued from previous page)

```
   D : constant := 2.0 ** (-31);
   type TQ31 is delta D range -1.0 .. 1.0 - D;
begin
   Put_Line ("T3_D3'Machine_Radix: "
             & T3_D3'Machine_Radix'Image);
   Put_Line ("TQ31'Machine_Radix:  "
             & TQ31'Machine_Radix'Image);
end Show_Fixed_Machine_Radix;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Fixed_Point_Types.Fixed_Machine_
 ↪Radix
MD5: a09d060a58f76550e948a8245ffb5fde
```

Runtime output

```
T3_D3'Machine_Radix:  2
TQ31'Machine_Radix:   2
```

Usually, this value is two, as the radix is based on a binary system.

Attribute: `Machine_Rounds` and `Machine_Overflows`

In this section, we discuss attributes that return **`Boolean`** values indicating whether a feature is available or not in the target architecture:

- `Machine_Rounds` is an attribute that indicates what happens when the result of a fixed-point operation is inexact:
  - `T'Machine_Rounds = True`: inexact result is rounded;
  - `T'Machine_Rounds = False`: inexact result is truncated.
- `Machine_Overflows` is an attribute that indicates whether a `Constraint_Error` is guaranteed to be raised when a fixed-point operation with that type produces an overflow or divide-by-zero.

Listing 606: show_boolean_attributes.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Boolean_Attributes is
   type T3_D3 is delta 10.0 ** (-3) digits 3;

   D : constant := 2.0 ** (-31);
   type TQ31 is delta D range -1.0 .. 1.0 - D;
begin
   Put_Line ("T3_D3'Machine_Rounds:    "
             & T3_D3'Machine_Rounds'Image);
   Put_Line ("TQ31'Machine_Rounds:     "
             & TQ31'Machine_Rounds'Image);
   Put_Line ("T3_D3'Machine_Overflows: "
             & T3_D3'Machine_Overflows'Image);
   Put_Line ("TQ31'Machine_Overflows:  "
             & TQ31'Machine_Overflows'Image);
end Show_Boolean_Attributes;
```

Attribute: Small and Delta

The Small and **Delta** attributes return numbers that indicate the numeric precision of a fixed-point type. In many cases, the Small of a type T is equal to the **Delta** of that type — i.e. T'Small = T'Delta. Let's discuss each attribute and how they distinguish from each other.

The **Delta** attribute returns the value of the **delta** that was used in the type definition. For example, if we declare **type T3_D3 is delta** 10.0 ** (-3) **digits** D, then the value of T3_D3'Delta is the 10.0 ** (-3) that we used in the type definition.

The Small attribute returns the "small" of a type, i.e. the smallest value used in the machine representation of the type. The *small* must be at least equal to or smaller than the *delta* — in other words, it must conform to the T'Small <= T'Delta rule.

For further reading...

The Small and the **Delta** need not actually be small numbers. They can be arbitrarily large. For instance, they could be 1.0, or 1000.0. Consider the following example:

Listing 607: fixed_point_defs.ads

```
package Fixed_Point_Defs is
   S     : constant := 32;
   Exp   : constant := 128;
   D     : constant := 2.0 ** (-S + Exp + 1);

   type Fixed is delta D
     range -1.0 * 2.0 ** Exp ..
           1.0 * 2.0 ** Exp - D;

   pragma Assert (Fixed'Size = S);
end Fixed_Point_Defs;
```

Listing 608: show_fixed_type_info.adb

```
with Fixed_Point_Defs; use Fixed_Point_Defs;
with Ada.Text_IO;      use Ada.Text_IO;

procedure Show_Fixed_Type_Info is
begin
   Put_Line ("Size : "
             & Fixed'Size'Image);
   Put_Line ("Small : "
             & Fixed'Small'Image);
   Put_Line ("Delta : "
             & Fixed'Delta'Image);
   Put_Line ("First : "
             & Fixed'First'Image);
   Put_Line ("Last : "
             & Fixed'Last'Image);
end Show_Fixed_Type_Info;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Fixed_Point_Types.Large_Small_
 ↪Attribute
MD5: 89672950b355060d250e0f5d7e2d40cb
```

Runtime output

```
Size :  32
Small :  1.58456325028528675E+29
Delta :  1.58456325028528675E+29
First : -340282366920938463463374607431768211456.0
Last :  340282366762482138434845932244680310784.0
```

In this example, the *small* of the Fixed type is actually quite large: 1.58456325028528675[29]. (Also, the first and the last values are large: -340,282,366,920,938,463,463,374,607,431,768,211,456.0 and 340,282,366,762,482,138,434,845,932,244,680,310,784.0, or approximately -3.4028[38] and 3.4028[38].)

In this case, if we assign 1 or 1,000 to a variable F of this type, the actual value stored in F is zero. Feel free to try this out!

When we declare an ordinary fixed-point data type, we must specify the *delta*. Specifying the *small*, however, is optional:

- If the *small* isn't specified, it is automatically selected by the compiler. In this case, the actual value of the *small* is an implementation-defined power of two — always following the rule that says: `T'Small <= T'Delta`.
- If we want, however, to specify the *small*, we can do that by using the `Small` aspect. In this case, it doesn't need to be a power of two.

For decimal fixed-point types, we cannot specify the *small*. In this case, it's automatically selected by the compiler, and it's always equal to the *delta*.

Let's see an example:

Listing 609: fixed_small_delta.ads

```
package Fixed_Small_Delta is
   D3 : constant := 10.0 ** (-3);

   type T3_D3 is delta D3 digits 3;

   type TD3   is delta D3 range -1.0 .. 1.0 - D3;

   D31 : constant := 2.0 ** (-31);
   D15 : constant := 2.0 ** (-15);

   type TQ31 is delta D31 range -1.0 .. 1.0 - D31;

   type TQ15 is delta D15 range -1.0 .. 1.0 - D15
     with Small => D31;
end Fixed_Small_Delta;
```

Listing 610: show_fixed_small_delta.adb

```
with Ada.Text_IO;       use Ada.Text_IO;

with Fixed_Small_Delta; use Fixed_Small_Delta;

procedure Show_Fixed_Small_Delta is
begin
   Put_Line ("T3_D3'Small: "
             & T3_D3'Small'Image);
   Put_Line ("T3_D3'Delta: "
             & T3_D3'Delta'Image);
   Put_Line ("T3_D3'Size: "
             & T3_D3'Size'Image);
   Put_Line ("--------------------");

   Put_Line ("TD3'Small: "
             & TD3'Small'Image);
   Put_Line ("TD3'Delta: "
             & TD3'Delta'Image);
```

(continues on next page)

(continued from previous page)

```
   Put_Line ("TD3'Size: "
             & TD3'Size'Image);
   Put_Line ("--------------------");

   Put_Line ("TQ31'Small: "
             & TQ31'Small'Image);
   Put_Line ("TQ31'Delta: "
             & TQ31'Delta'Image);
   Put_Line ("TQ32'Size: "
             & TQ31'Size'Image);
   Put_Line ("--------------------");

   Put_Line ("TQ15'Small: "
             & TQ15'Small'Image);
   Put_Line ("TQ15'Delta: "
             & TQ15'Delta'Image);
   Put_Line ("TQ15'Size: "
             & TQ15'Size'Image);
end Show_Fixed_Small_Delta;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Fixed_Point_Types.Fixed_Small_
 ↪Delta
MD5: 0e811c7c0b92f05483b0ac7c3489dc3d
```

Runtime output

```
T3_D3'Small:  1.00000000000000000E-03
T3_D3'Delta:  1.00000000000000000E-03
T3_D3'Size:  11
--------------------
TD3'Small:  9.76562500000000000E-04
TD3'Delta:  1.00000000000000000E-03
TD3'Size:  11
--------------------
TQ31'Small:  4.65661287307739258E-10
TQ31'Delta:  4.65661287307739258E-10
TQ32'Size:  32
--------------------
TQ15'Small:  4.65661287307739258E-10
TQ15'Delta:  3.05175781250000000E-05
TQ15'Size:  32
```

As we can see in the output of the code example, the **Delta** attribute returns the value we used for **delta** in the type definition of the T3_D3, TD3, TQ31 and TQ15 types.

The TD3 type is an ordinary fixed-point type with the the same delta as the decimal T3_D3 type. In this case, however, TD3'Small is not the same as the TD3'Delta. On a typical desktop PC, TD3'Small is 2^{-10}, while the delta is 10^{-3}. (Remember that, for ordinary fixed-point types, if we don't specify the *small*, it's automatically selected by the compiler as a power of two smaller than or equal to the *delta*.)

In the case of the TQ15 type, we're specifying the *small* by using the Small aspect. In this case, the underlying size of the TQ15 type is 32 bits, while the precision we get when operating with this type is 16 bits. Let's see a specific example for this type:

Listing 611: show_fixed_small_delta.adb

```
with Ada.Text_IO;       use Ada.Text_IO;

```

(continues on next page)

(continued from previous page)

```
with Fixed_Small_Delta; use Fixed_Small_Delta;

procedure Show_Fixed_Small_Delta is
   V : TQ15;
begin
   Put_Line ("V'Size: " & V'Size'Image);

   V := TQ15'Small;
   Put_Line ("V: " & V'Image);

   V := TQ15'Delta;
   Put_Line ("V: " & V'Image);
end Show_Fixed_Small_Delta;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Fixed_Point_Types.Fixed_Small_
↪Delta
MD5: f2a71db911913d6fbf5343671599c0ae
```

Runtime output

```
V'Size:  32
V:  0.00000
V:  0.00003
```

In the first assignment, we assign TQ15'Small (2^{-31}) to V. This value is smaller than the type's *delta* (2^{-15}). Even though V'Size is 32 bits, V'Delta indicates 16-bit precision, and TQ15'Small requires 32-bit precision to be represented correctly. As a result, V has a value of zero after this assignment.

In contrast, after the second assignment — where we assign TQ15'Delta (2^{-15}) to V — we see, as expected, that V has the same value as the *delta*.

Attributes: Fore and Aft

The Fore and Aft attributes indicate the number of characters or digits needed for displaying a value in decimal representation. To be more precise:

- The Fore attribute refers to the digits before the decimal point and it returns the number of digits plus one for the sign indicator (which is either - or space), and it's always at least two.
- The Aft attribute returns the number of decimal digits that is needed to represent the delta after the decimal point.

Let's see an example:

Listing 612: show_fixed_fore_aft.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Fixed_Fore_Aft is
   type T3_D3 is delta 10.0 ** (-3) digits 3;

   D : constant := 2.0 ** (-31);
   type TQ31 is delta D range -1.0 .. 1.0 - D;

   Dec : constant T3_D3 := -0.123;
   Fix : constant TQ31  := -TQ31'Delta;
begin
```

(continues on next page)

(continued from previous page)

```
12    Put_Line ("T3_D3'Fore: "
13              & T3_D3'Fore'Image);
14    Put_Line ("T3_D3'Aft:  "
15              & T3_D3'Aft'Image);
16
17    Put_Line ("TQ31'Fore: "
18              & TQ31'Fore'Image);
19    Put_Line ("TQ31'Aft:  "
20              & TQ31'Aft'Image);
21    Put_Line ("----");
22    Put_Line ("Dec: "
23              & Dec'Image);
24    Put_Line ("Fix: "
25              & Fix'Image);
26 end Show_Fixed_Fore_Aft;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Fixed_Point_Types.Fixed_Fore_Aft
MD5: d031f74d967a96dee1c6a83ff4bd14cf
```

Runtime output

```
T3_D3'Fore:  2
T3_D3'Aft:   3
TQ31'Fore:  2
TQ31'Aft:   10
----
Dec: -0.123
Fix: -0.0000000005
```

As we can see in the output of the `Dec` and `Fix` variables at the bottom, the value of `Fore` is two for both `T3_D3` and `TQ31`. This value corresponds to the length of the string "-0" displayed in the output for these variables (the first two characters of "-0.123" and "-0.0000000005").

The value of `Dec'Aft` is three, which matches the number of digits after the decimal point in "-0.123". Similarly, the value of `Fix'Aft` is 10, which matches the number of digits after the decimal point in "-0.0000000005".

Attributes of decimal fixed-point types

The attributes presented in this subsection are only available for decimal fixed-point types.

Attribute: `Digits`

`Digits` is an attribute that returns the number of significant decimal digits of a decimal fixed-point subtype. This corresponds to the value that we use for the **`digits`** in the definition of a decimal fixed-point type.

Let's see an example:

Listing 613: show_decimal_digits.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  procedure Show_Decimal_Digits is
4     type T3_D6 is delta 10.0 ** (-3) digits 6;
5     subtype T3_D2 is T3_D6 digits 2;
6  begin
```

(continues on next page)

(continued from previous page)

```
   Put_Line ("T3_D6'Digits: "
             & T3_D6'Digits'Image);
   Put_Line ("T3_D2'Digits: "
             & T3_D2'Digits'Image);
end Show_Decimal_Digits;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Fixed_Point_Types.Decimal_Digits
MD5: d46e67bd0f8b369918e7ab9ab4413ae7
```

Runtime output

```
T3_D6'Digits:  6
T3_D2'Digits:  2
```

In this example, T3_D6'Digits is six, which matches the value that we used for **digits** in the type definition of T3_D6. The same logic applies for subtypes, as we can see in the value of T3_D2'Digits. Here, the value is two, which was used in the declaration of the T3_D2 subtype.

Attribute: Scale

According to the Ada Reference Manual, the Scale attribute "indicates the position of the point relative to the rightmost significant digits of values" of a decimal type. For example:

- If the value of Scale is two, then there are two decimal digits after the decimal point.
- If the value of Scale is negative, that implies that the **Delta** is a power of 10 greater than 1, and it would be the number of zero digits that every value would end in.

The Scale corresponds to the N used in the **delta** 10.0 ** (-N) expression of the type declaration. For example, if we write **delta** 10.0 ** (-3) in the declaration of a type T, then the value of T'Scale is three.

Let's look at this complete example:

Listing 614: show_decimal_scale.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Decimal_Scale is
   type TM3_D6 is delta 10.0 **   3  digits 6;
   type T3_D6  is delta 10.0 ** (-3) digits 6;
   type T9_D12 is delta 10.0 ** (-9) digits 12;
begin
   Put_Line ("TM3_D6'Scale: "
             & TM3_D6'Scale'Image);
   Put_Line ("T3_D6'Scale: "
             & T3_D6'Scale'Image);
   Put_Line ("T9_D12'Scale: "
             & T9_D12'Scale'Image);
end Show_Decimal_Scale;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Fixed_Point_Types.Decimal_Scale
MD5: 56a99848cf31a9c69fe6d91ead73375a
```

Runtime output

```
TM3_D6'Scale: -3
T3_D6'Scale:  3
T9_D12'Scale:  9
```

In this example, we get the following values for the scales:

- TM3_D6'Scale = -3,
- T3_D6'Scale = 3,
- T9_D12 = 9.

As you can see, the value of Scale is directly related to the *delta* of the corresponding type declaration.

Attribute: Round

The Round attribute rounds a value of any real type to the nearest value that is a multiple of the *delta* of the decimal fixed-point type, rounding away from zero if exactly between two such multiples.

For example, if we have a type T with three digits, and we use a value with 10 digits after the decimal point in a call to T'Round, the resulting value will have three digits after the decimal point.

Note that the X input of an S'Round (X) call is a universal real value, while the returned value is of S'Base type.

Let's look at this example:

Listing 615: show_decimal_round.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Decimal_Round is
   type T3_D3 is delta 10.0 ** (-3) digits 3;
begin
   Put_Line ("T3_D3'Round (0.2774): "
             & T3_D3'Round (0.2774)'Image);
   Put_Line ("T3_D3'Round (0.2777): "
             & T3_D3'Round (0.2777)'Image);
end Show_Decimal_Round;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Data_Types.Numerics.Fixed_Point_Types.Decimal_Round
MD5: 153d9dae52fee750da30dd9152a03c37
```

Runtime output

```
T3_D3'Round (0.2774):  0.277
T3_D3'Round (0.2777):  0.278
```

Here, the T3_D3 has a precision of three digits. Therefore, to fit this precision, 0.2774 is rounded to 0.277, and 0.2777 is rounded to 0.278.

CHAPTER

TWENTYSIX

CONTROL FLOW

26.1 Expressions

26.1.1 Expressions: Definition

According to the Ada Reference Manual, an expression "is a formula that defines the computation or retrieval of a value." Also, when an expression is evaluated, the computed or retrieved value always has an associated type known at compile-time.

Even though the definition above is very simple, Ada expressions are actually very flexible — and they can also be very complex. In fact, if you read the corresponding section[163] of the Ada Reference Manual, you'll quickly discover that they include elements such as relations, membership choices, terms and primaries. Some of these are classic elements of expressions in programming languages, although some of their forms are unique to Ada. In this section, we present examples of just some of these elements. For a complete overview, please refer to the Reference Manual.

In the Ada Reference Manual

- 4.4 Expressions[164]

Relations and simple expressions

Expressions usually consist of relations, which in turn consist of simple expressions. (There are more details to this, but we'll keep it simple for the moment.) Let's see a code example with a few expressions, which we dissect into the corresponding grammatical elements — we're going to discuss them later:

Listing 1: show_expression_elements.adb

```
1  procedure Show_Expression_Elements is
2     type Mode is (Off, A, B, C, D);
3
4     pragma Unreferenced (B, C, D);
5
6     subtype Active_Mode is Mode
7       range Mode'Succ (Off) .. Mode'Last;
8
9     M1, M2 : Mode;
10    Dummy     : Boolean;
11 begin
12    M1 := A;
13
```

(continues on next page)

[163] http://www.ada-auth.org/standards/22rm/html/RM-4-4.html
[164] http://www.ada-auth.org/standards/22rm/html/RM-4-4.html

(continued from previous page)

```
   Dummy :=
       M1 in Active_Mode
                and then M2 in Off | A;
   --
   --   ^^^^^^^^^^^^^^^^^ relation
   --
   --                     ^^^^^^^^^^^^^^ relation
   --   ^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^
   --                                  expression

   Dummy :=
       M1 in Active_Mode;
   --  ^^ name
   --  ^^ primary
   --  ^^ factor
   --  ^^ term
   --  ^^ simple expression
   --
   --        ^^^^^^^^^^^ membership choice
   --        ^^^^^^^^^^^ membership choice list
   --
   --  ^^^^^^^^^^^^^^^^^ relation
   --  ^^^^^^^^^^^^^^^^^ expression

   Dummy :=
       M2 in Off | A;
   --  ^^ name
   --  ^^ primary
   --  ^^ factor
   --  ^^ term
   --  ^^ simple expression
   --
   --        ^^^ membership choice
   --             ^ membership choice
   --        ^^^^^^^ membership choice list
   --
   --  ^^^^^^^^^^^^^ relation
   --  ^^^^^^^^^^^^^ expression

end Show_Expression_Elements;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Expressions.Expressions_Definition.
 ↪Expression_Elements
MD5: a22e6f2d2bc181ce77097a1de204eb62
```

Build output

```
show_expression_elements.adb:9:08: warning: variable "M2" is read but never␣
 ↪assigned [-gnatwv]
```

In this code example, we see three expressions. As we mentioned earlier, every expression has a type; here, the type of each expression is **Boolean**.

The first expression (`M1 in Active_Mode and then M2 in Off | A`) consists of two relations: `M1 in Active_Mode` and `M2 in Off | A`. Let's discuss some of the details.

The `M1 in Active_Mode` relation consists of the simple expression `M1` and the membership choice list `Active_Mode`. (Here, the **in** keyword is part of the relation definition.) Also, as we see in the comments of the source code, the simple expression `M1` is, at the same time, a term, a factor, a primary and a name.

Let's briefly talk about this chain of syntactic elements for simple expressions. Very roughly said, this is how we can break up simple expressions:

- a simple expression consists of terms;
- a term consists of factors;
- a factor consists of primaries;
- a primary can be one of those:
  - a numeric literal;
  - `null`;
  - a string literal;
  - *an aggregate* (page 512);
  - a name;
  - an allocator (like `new Integer`);
  - *a parenthesized expression* (page 691);
  - *a conditional expression* (page 693);
  - *a quantified expression* (page 696);
  - *a declare expression* (page 700).

For further reading...

The definition of simple expressions we've just seen is very simplified. In actuality, these are the grammatical elements specified in the Ada Reference Manual:

```
simple_expression ::=
  [unary_adding_operator] term {binary_adding_operator term}

term ::= factor {multiplying_operator factor}

factor ::= primary [** primary] | abs primary | not primary

primary ::=
  numeric_literal | null | string_literal | aggregate
| name | allocator | (expression)
| (conditional_expression) | (quantified_expression)
| (declare_expression)
```

Later on in this chapter, we discuss *conditional expressions* (page 693), *quantified expressions* (page 696) and *declare expressions* (page 700) in more details.

In the relation `M2 in Off | A` from the code example, `Off | A` is a membership choice list, and `Off` and `A` are membership choices.

For further reading...

Relations can actually be much more complicated than the one we just saw. In fact, this is the definition from the Ada Reference Manual:

```
expression ::=
     relation {and relation}
   | relation {and then relation}
   | relation {or relation}
   | relation {or else relation}
   | relation {xor relation}
```

```
relation ::=
     simple_expression
       [relational_operator simple_expression]
   | simple_expression [not] in
       membership_choice_list
   | raise_expression
```

Again, for more details, please refer to the section on expressions[165] of the Ada Reference Manual.

In the Ada Reference Manual

- 4.4 Expressions[166]
- 4.5.2 Relational Operators and Membership Tests[167]

Numeric expressions

The expressions we've seen so far had the **Boolean** type. Although much of the grammar described in the Manual exists exclusively for Boolean operations, we can also write numeric expressions such as the following one:

Listing 2: show_numeric_expressions.adb

```
1  procedure Show_Numeric_Expressions is
2     C1    : constant Integer := 5;
3     Dummy :          Integer;
4  begin
5     Dummy :=
6         -2 ** 4 + 3 * C1 ** 8;
7     --                      ^ numeric literal
8     --                      ^ primary
9     --                ^^      name
10    --                ^^      primary
11    --                ^^^^^^^ factor
12    --              ^ multiplying operator
13    --            ^           numeric literal
14    --            ^           primary
15    --            ^           factor
16    --            ^^^^^^^^^^^ term
17    --
18    --        ^ numeric literal
19    --        ^ primary
20    --    ^ numeric literal
21    --    ^ primary
22    --    ^^^^^^              factor
23    --    ^^^^^^              term
24    --          ^ binary adding operator
25    --  ^ unary adding operator
26    --
27    --  ^^^^^^^^^^^^^^^^^^^^^ simple expression
28    --
29    --  ^^^^^^^^^^^^^^^^^^^^^ expression
30 end Show_Numeric_Expressions;
```

[165] http://www.ada-auth.org/standards/22rm/html/RM-4-4.html
[166] http://www.ada-auth.org/standards/22rm/html/RM-4-4.html
[167] http://www.ada-auth.org/standards/22rm/html/RM-4-5-2.html

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Expressions.Expressions_Definition.
 ↪Numeric_Expressions
MD5: a3c902c7aa5b0afe30ae220256c3306a
```

In this code example, the expression `- 2 ** 4 + 3 * C1 ** 8` consists of just a single simple expression. (Note that simple expressions do not have to be "simple".) This simple expression consists of two terms: `2 ** 4` and `3 * C1 ** 8`. While the `2 ** 4` term is also a single factor, the `3 * C1 ** 8` term consists of two factors: `3` and `C1 ** 8`. Both the `2 ** 4` and the `C1 ** 8` factors consists of two primaries each:

- the `2 ** 4` factor has the primaries `2` and `4`,
- the `C1 ** 8` factor has the primaries `C1` and `8`.

In the Ada Reference Manual

- 4.4 Expressions[168]

Other expressions

Expressions aren't limited to the **Boolean** type or to numeric types. Indeed, expressions can be of any type, and the definition of primaries we've seen earlier on already hints in this direction — as it includes elements such as allocators. Because expressions are very flexible, covering all possible variations and combinations in this section is out of scope. Again, please refer to the section on expressions[169] of the Ada Reference Manual for further details.

Parenthesized expression

An interesting aspect of primaries is that, by using parentheses, we can embed an expression inside another expression. As an example, let's discuss the following expression and its elements:

Listing 3: show_parenthesized_expressions.adb

```
1  procedure Show_Parenthesized_Expressions is
2     C1 : constant Integer := 4;
3     C2 : constant Integer := 5;
4
5     Dummy : Integer;
6  begin
7     Dummy :=
8         (2 + C1) * C2;
9     --        ^^        name
10    --        ^^        primary
11    --        ^^        factor
12    --        ^^        term
13    --
14    --    ^             numeric literal
15    --    ^             primary
16    --    ^             factor
17    --    ^             term
18    --
19    --      ^           binary adding operator
20    --  ^^^^^^^^        simple expression
```

(continues on next page)

[168] http://www.ada-auth.org/standards/22rm/html/RM-4-4.html
[169] http://www.ada-auth.org/standards/22rm/html/RM-4-4.html

(continued from previous page)

```
   --
   --  ^^^^^^^^      expression
   --  ^^^^^^^^      primary
   --  ^^^^^^^^      factor
   --
   --              ^^ factor
   --  ^^^^^^^^^^^^^ term
   --
   --  ^^^^^^^^^^^^^ simple expression
   --
   --  ^^^^^^^^^^^^^ expression
end Show_Parenthesized_Expressions;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Expressions.Expressions_Definition.
 ↪Parenthesized_Expressions
MD5: 5871d2b0cd33e4f562b96381e0f0d293
```

In this example, we first start with the single expression `(2 + C1) * C2`, which is also a simple expression consisting of just one term, which consists of two factors: `(2 + C1)` and `C2`. The `(2 + C1)` factor is also a primary. Now, because of the parentheses, we identify that the primary `(2 + C1)` is an expression that is embedded in another expression.

Important

To be fair, the existence of parentheses in a primary could also indicate other kinds of expressions, such as conditional or quantified expressions. However, differentiating between them is straightforward, as we'll see later on in this chapter.

We then proceed to parse the `(2 + C1)` expression, which consists of the terms `2` and `C1`. As we've seen in the comments of the code example, each of these terms consists of one factor, which consists of one primary. In the end, after parsing the primaries, we identify that `2` is a numeric literal and `C1` is a name.

Note that the usage of parentheses might lead to situations where we have expressions in potentially unsuspected places. For example, consider the following code example:

Listing 4: show_name_in_expression.adb

```
procedure Show_Name_In_Expression is
   type Mode is (Off, A, B, C, D);

   M1 : Mode;
begin
   M1 := A;

   case M1 is
     when Off | D   =>
       null;
     when A | B | C =>
       M1 := D;
   end case;

end Show_Name_In_Expression;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Expressions.Expressions_Definition.Name_
 ↪In_Expression
MD5: ec8fcbc511e6a372da4f0ad99d2619a5
```

Here, the case statement expects a selecting expression. In this case, M1 is identified as a name — after being identified as a relation, a simple expression, a term, a factor and a primary.

However, if we replace `case M1 is` by `case (M1) is`, (M1) is identified as a parenthesized expression, not as a name! This parenthesized expression is first parsed and evaluated, which might have implications in case statements, as we'll see *in another chapter* (page 717).

Let's look at another example, this time with a subprogram call:

Listing 5: increment_by_one.ads

```
1 procedure Increment_By_One (I : in out Integer);
```

Listing 6: increment_by_one.adb

```
1 procedure Increment_By_One (I : in out Integer) is
2 begin
3    I := I + 1;
4 end Increment_By_One;
```

Listing 7: show_name_in_expression.adb

```
1 with Increment_By_One;
2
3 procedure Show_Name_In_Expression is
4    V : Integer := 0;
5 begin
6    Increment_By_One ((V));
7 end Show_Name_In_Expression;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Expressions.Expressions_Definition.Name_
 ↪In_Expression
MD5: 4805df49dc702e5cb365252e58742dd2
```

Build output

```
show_name_in_expression.adb:6:23: error: actual for "I" must be a variable
gprbuild: *** compilation phase failed
```

The `Increment_By_One` procedure from this example expects a variable as an actual parameter because the parameter mode is `in out`. However, the `(V)` in the call to the procedure is interpreted as an expression, so we end up providing a value — the result of the expression — as the actual parameter instead of the `V` variable. Naturally, this is a compilation error. (Of course, writing `Increment_By_One (V)` fixes the error.)

26.1.2 Conditional Expressions

As we've seen before, we can write simple expressions such as `I = 0` or `D.Valid`. A conditional expression, as the name implies, is an expression that contains a condition. This might be an "if-expression" (in the `if ... then ... else` form) or a "case-expression" (in the `case ... is when =>` form).

The Max function in the following code example is an expression function implemented with a conditional expression — an if-expression, to be more precise:

Listing 8: expr_func.ads

```
package Expr_Func is

   function Max (A, B : Integer) return Integer is
     (if A >= B then A else B);

end Expr_Func;
```

Let's say we have a system with four states `Off`, `On`, `Waiting`, and `Invalid`. For this system, we want to implement a function named `Toggled` that returns the *toggled* value of a state `S`. If the current value of `S` is either `Off` or `On`, the function toggles from `Off` to `On` (or from `On` to `Off`). For other values, the state remains unchanged — i.e. the returned value is the same as the input value. This is the implementation using a conditional expression:

Listing 9: expr_func.ads

```
package Expr_Func is

   type State is (Off, On, Waiting, Invalid);

   function Toggled (S : State) return State is
     (if S = Off
       then On
       elsif S = On
         then Off
         else S);

end Expr_Func;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Expressions.Conditional_Expressions.
 ↪Conditional_If_Expressions_1
MD5: 7a99711afecc0b481557f9874dfbf4de
```

As you can see, if-expressions may contain an **`elsif`** branch (and therefore be more complicated).

The code above corresponds to this more verbose version:

Listing 10: expr_func.ads

```
package Expr_Func is

   type State is (Off, On, Waiting, Invalid);

   function Toggled (S : State) return State;

end Expr_Func;
```

Listing 11: expr_func.adb

```
package body Expr_Func is

   function Toggled (S : State) return State is
   begin
      if S = Off then
         return On;
```

(continues on next page)

(continued from previous page)

```
      elsif S = On then
         return Off;
      else
         return S;
      end if;
   end Toggled;

end Expr_Func;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Expressions.Conditional_Expressions.
 ↪Conditional_If_Expressions_2
MD5: 9e6cdf53c9c934f37e5717e1d230615a
```

If we compare the if-block of this code example to the if-expression of the previous example, we notice that the if-expression is just a simplified version without the **return** keyword and the **end if;**. In fact, converting an if-block to an if-expression is quite straightforward.

We could also replace the if-expression used in the Toggled function above with a case-expression. For example:

Listing 12: expr_func.ads

```
package Expr_Func is

   type State is (Off, On, Waiting, Invalid);

   function Toggled (S : State) return State is
     (case S is
       when Off    => On,
       when On     => Off,
       when others => S);

end Expr_Func;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Expressions.Conditional_Expressions.
 ↪Conditional_Case_Expressions_1
MD5: 0dd3a86f0872d1e8c3a81f7a17c44bd5
```

Note that we use commas in case-expressions to separate the alternatives (the **when** expressions). The code above corresponds to this more verbose version:

Listing 13: expr_func.ads

```
package Expr_Func is

   type State is (Off, On, Waiting, Invalid);

   function Toggled (S : State) return State;

end Expr_Func;
```

Listing 14: expr_func.adb

```
package body Expr_Func is

   function Toggled (S : State) return State is
   begin
```

(continues on next page)

(continued from previous page)

```
      case S is
         when Off    => return On;
         when On     => return Off;
         when others => return S;
      end case;
   end Toggled;

end Expr_Func;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Expressions.Conditional_Expressions.
↪Conditional_Case_Expressions_2
MD5: db6a0737e3931c83c31f53e4da3d8a2b
```

If we compare the case block of this code example to the case-expression of the previous example, we notice that the case-expression is just a simplified version of the case block without the **return** keyword and the **end case;**, and with alternatives separated by commas instead of semicolons.

In the Ada Reference Manual

- 4.5.7 Conditional Expressions[170]

26.1.3 Quantified Expressions

Quantified expressions are **for** expressions using a quantifier — which can be either **all** or **some** — and a predicate. This kind of expressions let us formalize statements such as:

- "all values of array A must be zero" into `for all I in A'Range => A (I) = 0`, and
- "at least one value of array A must be zero" into `for some I in A'Range => A (I) = 0`.

In the quantified expression `for all I in A'Range => A (I) = 0`, the quantifier is **all** and the predicate is `A (I) = 0`. In the second expression, the quantifier is **some**. The result of a quantified expression is always a Boolean value.

For example, we could use the quantified expressions above and implement these two functions:

- `Is_Zero`, which checks whether all components of an array A are zero, and
- `Has_Zero`, which checks whether array A has at least one component of the array A is zero.

This is the complete code:

Listing 15: int_arrays.ads

```
package Int_Arrays is

   type Integer_Arr is
     array (Positive range <>) of Integer;

   function Is_Zero (A : Integer_Arr)
                     return Boolean is
      (for all I in A'Range => A (I) = 0);

```

(continues on next page)

[170] http://www.ada-auth.org/standards/22rm/html/RM-4-5-7.html

(continued from previous page)

```
   function Has_Zero (A : Integer_Arr)
                      return Boolean is
      (for some I in A'Range => A (I) = 0);

   procedure Display_Array (A    : Integer_Arr;
                            Name : String);

end Int_Arrays;
```

Listing 16: int_arrays.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Int_Arrays is

   procedure Display_Array (A    : Integer_Arr;
                            Name : String) is
   begin
      Put (Name & ": ");
      for E of A loop
         Put (E'Image & " ");
      end loop;
      New_Line;
   end Display_Array;

end Int_Arrays;
```

Listing 17: test_int_arrays.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Int_Arrays;  use Int_Arrays;

procedure Test_Int_Arrays is
   A : Integer_Arr := (0, 0, 1);
begin
   Display_Array (A, "A");
   Put_Line ("Is_Zero: "
             & Boolean'Image (Is_Zero (A)));
   Put_Line ("Has_Zero: "
             & Boolean'Image (Has_Zero (A)));

   A := (0, 0, 0);

   Display_Array (A, "A");
   Put_Line ("Is_Zero: "
             & Boolean'Image (Is_Zero (A)));
   Put_Line ("Has_Zero: "
             & Boolean'Image (Has_Zero (A)));
end Test_Int_Arrays;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Expressions.Quantified_Expression.
 ↪Quantified_Expression_1
MD5: 4bbda8a3830272748500f797f23f76fc
```

Runtime output

```
A:  0  0  1
```

(continues on next page)

(continued from previous page)

```
Is_Zero: FALSE
Has_Zero: TRUE
A:  0  0  0
Is_Zero: TRUE
Has_Zero: TRUE
```

As you might have expected, we can rewrite a quantified expression as a loop in the `for I in A'Range loop if ... return ...` form. In the code below, we're implementing `Is_Zero` and `Has_Zero` using loops and conditions instead of quantified expressions:

Listing 18: int_arrays.ads

```
package Int_Arrays is

   type Integer_Arr is
     array (Positive range <>) of Integer;

   function Is_Zero (A : Integer_Arr)
                     return Boolean;

   function Has_Zero (A : Integer_Arr)
                      return Boolean;

   procedure Display_Array (A    : Integer_Arr;
                            Name : String);

end Int_Arrays;
```

Listing 19: int_arrays.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Int_Arrays is

   function Is_Zero (A : Integer_Arr)
                     return Boolean is
   begin
      for I in A'Range loop
         if A (I) /= 0 then
            return False;
         end if;
      end loop;

      return True;
   end Is_Zero;

   function Has_Zero (A : Integer_Arr)
                      return Boolean is
   begin
      for I in A'Range loop
        if A (I) = 0 then
           return True;
        end if;
      end loop;

      return False;
   end Has_Zero;

   procedure Display_Array (A    : Integer_Arr;
                            Name : String) is
```

(continues on next page)

(continued from previous page)

```
   begin
      Put (Name & ": ");
      for E of A loop
         Put (E'Image & " ");
      end loop;
      New_Line;
   end Display_Array;

end Int_Arrays;
```

Listing 20: test_int_arrays.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Int_Arrays;  use Int_Arrays;

procedure Test_Int_Arrays is
   A : Integer_Arr := (0, 0, 1);
begin
   Display_Array (A, "A");
   Put_Line ("Is_Zero: "
             & Boolean'Image (Is_Zero (A)));
   Put_Line ("Has_Zero: "
             & Boolean'Image (Has_Zero (A)));

   A := (0, 0, 0);

   Display_Array (A, "A");
   Put_Line ("Is_Zero: "
             & Boolean'Image (Is_Zero (A)));
   Put_Line ("Has_Zero: "
             & Boolean'Image (Has_Zero (A)));
end Test_Int_Arrays;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Expressions.Quantified_Expression.
 ↪Quantified_Expression_2
MD5: a957a8fd60e1849248efe1a84eae6afa
```

Runtime output

```
A:  0  0  1
Is_Zero: FALSE
Has_Zero: TRUE
A:  0  0  0
Is_Zero: TRUE
Has_Zero: TRUE
```

So far, we've seen quantified expressions using indices — e.g. `for all I in A'Range => ...`. We could avoid indices in quantified expressions by simply using the `E of A` form. In this case, we can just write `for all E of A => ...`. Let's adapt the implementation of `Is_Zero` and `Has_Zero` using this form:

Listing 21: int_arrays.ads

```
package Int_Arrays is

   type Integer_Arr is
     array (Positive range <>) of Integer;
```

(continues on next page)

(continued from previous page)

```
5
6     function Is_Zero (A : Integer_Arr)
7                       return Boolean is
8        (for all E of A => E = 0);
9
10    function Has_Zero (A : Integer_Arr)
11                       return Boolean is
12       (for some E of A => E = 0);
13
14 end Int_Arrays;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Expressions.Quantified_Expression.
 ↪Quantified_Expression_3
MD5: 059d12a6529483ebcc5db23dc6262896
```

Here, we're checking the components E of the array A and comparing them against zero.

In the Ada Reference Manual

- 4.5.8 Quantified Expressions[171]

26.1.4 Declare Expressions

So far, we've seen expressions that make use of existing objects declared outside of the expression. Sometimes, we might want to declare constant objects inside the expression, so we can use them locally in the expression. Similarly, we might want to rename an object and use the renamed object in an expression. In those cases, we can use a declare expression.

A declare expression allows for declaring or renaming objects within an expression:

Listing 22: p.ads

```
1 package P is
2
3    function Max (A, B : Integer) return Integer is
4      (declare
5          Bigger_A : constant Boolean := (A >= B);
6       begin
7          (if Bigger_A then A else B));
8
9 end P;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Expressions.Declare_Expressions.Simple_
 ↪Declare_Expression
MD5: c4773c3749eea045ac5db147fbac594b
```

The declare expression starts with the **declare** keyword and the usual object declarations, and it's followed by the **begin** keyword and the body. In this example, the body of the declare expression is a conditional expression.

Of course, the code above isn't really useful, so let's look at a more complete example:

[171] http://www.ada-auth.org/standards/22rm/html/RM-4-5-8.html

Listing 23: integer_arrays.ads

```
package Integer_Arrays is

   type Integer_Array is
     array (Positive range <>) of Integer;

   function Sum (Arr : Integer_Array)
                 return Integer;

   --
   --  Expression function using
   --  declare expression:
   --
   function Avg (Arr : Integer_Array)
                 return Float is
     (declare
         A :          Integer_Array renames Arr;
         S : constant Float := Float (Sum (A));
         L : constant Float := Float (A'Length);
      begin
         S / L);

end Integer_Arrays;
```

Listing 24: integer_arrays.adb

```
package body Integer_Arrays is

   function Sum (Arr : Integer_Array)
                 return Integer is
   begin
      return Acc : Integer := 0 do
         for V of Arr loop
            Acc := Acc + V;
         end loop;
      end return;
   end Sum;

end Integer_Arrays;
```

Listing 25: show_integer_arrays.adb

```
with Ada.Text_IO;    use Ada.Text_IO;

with Integer_Arrays; use Integer_Arrays;

procedure Show_Integer_Arrays is
   Arr : constant Integer_Array := [1, 2, 3];
begin
   Put_Line ("Sum: "
             & Sum (Arr)'Image);
   Put_Line ("Avg: "
             & Avg (Arr)'Image);
end Show_Integer_Arrays;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Expressions.Declare_Expressions.Integer_
 ↪Arrays
MD5: 30a035038508549822c819b60638133d
```

Runtime output

```
Sum:  6
Avg:  2.00000E+00
```

In this example, the Avg function is implemented using a declare expression. In this expression, A renames the Arr array, and S is a constant initialized with the value returned by the Sum function.

In the Ada Reference Manual

- 4.5.9 Declare Expressions[172]

Restrictions in the declarative part

The declarative part of a declare expression is more restricted than the declarative part of a subprogram or declare block. In fact, we cannot:

- declare variables;
- declare constants of limited types;
- rename an object of limited type that is constructed within the declarative part;
- declare aliased constants;
- declare constants that make use of the **Access** or Unchecked_Access attributes in the initialization;
- declare constants of anonymous access type.

Let's see some examples of erroneous declarations:

Listing 26: integer_arrays.ads

```
1  package Integer_Arrays is
2
3     type Integer_Array is
4       array (Positive range <>) of Integer;
5
6     type Integer_Sum is limited private;
7
8     type Const_Integer_Access is
9       access constant Integer;
10
11    function Sum (Arr : Integer_Array)
12                  return Integer;
13
14    function Sum (Arr : Integer_Array)
15                  return Integer_Sum;
16
17    --
18    --  Expression function using
19    --  declare expression:
20    --
21    function Avg (Arr : Integer_Array)
22                  return Float is
23      (declare
24          A  : Integer_Array renames Arr;
25
26          S1 : aliased constant Integer := Sum (A);
```

(continues on next page)

[172] http://www.ada-auth.org/standards/22rm/html/RM-4-5-9.html

(continued from previous page)

```
27          --  ERROR: aliased constant
28
29          S : Float := Float (S1);
30          L : Float := Float (A'Length);
31          --  ERROR: declaring variables
32
33          S2 : constant Integer_Sum := Sum (A);
34          --  ERROR: declaring constant of
35          --         limited type
36
37          A1 : Const_Integer_Access :=
38                 S1'Unchecked_Access;
39          --  ERROR: using 'Unchecked_Access
40          --         attribute
41
42          A2 : access Integer := null;
43          --  ERROR: declaring object of
44          --         anonymous access type
45       begin
46          S / L);
47
48    private
49
50       type Integer_Sum is new Integer;
51
52    end Integer_Arrays;
```

Listing 27: integer_arrays.adb

```
1  package body Integer_Arrays is
2
3     function Sum (Arr : Integer_Array)
4                   return Integer is
5     begin
6        return Acc : Integer := 0 do
7           for V of Arr loop
8              Acc := Acc + V;
9           end loop;
10       end return;
11    end Sum;
12
13    function Sum (Arr : Integer_Array)
14                  return Integer_Sum is
15      (Integer_Sum (Integer'(Sum (Arr))));
16
17 end Integer_Arrays;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Expressions.Declare_Expressions.Integer_
 ↪Arrays_Error
MD5: ea38f5067c849b85685d70ffc386f7a7
```

Build output

```
integer_arrays.ads:26:10: error: "aliased" not allowed in declare_expression
integer_arrays.ads:29:10: error: object renaming or constant declaration expected
integer_arrays.ads:30:10: error: object renaming or constant declaration expected
integer_arrays.ads:33:10: error: object renaming or constant declaration expected
integer_arrays.ads:38:19: error: "Unchecked_Access" attribute cannot occur in a␣
 ↪declare_expression
```

(continues on next page)

(continued from previous page)

```
integer_arrays.ads:42:15: error: anonymous access type not allowed in declare_
 ↪expression
gprbuild: *** compilation phase failed
```

In this version of the Avg function, we see many errors in the declarative part of the declare expression. If we convert the declare expression into an actual function implementation, however, those declarations won't trigger compilation errors. (Feel free to try this out!)

26.1.5 Reduction Expressions

> **Note**
>
> This feature was introduced in Ada 2022.

A reduction expression reduces a list of values into a single value. For example, we can reduce the list `[2, 3, 4]` to a single value:

- by adding the values of the list: `2 + 3 + 4 = 9`, or
- by multiplying the values of the list: `2 * 3 * 4 = 24`.

We write a reduction expression by using the Reduce attribute and providing the reducer and its initial value:

- the reducer is the operator (e.g.: `+` or `*`) that we use to *combine* the values of the list;
- the initial value is the value that we use before all other values of the list.

For example, if we use `+` as the operator and `0` an the initial value, we get the reduction expression: `0 + 2 + 3 + 4 = 9`. This can be implemented using an array:

Listing 28: show_reduction_expression.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Reduction_Expression is
   A : array (1 .. 3) of Integer;
   I : Integer;
begin
   A := [2, 3, 4];
   I := A'Reduce ("+", 0);

   Put_Line ("A = "
             & A'Image);
   Put_Line ("I = "
             & I'Image);
end Show_Reduction_Expression;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Expressions.Reduction_Expressions.
 ↪Simple_Reduction_Expression
MD5: 63c85aeff33e9ab3bf37bcb62559e0b2
```

Runtime output

```
A =
[ 2,  3,  4]
I =  9
```

Here, we have the array A with a list of values. The A'Reduce ("+", 0) expression reduces the list of values of A into a single value — in this case, an integer value that is stored in I. This statement is equivalent to:

```
I := 0;
for E of A loop
   I := I + E;
end loop;
```

Naturally, we can reduce the array using the * operator:

Listing 29: show_reduction_expression.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Reduction_Expression is
   A : array (1 .. 3) of Integer;
   I : Integer;
begin
   A := [2, 3, 4];
   I := A'Reduce ("*", 1);

   Put_Line ("A = "
             & A'Image);
   Put_Line ("I = "
             & I'Image);
end Show_Reduction_Expression;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Expressions.Reduction_Expressions.
↪Simple_Reduction_Expression
MD5: 98e1de10863eed4bd12cc6ab1d7ce7ef
```

Runtime output

```
A =
[ 2,  3,  4]
I =  24
```

In this example, we call A'Reduce ("*", 1) to reduce the list. (Note that we use an initial value of one because it is the identity element[173] of a multiplication, so the complete operation is: 1 * 2 * 3 * 4 = 24.)

In the Ada Reference Manual

- Reduction Expressions[174]

Value sequences

In addition to arrays, we can apply reduction expression to value sequences, which consist of an iterated element association — for example, [for I in 1 .. 3 => I + 1]. We can simply *append* the reduction expression to a value sequence:

[173] https://en.wikipedia.org/wiki/Identity_element
[174] http://www.ada-auth.org/standards/22rm/html/RM-4-5-10.html

Listing 30: show_reduction_expression.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Reduction_Expression is
   I : Integer;
begin
   I := [for I in 1 .. 3 =>
           I + 1]'Reduce ("+", 0);
   Put_Line ("I = "
             & I'Image);

   I := [for I in 1 .. 3 =>
           I + 1]'Reduce ("*", 1);
   Put_Line ("I = "
             & I'Image);
end Show_Reduction_Expression;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Expressions.Reduction_Expressions.
↪Reduction_Expression_Value_Sequences
MD5: 25b75869e53aa3c8a8f8c821a05718c5
```

Runtime output

```
I =  9
I =  24
```

In this example, we create the value sequence [**for** I **in** 1 .. 3 => I + 1] and reduce it using the + and * operators. (Note that the operations in this example have the same results as in the previous examples using arrays.)

Custom reducers

In the previous examples, we've used standard operators such as + and * as the reducer. We can, however, write our own reducers and pass them to the Reduce attribute. For example:

Listing 31: show_reduction_expression.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Reduction_Expression is
   type Integer_Array is
     array (Positive range <>) of Integer;

   A : Integer_Array (1 .. 3);
   I : Long_Integer;

   procedure Accumulate
     (Accumulator : in out Long_Integer;
      Value       : Integer) is
   begin
      Accumulator := Accumulator
                     + Long_Integer (Value);
   end Accumulate;

begin
   A := [2, 3, 4];
   I := A'Reduce (Accumulate, 0);

```

(continues on next page)

(continued from previous page)

```
   Put_Line ("A = "
             & A'Image);
   Put_Line ("I = "
             & I'Image);
end Show_Reduction_Expression;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Expressions.Reduction_Expressions.
 ↪Custom_Reducer_Procedure
MD5: 1ed7cd1f3f5d5b8acda36b04afa955f0
```

Runtime output

```
A =
[ 2,  3,  4]
I =  9
```

In this example, we implement the `Accumulate` procedure as our reducer, which is called to accumulate the individual elements (integer values) of the list. We pass this procedure to the Reduce attribute in the `I := A'Reduce (Accumulate, 0)` statement, which is equivalent to:

```
I := 0;
for E of A loop
   Accumulate (I, E);
end loop;
```

A custom reducer must have the following parameters:

1. The accumulator parameter, which stores the interim result — and the final result as well, once all elements of the list have been processed.
2. The value parameter, which is a single element from the list.

Note that the accumulator type doesn't need to match the type of the individual components. In this example, we're using **Integer** as the component type, while the accumulator type is **Long_Integer**. (For this kind of reducers, using **Long_Integer** instead of **Integer** for the accumulator type makes lots of sense due to the risk of triggering overflows while the reducer is accumulating values — e.g. when accumulating a long list with larger numbers.)

In the example above, we've implemented the reducer as a procedure. However, we can also implement it as a function. In this case, the accumulated value is returned by the function:

Listing 32: show_reduction_expression.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Reduction_Expression is
   type Integer_Array is
     array (Positive range <>) of Integer;

   A : Integer_Array (1 .. 3);
   I : Long_Integer;

   function Accumulate
     (Accumulator : Long_Integer;
      Value       : Integer)
      return Long_Integer is
```

(continues on next page)

(continued from previous page)

```
   begin
      return Accumulator + Long_Integer (Value);
   end Accumulate;

begin
   A := [2, 3, 4];
   I := A'Reduce (Accumulate, 0);

   Put_Line ("A = "
             & A'Image);
   Put_Line ("I = "
             & I'Image);
end Show_Reduction_Expression;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Expressions.Reduction_Expressions.
↪Custom_Reducer_Function
MD5: 3bfc9b59e4667490e40921770990f52b
```

Runtime output

```
A =
[ 2,  3,  4]
I =  9
```

In this example, we converted the `Accumulate` procedure into a function (while the core implementation is essentially the same).

Note that the reduction expression remains the same, independently of whether we're using a procedure or a function as the reducer. Therefore, the statement with the reduction expression in this example is the same as in the previous example: `I := A'Reduce (Accumulate, 0);`. Now that we're using a function, this statement is equivalent to:

```
I := 0;
for E of A loop
   I := Accumulate (I, E);
end loop;
```

Other accumulator types

The accumulator type isn't restricted to scalars: in fact, we could use record types as well. For example:

Listing 33: show_reduction_expression.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Reduction_Expression is
   type Integer_Array is
     array (Positive range <>) of Integer;

   A : Integer_Array (1 .. 3);

   type Integer_Accumulator is record
      Value : Long_Integer;
      Count : Integer;
   end record;

   function Accumulate
```

(continues on next page)

(continued from previous page)

```
15       (Accumulator : Integer_Accumulator;
16        Value       : Integer)
17        return Integer_Accumulator is
18     begin
19        return (Value => Accumulator.Value
20                         + Long_Integer (Value),
21                Count => Accumulator.Count + 1);
22     end Accumulate;
23
24     function Zero return Integer_Accumulator is
25       (Value => 0, Count => 0);
26
27     function Average (Acc : Integer_Accumulator)
28                       return Float is
29       (Float (Acc.Value) / Float (Acc.Count));
30
31     Acc : Integer_Accumulator;
32
33  begin
34     A := [2, 3, 4];
35
36     Acc := A'Reduce (Accumulate, Zero);
37     Put_Line ("Acc = "
38               & Acc'Image);
39     Put_Line ("Avg = "
40               & Average (Acc)'Image);
41  end Show_Reduction_Expression;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Expressions.Reduction_Expressions.
 ↪Reducer_Integer_Accumulator
MD5: 95d61e18e7b719d0a25dc35cdbff6af2
```

Runtime output

```
Acc =
(VALUE =>  9,
 COUNT =>  3)
Avg =  3.00000E+00
```

In this example, we're using the `Integer_Accumulator` record type in our reducer — the `Accumulate` function. In this case, we're not only accumulating the values, but also counting the number of elements in the list. (Of course, we could have used `A'Length` for that as well.)

Also, we're not limited to numeric types: we can also create a reducer using strings as the accumulator type. In fact, we can display the initial value and the elements of the list by using unbounded strings:

Listing 34: show_reduction_expression.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  with Ada.Strings.Unbounded;
4  use  Ada.Strings.Unbounded;
5
6  procedure Show_Reduction_Expression is
7     type Integer_Array is
8       array (Positive range <>) of Integer;
9
```

(continues on next page)

(continued from previous page)

```
   A : Integer_Array (1 .. 3);

   function Unbounded_String_List
     (Accumulator : Unbounded_String;
      Value       : Integer)
          return Unbounded_String is
   begin
      return Accumulator
             & ", " & Value'Image;
   end Unbounded_String_List;

begin
   A := [2, 3, 4];

   Put_Line ("A = "
             & A'Image);
   Put_Line ("L = "
             & To_String (A'Reduce
               (Unbounded_String_List,
                  To_Unbounded_String ("0"))));
end Show_Reduction_Expression;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Expressions.Reduction_Expressions.
 ↪Reducer_String_Accumulator
MD5: 557416f08f28a48110c0fa6909086629
```

Runtime output

```
A =
[ 2,  3,  4]
L = 0,  2,  3,  4
```

In this case, the "accumulator" is concatenating the initial value and individual values of the list into a string.

26.2 Statements

26.2.1 Simple and Compound Statements

We can classify statements as either simple or compound. Simple statements don't contain other statements; think of them as "atomic units" that cannot be further divided. Compound statements, on the other hand, may contain other — simple or compound — statements.

Here are some examples from each category:

Category	Examples
Simple statements	Null statement, assignment, subprogram call, etc.
Compound statements	If statement, case statement, loop statement, block statement

In the Ada Reference Manual

- 5.1 Simple and Compound Statements - Sequences of Statements[175]

[175] http://www.ada-auth.org/standards/22rm/html/RM-5-1.html

26.2.2 Labels

We can use labels to identify statements in the code. They have the following format: **<<Some_Label>>**. We write them right before the statement we want to apply it to. Let's see an example of labels with simple statements:

Listing 35: show_statement_identifier.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Statement_Identifier is
   pragma Warnings (Off, "is not referenced");
begin
   <<Show_Hello>> Put_Line ("Hello World!");
   <<Show_Test>>  Put_Line ("This is a test.");

   <<Show_Separator>>
   <<Show_Block_Separator>>
   Put_Line ("====================");
end Show_Statement_Identifier;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Statements.Labels.Simple_Labels
MD5: 820f5963b476af5c04314fd4373d2286
```

Runtime output

```
Hello World!
This is a test.
====================
```

Here, we're labeling each statement. For example, we use the `Show_Hello` label to identify the `Put_Line ("Hello World!");` statement. Note that we can use multiple labels a single statement. In this code example, we use the `Show_Separator` and `Show_Block_Separator` labels for the same statement.

In the Ada Reference Manual

- 5.1 Simple and Compound Statements - Sequences of Statements[176]

Labels and `goto` statements

Labels are mainly used in combination with **goto** statements. (Although pretty much uncommon, we could potentially use labels to indicate important statements in the code.) Let's see an example where we use a **goto** `label;` statement to *jump* to a specific label:

Listing 36: show_cleanup.adb

```
procedure Show_Cleanup is
   pragma Warnings (Off, "always false");

   Some_Error : Boolean;
begin
   Some_Error := False;

   if Some_Error then
      goto Cleanup;
```

(continues on next page)

[176] http://www.ada-auth.org/standards/22rm/html/RM-5-1.html

(continued from previous page)

```
   end if;

   <<Cleanup>> null;
end Show_Cleanup;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Statements.Labels.Label_Goto
MD5: 0ce06582bbefae818d4da3b7d2d3436b
```

Here, we transfer the control to the *cleanup* statement as soon as an error is detected.

Use-case: Continue

Another use-case is that of a `Continue` label in a loop. Consider a loop where we want to skip further processing depending on a condition:

Listing 37: show_continue.adb

```
procedure Show_Continue is
   function Is_Further_Processing_Needed
     (Dummy : Integer)
      return Boolean
   is
   begin
      --  Dummy implementation
      return False;
   end Is_Further_Processing_Needed;

   A : constant array (1 .. 10) of Integer :=
       (others => 0);
begin
   for E of A loop

      --  Some stuff here...

      if Is_Further_Processing_Needed (E) then

         --  Do more stuff...

         null;
      end if;
   end loop;
end Show_Continue;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Statements.Labels.Label_Continue_1
MD5: 115eeaf08d5fb072d707d6325fe9cfd0
```

In this example, we call the `Is_Further_Processing_Needed (E)` function to check whether further processing is needed or not. If it's needed, we continue processing in the **if** statement. We could simplify this code by just using a `Continue` label at the end of the loop and a **goto** statement:

Listing 38: show_continue.adb

```
procedure Show_Continue is
   function Is_Further_Processing_Needed
     (Dummy : Integer)
```

(continues on next page)

(continued from previous page)

```
      return Boolean
   is
   begin
      --  Dummy implementation
      return False;
   end Is_Further_Processing_Needed;

   A : constant array (1 .. 10) of Integer :=
     (others => 0);
begin
   for E of A loop

      --  Some stuff here...

      if not Is_Further_Processing_Needed (E) then
         goto Continue;
      end if;

      --  Do more stuff...

      <<Continue>>
   end loop;
end Show_Continue;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Statements.Labels.Label_Continue_2
MD5: 260b52ead782adf76eee5cf3c4e8332b
```

Here, we use a `Continue` label at the end of the loop and jump to it in the case that no further processing is needed. Note that, in this example, we don't have a statement after the `Continue` label because the label itself is at the end of a statement — to be more specific, at the end of the loop statement. In such cases, there's an implicit **`null`** statement.

Historically

Since Ada 2012, we can simply write:

```
loop
   --  Some statements...

   <<Continue>>
end loop;
```

If a label is used at the end of a sequence of statements, a **`null`** statement is implied. In previous versions of Ada, however, that is not the case. Therefore, when using those versions of the language, we must write at least a **`null`** statement:

```
loop
   --  Some statements...

   <<Continue>> null;
end loop;
```

Labels and compound statements

We can use labels with compound statements as well. For example, we can label a **`for`** loop:

Listing 39: show_statement_identifier.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Statement_Identifier is
   pragma Warnings (Off, "is not referenced");

   Arr   : constant array (1 .. 5) of Integer :=
             (1, 4, 6, 42, 49);
   Found : Boolean := False;
begin
   <<Find_42>> for E of Arr loop
      if E = 42 then
         Found := True;
         exit;
      end if;
   end loop;

   Put_Line ("Found: " & Found'Image);
end Show_Statement_Identifier;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Statements.Labels.Loop_Label
MD5: 5ca80b5a379ba0b08ccfaa4c6eab64d5
```

Runtime output

```
Found: TRUE
```

For further reading...

In addition to labels, loops and block statements allow us to use a statement identifier. In simple terms, instead of writing **<<Some_Label>>**, we write `Some_Label :`.

We could rewrite the previous code example using a loop statement identifier:

Listing 40: show_statement_identifier.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Statement_Identifier is
   Arr   : constant array (1 .. 5) of Integer :=
             (1, 4, 6, 42, 49);
   Found : Boolean := False;
begin
   Find_42 : for E of Arr loop
      if E = 42 then
         Found := True;
         exit Find_42;
      end if;
   end loop Find_42;

   Put_Line ("Found: " & Found'Image);
end Show_Statement_Identifier;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Statements.Labels.Loop_Statement_
 ↪Identifier
MD5: e52cb5eea9427addf3cabe64dd73bc2d
```

Runtime output

```
Found: TRUE
```

Loop statement and block statement identifiers are generally preferred over labels. Later in this chapter, we discuss this topic in more detail.

26.2.3 Exit loop statement

We've introduced bare loops back in the *Introduction to Ada course* (page 14). In this section, we'll briefly discuss loop names and exit loop statements.

A bare loop has this form:

```
loop
    exit when Some_Condition;
end loop;
```

We can name a loop by using a loop statement identifier:

```
Loop_Name:
   loop
      exit Loop_Name when Some_Condition;
   end loop Loop_Name;
```

In this case, we have to use the loop's name after **end loop**. Also, having a name for a loop allows us to indicate which loop we're exiting from: **exit** Loop_Name **when**.

Let's see a complete example:

Listing 41: show_vector_cursor_iteration.adb

```
1  with Ada.Text_IO;            use Ada.Text_IO;
2  with Ada.Containers.Vectors;
3
4  procedure Show_Vector_Cursor_Iteration is
5
6     package Integer_Vectors is new
7       Ada.Containers.Vectors
8         (Index_Type   => Positive,
9          Element_Type => Integer);
10
11    use Integer_Vectors;
12
13    V : constant Vector := 20 & 10 & 0 & 13;
14    C : Cursor;
15 begin
16    C := V.First;
17    Put_Line ("Vector elements are: ");
18
19    Show_Elements :
20       loop
21          exit Show_Elements when C = No_Element;
22
23          Put_Line ("Element: "
24                    & Integer'Image (V (C)));
25          C := Next (C);
26       end loop Show_Elements;
27
28 end Show_Vector_Cursor_Iteration;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Statements.Exit_Loop_Statement.Exit_
 ↪Named_Loop
MD5: b77353f6ed98f8ddb32c73c47d249020
```

Runtime output

```
Vector elements are:
Element:  20
Element:  10
Element:  0
Element:  13
```

Naming a loop is particularly useful when we have nested loops and we want to exit directly from the inner loop:

Listing 42: show_inner_loop_exit.adb

```
1  procedure Show_Inner_Loop_Exit is
2     pragma Warnings (Off);
3
4     Cond : Boolean := True;
5  begin
6
7     Outer_Processing : loop
8
9        Inner_Processing : loop
10          exit Outer_Processing when Cond;
11       end loop Inner_Processing;
12
13    end loop Outer_Processing;
14
15 end Show_Inner_Loop_Exit;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Statements.Exit_Loop_Statement.Inner_
 ↪Loop_Exit
MD5: b5c7434f1bf23c2cb8f81e4c13a31386
```

Here, we indicate that we exit from the `Outer_Processing` loop in case a condition `Cond` is met, even if we're actually within the inner loop.

In the Ada Reference Manual

- 5.7 Exit Statements[177]

26.2.4 If, case and loop statements

In the Introduction to Ada course, we talked about *if statements* (page 10), *loop statements* (page 13), and *case statements* (page 16). This is a very simple code example with these statements:

Listing 43: show_if_case_loop_statements.adb

```
1  procedure Show_If_Case_Loop_Statements is
2     pragma Warnings (Off);
3
```

(continues on next page)

[177] http://www.ada-auth.org/standards/22rm/html/RM-5-7.html

(continued from previous page)

```
4     Reset     : Boolean := False;
5     Increment : Boolean := True;
6     Val       : Integer := 0;
7  begin
8     --
9     --  If statement
10    --
11    if Reset then
12       Val := 0;
13    elsif Increment then
14       Val := Val + 1;
15    else
16       Val := Val - 1;
17    end if;
18
19    --
20    --  Loop statement
21    --
22    for I in 1 .. 5 loop
23       Val := Val * 2 - I;
24    end loop;
25
26    --
27    --  Case statement
28    --
29    case Val is
30       when 0 .. 5 =>
31          null;
32       when others =>
33          Val := 5;
34    end case;
35
36 end Show_If_Case_Loop_Statements;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Statements.If_Case_Loop_Statements.
↪Example
MD5: 4fdc7f00e5218ed59d9eb050339567f1
```

In this section, we'll look into a more advanced detail about the case statement.

In the Ada Reference Manual

- 5.3 If Statements[178]
- 5.4 Case Statements[179]
- 5.5 Loop Statements[180]

Case statements and expressions

As we know, the case statement has a choice expression (`case Choice_Expression is`), which is expected to be a discrete type. Also, this expression can be a function call or a type conversion, for example — in additional to being a variable or a constant.

As we discussed *earlier on* (page 691), if we use parentheses, the contents between those

[178] http://www.ada-auth.org/standards/22rm/html/RM-5-3.html
[179] http://www.ada-auth.org/standards/22rm/html/RM-5-4.html
[180] http://www.ada-auth.org/standards/22rm/html/RM-5-5.html

parentheses is parsed as an expression. In the context of case statements, the expression is first evaluated before being used as a choice expression. Consider the following code example:

Listing 44: scales.ads

```
package Scales is

   type Satisfaction_Scale is (Very_Dissatisfied,
                               Dissatisfied,
                               OK,
                               Satisfied,
                               Very_Satisfied);

   type Scale is range 0 .. 10;

   function To_Satisfaction_Scale
     (S : Scale)
      return Satisfaction_Scale;

end Scales;
```

Listing 45: scales.adb

```
package body Scales is

   function To_Satisfaction_Scale
     (S : Scale)
      return Satisfaction_Scale
   is
      Satisfaction : Satisfaction_Scale;
   begin
      case (S) is
         when 0 .. 2  =>
            Satisfaction := Very_Dissatisfied;
         when 3 .. 4  =>
            Satisfaction := Dissatisfied;
         when 5 .. 6  =>
            Satisfaction := OK;
         when 7 .. 8  =>
            Satisfaction := Satisfied;
         when 9 .. 10 =>
            Satisfaction := Very_Satisfied;
      end case;

      return Satisfaction;
   end To_Satisfaction_Scale;

end Scales;
```

Listing 46: show_case_statement_expression.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Scales;      use Scales;

procedure Show_Case_Statement_Expression is
   Score : constant Scale := 0;
begin
   Put_Line ("Score: "
             & Scale'Image (Score)
             & Satisfaction_Scale'Image (
```

(continues on next page)

(continued from previous page)

```
                To_Satisfaction_Scale (Score)));

end Show_Case_Statement_Expression;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Statements.If_Case_Loop_Statements.Case_
 ↪Statement_Expression
MD5: 353ff771291e0c994ec052e818f9720c
```

Build output

```
scales.adb:9:07: error: missing case values: -128 .. -1
scales.adb:9:07: error: missing case values: 11 .. 127
gprbuild: *** compilation phase failed
```

When we try to compile this code example, the compiler complains about missing values in the `To_Satisfaction_Scale` function. As we mentioned in the *Introduction to Ada course* (page 16), every possible value for the choice expression needs to be covered by a unique branch of the case statement. In principle, it *seems* that we're actually covering all possible values of the `Scale` type, which ranges from 0 to 10. However, we've written `case (S) is` instead of `case S is`. Because of the parentheses, `(S)` is evaluated as an expression. In this case, the expected range of the case statement is not `Scale'Range`, but the range of its *base type* (page 640) `Scale'Base'Range`.

In other languages

In C, the switch-case statement requires parentheses for the choice expression:

Listing 47: main.c

```c

#include <stdio.h>

int main(int argc, const char * argv[])
{
   int s = 0;

   switch (s)
   {
      case 0:
      case 1:
         printf("Value in the 0 -- 1 range\n");
      default:
         printf("Value > 1\n");
   }
}
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Statements.If_Case_Loop_Statements.
 ↪Case_Statement_C
MD5: 64ef6b15f1bdf14ca9273964ec5e1755
```

Runtime output

```
Value in the 0 -- 1 range
Value > 1
```

In Ada, parentheses aren't expected in the choice expression. Therefore, we shouldn't write `case (S) is` in a C-like fashion — unless, of course, we really want to evaluate an

expression in the case statement.

26.2.5 Block Statements

We've introduced block statements back in the *Introduction to Ada course* (page 19). They have this simple form:

Listing 48: show_block_statement.adb

```
procedure Show_Block_Statement is
   pragma Warnings (Off);
begin

   --  BLOCK STARTS HERE:
   declare
      I : Integer;
   begin
      I := 0;
   end;

end Show_Block_Statement;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Statements.Block_Statements.Simple_
 ↪Block_Statement
MD5: 61134b3899620c6d9ed68974fae33b5e
```

We can use an identifier when writing a block statement. (This is similar to loop statement identifiers that we discussed in the previous section.) In this example, we implement a block called `Simple_Block`:

Listing 49: show_block_statement.adb

```
procedure Show_Block_Statement is
   pragma Warnings (Off);
begin

   Simple_Block : declare
      I : Integer;
   begin
      I := 0;
   end Simple_Block;

end Show_Block_Statement;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Statements.Block_Statements.Block_
 ↪Statement_Identifier
MD5: b327b7675931d9b994637671c806c7c3
```

Note that we must write `end Simple_Block;` when we use the `Simple_Block` identifier.

Block statement identifiers are useful:

- to indicate the begin and the end of a block — as some blocks might be long or nested in other blocks;
- to indicate the purpose of the block (i.e. as code documentation).

In the Ada Reference Manual

- 5.6 Block Statements[181]

26.2.6 Extended return statement

A common idiom in Ada is to build up a function result in a local object, and then return that object:

Listing 50: show_return.adb

```
procedure Show_Return is

   type Array_Of_Natural is
     array (Positive range <>) of Natural;

   function Sum (A : Array_Of_Natural)
                 return Natural
   is
      Result : Natural := 0;
   begin
      for Index in A'Range loop
         Result := Result + A (Index);
      end loop;
      return Result;
   end Sum;

begin
   null;
end Show_Return;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Statements.Extended_Return_Statements.
↪Simple_Return
MD5: 16e85a8cba869802f912627c40a64c20
```

Since Ada 2005, a notation called the extended return statement is available: this allows you to declare the result object and return it as part of one statement. It looks like this:

Listing 51: show_extended_return.adb

```
procedure Show_Extended_Return is

   type Array_Of_Natural is
     array (Positive range <>) of Natural;

   function Sum (A : Array_Of_Natural)
                 return Natural
   is
   begin
      return Result : Natural := 0 do
         for Index in A'Range loop
            Result := Result + A (Index);
         end loop;
      end return;
   end Sum;

begin
```

(continues on next page)

[181] http://www.ada-auth.org/standards/22rm/html/RM-5-6.html

(continued from previous page)

```
18    null;
19 end Show_Extended_Return;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Statements.Extended_Return_Statements.
 ↪Extended_Return
MD5: d6d6edaf800a0e346ff8ede13cbbe100
```

The return statement here creates `Result`, initializes it to `0`, and executes the code between **`do`** and **`end return`**. When **`end return`** is reached, `Result` is automatically returned as the function result.

In the Ada Reference Manual

- 6.5 Return Statements[182]

Other usages of extended return statements

Note

This section was originally written by Robert A. Duff and published as Gem #10: Limited Types in Ada 2005[183].

While the `extended_return_statement` was added to the language specifically to support *limited constructor functions* (page 1069), it comes in handy whenever you want a local name for the function result:

Listing 52: show_string_construct.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  procedure Show_String_Construct is
4
5     function Make_String
6       (S          : String;
7        Prefix     : String;
8        Use_Prefix : Boolean) return String
9     is
10       Length : Natural := S'Length;
11    begin
12       if Use_Prefix then
13          Length := Length + Prefix'Length;
14       end if;
15
16       return Result : String (1 .. Length) do
17
18          --  fill in the characters
19          if Use_Prefix then
20             Result
21               (1 .. Prefix'Length) := Prefix;
22
23             Result
24               (Prefix'Length + 1 .. Length) := S;
```

(continues on next page)

[182] http://www.ada-auth.org/standards/22rm/html/RM-6-5.html
[183] https://www.adacore.com/gems/ada-gem-10

(continued from previous page)

```
25          else
26             Result := S;
27          end if;
28
29       end return;
30    end Make_String;
31
32    S1 : String := "Ada";
33    S2 : String := "Make_With_";
34 begin
35    Put_Line ("No prefix:   "
36              & Make_String (S1, S2, False));
37    Put_Line ("With prefix: "
38              & Make_String (S1, S2, True));
39 end Show_String_Construct;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Statements.Extended_Return_Statements.
↪Extended_Return_Other_Usages
MD5: a2b26ceed06a0ab66aff6c2b59c02003
```

Runtime output

```
No prefix:   Ada
With prefix: Make_With_Ada
```

In this example, we first calculate the length of the string and store it in `Length`. We then use this information to initialize the return object of the `Make_String` function.

26.3 Subprograms

26.3.1 Parameter Modes and Associations

In this section, we discuss some details about parameter modes and associations. First of all, as we know, parameters can be either formal or actual:

- Formal parameters are the ones we see in a subprogram declaration and implementation;
- Actual parameters are the ones we see in a subprogram call.
  - Note that actual parameters are also called *subprogram arguments* in other languages.

We define parameter associations as the connection between an actual parameter in a subprogram call and its declaration as a formal parameter in a subprogram specification or body.

In the Ada Reference Manual

- 6.2 Formal Parameter Modes[184]
- 6.4.1 Parameter Associations[185]

[184] http://www.ada-auth.org/standards/22rm/html/RM-6-2.html
[185] http://www.ada-auth.org/standards/22rm/html/RM-6-4-1.html

Formal Parameter Modes

We already discussed formal parameter modes in the *Introduction to Ada* (page 28) course:

`in`	Parameter can only be read, not written
`out`	Parameter can be written to, then read
`in out`	Parameter can be both read and written

As this topic was already discussed in that course — and we used parameter modes extensively in all code examples from that course —, we won't introduce the topic again here. Instead, we'll look into some of the more advanced details.

By-copy and by-reference

In the *Introduction to Ada* (page 28) course, we saw that parameter modes don't correspond directly to how parameters are actually passed. In fact, an `in out` parameter could be passed by copy. For example:

Listing 53: check_param_passing.ads

```
with System;

procedure Check_Param_Passing
  (Formal : System.Address;
   Actual : System.Address);
```

Listing 54: check_param_passing.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with System.Address_Image;

procedure Check_Param_Passing
  (Formal : System.Address;
   Actual : System.Address) is
begin
   Put_Line ("Formal parameter at "
             & System.Address_Image (Formal));
   Put_Line ("Actual parameter at "
             & System.Address_Image (Actual));
   if System.Address_Image (Formal) =
      System.Address_Image (Actual)
   then
      Put_Line
        ("Parameter is passed by reference.");
   else
      Put_Line
        ("Parameter is passed by copy.");
   end if;
end Check_Param_Passing;
```

Listing 55: machine_x.ads

```
with System;

package Machine_X is

   procedure Update_Value
     (V  : in out Integer;
      AV :        System.Address);
```

(continues on next page)

(continued from previous page)

```
8
9  end Machine_X;
```

Listing 56: machine_x.adb

```
1  with Check_Param_Passing;
2
3  package body Machine_X is
4
5     procedure Update_Value
6       (V  : in out Integer;
7        AV :        System.Address) is
8     begin
9        V := V + 1;
10       Check_Param_Passing (Formal => V'Address,
11                            Actual => AV);
12    end Update_Value;
13
14 end Machine_X;
```

Listing 57: show_by_copy_by_ref_params.adb

```
1  with Machine_X; use Machine_X;
2
3  procedure Show_By_Copy_By_Ref_Params is
4     A : Integer := 5;
5  begin
6     Update_Value (A, A'Address);
7  end Show_By_Copy_By_Ref_Params;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Parameter_Modes_
↪Associations.By_Copy_By_Ref_Params
MD5: e437d3432703124496f0a217177959eb
```

Runtime output

```
Formal parameter at 00007FFECD75C40C
Actual parameter at 00007FFECD75C42C
Parameter is passed by copy.
```

As we can see by running this example,

- the integer variable A in the Show_By_Copy_By_Ref_Params procedure

and

- the V parameter in the Update_Value procedure

have different addresses, so they are different objects. Therefore, we conclude that this parameter is being passed by value, even though it has the **in out** mode. (We talk more about addresses and the 'Address attribute *later on* (page 394)).

As we know, when a parameter is passed by copy, it is first copied to a temporary object. In the case of a parameter with **in out** mode, the temporary object is copied back to the original (actual) parameter at the end of the subprogram call. In our example, the temporary object indicated by V is copied back to A at the end of the call to Update_Value.

In Ada, it's not the parameter mode that determines whether a parameter is passed by copy or by reference, but rather its type. We can distinguish between three categories:

1. By-copy types;

2. By-reference types;
3. *Unspecified* types.

Obviously, parameters of by-copy types are passed by copy and parameters of by-reference type are passed by reference. However, if a category isn't specified — i.e. when the type is neither a by-copy nor a by-reference type —, the decision is essentially left to the compiler.

As a rule of thumb, we can say that;

- elementary types — and any type that is essentially elementary, such as a private type whose full view is an elementary type — are passed by copy;
- tagged and explicitly limited types — and other types that are essentially tagged, such as task types — are passed by reference.

The following table provides more details:

Type category	Parameter passing	List of types
By copy	By copy	• Elementary types • Descendant of a private type whose full type is a by-copy type
By reference	By reference	• Tagged types • Task and protected types • Explicitly limited record types • Composite types with at least one subcomponent of a by-reference type • Private types whose full type is a by-reference type • Any descendant of the types mentioned above
Unspecified	Either by copy or by reference	• Any type not mentioned above

Note that, for parameters of limited types, only those parameters whose type is *explicitly* limited are always passed by reference. We discuss this topic in more details *in another chapter* (page 1078).

Let's see an example:

Listing 58: machine_x.ads

```
1  with System;
2
3  package Machine_X is
4
5     type Integer_Array is
6       array (Positive range <>) of Integer;
```

(continues on next page)

(continued from previous page)

```
7
8     type Rec is record
9        A : Integer;
10    end record;
11
12    type Rec_Array is record
13       A   : Integer;
14       Arr : Integer_Array (1 .. 100);
15    end record;
16
17    type Tagged_Rec is tagged record
18       A : Integer;
19    end record;
20
21    procedure Update_Value
22      (R  : in out Rec;
23       AR :        System.Address);
24
25    procedure Update_Value
26      (RA  : in out Rec_Array;
27       ARA :        System.Address);
28
29    procedure Update_Value
30      (R  : in out Tagged_Rec;
31       AR :        System.Address);
32
33 end Machine_X;
```

Listing 59: machine_x.adb

```
1  with Check_Param_Passing;
2
3  package body Machine_X is
4
5     procedure Update_Value
6       (R  : in out Rec;
7        AR :        System.Address)
8     is
9     begin
10       R.A := R.A + 1;
11       Check_Param_Passing (Formal => R'Address,
12                            Actual => AR);
13    end Update_Value;
14
15    procedure Update_Value
16      (RA  : in out Rec_Array;
17       ARA :        System.Address)
18    is
19    begin
20       RA.A := RA.A + 1;
21       Check_Param_Passing (Formal => RA'Address,
22                            Actual => ARA);
23    end Update_Value;
24
25    procedure Update_Value
26      (R  : in out Tagged_Rec;
27       AR :        System.Address)
28    is
29    begin
30       R.A := R.A + 1;
31       Check_Param_Passing (Formal => R'Address,
```

(continues on next page)

(continued from previous page)

```
                              Actual => AR);
   end Update_Value;

end Machine_X;
```

Listing 60: show_by_copy_by_ref_params.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Machine_X;   use Machine_X;

procedure Show_By_Copy_By_Ref_Params is
   TR : Tagged_Rec := (A   => 5);
   R  : Rec        := (A   => 5);
   RA : Rec_Array  := (A   => 5,
                       Arr => (others => 0));
begin
   Put_Line ("Tagged record");
   Update_Value (TR, TR'Address);

   Put_Line ("Untagged record");
   Update_Value (R,  R'Address);

   Put_Line ("Untagged record with array");
   Update_Value (RA, RA'Address);
end Show_By_Copy_By_Ref_Params;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Parameter_Modes_
 ↪Associations.By_Copy_By_Ref_Params
MD5: 3ca46380c4df36af9393041181ff2f17
```

Runtime output

```
Tagged record
Formal parameter at 00007FFC39C703A0
Actual parameter at 00007FFC39C703A0
Parameter is passed by reference.
Untagged record
Formal parameter at 00007FFC39C701EC
Actual parameter at 00007FFC39C7039C
Parameter is passed by copy.
Untagged record with array
Formal parameter at 00007FFC39C70200
Actual parameter at 00007FFC39C70200
Parameter is passed by reference.
```

When we run this example, we see that the object of tagged type (Tagged_Rec) is passed by reference to the Update_Value procedure. In the case of the objects of untagged record types, you might see this:

- the parameter of Rec type — which is an untagged record with a single component of integer type —, the parameter is passed by copy;
- the parameter of Rec_Array type — which is an untagged record with a large array of 100 components —, the parameter is passed by reference.

Because Rec and Rec_Array are neither by-copy nor by-reference types, the decision about how to pass them to the Update_Value procedure is made by the compiler. (Thus, it is possible that you see different results when running the code above.)

Bounded errors

When we use parameters of types that are neither by-copy nor by-reference types, we might encounter the situation where we have the same object bound to different names in a subprogram. For example, if:

- we use a global object `Global_R` of a record type Rec

and

- we have a subprogram with an in-out parameter of the same record type Rec

and

- we pass `Global_R` as the actual parameter for the in-out parameter of this subprogram,

then we have two access paths to this object: one of them using the global variable directly, and the other one using it indirectly via the in-out parameter. This situation could lead to undefined behavior or to a program error. Consider the following code example:

Listing 61: machine_x.ads

```
with System;

package Machine_X is

   type Rec is record
      A : Integer;
   end record;

   Global_R : Rec := (A => 0);

   procedure Update_Value
     (R  : in out Rec;
      AR :        System.Address);

end Machine_X;
```

Listing 62: machine_x.adb

```
with Ada.Text_IO;         use Ada.Text_IO;

with Check_Param_Passing;

package body Machine_X is

   procedure Update_Value
     (R  : in out Rec;
      AR :        System.Address)
   is
      procedure Show_Vars is
      begin
         Put_Line ("Global_R.A: "
                   & Integer'Image (Global_R.A));
         Put_Line ("R.A:        "
                   & Integer'Image (R.A));
      end Show_Vars;
   begin
      Check_Param_Passing (Formal => R'Address,
                           Actual => AR);

      Put_Line ("Incrementing Global_R.A...");
      Global_R.A := Global_R.A + 1;
```

(continues on next page)

(continued from previous page)

```
      Show_Vars;

      Put_Line ("Incrementing R.A...");
      R.A := R.A + 5;
      Show_Vars;
   end Update_Value;

end Machine_X;
```

Listing 63: show_by_copy_by_ref_params.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Machine_X;   use Machine_X;

procedure Show_By_Copy_By_Ref_Params is
begin
   Put_Line ("Calling Update_Value...");
   Update_Value (Global_R,  Global_R'Address);

   Put_Line ("After call to Update_Value...");
   Put_Line ("Global_R.A: "
             & Integer'Image (Global_R.A));
end Show_By_Copy_By_Ref_Params;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Parameter_Modes_
 ↪Associations.By_Copy_By_Ref_Params
MD5: 96be7054b7ff64a304705edf6b15f031
```

Runtime output

```
Calling Update_Value...
Formal parameter at 00007FFC9FE4A8BC
Actual parameter at 000061E11C2953C4
Parameter is passed by copy.
Incrementing Global_R.A...
Global_R.A:  1
R.A:         0
Incrementing R.A...
Global_R.A:  1
R.A:         5
After call to Update_Value...
Global_R.A:  5
```

In the `Update_Value` procedure, because `Global_R` and `R` have a type that is neither a by-pass nor a by-reference type, the language does not specify whether the old or the new value would be read in the calls to `Put_Line`. In other words, the actual behavior is undefined. Also, this situation might raise the `Program_Error` exception.

Important

As a general advice:

- you should be very careful when using global variables and
- you should avoid passing them as parameters in situations such as the one illustrated in the code example above.

Aliased parameters

When a parameter is specified as *aliased*, it is always passed by reference, independently of the type we're using. In this sense, we can use this keyword to circumvent the rules mentioned so far. (We discuss more about *aliasing* (page 884) and *aliased parameters* (page 892) later on.)

Let's rewrite a previous code example that has a parameter of elementary type and change it to *aliased*:

Listing 64: machine_x.ads

```
with System;

package Machine_X is

   procedure Update_Value
     (V  : aliased in out Integer;
      AV :                System.Address);

end Machine_X;
```

Listing 65: machine_x.adb

```
with Check_Param_Passing;

package body Machine_X is

   procedure Update_Value
     (V  : aliased in out Integer;
      AV :                System.Address)
   is
   begin
      V := V + 1;
      Check_Param_Passing (Formal => V'Address,
                           Actual => AV);
   end Update_Value;

end Machine_X;
```

Listing 66: show_by_copy_by_ref_params.adb

```
with Machine_X; use Machine_X;

procedure Show_By_Copy_By_Ref_Params is
   A : aliased Integer := 5;
begin
   Update_Value (A, A'Address);
end Show_By_Copy_By_Ref_Params;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Parameter_Modes_
 ↪Associations.By_Copy_By_Ref_Params
MD5: c066af3a7081815d0a7598733f9e6aec
```

Runtime output

```
Formal parameter at 00007FFF1DE565DC
Actual parameter at 00007FFF1DE565DC
Parameter is passed by reference.
```

As we can see, A is now passed by reference.

Note that we can only pass aliased objects to aliased parameters. If we try to pass a non-aliased object, we get a compilation error:

Listing 67: show_by_copy_by_ref_params.adb

```
with Machine_X; use Machine_X;

procedure Show_By_Copy_By_Ref_Params is
   A : Integer := 5;
begin
   Update_Value (A, A'Address);
end Show_By_Copy_By_Ref_Params;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Parameter_Modes_
 ↪Associations.By_Copy_By_Ref_Params
MD5: 9e6586e0b771de68040131cae81799b8
```

Build output

```
show_by_copy_by_ref_params.adb:6:18: error: actual for aliased formal "V" must be␣
 ↪aliased object
gprbuild: *** compilation phase failed
```

Again, we discuss more about *aliased parameters* (page 892) and *aliased objects* (page 886) later on in the context of access types.

Parameter Associations

When actual parameters are associated with formal parameters, some rules are checked. As a typical example, the type of each actual parameter must match the type of the corresponding actual parameter. In this section, we see some details about how this association is made and some of the potential errors.

In the Ada Reference Manual

- 6.4.1 Parameter Associations[186]

Parameter order and association

As we already know, when calling subprograms, we can use positional or named parameter association — or a mixture of both. Also, parameters can have default values. Let's see some examples:

Listing 68: operations.ads

```
package Operations is

   procedure Add (Left  : in out Integer;
                  Right :        Float := 1.0);

end Operations;
```

[186] http://www.ada-auth.org/standards/22rm/html/RM-6-4-1.html

Listing 69: operations.adb

```
package body Operations is

   procedure Add (Left  : in out Integer;
                  Right :        Float := 1.0) is
   begin
      Left := Left + Integer (Right);
   end Add;

end Operations;
```

Listing 70: show_param_association.adb

```
with Operations; use Operations;

procedure Show_Param_Association is
   A : Integer := 5;
begin
   --  Positional association
   Add (A, 2.0);

   --  Positional association
   --  (using default value)
   Add (A);

   --  Named association
   Add (Left  => A,
        Right => 2.0);

   --  Named association (inversed order)
   Add (Right => 2.0,
        Left  => A);

   --  Mixed positional / named association
   Add (A, Right => 2.0);
end Show_Param_Association;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Parameter_Modes_
 ↪Associations.Param_Association_1
MD5: 64d3f44ac2bf72317fae22658f6d218e
```

This code snippet has examples of positional and name parameter association. Also, it has an example of mixed positional / named parameter association. In most cases, the actual A parameter is associated with the formal `Left` parameter, and the actual 2.0 parameter is associated with the formal `Right` parameter.

In addition to that, parameters can have default values, so, when we write `Add (A)`, the A variable is associated with the `Left` parameter and the default value (1.0) is associated with the `Right` parameter.

Also, when we use named parameter association, the parameter order is irrelevant: we can, for example, write the last parameter as the first one. Therefore, we can write `Add (Right => 2.0, Left => A)` instead of `Add (Left => A, Right => 2.0)`.

Ambiguous calls

Ambiguous calls can be detected by the compiler during parameter association. For example, when we have both default values in parameters and subprogram overloading, the compiler might be unable to decide which subprogram we're calling:

Listing 71: operations.ads

```
package Operations is

   procedure Add (Left  : in out Integer);

   procedure Add (Left  : in out Integer;
                  Right :        Float := 1.0);

end Operations;
```

Listing 72: operations.adb

```
package body Operations is

   procedure Add (Left  : in out Integer) is
   begin
      Left := Left + 1;
   end Add;

   procedure Add (Left  : in out Integer;
                  Right :        Float := 1.0) is
   begin
      Left := Left + Integer (Right);
   end Add;

end Operations;
```

Listing 73: show_param_association.adb

```
with Operations; use Operations;

procedure Show_Param_Association is
   A : Integer := 5;
begin
   Add (A);
   --  ERROR: cannot decide which
   --         procedure to take
end Show_Param_Association;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Parameter_Modes_
 ↪Associations.Param_Association_1
MD5: 2725517f82d4068b669028eca1815079
```

Build output

```
show_param_association.adb:6:04: error: ambiguous expression (cannot resolve "Add")
show_param_association.adb:6:04: error: possible interpretation at operations.ads:5
show_param_association.adb:6:04: error: possible interpretation at operations.ads:3
gprbuild: *** compilation phase failed
```

As we see in this example, the Add procedure is overloaded. The first instance has one parameter, and the second instance has two parameters, where the second parameter has a default value. When we call Add with just one parameter, the compiler cannot decide

whether we intend to call

- the first instance of Add with one parameter

or

- the second instance of Add using the default value for the second parameter.

In this specific case, there are multiple options to solve the issue, but all of them involve redesigning the package specification:

- we could just rename one of Add procedures (thereby eliminating the subprogram overloading);
- we could rename the first parameter of one of the Add procedures and use named parameter association in the call to the procedure;
  - For example, we could rename the parameter to Value and call `Add (Value => A)`.
- remove the default value from the second parameter of the second instance of Add.

Overlapping actual parameters

When we have more than one **out** or **in out** parameters in a subprogram, we might run into the situation where the actual parameter overlaps with another parameter. For example:

Listing 74: machine_x.ads

```
package Machine_X is

   procedure Update_Value (V1 : in out Integer;
                           V2 :    out Integer);

end Machine_X;
```

Listing 75: machine_x.adb

```
package body Machine_X is

   procedure Update_Value (V1 : in out Integer;
                           V2 :    out Integer) is
   begin
      V1 := V1 + 1;
      V2 := V2 + 1;
   end Update_Value;

end Machine_X;
```

Listing 76: show_by_copy_by_ref_params.adb

```
with Machine_X; use Machine_X;

procedure Show_By_Copy_By_Ref_Params is
   A : Integer := 5;
begin
   Update_Value (A, A);
end Show_By_Copy_By_Ref_Params;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Parameter_Modes_
 ↪Associations.Illegal_Calls
MD5: d18a7056463fee9298dd1fdef0a31daf
```

Build output

```
show_by_copy_by_ref_params.adb:6:18: error: writable actual for "V1" overlaps with␣
 ↪actual for "V2"
gprbuild: *** compilation phase failed
```

In this case, we're using A for both output parameters in the call to Update_Value. Passing one variable to more than one output parameter in a given call is forbidden in Ada, so this triggers a compilation error. Depending on the specific context, you could solve this issue by using temporary variables for the other output parameters.

26.3.2 Operators

Operators are commonly used for variables of scalar types such as **Integer** and **Float**. In these cases, they replace *usual* function calls. (To be more precise, operators are function calls, but written in a different format.) For example, we simply write `A := A + B + C;` when we want to add three integer variables. A hypothetical, non-intuitive version of this operation could be `A := Add (Add (A, B), C);`. In such cases, operators allow for expressing function calls in a more intuitive way.

Many primitive operators exist for scalar types. We classify them as follows:

Category	Operators
Logical	**and**, **or**, **xor**
Relational	=, /=, <, <=, >, >=
Unary adding	+, -
Binary adding	+, -, &
Multiplying	*, /, **mod**, **rem**
Highest precedence	**, **abs**, **not**

In the Ada Reference Manual

- 4.5 Operators and Expression Evaluation[187]

User-defined operators

For non-scalar types, not all operators are defined. For example, it wouldn't make sense to expect a compiler to include an addition operator for a record type with multiple components. Exceptions to this rule are the equality and inequality operators (= and /=), which are defined for any type (be it scalar, record types, and array types).

For array types, the concatenation operator (&) is a primitive operator:

Listing 77: integer_arrays.ads

```
1 package Integer_Arrays is
2
3    type Integer_Array is
4      array (Positive range <>) of Integer;
5
6 end Integer_Arrays;
```

[187] http://www.ada-auth.org/standards/22rm/html/RM-4-5.html

Listing 78: show_array_concatenation.adb

```
with Ada.Text_IO;    use Ada.Text_IO;
with Integer_Arrays; use Integer_Arrays;

procedure Show_Array_Concatenation is
   A, B : Integer_Array (1 .. 5);
   R    : Integer_Array (1 .. 10);
begin
   A := (1 & 2 & 3 & 4 & 5);
   B := (6 & 7 & 8 & 9 & 10);
   R := A & B;

   for E of R loop
      Put (E'Image & ' ');
   end loop;
   New_Line;
end Show_Array_Concatenation;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Operators.Integer_Arrays_
 ↪Concat
MD5: 1899e66ec1d0b36b10d8b89fc2dfac0e
```

Runtime output

```
 1  2  3  4  5  6  7  8  9  10
```

In this example, we're using the primitive & operator to concatenate the A and B arrays in the assignment to R. Similarly, we're concatenating individual components (integer values) to create an aggregate that we assign to A and B.

In contrast to this, the addition operator is not available for arrays:

Listing 79: integer_arrays.ads

```
package Integer_Arrays is

   type Integer_Array is
     array (Positive range <>) of Integer;

end Integer_Arrays;
```

Listing 80: show_array_addition.adb

```
with Ada.Text_IO;    use Ada.Text_IO;
with Integer_Arrays; use Integer_Arrays;

procedure Show_Array_Addition is
   A, B, R : Integer_Array (1 .. 5);
begin
   A := (1 & 2 & 3 & 4 & 5);
   B := (6 & 7 & 8 & 9 & 10);
   R := A + B;

   for E of R loop
      Put (E'Image & ' ');
   end loop;
   New_Line;

end Show_Array_Addition;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Operators.Integer_Arrays_
 ↪Addition
MD5: d94f9791523359d390a7cafd900d1268
```

Build output

```
show_array_addition.adb:9:11: error: there is no applicable operator "+" for type
 ↪"Integer_Array" defined at integer_arrays.ads:3
gprbuild: *** compilation phase failed
```

We can, however, define *custom* operators for any type. For example, if a specific type doesn't have a predefined addition operator, we can define our own + operator for it.

Note that we're limited to the operator symbols that are already defined by the Ada language (see the previous table for the complete list of operators). In other words, the operator we define must be selected from one of those existing symbols; we cannot use new symbols for custom operators.

In other languages

Some programming languages — such as Haskell — allow you to define and use custom operator symbols. For example, in Haskell, you can create a new "broken bar" (¦) operator for integer values:

```
(¦) :: Int -> Int -> Int
a ¦ b = a + a + b

main = putStrLn $ show (2 ¦ 3)
```

This is not possible in Ada.

Let's define a custom addition operator that adds individual components of the `Integer_Array` type:

Listing 81: integer_arrays.ads

```
1  package Integer_Arrays is
2
3     type Integer_Array is
4       array (Positive range <>) of Integer;
5
6     function "+" (Left, Right : Integer_Array)
7                   return Integer_Array
8       with Post =>
9         (for all I in "+"'Result'Range =>
10           "+"'Result (I) = Left (I) + Right (I));
11
12 end Integer_Arrays;
```

Listing 82: integer_arrays.adb

```
1  package body Integer_Arrays is
2
3     function "+" (Left, Right : Integer_Array)
4                   return Integer_Array
5     is
6        R : Integer_Array (Left'Range);
7     begin
8        for I in Left'Range loop
```

(continues on next page)

(continued from previous page)

```
         R (I) := Left (I) + Right (I);
      end loop;

      return R;
   end "+";

end Integer_Arrays;
```

Listing 83: show_array_addition.adb

```
with Ada.Text_IO;    use Ada.Text_IO;
with Integer_Arrays; use Integer_Arrays;

procedure Show_Array_Addition is
   A, B, R : Integer_Array (1 .. 5);
begin
   A := (1 & 2 & 3 & 4 & 5);
   B := (6 & 7 & 8 & 9 & 10);
   R := A + B;

   for E of R loop
      Put (E'Image & ' ');
   end loop;
   New_Line;

end Show_Array_Addition;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Operators.Integer_Arrays_
↪Addition
MD5: 6f50fa47270d97d3fb50379b6275777d
```

Runtime output

```
 7  9  11  13  15
```

Now, the `R := A + B` line doesn't trigger a compilation error anymore because the `+` operator is defined for the `Integer_Array` type.

In the implementation of the `+`, we return an array with the range of the `Left` array where each component is the sum of the `Left` and `Right` arrays. In the declaration of the `+` operator, we're defining the expected behavior in the postcondition. Here, we're saying that, for each index of the resulting array (`for all I in "+"'Result'Range`), the value of each component of the resulting array at that specific index is the sum of the components from the `Left` and `Right` arrays at the same index (`"+"'Result (I) = Left (I) + Right (I)`). (`for all` denotes a *quantified expression* (page 696).)

Note that, in this implementation, we assume that the range of `Right` is a subset of the range of `Left`. If that is not the case, the `Constraint_Error` exception will be raised at runtime in the loop. (You can test this by declaring `B` as `Integer_Array (5 .. 10)`, for example.)

We can also define custom operators for record types. For example, we could declare two `+` operators for a record containing the name and address of a person:

Listing 84: addresses.ads

```
package Addresses is

   type Person is private;
```

(continues on next page)

(continued from previous page)

```
4
5     function "+" (Name    : String;
6                   Address : String)
7                   return Person;
8     function "+" (Left, Right : Person)
9                   return Person;
10
11    procedure Display (P : Person);
12
13 private
14
15    subtype Name_String    is String (1 .. 40);
16    subtype Address_String is String (1 .. 100);
17
18    type Person is record
19       Name    : Name_String;
20       Address : Address_String;
21    end record;
22
23 end Addresses;
```

Listing 85: addresses.adb

```
1  with Ada.Strings.Fixed; use Ada.Strings.Fixed;
2  with Ada.Text_IO;       use Ada.Text_IO;
3
4  package body Addresses is
5
6     function "+" (Name    : String;
7                   Address : String)
8                   return Person
9     is
10    begin
11       return (Name    =>
12                  Head (Name,
13                        Name_String'Length),
14               Address =>
15                  Head (Address,
16                        Address_String'Length));
17    end "+";
18
19    function "+" (Left, Right : Person)
20                  return Person
21    is
22    begin
23       return (Name    => Left.Name,
24               Address => Right.Address);
25    end "+";
26
27    procedure Display (P : Person) is
28    begin
29       Put_Line ("Name:    " & P.Name);
30       Put_Line ("Address: " & P.Address);
31       New_Line;
32    end Display;
33
34 end Addresses;
```

Listing 86: show_address_addition.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Addresses;   use Addresses;

procedure Show_Address_Addition is
   John : Person := "John" + "4 Main Street";
   Jane : Person := "Jane" + "7 High Street";
begin
   Display (John);
   Display (Jane);
   Put_Line ("----------------");

   Jane := Jane + John;
   Display (Jane);
end Show_Address_Addition;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Operators.Rec_Operator
MD5: c69ff43ed5a80a0c62bad87eada14301
```

Runtime output

```
Name:    John
Address: 4 Main Street

Name:    Jane
Address: 7 High Street

----------------
Name:    Jane
Address: 4 Main Street
```

In this example, the first `+` operator takes two strings — with the name and address of a person — and returns an object of `Person` type. We use this operator to initialize the `John` and `Jane` variables.

The second `+` operator in this example brings two people together. Here, the person on the left side of the `+` operator moves to the home of the person on the right side. In this specific case, Jane is moving to John's house.

As a small remark, we usually expect that the `+` operator is commutative. In other words, changing the order of the elements in the operation doesn't change the result. However, in our definition above, this is *not* the case, as we can confirm by comparing the operation in both orders:

Listing 87: show_address_addition.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Addresses;   use Addresses;

procedure Show_Address_Addition is
   John : constant Person :=
            "John" + "4 Main Street";
   Jane : constant Person :=
            "Jane" + "7 High Street";
begin
   if Jane + John = John + Jane then
      Put_Line ("It's commutative!");
```

(continues on next page)

(continued from previous page)

```
   else
      Put_Line ("It's not commutative!");
   end if;
end Show_Address_Addition;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Operators.Rec_Operator
MD5: 2af6e1a31100a1d0fa786d42cc93c09b
```

Runtime output

```
It's not commutative!
```

In this example, we're using the primitive = operator for the Person to assess whether the result of the addition is commutative.

In the Ada Reference Manual

- 6.1 Subprogram Declarations[188]

26.3.3 Expression functions

Usually, we implement Ada functions with a construct like this: `begin return X; end;`. In other words, we create a `begin ... end;` block and we have at least one `return` statement in that block. An expression function, in contrast, is a function that is implemented with a simple expression in parentheses, such as `(X);`. In this case, we don't use a `begin ... end;` block or a `return` statement.

As an example of an expression, let's say we want to implement a function named `Is_Zero` that checks if the value of the integer parameter `I` is zero. We can implement this function with the expression `I = 0`. In the usual approach, we would create the implementation by writing `is begin return I = 0; end Is_Zero;`. When using expression functions, however, we can simplify the implementation by just writing `is (I = 0);`. This is the complete code of `Is_Zero` using an expression function:

Listing 88: expr_func.ads

```
package Expr_Func is

   function Is_Zero (I : Integer)
                     return Boolean is
     (I = 0);

end Expr_Func;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Expression_Functions.Simple_
↪Expression_Function_1
MD5: 44779999566f764279e1c2f292226f95
```

An expression function has the same effect as the usual version using a block. In fact, the code above is similar to this implementation of the `Is_Zero` function using a block:

[188] http://www.ada-auth.org/standards/22rm/html/RM-6-1.html

Listing 89: expr_func.ads

```
package Expr_Func is

   function Is_Zero (I : Integer)
                     return Boolean;

end Expr_Func;
```

Listing 90: expr_func.adb

```
package body Expr_Func is

   function Is_Zero (I : Integer)
                     return Boolean is
   begin
      return I = 0;
   end Is_Zero;

end Expr_Func;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Expression_Functions.Simple_
 ↪Expression_Function_2
MD5: 4d90b1c63928cbaf9c86a6cc6421bb61
```

The only difference between these two versions of the Expr_Func packages is that, in the first version, the package specification contains the implementation of the Is_Zero function, while, in the second version, the implementation is in the body of the Expr_Func package.

An expression function can be, at same time, the specification and the implementation of a function. Therefore, in the first version of the Expr_Func package above, we don't have a separate implementation of the Is_Zero function because (I = 0) is the actual implementation of the function. Note that this is only possible for expression functions; you cannot have a function implemented with a block in a package specification. For example, the following code is wrong and won't compile:

Listing 91: expr_func.ads

```
package Expr_Func is

   function Is_Zero (I : Integer)
                     return Boolean is
   begin
      return I = 0;
   end Is_Zero;

end Expr_Func;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Expression_Functions.Simple_
 ↪Expression_Function_3
MD5: 919f9c101b3224006e1302130eba8dd2
```

We can, of course, separate the function declaration from its implementation as an expression function. For example, we can rewrite the first version of the Expr_Func package and move the expression function to the body of the package:

Listing 92: expr_func.ads

```
package Expr_Func is

   function Is_Zero (I : Integer)
                     return Boolean;

end Expr_Func;
```

Listing 93: expr_func.adb

```
package body Expr_Func is

   function Is_Zero (I : Integer)
                     return Boolean is
     (I = 0);

end Expr_Func;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Expression_Functions.Simple_
 ↪Expression_Function_4
MD5: 491a491da92636a35579f870969aaf08
```

In addition, we can use expression functions in the private part of a package specification. For example, the following code declares the `Is_Valid` function in the specification of the `My_Data` package, while its implementation is an expression function in the private part of the package specification:

Listing 94: my_data.ads

```
package My_Data is

   type Data is private;

   function Is_Valid (D : Data)
                      return Boolean;

private

   type Data is record
      Valid : Boolean;
   end record;

   function Is_Valid (D : Data)
                      return Boolean is
     (D.Valid);

end My_Data;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Expression_Functions.
 ↪Private_Expression_Function_1
MD5: beb57eca67b3954097e0f7ac00ea70c9
```

Naturally, we could write the function implementation in the package body instead:

Listing 95: my_data.ads

```
package My_Data is

   type Data is private;

   function Is_Valid (D : Data)
                      return Boolean;

private

   type Data is record
      Valid : Boolean;
   end record;

end My_Data;
```

Listing 96: my_data.adb

```
package body My_Data is

   function Is_Valid (D : Data)
                      return Boolean is
     (D.Valid);

end My_Data;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Expression_Functions.
 ↪Private_Expression_Function_2
MD5: 3c6e2a3c53c7c8e1a7b86efccdc3bf8d
```

In the Ada Reference Manual

- 6.8 Expression functions[189]

26.3.4 Overloading

Note

This section was originally written by Robert A. Duff and published as Gem #50: Overload Resolution[190].

Ada allows overloading of subprograms, which means that two or more subprogram declarations with the same name can be visible at the same place. Here, "name" can refer to operator symbols, like "+". Ada also allows overloading of various other notations, such as literals and aggregates.

In most languages that support overloading, overload resolution is done "bottom up" — that is, information flows from inner constructs to outer constructs. As usual, computer folks draw their trees upside-down, with the root at the top. For example, if we have two procedures `Print`:

[189] http://www.ada-auth.org/standards/22rm/html/RM-6-8.html
[190] https://www.adacore.com/gems/gem-50

Listing 97: show_overloading.adb

```
procedure Show_Overloading is

   package Types is
      type Sequence is null record;
      type Set is null record;

      procedure Print (S : Sequence) is null;
      procedure Print (S : Set) is null;
   end Types;

   use Types;

   X : Sequence;
begin

   --  Compiler selects Print (S : Sequence)
   Print (X);
end Show_Overloading;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Overloading.Overloading
MD5: 020c4f04285c80c1050d8edbaf2dbcae
```

the type of X determines which `Print` is meant in the call.

Ada is unusual in that it supports top-down overload resolution as well:

Listing 98: show_top_down_overloading.adb

```
procedure Show_Top_Down_Overloading is

   package Types is
      type Sequence is null record;
      type Set is null record;

      function Empty return Sequence is
        ((others => <>));

      function Empty return Set is
        ((others => <>));

      procedure Print_Sequence (S : Sequence) is
        null;

      procedure Print_Set (S : Set) is
        null;
   end Types;

   use Types;

   X : Sequence;
begin
   --  Compiler selects function
   --  Empty return Sequence
   Print_Sequence (Empty);
end Show_Top_Down_Overloading;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Overloading.Overloading
MD5: 3b776a3efdee3d7e583ddbf5159c9a1b
```

The type of the formal parameter S of Print_Sequence determines which Empty is meant in the call. In C++, for example, the equivalent of the Print (X) example would resolve, but the Print_Sequence (Empty) would be illegal, because C++ does not use top-down information.

If we overload things too heavily, we can cause ambiguities:

Listing 99: show_overloading_error.adb

```
procedure Show_Overloading_Error is

   package Types is
      type Sequence is null record;
      type Set is null record;

      function Empty return Sequence is
        ((others => <>));

      function Empty return Set is
        ((others => <>));

      procedure Print (S : Sequence) is
        null;

      procedure Print (S : Set) is
        null;
   end Types;

   use Types;

   X : Sequence;
begin
   Print (Empty);  -- Illegal!
end Show_Overloading_Error;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Overloading.Overloading
MD5: 5182c517a1afff4568ab2404ac66fda8
```

Build output

```
show_overloading_error.adb:24:04: error: ambiguous expression (cannot resolve
 ↪"Print")
show_overloading_error.adb:24:04: error: possible interpretation at line 16
show_overloading_error.adb:24:04: error: possible interpretation at line 13
show_overloading_error.adb:24:11: error: ambiguous call to "Empty"
show_overloading_error.adb:24:11: error: possible interpretation at line 10
show_overloading_error.adb:24:11: error: possible interpretation at line 7
gprbuild: *** compilation phase failed
```

The call is ambiguous, and therefore illegal, because there are two possible meanings. One way to resolve the ambiguity is to use a qualified expression to say which type we mean:

```
Print (Sequence'(Empty));
```

Note that we're now using both bottom-up and top-down overload resolution: Sequence' determines which Empty is meant (top down) and which Print is meant (bottom up). You can qualify an expression, even if it is not ambiguous according to Ada rules — you might

want to clarify the type because it might be ambiguous for human readers.

Of course, you could instead resolve the `Print (Empty)` example by modifying the source code so the names are unique, as in the earlier examples. That might well be the best solution, assuming you can modify the relevant sources. Too much overloading can be confusing. How much is "too much" is in part a matter of taste.

Ada really needs to have top-down overload resolution, in order to resolve literals. In some languages, you can tell the type of a literal by looking at it, for example appending L (letter el) means "the type of this literal is long int". That sort of kludge won't work in Ada, because we have an open-ended set of integer types:

Listing 100: show_literal_resolution.adb

```
procedure Show_Literal_Resolution is

   type Apple_Count is range 0 .. 100;

   procedure Peel (Count : Apple_Count) is null;
begin
   Peel (20);
end Show_Literal_Resolution;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Overloading.Literal_
 ↪Resolution
MD5: f428b6b4c642c44ede6bc21e7522c532
```

You can't tell by looking at the literal `20` what its type is. The type of formal parameter **`Count`** tells us that `20` is an `Apple_Count`, as opposed to some other type, such as `Standard.Long_Integer`.

Technically, the type of `20` is `universal_integer`, which is implicitly converted to `Apple_Count` — it's really the result type of that implicit conversion that is at issue. But that's an obscure point — you won't go *too* far wrong if you think of the integer literal notation as being overloaded on all integer types.

Developers sometimes wonder why the compiler can't resolve something that seems obvious. For example:

Listing 101: show_literal_resolution_error.adb

```
procedure Show_Literal_Resolution_Error is

   type Apple_Count is range 0 .. 100;
   procedure Slice (Count : Apple_Count) is null;

   type Orange_Count is range 0 .. 10_000;
   procedure Slice (Count : Orange_Count) is null;
begin
   Slice (Count => (10_000));  --  Illegal!
end Show_Literal_Resolution_Error;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Overloading.Literal_
 ↪Resolution_Error
MD5: 4789d8eea9b82649ba8e453bb861688a
```

Build output

```
show_literal_resolution_error.adb:9:04: error: ambiguous expression (cannot␣
 ↪resolve "Slice")
show_literal_resolution_error.adb:9:04: error: possible interpretation at line 7
show_literal_resolution_error.adb:9:04: error: possible interpretation at line 4
gprbuild: *** compilation phase failed
```

This call is ambiguous, and therefore illegal. But why? Clearly the developer must have meant the `Orange_Count` one, because `10_000` is out of range for `Apple_Count`. And all the relevant expressions happen to be static.

Well, a good rule of thumb in language design (for languages with overloading) is that the overload resolution rules should not be "too smart". We want this example to be illegal to avoid confusion on the part of developers reading the code. As usual, a qualified expression fixes it:

```
Slice (Count => Orange_Count'(10_000));
```

Another example, similar to the literal, is the aggregate. Ada uses a simple rule: the type of an aggregate is determined top down (i.e., from the context in which the aggregate appears). Bottom-up information is not used; that is, the compiler does not look inside the aggregate in order to determine its type.

Listing 102: show_record_resolution_error.adb

```
1  procedure Show_Record_Resolution_Error is
2
3     type Complex is record
4        Re, Im : Float;
5     end record;
6
7     procedure Grind (X : Complex) is null;
8     procedure Grind (X : String) is null;
9  begin
10    Grind (X => (Re => 1.0, Im => 1.0));
11    --  ^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^
12    --  Illegal!
13 end Show_Record_Resolution_Error;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Overloading.Record_
 ↪Resolution_Error
MD5: e3dd1f1d0c403bcf672f4bab881b8ef9
```

Build output

```
show_record_resolution_error.adb:10:04: error: ambiguous expression (cannot␣
 ↪resolve "Grind")
show_record_resolution_error.adb:10:04: error: possible interpretation at line 8
show_record_resolution_error.adb:10:04: error: possible interpretation at line 7
gprbuild: *** compilation phase failed
```

There are two `Grind` procedures visible, so the type of the aggregate could be `Complex` or **`String`**, so it is ambiguous and therefore illegal. The compiler is not required to notice that there is only one type with components `Re` and `Im`, of some real type — in fact, the compiler is not *allowed* to notice that, for overloading purposes.

We can qualify as usual:

```
Grind (X => Complex'(Re => 1.0, Im => 1.0));
```

Only after resolving that the type of the aggregate is `Complex` can the compiler look inside and make sure `Re` and `Im` make sense.

This not-too-smart rule for aggregates helps prevent confusion on the part of developers reading the code. It also simplifies the compiler, and makes the overload resolution algorithm reasonably efficient.

26.3.5 Operator Overloading

We've seen *previously* (page 736) that we can define custom operators for any type. We've also seen that subprograms can be *overloaded* (page 745). Since operators are functions, we're essentially talking about operator overloading, as we're defining the same operator (say `+` or `-`) for different types.

As another example of operator overloading, in the Ada standard library, operators are defined for the `Complex` type of the `Ada.Numerics.Generic_Complex_Types` package. This package contains not only the definition of the `+` operator for two objects of `Complex` type, but also for combination of `Complex` and other types. For instance, we can find these declarations:

```
function "+" (Left, Right : Complex)
              return Complex;
function "+" (Left : Complex;   Right : Real'Base)
              return Complex;
function "+" (Left : Real'Base; Right : Complex)
              return Complex;
```

This example shows that the `+` operator — as well as other operators — are being overloaded in the `Generic_Complex_Types` package.

In the Ada Reference Manual

- 6.6 Overloading of Operators[191]
- G.1.1 Complex Types[192]

26.3.6 Operator Overriding

We can also override operators of derived types. This allows for modifying the behavior of operators for the corresponding derived types.

To override an operator of a derived type, we simply implement a function for that operator. This is the same as how we implement custom operators (as we've seen previously).

As an example, when adding two fixed-point values, the result might be out of range, which causes an exception to be raised. A common strategy to avoid exceptions in this case is to saturate the resulting value. This strategy is typically employed in signal processing algorithms, for example.

In this example, we declare and use the 32-bit fixed-point type `TQ31`:

Listing 103: fixed_point.ads

```
1 package Fixed_Point is
2
3    D : constant := 2.0 ** (-31);
4    type TQ31 is delta D range -1.0 .. 1.0 - D;
```

(continues on next page)

[191] http://www.ada-auth.org/standards/22rm/html/RM-6-6.html
[192] http://www.ada-auth.org/standards/22rm/html/RM-G-1-1.html

(continued from previous page)

```
5
6  end Fixed_Point;
```

Listing 104: show_sat_op.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2  with Fixed_Point; use Fixed_Point;
3
4  procedure Show_Sat_Op is
5     A, B, C : TQ31;
6  begin
7     A := TQ31'Last;
8     B := TQ31'Last;
9     C := A + B;
10
11    Put_Line (A'Image   & " + "
12              & B'Image & " = "
13              & C'Image);
14
15    A := TQ31'First;
16    B := TQ31'First;
17    C := A + B;
18
19    Put_Line (A'Image   & " + "
20              & B'Image & " = "
21              & C'Image);
22
23 end Show_Sat_Op;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Operator_Overriding.Fixed_
 ↪Point_Exception
MD5: 15d8860773ec7c0e505d0ee94781ae14
```

Runtime output

```

raised CONSTRAINT_ERROR : show_sat_op.adb:9 overflow check failed
```

Here, we're using the standard `+` operator, which raises a `Constraint_Error` exception in the `C := A + B;` statement due to an overflow. Let's now override the addition operator and enforce saturation when the result is out of range:

Listing 105: fixed_point.ads

```
1  package Fixed_Point is
2
3     D : constant := 2.0 ** (-31);
4     type TQ31 is delta D range -1.0 .. 1.0 - D;
5
6     function "+" (Left, Right : TQ31)
7                   return TQ31;
8
9  end Fixed_Point;
```

Listing 106: fixed_point.adb

```
1  package body Fixed_Point is
2
```

(continues on next page)

(continued from previous page)

```
   function "+" (Left, Right : TQ31)
                 return TQ31
   is
      type TQ31_2 is
        delta TQ31'Delta
        range TQ31'First * 2.0 .. TQ31'Last * 2.0;

      L   : constant TQ31_2 := TQ31_2 (Left);
      R   : constant TQ31_2 := TQ31_2 (Right);
      Res : TQ31_2;
   begin
      Res := L + R;

      if Res > TQ31_2 (TQ31'Last) then
         return TQ31'Last;
      elsif Res < TQ31_2 (TQ31'First) then
         return TQ31'First;
      else
         return TQ31 (Res);
      end if;
   end "+";

end Fixed_Point;
```

Listing 107: show_sat_op.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Fixed_Point; use Fixed_Point;

procedure Show_Sat_Op is
   A, B, C : TQ31;
begin
   A := TQ31'Last;
   B := TQ31'Last;
   C := A + B;

   Put_Line (A'Image   & " + "
             & B'Image & " = "
             & C'Image);

   A := TQ31'First;
   B := TQ31'First;
   C := A + B;

   Put_Line (A'Image   & " + "
             & B'Image & " = "
             & C'Image);

end Show_Sat_Op;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Operator_Overriding.Fixed_
 ↪Point_Operator_Overloading
MD5: 6317bcf9c278c01f86dbdcb761d86240
```

Runtime output

```
 0.9999999995 +  0.9999999995 =  0.9999999995
-1.0000000000 + -1.0000000000 = -1.0000000000
```

In the implementation of the overridden + operator of the TQ31 type, we declare another type (TQ31_2) with a wider range than TQ31. We use variables of the TQ31_2 type to perform the actual addition, and then we verify whether the result is still in TQ31's range. If it is, we simply convert the result *back* to the TQ31 type. Otherwise, we saturate it — using either the first or last value of the TQ31 type.

When overriding operators, the overridden operator replaces the original one. For example, in the A + B operation of the Show_Sat_Op procedure above, we're using the overridden version of the + operator, which performs saturation. Therefore, this operation doesn't raise an exception (as it was the case with the original + operator).

26.3.7 Nonreturning procedures

Usually, when calling a procedure P, we expect that it returns to the caller's *thread of control* after performing some action in the body of P. However, there are situations where a procedure never returns. We can indicate this fact by using the No_Return aspect in the subprogram declaration.

A typical example is that of a server that is designed to run forever until the process is killed or the machine where the server runs is switched off. This server can be implemented as an endless loop. For example:

Listing 108: servers.ads

```
package Servers is

   procedure Run_Server
     with No_Return;

end Servers;
```

Listing 109: servers.adb

```
package body Servers is

   procedure Run_Server is
   begin
      pragma Warnings
        (Off,
         "implied return after this statement");
      while True loop
         --  Processing happens here...
         null;
      end loop;
   end Run_Server;

end Servers;
```

Listing 110: show_endless_loop.adb

```
with Servers; use Servers;

procedure Show_Endless_Loop is
begin
   Run_Server;
end Show_Endless_Loop;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Nonreturning_Procedures.
 ↪Server_Proc
```

(continues on next page)

(continued from previous page)

```
MD5: 3f859b6e2aca8e31367658632e84126c
```

In this example, Run_Server doesn't exit from the `while True` loop, so it never returns to the Show_Endless_Loop procedure.

The same situation happens when we call a procedure that raises an exception unconditionally. In that case, exception handling is triggered, so that the procedure never returns to the caller. An example is that of a logging procedure that writes a message before raising an exception internally:

Listing 111: loggers.ads

```
package Loggers is

   Logged_Failure : exception;

   procedure Log_And_Raise (Msg : String)
     with No_Return;

end Loggers;
```

Listing 112: loggers.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Loggers is

   procedure Log_And_Raise (Msg : String) is
   begin
      Put_Line (Msg);
      raise Logged_Failure;
   end Log_And_Raise;

end Loggers;
```

Listing 113: show_no_return_exception.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Loggers;     use Loggers;

procedure Show_No_Return_Exception is
   Check_Passed : constant Boolean := False;
begin
   if not Check_Passed then
      Log_And_Raise ("Check failed!");
      Put_Line ("This line will not be reached!");
   end if;
end Show_No_Return_Exception;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Nonreturning_Procedures.Log_
↪Exception
MD5: 10b4933d8c862d14ade54935cbd2b541
```

In this example, Log_And_Raise writes a message to the user and raises the Logged_Failure, so it never returns to the Show_No_Return_Exception procedure.

We could implement exception handling in the Show_No_Return_Exception procedure, so that the Logged_Failure exception could be handled there after it's raised in Log_And_Raise. However, this wouldn't be considered a *normal* return to the procedure

because it wouldn't return to the point where it should (i.e. to the point where Put_Line is about to be called, right after the call to the Log_And_Raise procedure).

If a nonreturning procedure returns nevertheless, this is considered a program error, so that the Program_Error exception is raised. For example:

Listing 114: loggers.ads

```
package Loggers is

   Logged_Failure : exception;

   procedure Log_And_Raise (Msg : String)
     with No_Return;

end Loggers;
```

Listing 115: loggers.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Loggers is

   procedure Log_And_Raise (Msg : String) is
   begin
      Put_Line (Msg);
   end Log_And_Raise;

end Loggers;
```

Listing 116: show_no_return_exception.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Loggers;     use Loggers;

procedure Show_No_Return_Exception is
   Check_Passed : constant Boolean := False;
begin
   if not Check_Passed then
      Log_And_Raise ("Check failed!");
      Put_Line ("This line will not be reached!");
   end if;
end Show_No_Return_Exception;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Nonreturning_Procedures.
 ↪Erroneous_Log_Exception
MD5: e44fd8df0529dda5749e85b9e300a999
```

Build output

```
show_no_return_exception.adb:9:07: warning: unreachable code [enabled by default]
loggers.adb:7:07: warning: implied return after this statement will raise Program_
 ↪Error [enabled by default]
loggers.adb:7:07: warning: procedure "Log_And_Raise" is marked as No_Return␣
 ↪[enabled by default]
```

Runtime output

```
Check failed!
```

(continues on next page)

(continued from previous page)

```
raised PROGRAM_ERROR : loggers.adb:7 implicit return with No_Return
```

Here, `Program_Error` is raised when `Log_And_Raise` returns to the `Show_No_Return_Exception` procedure.

In the Ada Reference Manual

- 6.5.1 Nonreturning Subprograms[193]

26.3.8 Inline subprograms

Inlining[194] refers to a kind of optimization where the code of a subprogram is expanded at the point of the call in place of the call itself.

In modern compilers, inlining depends on the optimization level selected by the user. For example, if we select the higher optimization level, the compiler will perform automatic inlining agressively.

In the GNAT toolchain

The highest optimization level (`-O3`) of GNAT performs aggressive automatic inlining. This could mean that this level inlines too much rather than not enough. As a result, the cache may become an issue and the overall performance may be worse than the one we would achieve by compiling the same code with optimization level 2 (`-O2`). Therefore, the general recommendation is to not *just* select `-O3` for the optimized version of an application, but instead compare it the optimized version built with `-O2`.

It's important to highlight that the inlining we're referring above happens automatically, so the decision about which subprogram is inlined depends entirely on the compiler. However, in some cases, it's better to reduce the optimization level and perform manual inlining instead of automatic inlining. We do that by using the `Inline` aspect.

Let's look at this example:

Listing 117: float_arrays.ads

```
package Float_Arrays is

   type Float_Array is
     array (Positive range <>) of Float;

   function Average (Data : Float_Array)
                     return Float
     with Inline;

end Float_Arrays;
```

Listing 118: float_arrays.adb

```
package body Float_Arrays is

   function Average (Data : Float_Array)
                     return Float
```

(continues on next page)

[193] http://www.ada-auth.org/standards/22rm/html/RM-6-5-1.html
[194] https://en.wikipedia.org/wiki/Inline_expansion

(continued from previous page)

```
   is
      Total : Float := 0.0;
   begin
      for Value of Data loop
         Total := Total + Value;
      end loop;
      return Total / Float (Data'Length);
   end Average;

end Float_Arrays;
```

Listing 119: compute_average.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Float_Arrays; use Float_Arrays;

procedure Compute_Average is
   Values        : constant Float_Array :=
                     (10.0, 11.0, 12.0, 13.0);
   Average_Value : Float;
begin
   Average_Value := Average (Values);
   Put_Line ("Average = "
             & Float'Image (Average_Value));
end Compute_Average;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Inline_Subprograms.Inlining_
↪Float_Arrays
MD5: 246bc11e8a969d69873f416f583f450e
```

Runtime output

```
Average =  1.15000E+01
```

When compiling this example, the compiler will most probably inline `Average` in the `Compute_Average` procedure. Note, however, that the `Inline` aspect is just a *recommendation* to the compiler. Sometimes, the compiler might not be able to follow this recommendation, so it won't inline the subprogram.

These are some examples of situations where the compiler might not be able to inline a subprogram:

- when the code is too large,
- when it's too complicated — for example, when it involves exception handling —, or
- when it contains tasks, etc.

In the GNAT toolchain

In order to effectively use the `Inline` aspect, we need to set the optimization level to at least `-O1` and use the `-gnatn` switch, which instructs the compiler to take the `Inline` aspect into account.

In addition to the `Inline` aspect, in GNAT, we also have the (implementation-defined) `Inline_Always` aspect. In contrast to the former aspect, however, the `Inline_Always` aspect isn't primarily related to performance. Instead, it should be used when the functionality would be incorrect if inlining was not performed by the compiler. Examples of

this are procedures that insert Assembly instructions that only make sense when the procedure is inlined, such as memory barriers.

Similar to the `Inline` aspect, there might be situations where a subprogram has the `Inline_Always` aspect, but the compiler is unable to inline it. In this case, we get a compilation error from GNAT.

Note that we can use the `Inline` aspect for generic subprograms as well. When we do this, we indicate to the compiler that we wish it inlines all instances of that generic subprogram.

In the Ada Reference Manual

- 6.3.2 Inline Expansion of Subprograms[195]

26.3.9 Null Procedures

Null procedures are procedures that don't have any effect, as their body is empty. We declare a null procedure by simply writing **`is null`** in its declaration. For example:

Listing 120: null_procs.ads

```
1  package Null_Procs is
2
3     procedure Do_Nothing (Msg : String) is null;
4
5  end Null_Procs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Null_Procedures.Null_Proc_1
MD5: a8a801e6c71d8177db61e4aa131b8832
```

As expected, calling a null procedure doesn't have any effect. For example:

Listing 121: show_null_proc.adb

```
1  with Null_Procs; use Null_Procs;
2
3  procedure Show_Null_Proc is
4  begin
5     Do_Nothing ("Hello");
6  end Show_Null_Proc;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Null_Procedures.Null_Proc_1
MD5: 274eed0b0952b9aa7e422933ece42d86
```

Null procedures are equivalent to implementing a procedure with a body that only contains **`null`**. Therefore, the `Do_Nothing` procedure above is equivalent to this:

Listing 122: null_procs.ads

```
1  package Null_Procs is
2
3     procedure Do_Nothing (Msg : String);
```

(continues on next page)

[195] http://www.ada-auth.org/standards/22rm/html/RM-6-3-2.html

(continued from previous page)

```
4
5  end Null_Procs;
```

Listing 123: null_procs.adb

```
1  package body Null_Procs is
2
3     procedure Do_Nothing (Msg : String) is
4     begin
5        null;
6     end Do_Nothing;
7
8  end Null_Procs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Null_Procedures.Null_Proc_1
MD5: d0c9dc9265ebbaa9603681182dee1d92
```

Null procedures and overriding

We can use null procedures as a way to simulate interfaces for non-tagged types — similar to what actual interfaces do for tagged types. For example, we may start by declaring a type and null procedures that operate on that type. For example, let's model a very simple API:

Listing 124: simple_storage.ads

```
1  package Simple_Storage is
2
3     type Storage_Model is null record;
4
5     procedure Set (S : in out Storage_Model;
6                    V :        String) is null;
7     procedure Display (S : Storage_Model) is null;
8
9  end Simple_Storage;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Null_Procedures.Simple_
 ↪Storage_Model
MD5: 553e78bc15dcec1302be4b5f484ac21f
```

Here, the API of the `Storage_Model` type consists of the `Set` and `Display` procedures. Naturally, we can use objects of the `Storage_Model` type in an application, but this won't have any effect:

Listing 125: show_null_proc.adb

```
1  with Ada.Text_IO;     use Ada.Text_IO;
2  with Simple_Storage; use Simple_Storage;
3
4  procedure Show_Null_Proc is
5     S : Storage_Model;
6  begin
7     Put_Line ("Setting 24...");
8     Set (S, "24");
9     Display (S);
10 end Show_Null_Proc;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Null_Procedures.Simple_
 ↪Storage_Model
MD5: 523b3e7239e683f2d879caa9139106ca
```

Runtime output

```
Setting 24...
```

By itself, the Storage_Model type is not very useful. However, we can derive other types from it and override the null procedures. Let's say we want to implement the Integer_Storage type to store an integer value:

Listing 126: simple_storage.ads

```
1  package Simple_Storage is
2
3     type Storage_Model is null record;
4
5     procedure Set (S : in out Storage_Model;
6                    V :        String) is null;
7     procedure Display (S : Storage_Model) is null;
8
9     type Integer_Storage is private;
10
11    procedure Set (S : in out Integer_Storage;
12                   V :        String);
13    procedure Display (S : Integer_Storage);
14
15 private
16
17    type Integer_Storage is record
18       V : Integer := 0;
19    end record;
20
21 end Simple_Storage;
```

Listing 127: simple_storage.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  package body Simple_Storage is
4
5     procedure Set (S : in out Integer_Storage;
6                    V :        String) is
7     begin
8        S.V := Integer'Value (V);
9     end Set;
10
11    procedure Display (S : Integer_Storage) is
12    begin
13       Put_Line ("Value: " & S.V'Image);
14    end Display;
15
16 end Simple_Storage;
```

Listing 128: show_null_proc.adb

```
1  with Ada.Text_IO;    use Ada.Text_IO;
2  with Simple_Storage; use Simple_Storage;
3
```

(continues on next page)

(continued from previous page)

```
4  procedure Show_Null_Proc is
5     S : Integer_Storage;
6  begin
7     Put_Line ("Setting 24...");
8     Set (S, "24");
9     Display (S);
10 end Show_Null_Proc;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Subprograms.Null_Procedures.Simple_
 ↪Storage_Model
MD5: 55d491d1ef72fb7be2bf0d2a212f335b
```

Runtime output

```
Setting 24...
Value:  24
```

In this example, we can view `Storage_Model` as a sort of interface for derived non-tagged types, while the derived types — such as `Integer_Storage` — provide the actual implementation.

The section on *null records* (page 446) contains an extended example that makes use of null procedures.

In the Ada Reference Manual

- 6.7 Null Procedures[196]

26.4 Exceptions

26.4.1 Classification of Errors

When we talk about errors and erroneous behavior in Ada, we can classify them in one of the four categories:

- compilation errors — i.e. errors that an Ada compiler must detect at compilation time;
- runtime errors — i.e. errors that are detected by an Ada-based application using checks at runtime;
- bounded errors;
- erroneous execution.

In this section, we discuss each of these categories.

In the Ada Reference Manual

- 1.1.5 Classification of Errors[197]

[196] http://www.ada-auth.org/standards/22rm/html/RM-6-7.html
[197] http://www.ada-auth.org/standards/12rm/html/RM-1-1-5.html

Compilation errors

In the category of compilation errors, the goal is to prevent compilers from accepting illegal programs. Here, any program that doesn't follow the rules described in the Ada Reference Manual is considered illegal. Those rules include not only simple syntax errors, but also more complicated semantic rules, such as the ones concerning *accessibility levels* (page 894) for access types.

Note that Ada — in contrast to many programming languages, which can be quite permissive — tries to prevent as many errors as possible at compilation time because of its focus on safety. However, even though a wide range of errors can be detected at compilation time, this doesn't mean that a legal Ada program is free of errors. Therefore, using methods such as static analysis or unit testing is important.

Runtime errors

When a rule cannot be verified at compilation time, a common strategy is to have the compiler insert runtime checks into the resulting application. We see details about these checks later on when we discuss *checks and exceptions* (page 770).

A typical example is an *overflow check* (page 775). Consider a calculation using variables: if this calculation leads to a result that isn't representable with the underlying data types, we cannot possibly store a value into a register or memory that can be considered correct — so we have to detect this situation. Unfortunately, because we're using variables, we obviously cannot verify the result of the calculation at compilation time, so we have to verify it at runtime.

As we've mentioned before, Ada strives for detecting as many erroneous conditions as possible, while other programming language would allow errors such as overflow errors to remain undetected — which would likely lead the application to misbehave. Those checks raise an exception if an erroneous condition is detected, so the programmer has the means — and the responsibility — to catch that exception and handle the situation properly (Note, however, that some of the runtime checks can be deactivated. We will discuss this topic later on.)

Bounded errors

For certain kinds of errors, the compiler might not be able to detect the error — neither at compilation time, nor with checks at runtime. Such errors are called bounded errors because their possible effects are *bounded*. In fact, the Ada Reference Manual describes each bounded error and its possible effects — one of those effects is raising the `Program_Error` exception.

Just as an example, consider the bounded error described in section 13.9.1 Data Validity[198], paragraphs 9:

> If the representation of a scalar object does not represent a value of the object's subtype (perhaps because the object was not initialized), the object is said to have an invalid representation. It is a bounded error to evaluate the value of such an object. If the error is detected, either `Constraint_Error` or `Program_Error` is raised. Otherwise, execution continues using the invalid representation. The rules of the language outside this subclause assume that all objects have valid representations.

Let's see a code example:

[198] http://www.ada-auth.org/standards/12rm/html/RM-13-9-1.html

Listing 129: show_bounded_error.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Bounded_Error is
   subtype Int_1_10 is
     Integer range 1 .. 10;

   I1         : Int_1_10;
   I1_Overlay : Integer
     with Address => I1'Address,
                     Import,
                     Volatile;
begin
   I1_Overlay := 0;
   --  ^^^^^^^^^^^
   --  We use this overlay to write an invalid
   --  value to I1.

   Put_Line ("I1 = " & I1'Image);
   --                  ^^^^^^^^
   --  Bounded error: value in
   --  I1 is out of range.

   I1 := I1 + 1;
   --    ^^
   --  Bounded error: using value
   --  in operation that is out of
   --  range.

   Put_Line ("I1 = " & I1'Image);
end Show_Bounded_Error;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Classification_Of_Errors.
 ↪Data_Validity_Bounded_Error
MD5: 770ebb7b6e0015e373e96c0dce250caa
```

Runtime output

```
I1 =  0
I1 =  1
```

In this example, we simulate a missing initialization by using an overlay (`I1_Overlay`). As a consequence, `I1` has an invalid value that is out of the allowed range of the `Int_1_10` subtype. This situation causes two bounded errors:

- a bounded error when `I1` is evaluated in the call to `Image`; and
- a bounded error when the value of the right-sided `I1` is evaluated — in the increment `I1 := I1 + 1`.

In the Ada Reference Manual

- 13.9.1 Data Validity[199]

[199] http://www.ada-auth.org/standards/12rm/html/RM-13-9-1.html

Erroneous execution

Erroneous execution is similar to bounded errors in the sense that having the compiler detect the erroneous condition at compilation time or at runtime isn't possible. However, unlike bounded errors, the effects are usually nondeterministic: a bound on possible effects is not described by the language.

Again, as an example of erroneous execution, consider the description from section 13.9.1 Data Validity[200], paragraph 12/3, which discusses the implications of using the `Unchecked_Conversion` function. Let's see a code example:

Listing 130: show_erroneous_execution.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Ada.Unchecked_Conversion;

procedure Show_Erroneous_Execution is
   subtype Int_1_10 is
     Integer range 1 .. 10;

   function To_Int_1_10 is new
     Ada.Unchecked_Conversion
       (Source => Integer,
        Target => Int_1_10);

   I1 : Int_1_10 := To_Int_1_10 (0);
   --               ^^^^^^^^^^^^^^^
   --  Bounded error
begin
   Put_Line ("I1 = " & I1'Image);

   I1 := I1 + 1;
   --    ^^^^^^
   --  Erroneous execution: using value
   --  in operation that is out of range.

   Put_Line ("I1 = " & I1'Image);
end Show_Erroneous_Execution;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Classification_Of_Errors.
 ↪Data_Validity_Erroneous_Execution
MD5: 19218e9bb2e153366dea9114a5e59314
```

Build output

```
show_erroneous_execution.adb:8:04: warning: types for unchecked conversion have␣
 ↪different sizes [-gnatwz]
```

Runtime output

```
I1 =  0
I1 =  1
```

It is considered to be a bounded error to use the `To_Int_1_10` function (based on `Unchecked_Conversion`) with a value that is invalid for the target data type. However, if we use the invalid value of `I1` in an operation such as the `I1 := I1 + 1` assignment, this leads to erroneous execution, and the effects are unpredictable: they aren't described in the Ada Reference Manual, as they are nondeterministic.

[200] http://www.ada-auth.org/standards/12rm/html/RM-13-9-1.html

In the Ada Reference Manual

- 13.9.1 Data Validity[201]

26.4.2 Asserts

When we want to indicate a condition in the code that must always be valid, we can use the pragma `Assert`. As the name implies, when we use this pragma, we're *asserting* some truth about the source-code. (We can also use the procedural form, as we'll see later.)

Important

Another method to assert the truth about the source-code is to use pre and post-conditions.

A simple assert has this form:

Listing 131: show_pragma_assert.adb

```
1 procedure Show_Pragma_Assert is
2    I : constant Integer := 10;
3
4    pragma Assert (I = 10);
5 begin
6    null;
7 end Show_Pragma_Assert;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Asserts.Pragma_Assert_1
MD5: 8d40817304515169d0d5670904ca1e01
```

In this example, we're asserting that the value of `I` is always 10. We could also display a message if the assertion is false:

Listing 132: show_pragma_assert.adb

```
1 procedure Show_Pragma_Assert is
2    I : constant Integer := 11;
3
4    pragma Assert (I = 10, "I is not 10");
5 begin
6    null;
7 end Show_Pragma_Assert;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Asserts.Pragma_Assert_2
MD5: b70fa67c92542ade39c388964ce12302
```

Build output

```
show_pragma_assert.adb:4:19: warning: assertion will fail at run time [-gnatw.a]
```

Runtime output

[201] http://www.ada-auth.org/standards/12rm/html/RM-13-9-1.html

```
raised ADA.ASSERTIONS.ASSERTION_ERROR : I is not 10
```

Similarly, we can use the procedural form of `Assert`. For example, the code above can implemented as follows:

Listing 133: show_procedure_assert.adb

```
with Ada.Assertions; use Ada.Assertions;

procedure Show_Procedure_Assert is
   I : constant Integer := 11;

begin
   Assert (I = 10, "I is not 10");
end Show_Procedure_Assert;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Asserts.Procedure_Assert
MD5: cbab23645ff89d4adffcaaddaeb6f0e3
```

Runtime output

```
raised ADA.ASSERTIONS.ASSERTION_ERROR : I is not 10
```

Note that a call to `Assert` is simply translated to a check — and the `Assertion_Error` exception from the `Ada.Assertions` package being raised in the case that the check fails. For example, the code above roughly corresponds to this:

Listing 134: show_assertion_error.adb

```
with Ada.Assertions; use Ada.Assertions;

procedure Show_Assertion_Error is
   I : constant Integer := 11;

begin
   if I /= 10 then
      raise Assertion_Error with "I is not 10";
   end if;

end Show_Assertion_Error;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Asserts.Assertion_Error
MD5: 9c846acf998ca7adabd47c3b5a6ce39f
```

Runtime output

```
raised ADA.ASSERTIONS.ASSERTION_ERROR : I is not 10
```

In the Ada Reference Manual

- 11.4.2 Pragmas Assert and Assertion_Policy[202]

[202] http://www.ada-auth.org/standards/22rm/html/RM-11-4-2.html

26.4.3 Assertion policies

We can activate and deactivate assertions based on assertion policies. We can do that by using the pragma `Assertion_Policy`. As an argument to this pragma, we indicate whether a specific policy must be checked or ignored.

For example, we can deactivate assertion checks by specifying `Assert => Ignore`. Similarly, we can activate assertion checks by specifying `Assert => Check`. Let's see a code example:

Listing 135: show_pragma_assertion_policy.adb

```
procedure Show_Pragma_Assertion_Policy is
   I : constant Integer := 11;

   pragma Assertion_Policy (Assert => Ignore);
begin
   pragma Assert (I = 10);
end Show_Pragma_Assertion_Policy;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Assertion_Policies.Pragma_
 ↪Assertion_Policy_1
MD5: 39b8aa4a34b6169c03b54074f4136519
```

Build output

```
show_pragma_assertion_policy.adb:6:19: warning: assertion would fail at run time [-
 ↪gnatw.a]
```

Here, we're specifying that asserts shall be ignored. Therefore, the call to the pragma `Assert` doesn't raise an exception. If we replace `Ignore` with `Check` in the call to `Assertion_Policy`, the assert will raise the `Assertion_Error` exception.

The following table presents all policies that we can set:

Policy	Descripton
`Assert`	Check assertions
`Static_Predicate`	Check static predicates
`Dynamic_Predicate`	Check dynamic predicates
`Pre`	Check pre-conditions
`Pre'Class`	Check pre-condition of classes of tagged types
`Post`	Check post-conditions
`Post'Class`	Check post-condition of classes of tagged types
`Type_Invariant`	Check type invariants
`Type_Invariant'Class`	Check type invariant of classes of tagged types

In the GNAT toolchain

Compilers are free to include policies that go beyond the ones listed above. For example, GNAT includes the following policies — called *assertion kinds* in this context:

- `Assertions`
- `Assert_And_Cut`
- `Assume`
- `Contract_Cases`

- Debug
- Ghost
- Initial_Condition
- Invariant
- Invariant'Class
- Loop_Invariant
- Loop_Variant
- Postcondition
- Precondition
- Predicate
- Refined_Post
- Statement_Assertions
- Subprogram_Variant

Also, in addtion to Check and Ignore, GNAT allows you to set a policy to Disable and Suppressible.

You can read more about them in the GNAT Reference Manual[203].

You can specify multiple policies in a single call to Assertion_Policy. For example, you can activate all policies by writing:

Listing 136: show_multiple_assertion_policies.adb

```
procedure Show_Multiple_Assertion_Policies is
   pragma Assertion_Policy
     (Assert               => Check,
      Static_Predicate     => Check,
      Dynamic_Predicate    => Check,
      Pre                  => Check,
      Pre'Class            => Check,
      Post                 => Check,
      Post'Class           => Check,
      Type_Invariant       => Check,
      Type_Invariant'Class => Check);
begin
   null;
end Show_Multiple_Assertion_Policies;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Assertion_Policies.Multiple_
 ↪Assertion_Policies
MD5: 3abbf97160b755b84cc4f7e652ca5551
```

In the GNAT toolchain

With GNAT, policies can be specified in multiple ways. In addition to calls to Assertion_Policy, you can use configuration pragmas files[204]. You can use these files to specify all pragmas that are relevant to your application, including Assertion_Policy. In addition, you can manage the granularity for those pragmas. For example, you can

[203] https://gcc.gnu.org/onlinedocs/gnat_rm/Pragma-Assertion_005fPolicy

use a global configuration pragmas file for your complete application, or even different files for each source-code file you have.

Also, by default, all policies listed in the table above are deactivated, i.e. they're all set to `Ignore`. You can use the command-line switch `-gnata` to activate them.

Note that the `Assert` procedure raises an exception independently of the assertion policy (`Assertion_Policy (Assert => Ignore)`). For example:

Listing 137: show_assert_procedure_policy.adb

```
with Ada.Text_IO;    use Ada.Text_IO;
with Ada.Assertions; use Ada.Assertions;

procedure Show_Assert_Procedure_Policy is
   pragma Assertion_Policy (Assert => Ignore);

   I : constant Integer := 1;
begin
   Put_Line ("------ Pragma Assert -----");
   pragma Assert (I = 0);

   Put_Line ("---- Procedure Assert ----");
   Assert (I = 0);

   Put_Line ("Finished.");
end Show_Assert_Procedure_Policy;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Assertion_Policies.Assert_
 ↪Procedure_Policy
MD5: 7be3bab24d856081afeddabe40afc84f
```

Build output

```
show_assert_procedure_policy.adb:10:19: warning: assertion would fail at run time␣
 ↪[-gnatw.a]
```

Runtime output

```
------ Pragma Assert -----
---- Procedure Assert ----

raised ADA.ASSERTIONS.ASSERTION_ERROR : a-assert.adb:42
```

Here, the **pragma** *Assert* is ignored due to the assertion policy. However, the call to `Assert` is not ignored.

In the Ada Reference Manual

- 11.4.2 Pragmas Assert and Assertion_Policy[205]

[204] https://gcc.gnu.org/onlinedocs/gnat_ugn/The-Configuration-Pragmas-Files#The-Configuration-Pragmas-Files
[205] http://www.ada-auth.org/standards/22rm/html/RM-11-4-2.html

26.4.4 Checks and exceptions

This table shows all language-defined checks and the associated exceptions:

Check	Exception
Access_Check	Constraint_Error
Discriminant_Check	Constraint_Error
Division_Check	Constraint_Error
Index_Check	Constraint_Error
Length_Check	Constraint_Error
Overflow_Check	Constraint_Error
Range_Check	Constraint_Error
Tag_Check	Constraint_Error
Accessibility_Check	Program_Error
Allocation_Check	Program_Error
Elaboration_Check	Program_Error
Program_Error_Check	Program_Error
Storage_Check	Storage_Error
Tasking_Check	Tasking_Error

In addition, we can use `All_Checks` to refer to all those checks above at once.

Let's discuss each check and see code examples where those checks are performed. Note that all examples are erroneous, so please avoid reusing them elsewhere.

Access Check

As you know, an object of an access type might be null. It would be an error to dereference this object, as it doesn't indicate a valid position in memory. Therefore, the access check verifies that an access object is not null when dereferencing it. For example:

Listing 138: show_access_check.adb

```
procedure Show_Access_Check is

   type Integer_Access is access Integer;

   AI : Integer_Access;
begin
   AI.all := 10;
end Show_Access_Check;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Checks_And_Exceptions.Access_
 ↪Check
MD5: 4db8b63efb23caa7da926d4ec9f204bf
```

Build output

```
show_access_check.adb:5:04: warning: variable "AI" is read but never assigned [-
 ↪gnatwv]
show_access_check.adb:7:04: warning: null value not allowed here [enabled by␣
 ↪default]
show_access_check.adb:7:04: warning: Constraint_Error will be raised at run time␣
 ↪[enabled by default]
```

Runtime output

```
raised CONSTRAINT_ERROR : show_access_check.adb:7 access check failed
```

Here, the value of AI is null by default, so we cannot dereference it.

The access check also performs this verification when assigning to a subtype that excludes null (**not null access**). (You can find more information about this topic in the section about *not null access* (page 914).) For example:

Listing 139: show_access_check.adb

```
1  procedure Show_Access_Check is
2
3     type Integer_Access is
4       access all Integer;
5
6     type Safe_Integer_Access is
7       not null access all Integer;
8
9     AI  : Integer_Access;
10    SAI : Safe_Integer_Access := new Integer;
11
12 begin
13    SAI := Safe_Integer_Access (AI);
14 end Show_Access_Check;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Checks_And_Exceptions.Access_
 ↪Check_2
MD5: 47895a404e2a111476cd67f43c12d4b5
```

Build output

```
show_access_check.adb:9:04: warning: variable "AI" is read but never assigned [-
 ↪gnatwv]
show_access_check.adb:13:32: warning: null value not allowed here [enabled by␣
 ↪default]
show_access_check.adb:13:32: warning: Constraint_Error will be raised at run time␣
 ↪[enabled by default]
```

Runtime output

```
raised CONSTRAINT_ERROR : show_access_check.adb:13 access check failed
```

Here, the value of AI is null (by default), so we cannot assign it to SAI because its type excludes null.

Note that, if we remove the **:= new Integer** assignment from the declaration of SAI, the null exclusion fails in the declaration itself (because the default value of the access type is **null**).

Discriminant Check

As we've seen earlier, a variant record is a record with discriminants that allows for changing its structure. In operations such as an assignment, it's important to ensure that the discriminants of the objects match — i.e. to ensure that the structure of the objects matches. The discriminant check verifies whether this is the case. For example:

Listing 140: show_discriminant_check.adb

```
procedure Show_Discriminant_Check is

   type Rec (Valid : Boolean) is record
      case Valid is
         when True =>
            Counter : Integer;
         when False =>
            null;
      end case;
   end record;

   R : Rec (Valid => False);
begin
   R := (Valid  => True,
         Counter => 10);
end Show_Discriminant_Check;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Checks_And_Exceptions.
 ↪Discriminant_Check
MD5: 665ab37962f8f9c129acac543b1eb15d
```

Build output

```
show_discriminant_check.adb:14:09: warning: incorrect value for discriminant "Valid
 ↪" [enabled by default]
show_discriminant_check.adb:14:09: warning: Constraint_Error will be raised at run␣
 ↪time [enabled by default]
```

Runtime output

```

raised CONSTRAINT_ERROR : show_discriminant_check.adb:14 discriminant check failed
```

Here, R's discriminant (`Valid`) is **`False`**, so we cannot assign an object whose `Valid` discriminant is **`True`**.

Also, when accessing a component, the discriminant check ensures that this component exists for the current discriminant value:

Listing 141: show_discriminant_check.adb

```
procedure Show_Discriminant_Check is

   type Rec (Valid : Boolean) is record
      case Valid is
         when True =>
            Counter : Integer;
         when False =>
            null;
      end case;
   end record;

   R : Rec (Valid => False);
   I : Integer;
begin
   I := R.Counter;
end Show_Discriminant_Check;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Checks_And_Exceptions.
 ↪Discriminant_Check_2
MD5: 440973b0be7c4261ddf3c2211a2c1325
```

Build output

```
show_discriminant_check.adb:15:10: warning: component not present in subtype of
 ↪"Rec" defined at line 12 [enabled by default]
show_discriminant_check.adb:15:10: warning: Constraint_Error will be raised at run␣
 ↪time [enabled by default]
```

Runtime output

```

raised CONSTRAINT_ERROR : show_discriminant_check.adb:15 discriminant check failed
```

Here, R's discriminant (`Valid`) is **`False`**, so we cannot access the `Counter` component, for it only exists when the `Valid` discriminant is **`True`**.

Division Check

The division check verifies that we're not trying to divide a value by zero when using the `/`, **`rem`** and **`mod`** operators. For example:

Listing 142: ops.ads

```
1  package Ops is
2     function Div_Op (A, B : Integer)
3                      return Integer is
4       (A / B);
5
6     function Rem_Op (A, B : Integer)
7                      return Integer is
8       (A rem B);
9
10    function Mod_Op (A, B : Integer)
11                     return Integer is
12      (A mod B);
13 end Ops;
```

Listing 143: show_division_check.adb

```
1  with Ops; use Ops;
2
3  procedure Show_Division_Check is
4     I : Integer;
5  begin
6     I := Div_Op (10, 0);
7     I := Rem_Op (10, 0);
8     I := Mod_Op (10, 0);
9  end Show_Division_Check;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Checks_And_Exceptions.
 ↪Division_Check
MD5: 6ec0856be947eea6610cffaa0e875d45
```

Runtime output

```
raised CONSTRAINT_ERROR : ops.ads:4 divide by zero
```

All three calls in the `Show_Division_Check` procedure — to the `Div_Op`, `Rem_Op` and `Mod_Op` functions — can raise an exception because we're using 0 as the second argument, which makes the division check in those functions fail.

Index Check

We use indices to access components of an array. An index check verifies that the index we're using to access a specific component is within the array's bounds. For example:

Listing 144: show_index_check.adb

```
procedure Show_Index_Check is

   type Integer_Array is
     array (Positive range <>) of Integer;

   function Value_Of (A : Integer_Array;
                      I : Integer)
                      return Integer
   is
      type Half_Integer_Array is new
        Integer_Array (A'First ..
                       A'First + A'Length / 2);

      A_2 : Half_Integer_Array := (others => 0);
   begin
      return A_2 (I);
   end Value_Of;

   Arr_1 : Integer_Array (1 .. 10) :=
             (others => 1);

begin
   Arr_1 (10) := Value_Of (Arr_1, 10);

end Show_Index_Check;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Checks_And_Exceptions.Index_
 ↪Check
MD5: fa791718701c4ac805badf368df9064e
```

Runtime output

```
raised CONSTRAINT_ERROR : show_index_check.adb:16 index check failed
```

The range of `A_2` — which is passed as an argument to the `Value_Of` function — is 1 to 6. However, in that function call, we're trying to access position 10, which is outside `A_2` 's bounds.

Length Check

In array assignments, both arrays must have the same length. To ensure that this is the case, a length check is performed. For example:

Listing 145: show_length_check.adb

```
procedure Show_Length_Check is

   type Integer_Array is
     array (Positive range <>) of Integer;

   procedure Assign (To   : out Integer_Array;
                     From :     Integer_Array) is
   begin
      To := From;
   end Assign;

   Arr_1 : Integer_Array (1 .. 10);
   Arr_2 : Integer_Array (1 .. 9) :=
             (others => 1);

begin
   Assign (Arr_1, Arr_2);
end Show_Length_Check;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Checks_And_Exceptions.Length_
 ↪Check
MD5: a521afd0a46a67d260e8b0bd5f046ce4
```

Runtime output

```

raised CONSTRAINT_ERROR : show_length_check.adb:9 length check failed
```

Here, the length of `Arr_1` is 10, while the length of `Arr_2` is 9, so we cannot assign `Arr_2` (`From` parameter) to `Arr_1` (`To` parameter) in the `Assign` procedure.

Overflow Check

Operations on scalar objects might lead to overflow, which, if not checked, lead to wrong information being computed and stored. Therefore, an overflow check verifies that the value of a scalar object is within the base range of its type. For example:

Listing 146: show_overflow_check.adb

```
procedure Show_Overflow_Check is
   A, B : Integer;
begin
   A := Integer'Last;
   B := 1;

   A := A + B;
end Show_Overflow_Check;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Checks_And_Exceptions.
 ↪Overflow_Check
MD5: baa46d9085cbd14863aaa7e24dc7b9cc
```

Build output

```
show_overflow_check.adb:7:11: warning: value not in range of type "Standard.Integer
 ↪" [enabled by default]
show_overflow_check.adb:7:11: warning: Constraint_Error will be raised at run time␣
 ↪[enabled by default]
```

Runtime output

```

raised CONSTRAINT_ERROR : show_overflow_check.adb:7 overflow check failed
```

In this example, A already has the last possible value of the `Integer'Base` range, so increasing it by one causes an overflow error.

Range Check

The range check verifies that a scalar value is within a specific range — for instance, the range of a subtype. Let's see an example:

Listing 147: show_range_check.adb

```
1  procedure Show_Range_Check is
2
3     subtype Int_1_10 is Integer range 1 .. 10;
4
5     I : Int_1_10;
6
7  begin
8     I := 11;
9  end Show_Range_Check;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Checks_And_Exceptions.Range_
 ↪Check
MD5: 54b1d67d98d97a58d4265a854fcfa992
```

Build output

```
show_range_check.adb:8:09: warning: value not in range of type "Int_1_10" defined␣
 ↪at line 3 [enabled by default]
show_range_check.adb:8:09: warning: Constraint_Error will be raised at run time␣
 ↪[enabled by default]
```

Runtime output

```

raised CONSTRAINT_ERROR : show_range_check.adb:8 range check failed
```

In this example, we're trying to assign 11 to the variable I of the `Int_1_10` subtype, which has a range from 1 to 10. Since 11 is outside that range, the range check fails.

Tag Check

The tag check ensures that the tag of a tagged object matches the expected tag in a dispatching operation. For example:

Listing 148: p.ads

```
1  package P is
2
```

(continues on next page)

(continued from previous page)

```
   type T is tagged null record;
   type T1 is new T with null record;
   type T2 is new T with null record;

end P;
```

Listing 149: show_tag_check.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Ada.Tags;

with P;           use P;

procedure Show_Tag_Check is

   A1 : T'Class := T1'(null record);
   A2 : T'Class := T2'(null record);

begin
   Put_Line ("A1'Tag: "
             & Ada.Tags.Expanded_Name (A1'Tag));
   Put_Line ("A2'Tag: "
             & Ada.Tags.Expanded_Name (A2'Tag));

   A2 := A1;

end Show_Tag_Check;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Checks_And_Exceptions.Tag_
↪Check
MD5: 5a685be7804200a884649f54c175ee42
```

Runtime output

```
A1'Tag: P.T1
A2'Tag: P.T2

raised CONSTRAINT_ERROR : show_tag_check.adb:17 tag check failed
```

Here, A1 and A2 have different tags:

- A1'Tag = T1'Tag, while
- A2'Tag = T2'Tag.

Since the tags don't match, the tag check fails in the assignment of A1 to A2.

Accessibility Check

The accessibility check verifies that the accessibility level of an entity matches the expected level. We discuss accessibility levels *in a later chapter* (page 894).

Let's look at an example that mixes access types and anonymous access types. Here, we use an anonymous access type in the declaration of A1 and a named access type in the declaration of A2:

Listing 150: p.ads

```
package P is

   type T is tagged null record;
   type T_Class is access all T'Class;

end P;
```

Listing 151: show_accessibility_check.adb

```
with P; use P;

procedure Show_Accessibility_Check is

   A1 : access T'Class := new T;
   A2 : T_Class;

begin
   A2 := T_Class (A1);

end Show_Accessibility_Check;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Checks_And_Exceptions.
 ↪Accessibility_Check
MD5: 7120d908b55ef576db93e9a15db257f2
```

Build output

```
show_accessibility_check.adb:9:19: warning: accessibility check fails [enabled by␣
 ↪default]
show_accessibility_check.adb:9:19: warning: Program_Error will be raised at run␣
 ↪time [enabled by default]
```

Runtime output

```

raised PROGRAM_ERROR : show_accessibility_check.adb:9 accessibility check failed
```

The anonymous type (`access T'Class`), which is used in the declaration of A1, doesn't have the same accessibility level as the `T_Class` type. Therefore, the accessibility check fails during the `T_Class (A1)` conversion.

We can see the accessibility check failing in this example as well:

Listing 152: show_accessibility_check.adb

```
with P; use P;

procedure Show_Accessibility_Check is

   A : access T'Class := new T;

   procedure P (A : T_Class) is null;

begin
   P (T_Class (A));

end Show_Accessibility_Check;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Checks_And_Exceptions.
 ↪Accessibility_Check
MD5: 97db82410dd3459249d0e7a97118b7ef
```

Build output

```
show_accessibility_check.adb:10:16: warning: accessibility check fails [enabled by␣
 ↪default]
show_accessibility_check.adb:10:16: warning: Program_Error will be raised at run␣
 ↪time [enabled by default]
```

Runtime output

```

raised PROGRAM_ERROR : show_accessibility_check.adb:10 accessibility check failed
```

Again, the check fails in the `T_Class (A)` conversion and raises a `Program_Error` exception.

Allocation Check

The allocation check ensures, when a task is about to be created, that its master has not been completed. Also, it ensures that the finalization has not started.

This is an example adapted from AI-00280[206]:

Listing 153: p.ads

```
with Ada.Finalization;
with Ada.Unchecked_Deallocation;

package P is
   type T1 is new
     Ada.Finalization.Controlled with null record;
   procedure Finalize (X : in out T1);

   type T2 is new
     Ada.Finalization.Controlled with null record;
   procedure Finalize (X : in out T2);

   X1 : T1;

   type T2_Ref is access T2;
   procedure Free is new
     Ada.Unchecked_Deallocation (T2, T2_Ref);
end P;
```

Listing 154: p.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body P is

   procedure Finalize (X : in out T1) is
      X2 : T2_Ref := new T2;
   begin
      Put_Line ("Finalizing T1...");
      Free (X2);
   end Finalize;

```

(continues on next page)

[206] http://www.ada-auth.org/cgi-bin/cvsweb.cgi/ais/ai-00280.txt?rev=1.12&raw=N

(continued from previous page)

```
12    procedure Finalize (X : in out T2) is
13    begin
14       Put_Line ("Finalizing T2...");
15    end Finalize;
16
17 end P;
```

Listing 155: show_allocation_check.adb

```
1  with P; use P;
2
3  procedure Show_Allocation_Check is
4     X2 : T2_Ref := new T2;
5  begin
6     Free (X2);
7  end Show_Allocation_Check;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Checks_And_Exceptions.
 ↪Allocation_Check
MD5: 915e8ab21e550c981503c014bcceade1
```

Runtime output

```
Finalizing T2...

raised PROGRAM_ERROR : finalize/adjust raised exception
```

Here, in the finalization of the X1 object of T1 type, we're trying to create an object of T2 type while the finalization of the master has already started. (Note that X1 was declared in the P package.) This is forbidden, so the allocation check raises a `Program_Error` exception.

Elaboration Check

The elaboration check verifies that subprograms — or protected entries, or task activations — have been elaborated before being called.

This is an example adapted from AI-00064[207]:

Listing 156: p.ads

```
1  function P return Integer;
```

Listing 157: p.adb

```
1  function P return Integer is
2  begin
3     return 1;
4  end P;
```

Listing 158: show_elaboration_check.adb

```
1  with P;
2
3  procedure Show_Elaboration_Check is
4
5     function F return Integer;
```

(continues on next page)

[207] http://www.ada-auth.org/cgi-bin/cvsweb.cgi/ais/ai-00064.txt?rev=1.12&raw=N

(continued from previous page)

```
6
7     type Pointer_To_Func is
8       access function return Integer;
9
10    X : constant Pointer_To_Func := P'Access;
11
12    Y : constant Integer := F;
13    Z : constant Pointer_To_Func := X;
14
15    --  Renaming-as-body
16    function F return Integer renames Z.all;
17 begin
18    null;
19 end Show_Elaboration_Check;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Checks_And_Exceptions.
 ↪Elaboration_Check
MD5: 80a39df912aae8788296f81ee9d4a79e
```

Build output

```
show_elaboration_check.adb:12:28: warning: cannot call "F" before body seen␣
 ↪[enabled by default]
show_elaboration_check.adb:12:28: warning: Program_Error will be raised at run␣
 ↪time [enabled by default]
```

Runtime output

```

raised PROGRAM_ERROR : show_elaboration_check.adb:12 access before elaboration
```

This is a curious example: first, we declare a function F and assign the value returned by this function to constant Y in its declaration. Then, we declare F as a renamed function, thereby providing a body to F — this is called renaming-as-body. Consequently, the compiler doesn't complain that a body is missing for function F. (If you comment out the function renaming, you'll see that the compiler can then detect the missing body.) Therefore, at runtime, the elaboration check fails because the body of the first declaration of the F function is actually missing.

Program_Error_Check

> **Note**
>
> This concept was introduced in Ada 2022.

As we've seen before, there are three checks that may raise a `Program_Error` exception: the `Accessibility_Check`, the `Allocation_Check` and the `Elaboration_Check`. In addition to that, we have the `Program_Error_Check`, which is actually a collection of various different checks that may raise a `Program_Error`, but don't have a category for themselves.

For completeness, these are the error conditions checked by the `Program_Error_Check` (listed in the Action Item (AI) 12-0309 document[208]), according to their definition in the Ada Reference Manual:

[208] http://www.ada-auth.org/cgi-bin/cvsweb.cgi/ai12s/ai12-0309-1.txt?rev=1.5&raw=N

Ada Reference Manual	Paragraph	Description
3.2.4 Subtype Predicates[209]	(29.1	It checks that subtypes with predicates are not used to index an array in generic units.
5.5 Loop Statements[210]	(8.1/!	It checks that the maximum number of chunks for statement-level parallelism is greater than zero.
6.4.1 Parameter Associations[211]	(13.4	It checks that the default value of an out parameter is convertible: an error occurs when we have an out parameter with `Default_Value`, and the actual is a view conversion of an unrelated type that does not have `Default_Value`.
12.5.1 Formal Private and Derived Types[212]	(23.3	It checks that there is no misuse of functions in a generic with a class-wide actual type.
13.3 Operational and Representation Attributes[213]	(75.1	It checks that there are no colliding `External_Tag` values.
B.3.3 Unchecked Union Types[214]	(22/2	It checks that there is no misuse of operations of `Unchecked_Unions` without inferable discriminants.

In the Ada Reference Manual

- 11.5 Suppressing Checks[215]
- 3.2.4 Subtype Predicates[216]
- 5.5 Loop Statements[217]
- 6.4.1 Parameter Associations[218]
- 12.5.1 Formal Private and Derived Types[219]
- 13.3 Operational and Representation Attributes[220]
- B.3.3 Unchecked Union Types[221]

[209] http://www.ada-auth.org/standards/22rm/html/RM-3-2-4.html
[210] http://www.ada-auth.org/standards/22rm/html/RM-5-5.html
[211] http://www.ada-auth.org/standards/22rm/html/RM-6-4-1.html
[212] http://www.ada-auth.org/standards/22rm/html/RM-12-5-1.html
[213] http://www.ada-auth.org/standards/22rm/html/RM-13-3.html
[214] http://www.ada-auth.org/standards/22rm/html/RM-B-3-3.html
[215] http://www.ada-auth.org/standards/22rm/html/RM-11-5.html
[216] http://www.ada-auth.org/standards/22rm/html/RM-3-2-4.html
[217] http://www.ada-auth.org/standards/22rm/html/RM-5-5.html
[218] http://www.ada-auth.org/standards/22rm/html/RM-6-4-1.html
[219] http://www.ada-auth.org/standards/22rm/html/RM-12-5-1.html
[220] http://www.ada-auth.org/standards/22rm/html/RM-13-3.html
[221] http://www.ada-auth.org/standards/22rm/html/RM-B-3-3.html

Example of a Program_Error_Check

Just as an example, let's look at the check for subtype predicates in generic units:

Listing 159: some_generic_package.ads

```
generic
   type R is (<>);
package Some_Generic_Package is
   procedure Process;
end Some_Generic_Package;
```

Listing 160: some_generic_package.adb

```
package body Some_Generic_Package is

   procedure Process is
      type Arr is
        array (R) of Integer;

      Dummy : Arr := (others => 0);
   begin
      null;
   end Process;

end Some_Generic_Package;
```

Listing 161: show_subtype_predicate_programm_error.adb

```
with Some_Generic_Package;

procedure Show_Subtype_Predicate_Programm_Error is

   type Custom_Range is range 1 .. 5
     with Dynamic_Predicate =>
            4 not in Custom_Range;

   package P is new
     Some_Generic_Package (Custom_Range);
   use P;
begin
   Process;
end Show_Subtype_Predicate_Programm_Error;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Checks_And_Exceptions.
 ↪Subtype_Predicate_Programm_Error
MD5: b1a5cc579393162dedecb6b65b75eef4
```

Build output

```
show_subtype_predicate_programm_error.adb:9:04: warning: in instantiation at some_
 ↪generic_package.adb:5 [enabled by default]
show_subtype_predicate_programm_error.adb:9:04: warning: subtype "R" has predicate,
 ↪ not allowed as index subtype [enabled by default]
show_subtype_predicate_programm_error.adb:9:04: warning: Program_Error will be␣
 ↪raised at run time [enabled by default]
```

Runtime output

```
raised PROGRAM_ERROR : some_generic_package.adb:5 improper use of generic subtype␣
↪with predicate
```

Here, we're using the `Custom_Range` type for the formal type R in the instantiation of the generic package `Some_Generic_Package`. Since we use R as an index for the array type `Arr` (in the procedure `Process`), we cannot map a type to R that uses a predicate. Therefore, because `Custom_Range` type has a dynamic predicate, the `Program_Error` exception is raised.

Storage Check

The storage check ensures that the storage pool has enough space when allocating memory. Let's revisit an example that we *discussed earlier* (page 358):

Listing 162: custom_types.ads

```
1  package Custom_Types is
2
3     type UInt_7 is range 0 .. 127;
4
5     type UInt_7_Reserved_Access is access UInt_7
6       with Storage_Size => 8;
7
8  end Custom_Types;
```

Listing 163: show_storage_check.adb

```
1  with Ada.Text_IO;  use Ada.Text_IO;
2
3  with Custom_Types; use Custom_Types;
4
5  procedure Show_Storage_Check is
6
7     RAV1, RAV2 : UInt_7_Reserved_Access;
8
9  begin
10    Put_Line ("Allocating RAV1...");
11    RAV1 := new UInt_7;
12
13    Put_Line ("Allocating RAV2...");
14    RAV2 := new UInt_7;
15
16    New_Line;
17 end Show_Storage_Check;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Checks_And_Exceptions.
↪Storage_Check
MD5: 4e4bd284adb1c1d97f8f7563068c18de
```

Runtime output

```
Allocating RAV1...
Allocating RAV2...

raised STORAGE_ERROR : s-poosiz.adb:108 explicit raise
```

On each allocation (`new UInt_7`), a storage check is performed. Because there isn't enough reserved storage space before the second allocation, the checks fails and raises a `Stor-`

age_Error exception.

Tasking_Check

The Tasking_Check ensures that all tasks have been activated successfully and that no terminated task is called. If the check fails, a Tasking_Error exception is raised.

> **Note**
>
> This concept was introduced in Ada 2022. It was created to group all checks that might raise the Tasking_Error exception.

Let's look at a simple example:

Listing 164: workers.ads

```
package Workers is

    task type Worker  is
        entry Start;
    end Worker;

end Workers;
```

Listing 165: workers.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Workers is

    task body Worker  is
    begin
       Put_Line ("Task has started.");
       delay 1.0;
       Put_Line ("Task has finished.");
    end Worker;

end Workers;
```

Listing 166: show_tasking_check_error.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Workers;     use Workers;

procedure Show_Tasking_Check_Error is
    W : Worker;
begin
    Put_Line ("W.Start...");
    W.Start;
    Put_Line ("Finished");
end Show_Tasking_Check_Error;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Checks_And_Exceptions.
 ↪Tasking_Check_Error
MD5: 38f9093082d3fe545847ea3d22376e39
```

Build output

```
workers.adb:5:05: warning: no accept for entry "Start" [enabled by default]
```

Runtime output

```
Task has started.
W.Start...
Task has finished.

raised TASKING_ERROR
```

In this example, the body of `Worker` doesn't have an **`accept`**. Therefore, no rendezvous can happen for the `W.Start` call. Since the task eventually terminates (as you can see in the user messages), the call to `Start` constitutes a call to a terminated task. This condition is checked by the **`Tasking`**`_Check`, which fails in this case, thereby raising a **`Tasking`**`_Error`.

26.4.5 `Ada.Exceptions` package

Note

Parts of this section were originally published as Gem #142 : Exception-ally[222]

The standard Ada run-time library provides the package `Ada.Exceptions`. This package provides a number of services to help analyze exceptions.

Each exception is associated with a (short) message that can be set by the code that raises the exception, as in the following code:

```
raise Constraint_Error with "some message";
```

Historically

Since Ada 2005, we can use the **`raise`** `Constraint_Error` **`with`** `"some message"` syntax. In Ada 95, you had to call the `Raise_Exception` procedure:

```
Ada.Exceptions.Raise_Exception         --  Ada 95
  (Constraint_Error'Identity, "some message");
```

In Ada 83, there was no way to do it at all.

The new syntax is now very convenient, and developers should be encouraged to provide as much information as possible along with the exception.

In the GNAT toolchain

The length of the message is limited to 200 characters by default in GNAT, and messages longer than that will be truncated.

In the Ada Reference Manual

- 11.4.1 The Package Exceptions[223]

[222] https://www.adacore.com/gems/gem-142-exceptions
[223] http://www.ada-auth.org/standards/22rm/html/RM-11-4-1.html

Retrieving exception information

Exceptions also embed information set by the run-time itself that can be retrieved by calling the `Exception_Information` function. The function `Exception_Information` also displays the `Exception_Message`.

For example:

```
exception
   when E : others =>
     Put_Line
       (Ada.Exceptions.Exception_Information (E));
```

In the GNAT toolchain

In the case of GNAT, the information provided by an exception might include the source location where the exception was raised and a nonsymbolic traceback.

You can also retrieve this information individually. Here, you can use:

- the `Exception_Name` functions — and its derivatives `Wide_Exception_Name` and `Wide_Wide_Exception_Name` — to retrieve the name of an exception.
- the `Exception_Message` function to retrieve the message associated with an exception.

Let's see a complete example:

Listing 167: show_exception_info.adb

```
with Ada.Text_IO;    use Ada.Text_IO;
with Ada.Exceptions; use Ada.Exceptions;

procedure Show_Exception_Info is

   Custom_Exception : exception;

   procedure Nested is
   begin
      raise Custom_Exception
        with "We got a problem";
   end Nested;

begin
   Nested;

exception
   when E : others =>
      Put_Line ("Exception info: "
                & Exception_Information (E));
      Put_Line ("Exception name: "
                & Exception_Name (E));
      Put_Line ("Exception msg:  "
                & Exception_Message (E));
end Show_Exception_Info;
```

Collecting exceptions

Save_Occurrence

You can save an exception occurrence using the Save_Occurrence procedure. (Note that a Save_Occurrence function exists as well.)

For example, the following application collects exceptions into a list and displays them after running the Test_Exceptions procedure:

Listing 168: exception_tests.ads

```
with Ada.Exceptions; use Ada.Exceptions;

package Exception_Tests is

   Custom_Exception : exception;

   type All_Exception_Occur is
     array (Positive range <>) of
       Exception_Occurrence;

   procedure Test_Exceptions
     (All_Occur  : in out All_Exception_Occur;
      Last_Occur :    out Integer);

end Exception_Tests;
```

Listing 169: exception_tests.adb

```
package body Exception_Tests is

   procedure Save_To_List
     (E          :        Exception_Occurrence;
      All_Occur  : in out All_Exception_Occur;
      Last_Occur : in out Integer)
   is
      L : Integer renames Last_Occur;
      O : All_Exception_Occur renames All_Occur;
   begin
      L := L + 1;
      if L > O'Last then
         raise Constraint_Error
           with "Cannot save occurrence";
      end if;

      Save_Occurrence (Target => O (L),
                       Source => E);
   end Save_To_List;

   procedure Test_Exceptions
     (All_Occur  : in out All_Exception_Occur;
      Last_Occur :    out Integer)
   is

      procedure Nested_1 is
      begin
         raise Custom_Exception
           with "We got a problem";
      exception
         when E : others =>
            Save_To_List (E,
```

(continues on next page)

(continued from previous page)

```
                           All_Occur,
                           Last_Occur);
      end Nested_1;

      procedure Nested_2 is
      begin
         raise Constraint_Error
           with "Constraint is not correct";
      exception
         when E : others =>
            Save_To_List (E,
                           All_Occur,
                           Last_Occur);
      end Nested_2;

   begin
      Last_Occur := 0;

      Nested_1;
      Nested_2;
   end Test_Exceptions;

end Exception_Tests;
```

Listing 170: show_exception_info.adb

```
with Ada.Text_IO;    use Ada.Text_IO;
with Ada.Exceptions; use Ada.Exceptions;

with Exception_Tests; use Exception_Tests;

procedure Show_Exception_Info is
   L : Integer;
   O : All_Exception_Occur (1 .. 10);
begin
   Test_Exceptions (O, L);

   for I in O 'First .. L loop
      Put_Line (Exception_Information (O (I)));
   end loop;
end Show_Exception_Info;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Exceptions_Package.Save_
↪Occurrence
MD5: da0cc5db7039e1458dbcf8be49db969d
```

Runtime output

```
raised EXCEPTION_TESTS.CUSTOM_EXCEPTION : We got a problem

raised CONSTRAINT_ERROR : Constraint is not correct
```

In the Save_To_List procedure of the Exception_Tests package, we call the Save_Occurrence procedure to store the exception occurrence to the All_Occur array. In the Show_Exception_Info, we display all the exception occurrences that we collected.

Read and Write attributes

Similarly, we can use files to read and write exception occurrences. To do that, we can simply use the Read and Write attributes.

Listing 171: exception_occurrence_stream.adb

```
with Ada.Text_IO;

with Ada.Streams.Stream_IO;
use  Ada.Streams.Stream_IO;

with Ada.Exceptions;
use  Ada.Exceptions;

procedure Exception_Occurrence_Stream is

   Custom_Exception : exception;

   S : Stream_Access;

   procedure Nested_1 is
   begin
      raise Custom_Exception
        with "We got a problem";
   exception
      when E : others =>
         Exception_Occurrence'Write (S, E);
   end Nested_1;

   procedure Nested_2 is
   begin
      raise Constraint_Error
        with "Constraint is not correct";
   exception
      when E : others =>
         Exception_Occurrence'Write (S, E);
   end Nested_2;

   F         : File_Type;
   File_Name : constant String :=
                 "exceptions_file.bin";
begin
   Create (F, Out_File, File_Name);
   S := Stream (F);

   Nested_1;
   Nested_2;

   Close (F);

   Read_Exceptions : declare
      E : Exception_Occurrence;
   begin
      Open (F, In_File, File_Name);
      S := Stream (F);

      while not End_Of_File (F) loop
         Exception_Occurrence'Read (S, E);

         Ada.Text_IO.Put_Line
           (Exception_Information (E));
```

(continues on next page)

(continued from previous page)

```
56       end loop;
57       Close (F);
58    end Read_Exceptions;
59
60 end Exception_Occurrence_Stream;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Exceptions_Package.Exception_
 ↪Occurrence_Stream
MD5: 3d9f2bd9480aa6dcc250b249b9ef4870
```

Runtime output

```
raised EXCEPTION_OCCURRENCE_STREAM.CUSTOM_EXCEPTION : We got a problem

raised CONSTRAINT_ERROR : Constraint is not correct
```

In this example, we store the exceptions raised in the application in the *exceptions_file.bin* file. In the exception part of procedures Nested_1 and Nested_2, we call Exception_Occurrence'Write to store an exception occurence in the file. In the Read_Exceptions block, we read the exceptions from the the file by calling Exception_Occurrence'Read.

Debugging exceptions in the GNAT toolchain

Here is a typical exception handler that catches all unexpected exceptions in the application:

Listing 172: main.adb

```
1  with Ada.Exceptions;
2  with Ada.Text_IO;   use Ada.Text_IO;
3
4  procedure Main is
5
6     procedure Nested is
7     begin
8        raise Constraint_Error
9                with "some message";
10    end Nested;
11
12 begin
13    Nested;
14
15 exception
16    when E : others =>
17       Put_Line
18        (Ada.Exceptions.Exception_Information (E));
19 end Main;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Exceptions_Package.Exception_
 ↪Information
MD5: f95068ca90d79b92a7c2031322349153
```

Runtime output

```
raised CONSTRAINT_ERROR : some message
```

The output we get when running the application is not very informative. To get more information, we need to rerun the program in the debugger. To make the session more interesting though, we should add debug information in the executable, which means using the `-g` switch in the **gnatmake** command.

The session would look like the following (omitting some of the output from the debugger):

```
> rm *.o      # Cleanup previous compilation
> gnatmake -g main.adb
> gdb ./main
(gdb)  catch exception
(gdb)  run
Catchpoint 1, CONSTRAINT_ERROR at 0x0000000000402860 in main.nested () at main.
 ↪adb:8
8               raise Constraint_Error with "some message";

(gdb) bt
#0  <__gnat_debug_raise_exception> (e=0x62ec40 <constraint_error>) at s-excdeb.
 ↪adb:43
#1  0x000000000040426f in ada.exceptions.complete_occurrence (x=x@entry=0x637050)
at a-except.adb:934
#2  0x000000000040427b in ada.exceptions.complete_and_propagate_occurrence (
x=x@entry=0x637050) at a-except.adb:943
#3  0x00000000004042d0 in <__gnat_raise_exception> (e=0x62ec40 <constraint_error>,
message=...) at a-except.adb:982
#4  0x0000000000402860 in main.nested ()
#5  0x000000000040287c in main ()
```

And we now know exactly where the exception was raised. But in fact, we could have this information directly when running the application. For this, we need to bind the application with the switch `-E`, which tells the binder to store exception tracebacks in exception occurrences. Let's recompile and rerun the application.

```
> rm *.o   # Cleanup previous compilation
> gnatmake -g main.adb -bargs -E
> ./main

Exception name: CONSTRAINT_ERROR
Message: some message
Call stack traceback locations:
0x10b7e24d1 0x10b7e24ee 0x10b7e2472
```

The traceback, as is, is not very useful. We now need to use another tool that is bundled with GNAT, called **addr2line**. Here is an example of its use:

```
> addr2line -e main --functions --demangle 0x10b7e24d1 0x10b7e24ee 0x10b7e2472
/path/main.adb:8
_ada_main
/path/main.adb:12
main
/path/b~main.adb:240
```

This time we do have a symbolic backtrace, which shows information similar to what we got in the debugger.

For users on OSX machines, **addr2line** does not exist. On these machines, however, an equivalent solution exists. You need to link your application with an additional switch, and then use the tool **atos**, as in:

```
> rm *.o
> gnatmake -g main.adb -bargs -E -largs -Wl,-no_pie
> ./main

Exception name: CONSTRAINT_ERROR
Message: some message
Call stack traceback locations:
0x1000014d1 0x1000014ee 0x100001472
> atos -o main 0x1000014d1 0x1000014ee 0x100001472
main__nested.2550 (in main) (main.adb:8)
_ada_main (in main) (main.adb:12)
main (in main) + 90
```

We will now discuss a relatively new switch of the compiler, namely `-gnateE`. When used, this switch will generate extra information in exception messages.

Let's amend our test program to:

Listing 173: main.adb

```
1  with Ada.Exceptions;
2  with Ada.Text_IO;      use Ada.Text_IO;
3
4  procedure Main is
5
6     procedure Nested (Index : Integer) is
7        type T_Array is array (1 .. 2) of Integer;
8        T : constant T_Array := (10, 20);
9     begin
10       Put_Line (T (Index)'Img);
11    end Nested;
12
13 begin
14    Nested (3);
15
16 exception
17    when E : others =>
18       Put_Line
19        (Ada.Exceptions.Exception_Information (E));
20 end Main;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Exceptions_Package.Exception_
 ↪Information
MD5: 3590f2bf48f6ed1cf7745d576924cad4
```

Runtime output

```
raised CONSTRAINT_ERROR : main.adb:10:17 index check failed
index 3 not in 1..2
```

When running the application, we see that the exception information (traceback) is the same as before, but this time the exception message is set automatically by the compiler. So we know we got a `Constraint_Error` because an incorrect index was used at the named source location (`main.adb`, line 10). But the significant addition is the second line of the message, which indicates exactly the cause of the error. Here, we wanted to get the element at index 3, in an array whose range of valid indexes is from 1 to 2. (No need for a debugger in this case.)

The column information on the first line of the exception message is also very useful when dealing with null pointers. For instance, a line such as:

```
A := Rec1.Rec2.Rec3.Rec4.all;
```

where each of the Rec is itself a pointer, might raise `Constraint_Error` with a message "access check failed". This indicates for sure that one of the pointers is null, and by using the column information it is generally easy to find out which one it is.

26.4.6 Exception renaming

We can rename exceptions by using the an exception renaming declaration in this form `Renamed_Exception : exception renames Existing_Exception;`. For example:

Listing 174: show_exception_renaming.adb

```
procedure Show_Exception_Renaming is
   CE : exception renames Constraint_Error;
begin
   raise CE;
end Show_Exception_Renaming;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Exception_Renaming.Exception_
↪Renaming
MD5: ff20825162ee9eef6ac8ed329da2a80f
```

Runtime output

```

raised CONSTRAINT_ERROR : show_exception_renaming.adb:4
```

Exception renaming creates a new view of the original exception. If we rename an exception from package A in package B, that exception will become visible in package B. For example:

Listing 175: internal_exceptions.ads

```
package Internal_Exceptions is

   Int_E : exception;

end Internal_Exceptions;
```

Listing 176: test_constraints.ads

```
with Internal_Exceptions;

package Test_Constraints is

   Ext_E : exception renames
             Internal_Exceptions.Int_E;

end Test_Constraints;
```

Listing 177: show_exception_renaming_view.adb

```
with Ada.Text_IO;    use Ada.Text_IO;
with Ada.Exceptions; use Ada.Exceptions;

with Test_Constraints; use Test_Constraints;

procedure Show_Exception_Renaming_View is
```

(continues on next page)

(continued from previous page)

```
begin
   raise Ext_E;
exception
   when E : others =>
      Put_Line
       (Ada.Exceptions.Exception_Information (E));
end Show_Exception_Renaming_View;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Exception_Renaming.Exception_
↪Renaming_View
MD5: a44e2698170c6fab79241d0f33ef8c2e
```

Runtime output

```
raised INTERNAL_EXCEPTIONS.INT_E : show_exception_renaming_view.adb:8
```

Here, we're renaming the `Int_E` exception in the `Test_Constraints` package. The `Int_E` exception isn't directly visible in the `Show_Exception_Renaming` procedure because we're not **with**ing the `Internal_Exceptions` package. However, it is indirectly visible in that procedure via the renaming (`Ext_E`) in the `Test_Constraints` package.

In the Ada Reference Manual

- 8.5.2 Exception Renaming Declarations[224]

26.4.7 Out and Uninitialized

Note

This section was originally written by Robert Dewar and published as Gem #150: Out and Uninitialized[225]

Perhaps surprisingly, the Ada standard indicates cases where objects passed to **out** and **in out** parameters might not be updated when a procedure terminates due to an exception. Let's take an example:

Listing 178: show_out_uninitialized.adb

```
with Ada.Text_IO;  use Ada.Text_IO;
procedure Show_Out_Uninitialized is

   procedure Local (A     : in out Integer;
                    Error : Boolean) is
   begin
      A := 1;

      if Error then
         raise Program_Error;
      end if;
   end Local;

```

(continues on next page)

[224] http://www.ada-auth.org/standards/22rm/html/RM-8-5-2.html
[225] https://www.adacore.com/gems/gem-150out-and-uninitialized

(continued from previous page)

```
   B : Integer := 0;

begin
   Local (B, Error => True);
exception
   when Program_Error =>
      Put_Line ("Value for B is"
                & Integer'Image (B));  --  "0"
end Show_Out_Uninitialized;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Out_Uninitialized.Out_
 ↪Uninitialized_1
MD5: cebcf14e9fd088e38b98a5132d9fd998
```

Runtime output

```
Value for B is 0
```

This program outputs a value of 0 for B, whereas the code indicates that A is assigned before raising the exception, and so the reader might expect B to also be updated.

The catch, though, is that a compiler must by default pass objects of elementary types (scalars and access types) by copy and might choose to do so for other types (records, for example), including when passing **out** and **in out** parameters. So what happens is that while the formal parameter A is properly initialized, the exception is raised before the new value of A has been copied back into B (the copy will only happen on a normal return).

In the GNAT toolchain

In general, any code that reads the actual object passed to an **out** or **in out** parameter after an exception is suspect and should be avoided. GNAT has useful warnings here, so that if we simplify the above code to:

Listing 179: show_out_uninitialized_warnings.adb

```
with Ada.Text_IO;  use Ada.Text_IO;

procedure Show_Out_Uninitialized_Warnings is

    procedure Local (A : in out Integer) is
    begin
       A := 1;
       raise Program_Error;
    end Local;

   B : Integer := 0;

begin
   Local (B);
exception
   when others =>
      Put_Line ("Value for B is"
                & Integer'Image (B));
end Show_Out_Uninitialized_Warnings;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Out_Uninitialized.Out_
 ↪Uninitialized_2
MD5: 5b6960974c729ea37a70fb313d6e5084
```

Build output

```
show_out_uninitialized_warnings.adb:7:10: warning: assignment to pass-by-copy␣
 ↪formal may have no effect [enabled by default]
show_out_uninitialized_warnings.adb:7:10: warning: "raise" statement may result␣
 ↪in abnormal return (RM 6.4.1(17)) [enabled by default]
```

Runtime output

```
Value for B is 0
```

We now get a compilation warning that the pass-by-copy formal may have no effect.

Of course, GNAT is not able to point out all such errors (see first example above), which in general would require full flow analysis.

The behavior is different when using parameter types that the standard mandates be passed by reference, such as tagged types for instance. So the following code will work as expected, updating the actual parameter despite the exception:

Listing 180: show_out_initialized_rec.adb

```
1  with Ada.Text_IO;  use Ada.Text_IO;
2
3  procedure Show_Out_Initialized_Rec is
4
5     type Rec is tagged record
6        Field : Integer;
7     end record;
8
9     procedure Local (A : in out Rec) is
10    begin
11       A.Field := 1;
12       raise Program_Error;
13    end Local;
14
15    V : Rec;
16
17 begin
18    V.Field := 0;
19    Local (V);
20 exception
21    when others =>
22       Put_Line ("Value of Field is"
23                 & V.Field'Img); -- "1"
24 end Show_Out_Initialized_Rec;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Out_Uninitialized.Out_
 ↪Uninitialized_3
MD5: 370031a404657ea18ffabf3c1d507cd4
```

Runtime output

```
Value of Field is 1
```

In the GNAT toolchain

It's worth mentioning that GNAT provides a pragma called `Export_Procedure` that forces reference semantics on **`out`** parameters. Use of this pragma would ensure updates of the

actual parameter prior to abnormal completion of the procedure. However, this pragma only applies to library-level procedures, so the examples above have to be rewritten to avoid the use of a nested procedure, and really this pragma is intended mainly for use in interfacing with foreign code. The code below shows an example that ensures that B is set to 1 after the call to Local:

Listing 181: exported_procedures.ads

```
package Exported_Procedures is

  procedure Local (A     : in out Integer;
                   Error : Boolean);
  pragma Export_Procedure
    (Local,
    Mechanism => (A => Reference));

end Exported_Procedures;
```

Listing 182: exported_procedures.adb

```
package body Exported_Procedures is

   procedure Local (A     : in out Integer;
                    Error : Boolean) is
   begin A := 1;
      if Error then
         raise Program_Error;
      end if;
   end Local;

end Exported_Procedures;
```

Listing 183: show_out_reference.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Exported_Procedures;
use  Exported_Procedures;

procedure Show_Out_Reference is
   B : Integer := 0;
begin
   Local (B, Error => True);
exception
   when Program_Error =>
      Put_Line ("Value for B is"
                & Integer'Image (B)); -- "1"
end Show_Out_Reference;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Out_Uninitialized.Out_
 ↪Uninitialized_4
MD5: aed2788be2b3ceeec19b28421c53fc66
```

Runtime output

```
Value for B is 1
```

In the case of direct assignments to global variables, the behavior in the presence of exceptions is somewhat different. For predefined exceptions, most notably Constraint_Error, the optimization permissions allow some flexibility in whether a global variable is or is not updated when an exception occurs (see Ada RM 11.6[226]). For instance, the following code

[226] http://www.ada-auth.org/standards/22rm/html/RM-11-6.html

makes an incorrect assumption:

```
X := 0;     -- about to try addition
Y := Y + 1; -- see if addition raises exception
X := 1      -- addition succeeded
```

A program is not justified in assuming that `X = 0` if the addition raises an exception (assuming X is a global here). So any such assumptions in a program are incorrect code which should be fixed.

In the Ada Reference Manual

- 11.6 Exceptions and Optimization[227]

26.4.8 Suppressing checks

`pragma Suppress`

Note

This section was originally written by Gary Dismukes and published as Gem #63: The Effect of Pragma Suppress[228].

One of Ada's key strengths has always been its strong typing. The language imposes stringent checking of type and subtype properties to help prevent accidental violations of the type system that are a common source of program bugs in other less-strict languages such as C. This is done using a combination of compile-time restrictions (legality rules), that prohibit mixing values of different types, together with run-time checks to catch violations of various dynamic properties. Examples are checking values against subtype constraints and preventing dereferences of null access values.

At the same time, Ada does provide certain "loophole" features, such as `Unchecked_Conversion`, that allow selective bypassing of the normal safety features, which is sometimes necessary when interfacing with hardware or code written in other languages.

Ada also permits explicit suppression of the run-time checks that are there to ensure that various properties of objects are not violated. This suppression can be done using **`pragma`** *`Suppress`*, as well as by using a compile-time switch on most implementations — in the case of GNAT, with the `-gnatp` switch.

In addition to allowing all checks to be suppressed, **`pragma`** *`Suppress`* supports suppression of specific forms of check, such as `Index_Check` for array indexing, `Range_Check` for scalar bounds checking, and `Access_Check` for dereferencing of access values. (See section 11.5 of the Ada Reference Manual for further details.)

Here's a simple example of suppressing index checks within a specific subprogram:

```
procedure Main is
   procedure Sort_Array (A : in out Some_Array) is
      pragma Suppress (Index_Check);
      --      ^^^^^^^^^^^^^^^^^^^^
      --    eliminate check overhead
   begin
     ...
```

(continues on next page)

[227] http://www.ada-auth.org/standards/22rm/html/RM-11-6.html
[228] https://www.adacore.com/gems/gem-63

(continued from previous page)

```
   end Sort_Array;
end Main;
```

Unlike a feature such as `Unchecked_Conversion`, however, the purpose of check suppression is not to enable programs to subvert the type system, though many programmers seem to have that misconception.

What's important to understand about **pragma** *Suppress* is that it only gives permission to the implementation to remove checks, but doesn't require such elimination. The intention of `Suppress` is not to allow bypassing of Ada semantics, but rather to improve efficiency, and the Ada Reference Manual has a clear statement to that effect in the note in RM-11.5, paragraph 29:

> There is no guarantee that a suppressed check is actually removed; hence a **pragma** *Suppress* should be used only for efficiency reasons.

There is associated Implementation Advice that recommends that implementations should minimize the code executed for checks that have been suppressed, but it's still the responsibility of the programmer to ensure that the correct functioning of the program doesn't depend on checks not being performed.

There are various reasons why a compiler might choose not to remove a check. On some hardware, certain checks may be essentially free, such as null pointer checks or arithmetic overflow, and it might be impractical or add extra cost to suppress the check. Another example where it wouldn't make sense to remove checks is for an operation implemented by a call to a run-time routine, where the check might be only a small part of a more expensive operation done out of line.

Furthermore, in many cases GNAT can determine at compile time that a given run-time check is guaranteed to be violated. In such situations, it gives a warning that an exception will be raised, and generates code specifically to raise the exception. Here's an example:

```
X : Integer range 1..10 := ...;

..

if A > B then
   X := X + 1;
  ..
end if;
```

For the assignment incrementing X, the compiler will normally generate machine code equivalent to:

```
Temp := X + 1;
if Temp > 10 then
   raise Constraint_Error;
end if;
X := Temp;
```

If range checks are suppressed, then the compiler can just generate the increment and assignment. However, if the compiler is able to somehow prove that `X = 10` at this point, it will issue a warning, and replace the entire assignment with simply:

```
raise Constraint_Error;
```

even though checks are suppressed. This is appropriate, because

1. we don't care about the efficiency of buggy code, and
2. there is no "extra" cost to the check, because if we reach that point, the code will unconditionally fail.

One other important thing to note about checks and **pragma** *Suppress* is this statement in the Ada RM (RM-11.5, paragraph 26):

> If a given check has been suppressed, and the corresponding error situation occurs, the execution of the program is erroneous.

In Ada, erroneous execution is a bad situation to be in, because it means that the execution of your program could have arbitrary nasty effects, such as unintended overwriting of memory. Note also that a program whose "correct" execution somehow depends on a given check being suppressed might work as the programmer expects, but could still fail when compiled with a different compiler, or for a different target, or even with a newer version of the same compiler. Other changes such as switching on optimization or making a change to a totally unrelated part of the code could also cause the code to start failing.

So it's definitely not wise to write code that relies on checks being removed. In fact, it really only makes sense to suppress checks once there's good reason to believe that the checks can't fail, as a result of testing or other analysis. Otherwise, you're removing an important safety feature of Ada that's intended to help catch bugs.

pragma Unsuppress

We can use **pragma** *Unsuppress* to reverse the effect of a **pragma** *Suppress*. While **pragma** *Suppress* gives permission to the compiler to remove a specific check, **pragma** *Unsuppress* revokes that permission.

Let's see an example:

Listing 184: show_index_check.adb

```
1  procedure Show_Index_Check is
2
3     type Integer_Array is
4       array (Positive range <>) of Integer;
5
6     pragma Suppress (Index_Check);
7     --  from now on, the compiler may
8     --  eliminate index checks...
9
10    function Unchecked_Value_Of
11      (A : Integer_Array;
12       I : Integer)
13       return Integer
14    is
15       type Half_Integer_Array is new
16         Integer_Array (A'First ..
17                        A'First + A'Length / 2);
18
19       A_2 : Half_Integer_Array := (others => 0);
20    begin
21       return A_2 (I);
22    end Unchecked_Value_Of;
23
24    pragma Unsuppress (Index_Check);
25    --  from now on, index checks are
26    --  typically performed...
27
28    function Value_Of
29      (A : Integer_Array;
30       I : Integer)
31       return Integer
32    is
33       type Half_Integer_Array is new
```

(continues on next page)

(continued from previous page)

```
34          Integer_Array (A'First ..
35                         A'First + A'Length / 2);
36
37       A_2 : Half_Integer_Array := (others => 0);
38    begin
39       return A_2 (I);
40    end Value_Of;
41
42    Arr_1 : Integer_Array (1 .. 10) :=
43              (others => 1);
44
45 begin
46    Arr_1 (10) := Unchecked_Value_Of (Arr_1, 10);
47    Arr_1 (10) := Value_Of (Arr_1, 10);
48
49 end Show_Index_Check;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Control_Flow.Exceptions.Pragma_Unsuppress.Pragma_
↪Unsuppress
MD5: 0585b78fd57913d3172c7ab1ea6f4864
```

Runtime output

```
raised CONSTRAINT_ERROR : show_index_check.adb:39 index check failed
```

In this example, we first use a **pragma** *Suppress* (Index_Check), so the compiler is allowed to remove the index check from the Unchecked_Value_Of function. (Therefore, depending on the compiler, the call to the Unchecked_Value_Of function may complete without raising an exception.) Of course, in this specific example, suppressing the index check masks a severe issue.

In contrast, an index check is performed in the Value_Of function because of the **pragma** *Unsuppress*. As a result, the index checks fails in the call to this function, which raises a Constraint_Error exception.

In the Ada Reference Manual

- 11.5 Suppressing Checks[229]

[229] http://www.ada-auth.org/standards/22rm/html/RM-11-5.html

CHAPTER

TWENTYSEVEN

MODULAR PROGRAMMING

27.1 Packages

27.1.1 Package renaming

We've seen in the Introduction to Ada course that we can *rename packages* (page 45).

In the Ada Reference Manual

- 10.1.1 Compilation Units - Library Units[230]

Grouping packages

A use-case that we haven't mentioned in that course is that we can apply package renaming to group individual packages into a common hierarchy. For example:

Listing 1: driver_m1.ads

```
1 package Driver_M1 is
2
3 end Driver_M1;
```

Listing 2: driver_m2.ads

```
1 package Driver_M2 is
2
3 end Driver_M2;
```

Listing 3: drivers.ads

```
1 package Drivers
2   with Pure is
3
4 end Drivers;
```

Listing 4: drivers-m1.ads

```
1 with Driver_M1;
2
3 package Drivers.M1 renames Driver_M1;
```

[230] http://www.ada-auth.org/standards/22rm/html/RM-10-1-1.html

Listing 5: drivers-m2.ads

```
with Driver_M2;

package Drivers.M2 renames Driver_M2;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Package_Renaming.Package_
 ↪Renaming_1
MD5: 8d6a6bec32f7ec4397de1faf9f0b44d9
```

Here, we're renaming the `Driver_M1` and `Driver_M2` packages as child packages of the `Drivers` package, which is a pure package.

Important

Note that a package that is renamed as a child package cannot refer to information from its (non-renamed) parent. In other words, `Driver_M1` (renamed as `Drivers.M1`) cannot refer to information from the `Drivers` package. For example:

Listing 6: driver_m1.ads

```
package Driver_M1 is

   Counter_2 : Integer := Drivers.Counter;

end Driver_M1;
```

Listing 7: drivers.ads

```
package Drivers is

   Counter : Integer := 0;

end Drivers;
```

Listing 8: drivers-m1.ads

```
with Driver_M1;

package Drivers.M1 renames Driver_M1;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Package_Renaming.Package_
 ↪Renaming_1_Refer_To_Parent
MD5: d174746d8151d9a2cd048ad44e853850
```

Build output

```
driver_m1.ads:3:27: error: "Drivers" is undefined
gprbuild: *** compilation phase failed
```

As expected, compilation fails here because `Drivers.Counter` isn't visible in `Driver_M1`, even though the renaming (`Drivers.M1`) creates a virtual hierarchy.

Child of renamed package

Note that we cannot create a child package using a parent package name that was introduced by a renaming. For example, let's say we want to create a child package `Ext` for the `Drivers.M1` package we've seen earlier. We cannot just declare a `Drivers.M1.Ext` package like this:

```
package Drivers.M1.Ext is

end Drivers.M1.Ext;
```

because the parent unit cannot be a renaming. The solution is to actually extend the original (non-renamed) package:

Listing 9: driver_m1-ext.ads

```
1 package Driver_M1.Ext is
2
3 end Driver_M1.Ext;
```

Listing 10: dummy.adb

```
1 --  A package called Drivers.M1.Ext is
2 --  automatically available!
3
4 with Drivers.M1.Ext;
5
6 procedure Dummy is
7 begin
8    null;
9 end Dummy;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Package_Renaming.Package_
 ↪Renaming_1
MD5: e338d668dbd98b1a3917a8d3d948a439
```

This works fine because any child package of a package `P` is also a child package of a renamed version of `P`. (Therefore, because `Ext` is a child package of `Driver_M1`, it is also a child package of the renamed `Drivers.M1` package.)

Backwards-compatibility via renaming

We can also use renaming to ensure backwards-compatibility when changing the package hierarchy. For example, we could adapt the previous source-code by:

- converting `Driver_M1` and `Driver_M2` to child packages of `Drivers`, and
- using package renaming to *mimic* the original names (`Driver_M1` and `Driver_M2`).

This is the adapted code:

Listing 11: drivers.ads

```
1 package Drivers
2   with Pure is
3
4 end Drivers;
```

Listing 12: drivers-m1.ads

```
1  --  We've converted Driver_M1 to
2  --  Drivers.M1:
3
4  package Drivers.M1 is
5
6  end Drivers.M1;
```

Listing 13: drivers-m2.ads

```
1  --  We've converted Driver_M2 to
2  --  Drivers.M2:
3
4  package Drivers.M2 is
5
6  end Drivers.M2;
```

Listing 14: driver_m1.ads

```
1  --  Original Driver_M1 package still
2  --  available via package renaming:
3
4  with Drivers.M1;
5
6  package Driver_M1 renames Drivers.M1;
```

Listing 15: driver_m2.ads

```
1  --  Original Driver_M2 package still
2  --  available via package renaming:
3
4  with Drivers.M2;
5
6  package Driver_M2 renames Drivers.M2;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Package_Renaming.Package_
 ↪Renaming_2
MD5: 27f8066b5f5954514fea51b6e9b9de81
```

Now, M1 and M2 are *actual* child packages of `Drivers`, but their original names are still available. By doing so, we ensure that existing software that makes use of the original packages doesn't break.

27.1.2 Private packages

In this section, we discuss the concept of private packages. However, before we proceed with the discussion, let's recapitulate some important ideas that we've seen earlier.

In the *Introduction to Ada course* (page 113), we've seen that encapsulation plays an important role in modular programming. By using the private part of a package specification, we can disclose some information, but, at the same time, prevent that this information gets accessed where it shouldn't be used directly. Similarly, we've seen that we can use the private part of a package to distinguish between the *partial and full view* (page 310) of a data type.

The main application of private packages is to create private child packages, whose purpose is to serve as internal implementation packages within a package hierarchy. By doing so,

we can expose the internals to other public child packages, but prevent that external clients can directly access them.

As we'll see next, there are many rules that ensure that internal visibility is enforced for those private child packages. At the same time, the same rules ensure that private packages aren't visible outside of the package hierarchy.

Declaration and usage

We declare private packages by using the **private** keyword. For example, let's say we have a package named `Data_Processing`:

Listing 16: data_processing.ads

```
package Data_Processing is

--  ...

end Data_Processing;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Private_Packages.Private_
 ↪Package_Decl
MD5: 502811212890785d90c6f891d7f8e557
```

We simply write **private package** to declare a private child package named `Calculations`:

Listing 17: data_processing-calculations.ads

```
private package Data_Processing.Calculations is

--  ...

end Data_Processing.Calculations;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Private_Packages.Private_
 ↪Package_Decl
MD5: 20df8b2ac4c9aa93f03a12afd9b7ef30
```

Let's see a complete example:

Listing 18: data_processing.ads

```
package Data_Processing is

   type Data is private;

   procedure Process (D : in out Data);

private

   type Data is null record;

end Data_Processing;
```

Listing 19: data_processing-calculations.ads

```
private package Data_Processing.Calculations is

```

(continues on next page)

(continued from previous page)

```
   procedure Calculate (D : in out Data);

end Data_Processing.Calculations;
```

Listing 20: data_processing.adb

```
with Data_Processing.Calculations;
use  Data_Processing.Calculations;

package body Data_Processing is

   procedure Process (D : in out Data) is
   begin
      Calculate (D);
   end Process;

end Data_Processing;
```

Listing 21: data_processing-calculations.adb

```
package body Data_Processing.Calculations is

   procedure Calculate (D : in out Data) is
   begin
      --  Dummy implementation...
      null;
   end Calculate;

end Data_Processing.Calculations;
```

Listing 22: test_data_processing.adb

```
with Data_Processing; use Data_Processing;

procedure Test_Data_Processing is
   D : Data;
begin
   Process (D);
end Test_Data_Processing;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Private_Packages.Private_
 ↪Package
MD5: 3edd5f73938e809994347b5876014d0d
```

In this example, we refer to the private child package `Calculations` in the body of the `Data_Processing` package — by simply writing `with Data_Processing.Calculations`. After that, we can call the `Calculate` procedure normally in the `Process` procedure.

Private sibling packages

We can introduce another private package `Advanced_Calculations` as a child of `Data_Processing` and refer to the `Calculations` package in its specification:

Listing 23: data_processing.ads

```
package Data_Processing is

```

(continues on next page)

(continued from previous page)

```
   type Data is private;

   procedure Process (D : in out Data);

private

   type Data is null record;

end Data_Processing;
```

Listing 24: data_processing-calculations.ads

```
private package Data_Processing.Calculations is

   procedure Calculate (D : in out Data);

end Data_Processing.Calculations;
```

Listing 25: data_processing-advanced_calculations.ads

```
with Data_Processing.Calculations;
use  Data_Processing.Calculations;

private
package Data_Processing.Advanced_Calculations is

   procedure Advanced_Calculate (D : in out Data)
     renames Calculate;

end Data_Processing.Advanced_Calculations;
```

Listing 26: data_processing.adb

```
with Data_Processing.Advanced_Calculations;
use  Data_Processing.Advanced_Calculations;

package body Data_Processing is

   procedure Process (D : in out Data) is
   begin
      Advanced_Calculate (D);
   end Process;

end Data_Processing;
```

Listing 27: data_processing-calculations.adb

```
package body Data_Processing.Calculations is

   procedure Calculate (D : in out Data) is
   begin
      --  Dummy implementation...
      null;
   end Calculate;

end Data_Processing.Calculations;
```

Listing 28: test_data_processing.adb

```
with Data_Processing; use Data_Processing;

procedure Test_Data_Processing is
   D : Data;
begin
   Process (D);
end Test_Data_Processing;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Private_Packages.Private_
 ↪Package_2
MD5: 32fc76ae13f1eecdd854a029793034d8
```

Note that, in the body of the `Data_Processing` package, we're now referring to the new `Advanced_Calculations` package instead of the `Calculations` package.

Referring to a private child package in the specification of another private child package is OK, but we cannot do the same in the specification of a *non-private* package. For example, let's change the specification of the `Advanced_Calculations` and make it *non-private*:

Listing 29: data_processing-advanced_calculations.ads

```
with Data_Processing.Calculations;
use  Data_Processing.Calculations;

package Data_Processing.Advanced_Calculations is

   procedure Advanced_Calculate (D : in out Data)
     renames Calculate;

end Data_Processing.Advanced_Calculations;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Private_Packages.Private_
 ↪Package_2
MD5: 27fd3bdb063a11ed7797cc44fa1e8349
```

Build output

```
data_processing-advanced_calculations.ads:1:06: error: current unit must also be␣
 ↪private descendant of "Data_Processing"
gprbuild: *** compilation phase failed
```

Now, the compilation doesn't work anymore. However, we could still refer to `Calculations` packages in the body of the `Advanced_Calculations` package:

Listing 30: data_processing-advanced_calculations.ads

```
package Data_Processing.Advanced_Calculations is

   procedure Advanced_Calculate (D : in out Data);

end Data_Processing.Advanced_Calculations;
```

Listing 31: data_processing-advanced_calculations.adb

```
with Data_Processing.Calculations;
use  Data_Processing.Calculations;

package body Data_Processing.Advanced_Calculations
is

   procedure Advanced_Calculate (D : in out Data)
   is
   begin
     Calculate (D);
   end Advanced_Calculate;

end Data_Processing.Advanced_Calculations;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Private_Packages.Private_
 ↪Package_2
MD5: 3f37c129a6994c6b71a25ad17dcb440e
```

This works fine as expected: we can refer to private child packages in the body of another package — as long as both packages belong to the same package tree.

Outside the package tree

While we can use a with-clause of a private child package in the body of the Data_Processing package, we cannot do the same outside the package tree. For example, we cannot refer to it in the Test_Data_Processing procedure:

Listing 32: test_data_processing.adb

```
with Data_Processing; use Data_Processing;

with Data_Processing.Calculations;
use  Data_Processing.Calculations;

procedure Test_Data_Processing is
   D : Data;
begin
   Calculate (D);
end Test_Data_Processing;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Private_Packages.Private_
 ↪Package
MD5: c844327995b28d60c9a79b138a0f21d2
```

Build output

```
test_data_processing.adb:3:06: error: unit in with clause is private child unit
test_data_processing.adb:3:06: error: current unit must also have parent "Data_
 ↪Processing"
gprbuild: *** compilation phase failed
```

As expected, we get a compilation error because Calculations is only accessible within the Data_Processing, but not in the Test_Data_Processing procedure.

The same restrictions apply to child packages of private packages. For example, if we

implement a child package of the `Calculations` package — let's name it `Calculations.Child` —, we cannot refer to it in the `Test_Data_Processing` procedure:

Listing 33: data_processing-calculations-child.ads

```
package Data_Processing.Calculations.Child is

   procedure Process (D : in out Data);

end Data_Processing.Calculations.Child;
```

Listing 34: data_processing-calculations-child.adb

```
package body Data_Processing.Calculations.Child is

   procedure Process (D : in out Data) is
   begin
      Calculate (D);
   end Process;

end Data_Processing.Calculations.Child;
```

Listing 35: test_data_processing.adb

```
with Data_Processing; use Data_Processing;

with Data_Processing.Calculations.Child;
use  Data_Processing.Calculations.Child;

procedure Test_Data_Processing is
   D : Data;
begin
   Calculate (D);
end Test_Data_Processing;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Private_Packages.Private_
 ↪Package
MD5: 2eaf23ddbab72578246ac07424008d9d
```

Build output

```
test_data_processing.adb:3:06: error: unit in with clause is private child unit
test_data_processing.adb:3:06: error: current unit must also have parent "Data_
 ↪Processing"
test_data_processing.adb:9:04: error: "Calculate" is not visible
test_data_processing.adb:9:04: error: non-visible declaration at data_processing-
 ↪calculations.ads:3
gprbuild: *** compilation phase failed
```

Again, as expected, we get an error because `Calculations.Child` — being a child of a private package — has the same restricted view as its parent package. Therefore, it cannot be visible in the `Test_Data_Processing` procedure as well. We'll discuss more about visibility *later* (page 822).

Note that subprograms can also be declared private. We'll see this *in another section* (page 837).

Important

We've discussed package renaming *in a previous section* (page 803). We can rename a package as a private package, too. For example:

Listing 36: driver_m1.ads

```
1 package Driver_M1 is
2
3 end Driver_M1;
```

Listing 37: drivers.ads

```
1 package Drivers
2   with Pure is
3
4 end Drivers;
```

Listing 38: drivers-m1.ads

```
1 with Driver_M1;
2
3 private package Drivers.M1 renames Driver_M1;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Private_Packages.Private_
 ↪Package_Renaming
MD5: c03584dc26abb108c9c04074234b9637
```

Obviously, `Drivers.M1` has the same restrictions as any private package:

Listing 39: test_driver.adb

```
1 with Driver_M1;
2 with Drivers.M1;
3
4 procedure Test_Driver is
5 begin
6    null;
7 end Test_Driver;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Private_Packages.Private_
 ↪Package_Renaming
MD5: 55415978604ccea4eeaeb02df13cd2f4
```

Build output

```
test_driver.adb:2:06: error: unit in with clause is private child unit
test_driver.adb:2:06: error: current unit must also have parent "Drivers"
gprbuild: *** compilation phase failed
```

As expected, although we can have the `Driver_M1` package in a with clause of the `Test_Driver` procedure, we cannot do the same in the case of the `Drivers.M1` package because it is private.

In the Ada Reference Manual

- 10.1.1 Compilation Units - Library Units[231]

[231] http://www.ada-auth.org/standards/22rm/html/RM-10-1-1.html

27.1.3 Private with clauses

Definition and usage

A private with clause allows us to refer to a package in the private part of another package. For example, if we want to refer to package P in the private part of Data, we can write **private with** P:

Listing 40: p.ads

```
package P is

   type T is null record;

end P;
```

Listing 41: data.ads

```
private with P;

package Data is

   type T2 is private;

private

   --  Information from P is
   --  visible here
   type T2 is new P.T;

end Data;
```

Listing 42: main.adb

```
with Data; use Data;

procedure Main is
   A : T2;
begin
   null;
end Main;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Private_With_Clauses.Simple_
 ↪Private_With_Clause
MD5: d0705add0dd7861c83822b0d35dacba4
```

As you can see in the example, as the information from P is available in the private part of Data, we can derive a new type T2 based on T from P. However, we cannot do the same in the visible part of Data:

Listing 43: data.ads

```
private with P;

package Data is

   --  ERROR: information from P
   --  isn't visible here

   type T2 is new P.T;
```

(continues on next page)

(continued from previous page)

```
9
10 end Data;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Private_With_Clauses.Simple_
 ↪Private_With_Clause
MD5: b454e875f73432f5632a20ab40ae7da6
```

Build output

```
data.ads:8:19: error: "P" is not visible
data.ads:8:19: error: non-visible declaration at p.ads:1
gprbuild: *** compilation phase failed
```

Also, the information from P is available in the package body. For example, let's declare a Process procedure in the P package and use it in the body of the Data package:

Listing 44: p.ads

```
1  package P is
2
3     type T is null record;
4
5     procedure Process (A : T) is null;
6
7  end P;
```

Listing 45: data.ads

```
1  private with P;
2
3  package Data is
4
5     type T2 is private;
6
7     procedure Process (A : T2);
8
9  private
10
11    --  Information from P is
12    --  visible here
13    type T2 is new P.T;
14
15 end Data;
```

Listing 46: data.adb

```
1  package body Data is
2
3     procedure Process (A : T2) is
4     begin
5        P.Process (P.T (A));
6     end Process;
7
8  end Data;
```

Listing 47: main.adb

```
with Data; use Data;

procedure Main is
   A : T2;
begin
   null;
end Main;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Private_With_Clauses.Simple_
 ↪Private_With_Clause
MD5: cecc09f95bd43dd7fd34a9e289bd2674
```

In the body of the `Data`, we can access information from the `P` package — as we do in the `P.Process (P.T (A))` statement of the `Process` procedure.

Referring to private child package

There's one case where using a private with clause is the only way to refer to a package: when we want to refer to a private child package in another child package. For example, here we have a package P and its two child packages: `Private_Child` and `Public_Child`:

Listing 48: p.ads

```
package P is

end P;
```

Listing 49: p-private_child.ads

```
private package P.Private_Child is

   type T is null record;

end P.Private_Child;
```

Listing 50: p-public_child.ads

```
private with P.Private_Child;

package P.Public_Child is

   type T2 is private;

private

   type T2 is new P.Private_Child.T;

end P.Public_Child;
```

Listing 51: test_parent_child.adb

```
with P.Public_Child; use P.Public_Child;

procedure Test_Parent_Child is
   A : T2;
begin
```

(continues on next page)

(continued from previous page)

```
6     null;
7  end Test_Parent_Child;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Private_With_Clauses.Private_
 ↪With_Clause
MD5: a6028416a957184be55a54f96a319e61
```

In this example, we're referring to the `P.Private_Child` package in the `P.Public_Child` package. As expected, this works fine. However, using a *normal* with clause doesn't work in this case:

Listing 52: p-public_child.ads

```
1  with P.Private_Child;
2
3  package P.Public_Child is
4
5     type T2 is private;
6
7  private
8
9     type T2 is new P.Private_Child.T;
10
11 end P.Public_Child;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Private_With_Clauses.Private_
 ↪With_Clause
MD5: 2f32f29ecb4ae13bb4487c94d3bf18d9
```

Build output

```
p-public_child.ads:1:06: error: current unit must also be private descendant of "P"
gprbuild: *** compilation phase failed
```

This gives an error because the information from the `P.Private_Child`, being a private child package, cannot be accessed in the public part of another child package. In summary, unless both packages are private packages, it's only possible to access the information from a private package in the private part of a non-private child package.

In the Ada Reference Manual

- 10.1.2 Context Clauses - With Clauses[232]

27.1.4 Limited Visibility

Sometimes, we might face the situation where two packages depend on information from each other. Let's consider a package A that depends on a package B, and vice-versa:

Listing 53: a.ads

```
1  with B; use B;
2
```

(continues on next page)

[232] http://www.ada-auth.org/standards/22rm/html/RM-10-1-2.html

(continued from previous page)

```
3  package A is
4
5     type T1 is record
6        Value : T2;
7     end record;
8
9  end A;
```

Listing 54: b.ads

```
1  with A; use A;
2
3  package B is
4
5     type T2 is record
6        Value : T1;
7     end record;
8
9  end B;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Limited_Visibility.Circular_
 ↪Dependency
MD5: ae64f33706f1c58603aff2c33b02c910
```

Build output

```
b.ads:1:06: error: circular unit dependency
b.ads:1:06: error: "B (spec)" depends on "A (spec)"
b.ads:1:06: error: "A (spec)" depends on "B (spec)"
b.ads:1:06: error: "B (spec)" depends on "B (spec)"
gprbuild: *** compilation phase failed
```

Here, we have two *mutually dependent types* (page 444) T1 and T2, which are declared in two packages A and B that refer to each other. These with clauses constitute a circular dependency, so the compiler cannot compile either of those packages.

One way to solve this problem is by transforming this circular dependency into a partial dependency. We do this by limiting the visibility — using a limited with clause. To use a limited with clause for a package P, we simply write **`limited with`** P.

If a package A has limited visibility to a package B, then all types from package B are visible as if they had been declared as *incomplete types* (page 308). For the specific case of the previous source-code example, this would be the limited visibility to package B from package A's perspective:

```
package B is

   --  Incomplete type
   type T2;

end B;
```

As we've seen previously,

- we cannot declare objects of incomplete types, but we can declare access types and anonymous access objects of incomplete types. Also,
- we can use anonymous access types to declare *mutually dependent types* (page 444).

Keeping this information in mind, we can now correct the previous code by using limited with

clauses for package A and declaring the component of the T1 record using an anonymous access type:

Listing 55: a.ads

```
limited with B;

package A is

   type T1 is record
      Ref : access B.T2;
   end record;

end A;
```

Listing 56: b.ads

```
with A; use A;

package B is

   type T2 is record
      Value : T1;
   end record;

end B;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Limited_Visibility.Limited_
 ↪Visibility
MD5: 48591850665085a6fbb184f51b658a1b
```

As expected, we can now compile the code without issues.

Note that we can also use limited with clauses for both packages. If we do that, we must declare all components using anonymous access types:

Listing 57: a.ads

```
limited with B;

package A is

   type T1 is record
      Ref : access B.T2;
   end record;

end A;
```

Listing 58: b.ads

```
limited with A;

package B is

   type T2 is record
      Ref : access A.T1;
   end record;

end B;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Limited_Visibility.Limited_
 ↪Visibility_2
MD5: 3884086e89400245346acfbbf0691906
```

Now, both packages A and B have limited visibility to each other.

In the Ada Reference Manual

- 10.1.2 Context Clauses - With Clauses[233]

Limited visibility and private with clauses

We can limit the visibility and use *private with clauses* (page 814) at the same time. For a package P, we do this by simply writing **`limited private with`** P.

Let's reuse the previous source-code example and convert types T1 and T2 to private types:

Listing 59: a.ads

```
1  limited private with B;
2
3  package A is
4
5     type T1 is private;
6
7  private
8
9     --  Here, we have limited visibility
10    --  of package B
11
12    type T1 is record
13       Ref : access B.T2;
14    end record;
15
16 end A;
```

Listing 60: b.ads

```
1  private with A;
2
3  package B is
4
5     type T2 is private;
6
7  private
8
9     use A;
10
11    --  Here, we have full visibility
12    --  of package A
13
14    type T2 is record
15       Value : T1;
16    end record;
17
18 end B;
```

Code block metadata

[233] http://www.ada-auth.org/standards/22rm/html/RM-10-1-2.html

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Limited_Visibility.Limited_
 ↪Private_Visibility
MD5: b3ac546e2f55fb91229e834ca7a9783d
```

In this updated version of the source-code example, we have not only limited visibility to package B, but also, each package is just visible in the private part of the other package.

Limited visibility and other elements

It's important to mention that the limited visibility we've been discussing so far is restricted to type declarations — which are seen as incomplete types. In fact, when we use a limited with clause, all other declarations have no visibility at all! For example, let's say we have a package `Info` that declares a constant `Zero_Const` and a function `Zero_Func`:

Listing 61: info.ads

```
1  package Info is
2
3     function Zero_Func return Integer is (0);
4
5     Zero_Const : constant := 0;
6
7  end Info;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Limited_Visibility.Limited_
 ↪Private_Visibility_Other_Elements
MD5: e9b01b4d59db5982532634f9162518ce
```

Also, let's say we want to use the information (from package `Info`) in package A. If we have limited visibility to package `Info`, however, this information won't be visible. For example:

Listing 62: a.ads

```
1  limited private with Info;
2
3  package A is
4
5     type T1 is private;
6
7  private
8
9     type T1 is record
10       V : Integer := Info.Zero_Const;
11       W : Integer := Info.Zero_Func;
12    end record;
13
14 end A;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Limited_Visibility.Limited_
 ↪Private_Visibility_Other_Elements
MD5: 61ecb5dc2617eecac62a05d7d2c6c0df
```

Build output

```
a.ads:10:26: error: "Zero_Const" not declared in "Info"
a.ads:11:26: error: "Zero_Func" not declared in "Info"
gprbuild: *** compilation phase failed
```

As expected, compilation fails because of the limited visibility — as `Zero_Const` and `Zero_Func` from the `Info` package are not visible in the private part of `A`. (Of course, if we revert to full visibility by simply removing the `limited` keyword from the example, the code compiles just fine.)

27.1.5 Visibility

In the previous sections, we already discussed visibility from various angles. However, it can be interesting to recapitulate this information with the help of diagrams that illustrate the different parts of a package and its relation with other units.

Automatic visibility

First, let's consider we have a package `A`, its children (`A.G` and `A.H`), and the grandchild `A.G.T`. As we've seen before, information of a parent package is automatically visible in its children. The following diagrams illustrates this:

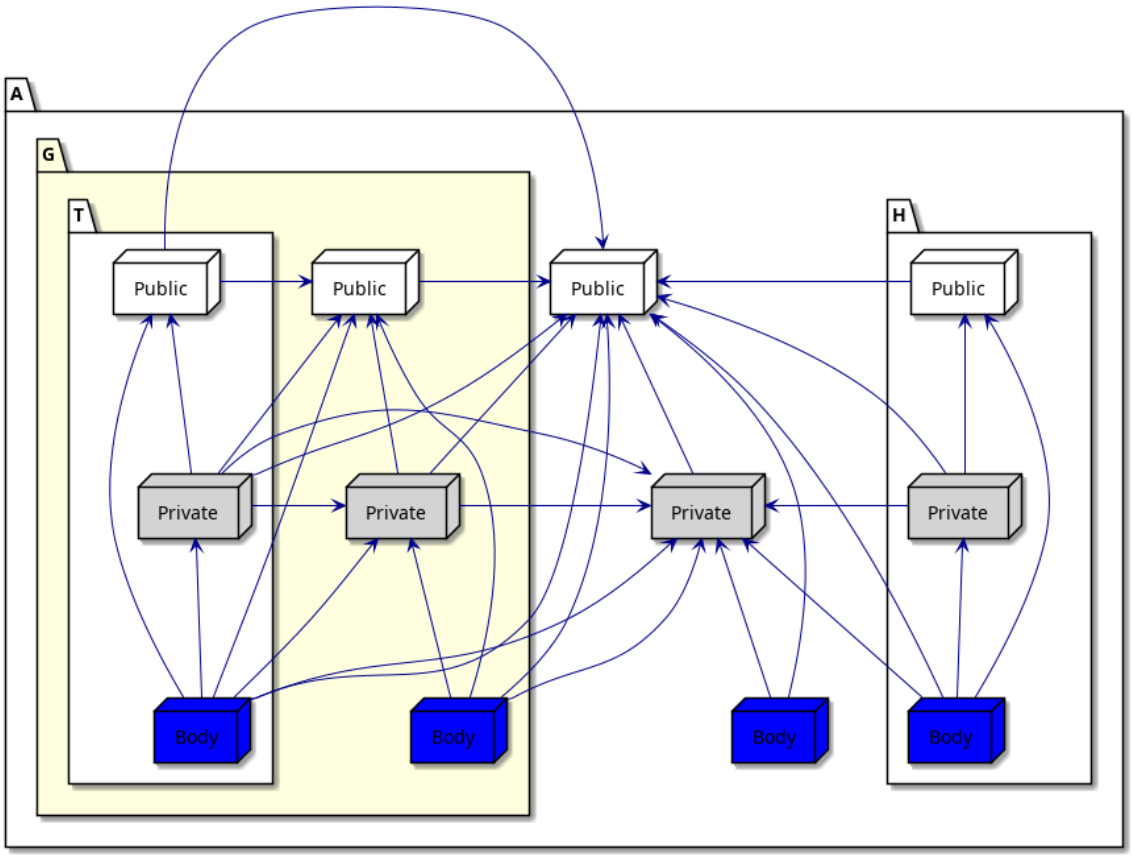

Because of this automatic visibility, many with clauses would be redundant in child packages. For example, we don't have to write `with A; package A.G is`, since the specification of package `A` is already visible in its child packages.

If we focus on package `A.G` (highlighted in the figure above), we see that it only has automatic visibility to its parent `A`, but not its child `A.G.T`. Also, it doesn't have visibility to its sibling `A.H`.

With clauses and visibility

In the rest of this section, we discuss all the situations where using with clauses is necessary to access the information of a package. Let's consider this example where we refer to a package B in the specification of a package A (using `with` B):

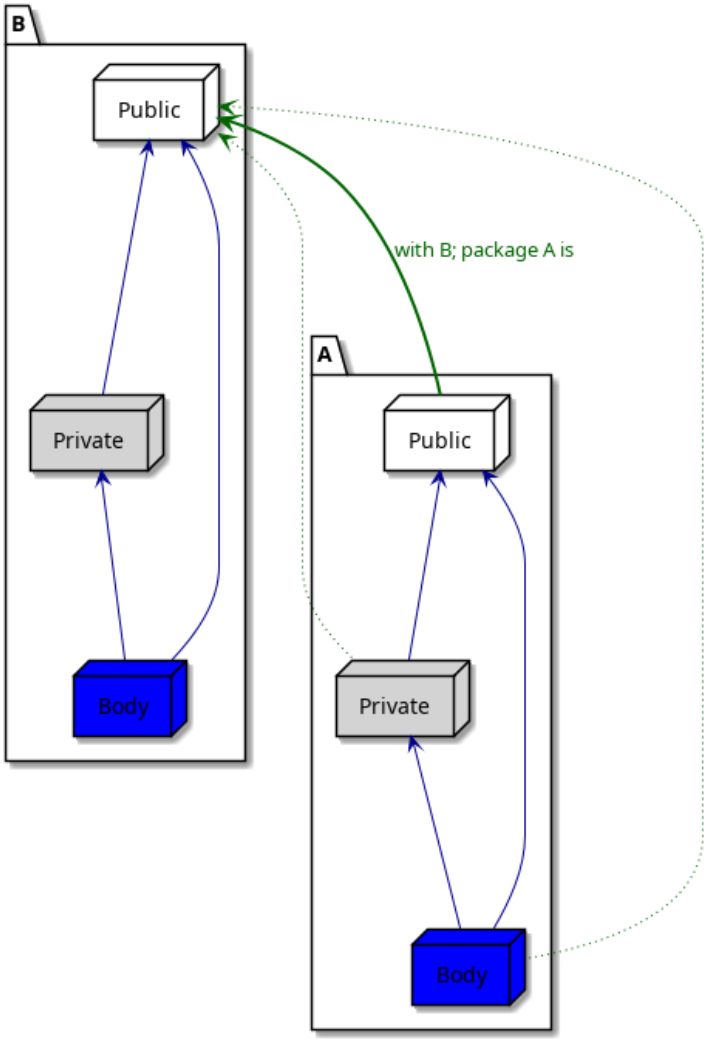

As we already know, the information from the public part of package B is visible in the public part of package A. In addition to that, it's also visible in the private part and in the body of package A. This is indicated by the dotted green arrows in the figure above.

Now, let's see the case where we refer to package B in the private part of package A (using `private with` B):

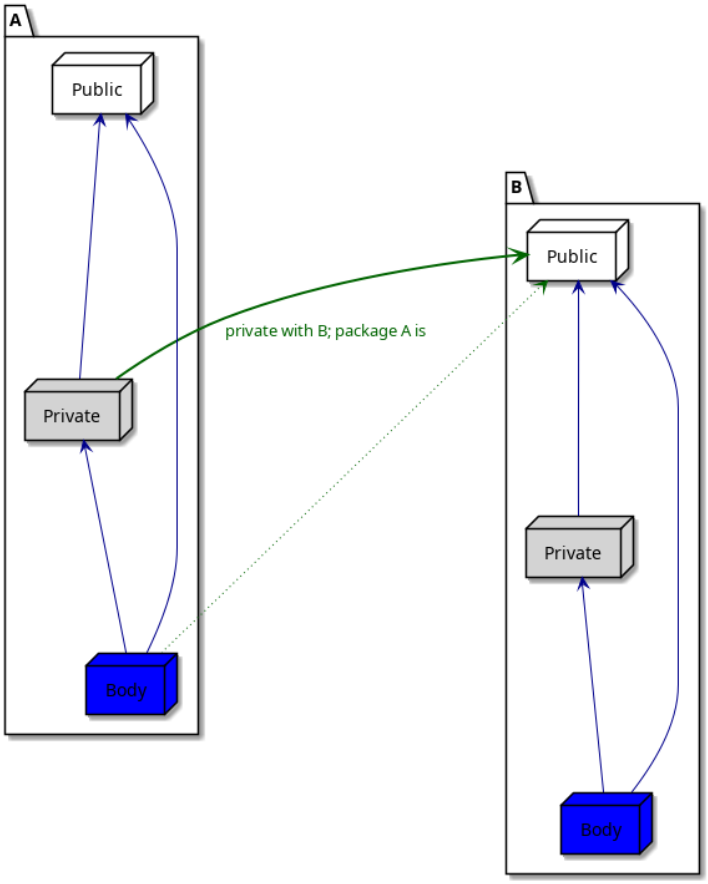

Here, the information is visible in the private part of package A, as well as in its body. Finally, let's see the case where we refer to package B in the body of package A:

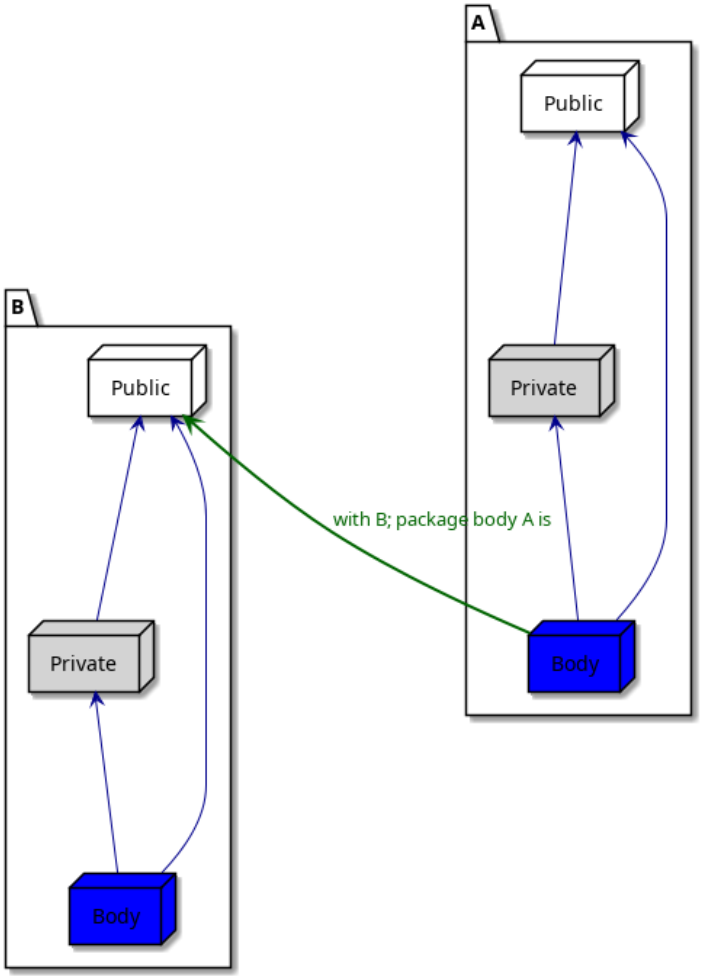

Here, the information is only visible in the body of package A.

Circular dependency

Let's return to package A and its descendants. As we've seen in previous sections, we cannot refer to a child package in the specification of its parent package because that would constitute circular dependency. (For example, we cannot write `with A.G; package A is`.) This situation — which causes a compilation error — is indicated by the red arrows in the figure below:

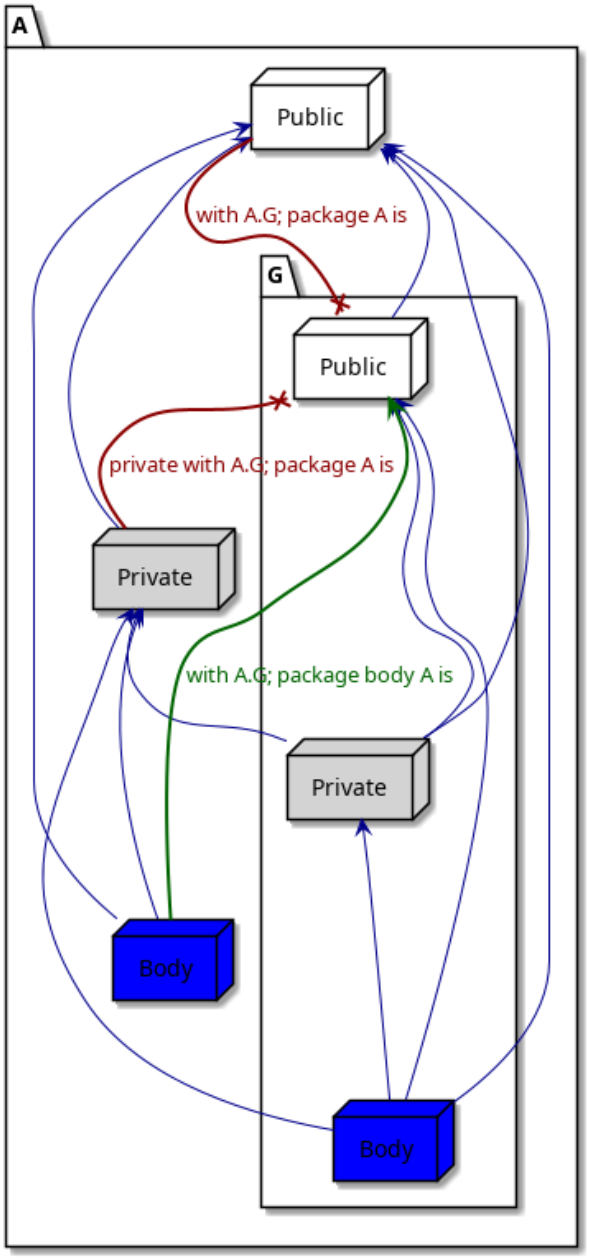

Note that referring to the child package `A.G` in the body of its parent is perfectly fine.

Private packages

The previous examples of this section only showed public packages. As we've seen before, we cannot refer to private packages outside of a package hierarchy, as we can see in the following example where we try to refer to package `A` and its descendants in the `Test` procedure:

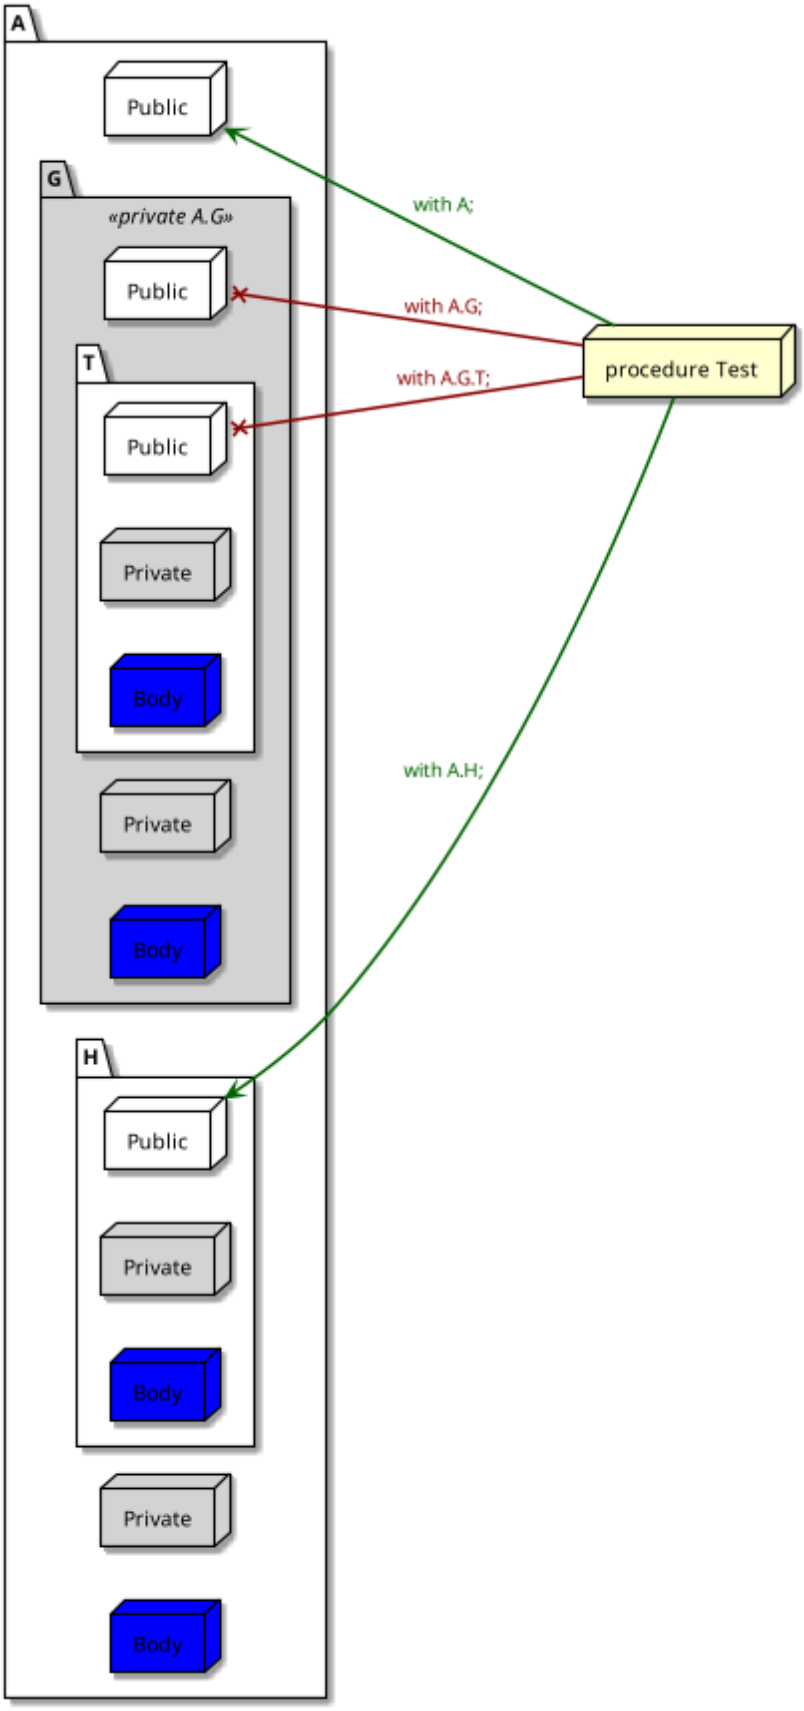

As indicated by the red arrows, we cannot refer to the private child packages of A in the Test procedure, only the public child packages. Within the package hierarchy itself, we

cannot refer to the private package `A.G` in public sibling packages. For example:

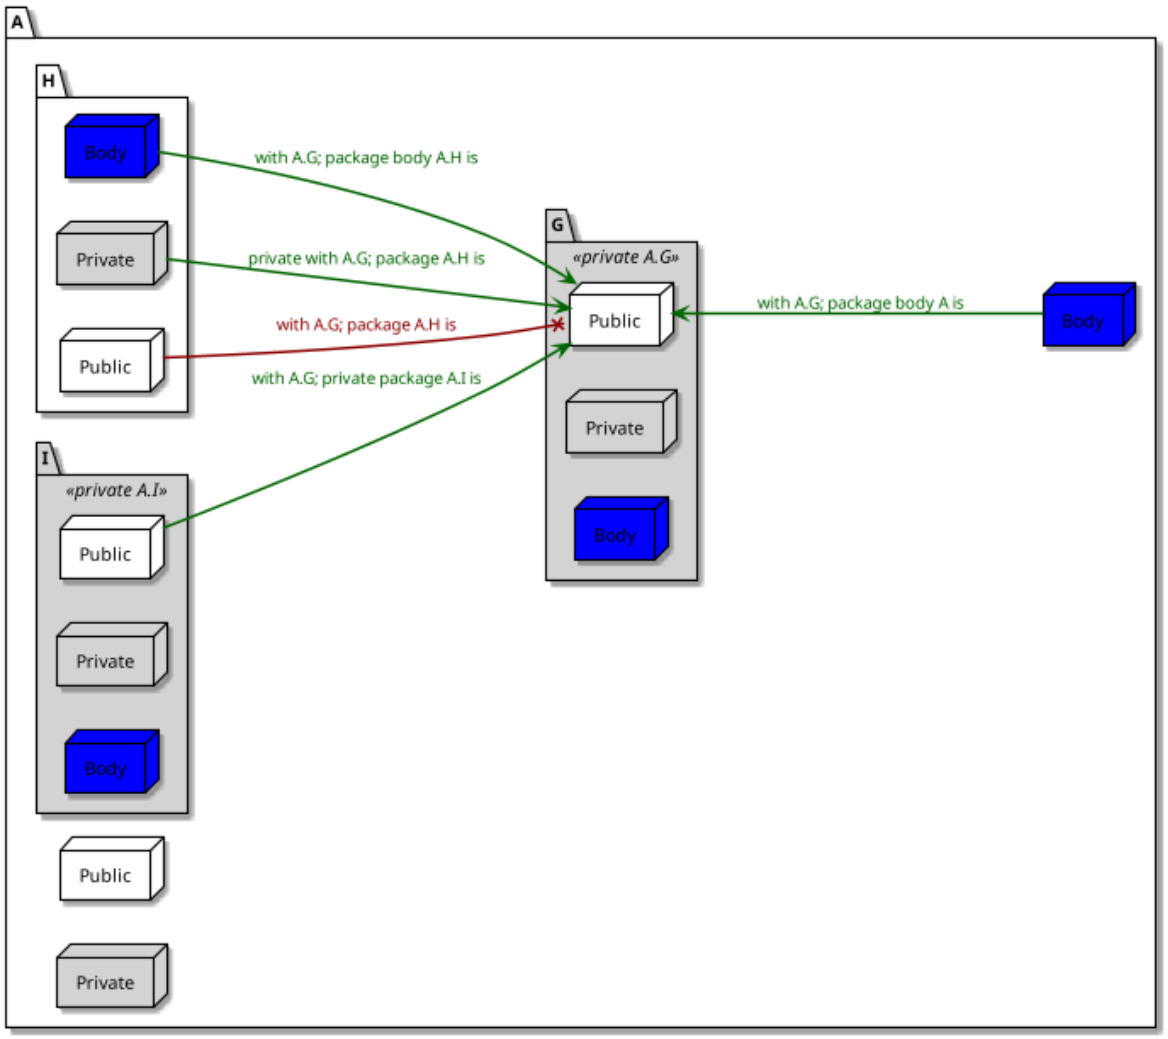

Here, we cannot refer to the private package `A.G` in the public package `A.H` — as indicated by the red arrow. However, we can refer to the private package `A.G` in other private packages, such as `A.I` — as indicated by the green arrows.

27.1.6 Use type clause

Back in the *Introduction to Ada course* (page 37), we saw that use clauses provide direct visibility — in the scope where they're used — to the content of a package's visible part.

For example, consider this simple procedure:

Listing 63: display_message.adb

```
with Ada.Text_IO;

procedure Display_Message is
begin
   Ada.Text_IO.Put_Line ("Hello World!");
end Display_Message;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Use_Type_Clause.No_Use_Clause
MD5: 4c6ff19809c13ebd2fdfda482914e5f8
```

Runtime output

```
Hello World!
```

By adding `use Ada.Text_IO` to this code, we make the visible part of the `Ada.Text_IO` package directly visible in the scope of the `Display_Message` procedure, so we can now just write `Put_Line` instead of `Ada.Text_IO.Put_Line`:

Listing 64: display_message.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  procedure Display_Message is
4  begin
5     Put_Line ("Hello World!");
6  end Display_Message;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Use_Type_Clause.Use_Clause
MD5: b105a777a1afd79008f8580cda432cfe
```

Runtime output

```
Hello World!
```

In this section, we discuss another example of use clauses. In addition, we introduce two specific forms of use clauses: `use type` and `use all type`.

In the Ada Reference Manual

- 8.4 Use Clauses[234]

Another use clause example

Let's now consider a simple package called `Points`, which contains the declaration of the `Point` type and two primitive: an `Init` function and an addition operator.

Listing 65: points.ads

```
1  package Points is
2
3     type Point is private;
4
5     function Init return Point;
6
7     function "+" (P : Point;
8                   I : Integer) return Point;
9
10 private
11
12    type Point is record
13       X, Y : Integer;
14    end record;
15
```

(continues on next page)

[234] http://www.ada-auth.org/standards/22rm/html/RM-8-4.html

(continued from previous page)

```
16    function Init return Point is (0, 0);
17
18    function "+" (P : Point;
19                  I : Integer) return Point is
20      (P.X + I, P.Y + I);
21
22 end Points;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Use_Type_Clause.Use_Type_Clause
MD5: 1a43740d7231a3cc497e778866a12c55
```

We can implement a simple procedure that makes use of this package:

Listing 66: show_point.adb

```
1 with Points; use Points;
2
3 procedure Show_Point is
4    P : Point;
5 begin
6    P := Init;
7    P := P + 1;
8 end Show_Point;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Use_Type_Clause.Use_Type_Clause
MD5: f5d44dd1fee8cf4d1a7e730f9a7c64cc
```

Here, we have a use clause, so we have direct visibility to the content of `Points`'s visible part.

Visibility and Readability

In certain situations, however, we might want to avoid the use clause. If that's the case, we can rewrite the previous implementation by removing the use clause and specifying the `Points` package in the prefixed form:

Listing 67: show_point.adb

```
1 with Points;
2
3 procedure Show_Point is
4    P : Points.Point;
5 begin
6    P := Points.Init;
7    P := Points."+" (P, 1);
8 end Show_Point;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Use_Type_Clause.Use_Type_Clause
MD5: ca896b456a90c19b29ec4f262144c131
```

Although this code is correct, it might be difficult to read, as we have to specify the package whenever we're referring to a type or a subprogram from that package. Even worse: we now have to write operators in the prefixed form — such as `Points."+" (P, 1)`.

use type

As a compromise, we can have direct visibility to the operators of a certain type. We do this by using a use clause in the form `use type`. This allows us to simplify the previous example:

Listing 68: show_point.adb

```
with Points;

procedure Show_Point is
   use type Points.Point;

   P : Points.Point;
begin
   P := Points.Init;
   P := P + 1;
end Show_Point;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Use_Type_Clause.Use_Type_Clause
MD5: a9527276c27a67be8b5a59efcf6e5cfd
```

Note that `use type` just gives us direct visibility to the operators of a certain type, but not other primitives. For this reason, we still have to write `Points.Init` in the code example.

use all type

If we want to have direct visibility to all primitives of a certain type (and not just its operators), we need to write a use clause in the form `use all type`. This allows us to simplify the previous example even further:

Listing 69: show_point.adb

```
with Points;

procedure Show_Point is
   use all type Points.Point;

   P : Points.Point;
begin
   P := Init;
   P := P + 1;
end Show_Point;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Use_Type_Clause.Use_Type_Clause
MD5: 4a8f6edd4e1811c4e8acb24393690282
```

Now, we've removed the prefix from all operations on the P variable.

27.1.7 Use clauses and naming conflicts

Visibility issues may arise when we have multiple use clauses. For instance, we might have types with the same name declared in multiple packages. This constitutes a naming conflict; in this case, the types become hidden — so they're not directly visible anymore, even if we have a use clause.

In the Ada Reference Manual

- 8.4 Use Clauses[235]

Code example

Let's start with a code example. First, we declare and implement a generic procedure that shows the value of a Complex object:

Listing 70: show_any_complex.ads

```
with Ada.Numerics.Generic_Complex_Types;

generic
   with package Complex_Types is new
     Ada.Numerics.Generic_Complex_Types (<>);
procedure Show_Any_Complex
  (Msg : String;
   Val : Complex_Types.Complex);
```

Listing 71: show_any_complex.adb

```
with Ada.Text_IO;
with Ada.Text_IO.Complex_IO;

procedure Show_Any_Complex
  (Msg : String;
   Val : Complex_Types.Complex)
is
   package Complex_Float_Types_IO is new
     Ada.Text_IO.Complex_IO (Complex_Types);
   use Complex_Float_Types_IO;

   use Ada.Text_IO;
begin
   Put (Msg & " ");
   Put (Val);
   New_Line;
end Show_Any_Complex;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Use_Clause_Naming_Conflicts.
 ↪Use_Type_Clause_Complex_Types
MD5: 2527291906d3a600eecd6d36e4359c1a
```

Then, we implement a test procedure where we declare the Complex_Float_Types package as an instance of the Generic_Complex_Types package:

Listing 72: show_use.adb

```
with Ada.Numerics; use Ada.Numerics;

with Ada.Numerics.Generic_Complex_Types;

with Show_Any_Complex;

procedure Show_Use is
```

(continues on next page)

[235] http://www.ada-auth.org/standards/22rm/html/RM-8-4.html

(continued from previous page)

```
8     package Complex_Float_Types is new
9       Ada.Numerics.Generic_Complex_Types
10        (Real => Float);
11    use Complex_Float_Types;
12
13    procedure Show_Complex_Float is new
14      Show_Any_Complex (Complex_Float_Types);
15
16    C, D, X : Complex;
17 begin
18    C := Compose_From_Polar (3.0, Pi / 2.0);
19    D := Compose_From_Polar (5.0, Pi / 2.0);
20    X := C + D;
21
22    Show_Complex_Float ("C:", C);
23    Show_Complex_Float ("D:", D);
24    Show_Complex_Float ("X:", X);
25 end Show_Use;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Use_Clause_Naming_Conflicts.
 ↪Use_Type_Clause_Complex_Types
MD5: cc2a612c9884539f33154680854a4c82
```

Runtime output

```
C: (-1.31134E-07, 3.00000E+00)
D: (-2.18557E-07, 5.00000E+00)
X: (-3.49691E-07, 8.00000E+00)
```

In this example, we declare variables of the `Complex` type, initialize them and use them in operations. Note that we have direct visibility to the package instance because we've added a simple use clause after the package instantiation — see `use Complex_Float_Types` in the example.

Naming conflict

Now, let's add the declaration of the `Complex_Long_Float_Types` package — a second instantiation of the `Generic_Complex_Types` package — to the code example:

Listing 73: show_use.adb

```
1  with Ada.Numerics; use Ada.Numerics;
2
3  with Ada.Numerics.Generic_Complex_Types;
4
5  with Show_Any_Complex;
6
7  procedure Show_Use is
8     package Complex_Float_Types is new
9       Ada.Numerics.Generic_Complex_Types
10        (Real => Float);
11    use Complex_Float_Types;
12
13    package Complex_Long_Float_Types is new
14      Ada.Numerics.Generic_Complex_Types
15        (Real => Long_Float);
16    use Complex_Long_Float_Types;
17
```

(continues on next page)

(continued from previous page)

```
18    procedure Show_Complex_Float is new
19      Show_Any_Complex (Complex_Float_Types);
20
21    C, D, X : Complex;
22    --        ^ ERROR: type is hidden!
23 begin
24    C := Compose_From_Polar (3.0, Pi / 2.0);
25    D := Compose_From_Polar (5.0, Pi / 2.0);
26    X := C + D;
27
28    Show_Complex_Float ("C:", C);
29    Show_Complex_Float ("D:", D);
30    Show_Complex_Float ("X:", X);
31 end Show_Use;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Use_Clause_Naming_Conflicts.
 ↪Use_Type_Clause_Complex_Types
MD5: 30b562e2f81ae62912ec4e067150d5cd
```

Build output

```
show_use.adb:21:14: error: "Complex" is not visible
show_use.adb:21:14: error: multiple use clauses cause hiding
show_use.adb:21:14: error: hidden declaration at a-ngcoty.ads:42, instance at line␣
 ↪13
show_use.adb:21:14: error: hidden declaration at a-ngcoty.ads:42, instance at line␣
 ↪8
gprbuild: *** compilation phase failed
```

This example doesn't compile because we have direct visibility to both Complex_Float_Types and Complex_Long_Float_Types packages, and both of them declare the Complex type. In this case, the type declaration becomes hidden, as the compiler cannot decide which declaration of Complex it should take.

Circumventing naming conflicts

As we know, a simple fix for this compilation error is to add the package prefix in the variable declaration:

Listing 74: show_use.adb

```
1  with Ada.Numerics; use Ada.Numerics;
2
3  with Ada.Numerics.Generic_Complex_Types;
4
5  with Show_Any_Complex;
6
7  procedure Show_Use is
8     package Complex_Float_Types is new
9       Ada.Numerics.Generic_Complex_Types
10        (Real => Float);
11    use Complex_Float_Types;
12
13    package Complex_Long_Float_Types is new
14      Ada.Numerics.Generic_Complex_Types
15        (Real => Long_Float);
16    use Complex_Long_Float_Types;
17
```

(continues on next page)

(continued from previous page)

```
   procedure Show_Complex_Float is new
     Show_Any_Complex (Complex_Float_Types);

   C, D, X : Complex_Float_Types.Complex;
   --        ^ SOLVED: package is now specified.
begin
   C := Compose_From_Polar (3.0, Pi / 2.0);
   D := Compose_From_Polar (5.0, Pi / 2.0);
   X := C + D;

   Show_Complex_Float ("C:", C);
   Show_Complex_Float ("D:", D);
   Show_Complex_Float ("X:", X);
end Show_Use;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Use_Clause_Naming_Conflicts.
 ↪Use_Type_Clause_Complex_Types
MD5: 0b3285364ea0188a678db2fc406741b8
```

Runtime output

```
C: (-1.31134E-07, 3.00000E+00)
D: (-2.18557E-07, 5.00000E+00)
X: (-3.49691E-07, 8.00000E+00)
```

Another possibility is to write a use clause in the form **use** `all` **type**:

Listing 75: show_use.adb

```
with Ada.Numerics; use Ada.Numerics;

with Ada.Numerics.Generic_Complex_Types;

with Show_Any_Complex;

procedure Show_Use is
   package Complex_Float_Types is new
     Ada.Numerics.Generic_Complex_Types
       (Real => Float);
   use all type Complex_Float_Types.Complex;

   package Complex_Long_Float_Types is new
     Ada.Numerics.Generic_Complex_Types
       (Real => Long_Float);
   use all type Complex_Long_Float_Types.Complex;

   procedure Show_Complex_Float is new
     Show_Any_Complex (Complex_Float_Types);

   C, D, X : Complex_Float_Types.Complex;
begin
   C := Compose_From_Polar (3.0, Pi / 2.0);
   D := Compose_From_Polar (5.0, Pi / 2.0);
   X := C + D;

   Show_Complex_Float ("C:", C);
   Show_Complex_Float ("D:", D);
   Show_Complex_Float ("X:", X);
end Show_Use;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Use_Clause_Naming_Conflicts.
 ↪Use_Type_Clause_Complex_Types
MD5: 90333ff41e25afb1399f7f94f7e2b566
```

Runtime output

```
C: (-1.31134E-07, 3.00000E+00)
D: (-2.18557E-07, 5.00000E+00)
X: (-3.49691E-07, 8.00000E+00)
```

For the sake of completeness, let's declare and use variables of both Complex types:

Listing 76: show_use.adb

```
with Ada.Numerics; use Ada.Numerics;

with Ada.Numerics.Generic_Complex_Types;

with Show_Any_Complex;

procedure Show_Use is
   package Complex_Float_Types is new
     Ada.Numerics.Generic_Complex_Types
       (Real => Float);
   use all type Complex_Float_Types.Complex;

   package Complex_Long_Float_Types is new
     Ada.Numerics.Generic_Complex_Types
       (Real => Long_Float);
   use all type Complex_Long_Float_Types.Complex;

   procedure Show_Complex_Float is new
     Show_Any_Complex (Complex_Float_Types);

   procedure Show_Complex_Long_Float is new
     Show_Any_Complex (Complex_Long_Float_Types);

   C, D, X : Complex_Float_Types.Complex;
   E, F, Y : Complex_Long_Float_Types.Complex;
begin
   C := Compose_From_Polar (3.0, Pi / 2.0);
   D := Compose_From_Polar (5.0, Pi / 2.0);
   X := C + D;

   Show_Complex_Float ("C:", C);
   Show_Complex_Float ("D:", D);
   Show_Complex_Float ("X:", X);

   E := Compose_From_Polar (3.0, Pi / 2.0);
   F := Compose_From_Polar (5.0, Pi / 2.0);
   Y := E + F;

   Show_Complex_Long_Float ("E:", E);
   Show_Complex_Long_Float ("F:", F);
   Show_Complex_Long_Float ("Y:", Y);
end Show_Use;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Packages.Use_Clause_Naming_Conflicts.
 ↪Use_Type_Clause_Complex_Types
```

(continues on next page)

(continued from previous page)

```
MD5: 48f31250116f107d3143703debb3107d
```

Runtime output

```
C: (-1.31134E-07, 3.00000E+00)
D: (-2.18557E-07, 5.00000E+00)
X: (-3.49691E-07, 8.00000E+00)
E: ( 1.83697019872103E-16, 3.00000000000000E+00)
F: ( 3.06161699786838E-16, 5.00000000000000E+00)
Y: ( 4.89858719658941E-16, 8.00000000000000E+00)
```

As expected, the code compiles correctly.

27.2 Subprograms and Modularity

27.2.1 Private subprograms

We've seen *previously* (page 806) that we can declare private packages. Because packages and subprograms can both be library units, we can declare private subprograms as well. We do this by using the **private** keyword. For example:

Listing 77: test.ads

```
1 private procedure Test;
```

Listing 78: test.adb

```
1 procedure Test is
2 begin
3    null;
4 end Test;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Subprograms_Modularity.Private_
 ↪Subprograms.Private_Test_Procedure
MD5: 2ea1770a5fd5dee40f015b9d33d2f309
```

Such a subprogram as the one above isn't really useful. For example, we cannot write a with clause that refers to the Test procedure, as it's not visible anywhere:

Listing 79: show_test.adb

```
1 with Test;
2
3 procedure Show_Test is
4 begin
5    Test;
6 end Show_Test;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Subprograms_Modularity.Private_
 ↪Subprograms.Private_Test_Procedure
MD5: 0702378a034f65a69a4c5b5258f7b32e
```

Build output

```
show_test.adb:1:06: error: current unit must also be private descendant of
 ↪"Standard"
gprbuild: *** compilation phase failed
```

As expected, since Test is private, we get a compilation error because this procedure cannot be referenced in the Show_Test procedure.

In the Ada Reference Manual

- 10.1.1 Compilation Units - Library Units[236]
- 10.1.2 Context Clauses - With Clauses[237]

Private subprograms of a package

A more useful example is to declare private subprograms of a package. For example:

Listing 80: data_processing.ads

```
1  package Data_Processing is
2
3     type Data is private;
4
5     procedure Process (D : in out Data);
6
7  private
8
9      type Data is record
10        F : Float;
11     end record;
12
13 end Data_Processing;
```

Listing 81: data_processing.adb

```
1  with Data_Processing.Calculate;
2
3  package body Data_Processing is
4
5     procedure Process (D : in out Data) is
6     begin
7        Calculate (D);
8     end Process;
9
10 end Data_Processing;
```

Listing 82: data_processing-calculate.ads

```
1  private
2  procedure Data_Processing.Calculate
3    (D : in out Data);
```

Listing 83: data_processing-calculate.adb

```
1  procedure Data_Processing.Calculate
2    (D : in out Data)
```

(continues on next page)

[236] http://www.ada-auth.org/standards/22rm/html/RM-10-1-1.html
[237] http://www.ada-auth.org/standards/22rm/html/RM-10-1-2.html

(continued from previous page)

```
is
begin
   --  Dummy implementation...
   D.F := 0.0;
end Data_Processing.Calculate;
```

Listing 84: test_data_processing.adb

```
with Data_Processing; use Data_Processing;

procedure Test_Data_Processing is
   D : Data;
begin
   Process (D);
end Test_Data_Processing;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Subprograms_Modularity.Private_
 ↪Subprograms.Private_Package_Procedure
MD5: 0f6af1b02f37e011abac5b2a6dfc482d
```

In this example, we declare `Calculate` as a private procedure of the `Data_Processing` package. Therefore, it's visible in that package (but not in the `Test_Data_Processing` procedure). Also, in the `Calculate` procedure, we're able to initialize the private component `F` of the `D` object because the child subprogram has access to the private part of its parent package.

Private subprograms and private packages

We can also use private subprograms to test private packages. As we know, in most cases, we cannot access private packages in external clients — such as external subprograms. However, by declaring a subprogram private, we're allowed to access private packages. This can be very useful to create applications that we can use to test private packages. (Note that these applications must be library-level parameterless subprograms, because only those can be main programs.)

Let's see an example:

Listing 85: private_data_processing.ads

```
private package Private_Data_Processing is

   type Data is private;

   procedure Process (D : in out Data);

private

    type Data is record
       F : Float;
    end record;

end Private_Data_Processing;
```

Listing 86: private_data_processing.adb

```
package body Private_Data_Processing is

```

(continues on next page)

(continued from previous page)

```
   procedure Process (D : in out Data) is
   begin
      D.F := 0.0;
   end Process;

end Private_Data_Processing;
```

Listing 87: test_private_data_processing.ads

```
private procedure Test_Private_Data_Processing;
```

Listing 88: test_private_data_processing.adb

```
with Private_Data_Processing;
use  Private_Data_Processing;

procedure Test_Private_Data_Processing is
   D : Data;
begin
   Process (D);
end Test_Private_Data_Processing;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Subprograms_Modularity.Private_
 ↪Subprograms.Private_Subprogram_Private_Package
MD5: 3527e54f99eb2cb52317c987b499caaf
```

In this code example, we have the private **Private**_Data_Processing package. In order to test it, we implement the private procedure Test_Private_Data_Processing. The fact that this procedure is private allows us to use the **Private**_Data_Processing package as if it was a non-private package. We then use the private Test_Private_Data_Processing procedure as our main application, so we can run it to test application the private package.

Child subprograms of private packages

We could also implement the Test subprogram that we use to test a private package P as a child subprogram of that package. In other words, we could write a procedure P.Test and use it as our main application. The advantage here is that this allows us to access the private part of the parent package P in the test procedure.

Let's rewrite the Test_Private_Data_Processing procedure from the previous example as the child procedure **Private**_Data_Processing.Test:

Listing 89: private_data_processing.ads

```
private package Private_Data_Processing is

   type Data is private;

   procedure Process (D : in out Data);

private

    type Data is record
       F : Float;
    end record;

end Private_Data_Processing;
```

Listing 90: private_data_processing.adb

```
package body Private_Data_Processing is

   procedure Process (D : in out Data) is
   begin
      null;
   end Process;

end Private_Data_Processing;
```

Listing 91: private_data_processing-test.ads

```
procedure Private_Data_Processing.Test;
```

Listing 92: private_data_processing-test.adb

```
procedure Private_Data_Processing.Test is
   D : Data := (F => 0.0);
begin
   Process (D);
end Private_Data_Processing.Test;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Modular_Prog.Subprograms_Modularity.Private_
 ↪Subprograms.Private_Package_Child_Subprogram
MD5: 0726f5890a5b3847244d1ae08989e158
```

In this code example, we now implement the `Test` procedure as a child of the **`Private`**`_Data_Processing` package. In this procedure, we're able to initialize the private component `F` of the `D` object. As we know, this initialization of a private component wouldn't be possible if `Test` wasn't a child procedure. (For instance, writing such an initialization in the `Test_Private_Data_Processing` procedure from the previous code example would trigger a compilation error.)

CHAPTER

TWENTYEIGHT

RESOURCE MANAGEMENT

28.1 Access Types

We discussed access types back in the *Introduction to Ada course* (page 95). In this chapter, we discuss further details about access types and techniques when using them. Before we dig into details, however, we're going to make sure we understand the terminology.

28.1.1 Access types: Terminology

In this section, we discuss some of the terminology associated with access types. Usually, the terms used in Ada when discussing references and dynamic memory allocation are different than the ones you might encounter in other languages, so it's necessary you understand what each term means.

Access type, designated subtype and profile

The first term we encounter is (obviously) *access type*, which is a type that provides us access to an object or a subprogram. We declare access types by using the **access** keyword:

Listing 1: show_access_type_declaration.ads

```
1  package Show_Access_Type_Declaration is
2
3     --
4     --  Declaring access types:
5     --
6
7     --  Access-to-object type
8     type Integer_Access is access Integer;
9
10    --  Access-to-subprogram type
11    type Init_Integer_Access is access
12      function return Integer;
13
14 end Show_Access_Type_Declaration;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Terminology.Access_
 ↪Type_Declaration
MD5: 64e4e0847a73a9ed23e29e09798934de
```

Here, we're declaring two access types: the access-to-object type `Integer_Access` and the access-to-subprogram type `Init_Integer_Access`. (We discuss access-to-subprogram types *later on* (page 926)).

In the declaration of an access type, we always specify — after the **access** keyword — the kind of thing we want to designate. In the case of an access-to-object type declaration,

we declare a subtype we want to access, which is known as the *designated subtype* of an access type. In the case of an access-to-subprogram type declaration, the subprogram prototype is known as the *designated profile*.

In our previous code example, `Integer` is the designated subtype of the `Integer_Access` type, and `function return Integer` is the designated profile of the `Init_Integer_Access` type.

Important

In contrast to other programming languages, an access type is not a pointer, and it doesn't just indicate an address in memory. We discuss more about *addresses* (page 955) later on.

Access object and designated object

We use an access-to-object type by first declaring a variable (or constant) of an access type and then allocating an object. (This is actually just one way of using access types; we discuss other methods later in this chapter.) The actual variable or constant of an access type is called *access object*, while the object we allocate (via `new`) is the *designated object*.

For example:

Listing 2: show_simple_allocation.adb

```
procedure Show_Simple_Allocation is

   --  Access-to-object type
   type Integer_Access is access Integer;

   --  Access object
   I1 : Integer_Access;

begin
   I1 := new Integer;
   --    ^^^^^^^^^^^ allocating an object,
   --                which becomes the designated
   --                object for I1

end Show_Simple_Allocation;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Terminology.Simple_
 ↪Allocation
MD5: 32ca8cf523e19b25dabb55da6df1f18d
```

In this example, `I1` is an access object and the object allocated via `new Integer` is its designated object.

Access value and designated value

An access object and a designated (allocated) object, both store values. The value of an access object is the *access value* and the value of a designated object is the *designated value*. For example:

Listing 3: show_values.adb

```
procedure Show_Values is

   --  Access-to-object type
   type Integer_Access is access Integer;

   I1, I2, I3 : Integer_Access;

begin
   I1 := new Integer;
   I3 := new Integer;

   --  Copying the access value of I1 to I2
   I2 := I1;

   --  Copying the designated value of I1
   I3.all := I1.all;

end Show_Values;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Terminology.Values
MD5: a152ee813b8ed9fad985cf4e2c25d847
```

In this example, the assignment `I2 := I1` copies the access value of `I1` to `I2`. The assignment `I3.all := I1.all` copies `I1`'s designated value to `I3`'s designated object. (As we already know, `.all` is used to dereference an access object. We discuss this topic again *later in this chapter* (page 873).)

In the Ada Reference Manual

- 3.10 Access Types[238]

28.1.2 Access types: Allocation

Ada makes the distinction between pool-specific and general access types, as we'll discuss in this section. Before doing so, however, let's talk about memory allocation.

In general terms, memory can be allocated dynamically on the heap or statically on the stack. (Strictly speaking, both are dynamic allocations, in that they occur at run-time with amounts not previously specified.) For example:

Listing 4: show_simple_allocation.adb

```
procedure Show_Simple_Allocation is

   --  Declaring access type:
   type Integer_Access is access Integer;

   --  Declaring access object:
   A1 : Integer_Access;

begin
   --  Allocating an Integer object on the heap
   A1 := new Integer;

```

(continues on next page)

[238] http://www.ada-auth.org/standards/22rm/html/RM-3-10.html

(continued from previous page)

```
13    declare
14       --  Allocating an Integer object on the
15       --  stack
16       I : Integer;
17    begin
18       null;
19    end;
20
21 end Show_Simple_Allocation;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_Types_
 ↪Allocation.Simple_Allocation
MD5: 4144feb99e6e0b1a0749fce0b20370a1
```

When we allocate an object on the heap via **new**, the allocation happens in a memory pool that is associated with the access type. In our code example, there's a memory pool associated with the Integer_Access type, and each **new Integer** allocates a new integer object in that pool. Therefore, access types of this kind are called pool-specific access types. (We discuss *more about these types* (page 847) later.)

It is also possible to access objects that were allocated on the stack. To do that, however, we cannot use pool-specific access types because — as the name suggests — they're only allowed to access objects that were allocated in the specific pool associated with the type. Instead, we have to use general access types in this case:

Listing 5: show_general_access_type.adb

```
1  procedure Show_General_Access_Type is
2
3     --  Declaring general access type:
4     type Integer_Access is access all Integer;
5
6     --  Declaring access object:
7     A1 : Integer_Access;
8
9     --  Allocating an Integer object on the
10    --  stack:
11    I : aliased Integer;
12
13 begin
14    --  Getting access to an Integer object that
15    --  was allocated on the stack
16    A1 := I'Access;
17
18 end Show_General_Access_Type;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_Types_
 ↪Allocation.General_Access_Types
MD5: f166291ad1975396131775d0aff6ad9d
```

In this example, we declare the general access type Integer_Access and the access object A1. To initialize A1, we write I'Access to get access to an integer object I that was allocated on the stack. (For the moment, don't worry much about these details: we'll talk about general access types again when we introduce the topic of *aliased objects* (page 886) later on.)

For further reading...

Note that it is possible to use general access types to allocate objects on the heap:

Listing 6: show_simple_allocation.adb

```
1  procedure Show_Simple_Allocation is
2
3     --  Declaring general access type:
4     type Integer_Access is access all Integer;
5
6     --  Declaring access object:
7     A1 : Integer_Access;
8
9  begin
10    --
11    --  Allocating an Integer object on the heap
12    --  and initializing an access object of
13    --  the general access type Integer_Access.
14    --
15    A1 := new Integer;
16
17 end Show_Simple_Allocation;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_Types_
 ↪Allocation.General_Access_Types_Heap
MD5: 3fa5efeac2f66794f066ab29f26bf7ca
```

Here, we're using a general access type `Integer_Access`, but allocating an integer object on the heap.

Important

In many code examples, we have used the **`Integer`** type as the designated subtype of the access types — by writing **`access Integer`**. Although we have used this specific scalar type, we aren't really limited to those types. In fact, we can use *any type* as the designated subtype, including user-defined types, composite types, task types and protected types.

In the Ada Reference Manual

- 3.10 Access Types[239]

Pool-specific access types

We've already discussed many aspects about pool-specific access types. In this section, we recapitulate some of those aspects, and discuss some new details that haven't seen yet.

As we know, we cannot directly assign an object `Distance_Miles` of type `Miles` to an object `Distance_Meters` of type `Meters`, even if both share a common **`Float`** type ancestor. The assignment is only possible if we perform a type conversion from `Miles` to `Meters`, or vice-versa — e.g.: `Distance_Meters := Meters (Distance_Miles) * Miles_To_Meters_Factor`.

[239] http://www.ada-auth.org/standards/22rm/html/RM-3-10.html

Similarly, in the case of pool-specific access types, a direct assignment between objects of different access types isn't possible. However, even if both access types have the same designated subtype (let's say, they are both declared using **is access Integer**), it's still not possible to perform a type conversion between those access types. The only situation when an access type conversion is allowed is when both types have a common ancestor.

Let's see an example:

Listing 7: show_simple_allocation.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Simple_Allocation is

   --  Declaring pool-specific access type:
   type Integer_Access_1 is access Integer;
   type Integer_Access_2 is access Integer;
   type Integer_Access_2B is new Integer_Access_2;

   --  Declaring access object:
   A1  : Integer_Access_1;
   A2  : Integer_Access_2;
   A2B : Integer_Access_2B;

begin
   A1 := new Integer;
   Put_Line ("A1  : " & A1'Image);
   Put_Line ("Pool: " & A1'Storage_Pool'Image);

   A2 := new Integer;
   Put_Line ("A2:   " & A2'Image);
   Put_Line ("Pool: " & A2'Storage_Pool'Image);

   --  ERROR: Cannot directly assign access values
   --         for objects of unrelated access
   --         types; also, cannot convert between
   --         these types.
   --
   --  A1 := A2;
   --  A1 := Integer_Access_1 (A2);

   A2B := Integer_Access_2B (A2);
   Put_Line ("A2B:  " & A2B'Image);
   Put_Line ("Pool: " & A2B'Storage_Pool'Image);

end Show_Simple_Allocation;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_Types_
 ↪Allocation.Pool_Specific_Access_Types
MD5: 80d0e9764917fa8352b6616e3a8425de
```

Runtime output

```
A1  : (access 591e7fc7e3d0)
Pool: SYSTEM.POOL_GLOBAL.UNBOUNDED_NO_RECLAIM_POOL'{SYSTEM.STORAGE_POOLS.TROOT_
 ↪STORAGE_POOLC object}
A2:   (access 591e7fc7e490)
Pool: SYSTEM.POOL_GLOBAL.UNBOUNDED_NO_RECLAIM_POOL'{SYSTEM.STORAGE_POOLS.TROOT_
 ↪STORAGE_POOLC object}
A2B:  (access 591e7fc7e490)
```

(continues on next page)

(continued from previous page)

```
Pool: SYSTEM.POOL_GLOBAL.UNBOUNDED_NO_RECLAIM_POOL'{SYSTEM.STORAGE_POOLS.TROOT_
↪STORAGE_POOLC object}
```

In this example, we declare three access types: `Integer_Access_1`, `Integer_Access_2` and `Integer_Access_2B`. Also, the `Integer_Access_2B` type is derived from the `Integer_Access_2` type. Therefore, we can convert an object of `Integer_Access_2` type to the `Integer_Access_2B` type — we do this in the `A2B := Integer_Access_2B (A2)` assignment. However, we cannot directly assign to or convert between unrelated types such as `Integer_Access_1` and `Integer_Access_2`. (We would get a compilation error if we included the `A1 := A2` or the `A1 := Integer_Access_1 (A2)` assignment.)

Important

Remember that:

- As mentioned in the *Introduction to Ada course* (page 97):
  - an access type can be unconstrained, but the actual object allocation must be constrained;
  - we can use a *qualified expression* (page 336) to allocate an object.
- We can use the `Storage_Size` attribute to limit the size of the memory pool associated with an access type, as discussed previously in the *section about storage size* (page 356).
- When running out of memory while allocating via **new**, we get a `Storage_Error` exception because of the *storage check* (page 784).

For example:

Listing 8: show_array_allocation.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Array_Allocation is

   --  Unconstrained array type:
   type Integer_Array is
     array (Positive range <>) of Integer;

   --  Access type with unconstrained
   --  designated subtype and limited storage
   --  size.
   type Integer_Array_Access is
     access Integer_Array
       with Storage_Size => 128;

   --  An access object:
   A1 : Integer_Array_Access;

   procedure Show_Info
     (IAA : Integer_Array_Access) is
   begin
      Put_Line ("Allocated: " & IAA'Image);
      Put_Line ("Length:    "
                & IAA.all'Length'Image);
      Put_Line ("Values:    "
                & IAA.all'Image);
   end Show_Info;

begin
```

```
   --  Allocating an integer array with
   --  constrained range on the heap:
   A1 := new Integer_Array (1 .. 3);
   A1.all := [others => 42];
   Show_Info (A1);

   --  Allocating an integer array on the
   --  heap using a qualified expression:
   A1 := new Integer_Array'(5, 10);
   Show_Info (A1);

   --  A third allocation fails at run time
   --  because of the constrained storage
   --  size:
   A1 := new Integer_Array (1 .. 100);
   Show_Info (A1);

exception
    when Storage_Error =>
       Put_Line ("Out of memory!");

end Show_Array_Allocation;
```

Multiple allocation

Up to now, we have seen examples of allocating a single object on the heap. It's possible to allocate multiple objects *at once* as well — i.e. syntactic sugar is available to simplify the code that performs this allocation. For example:

Listing 9: show_access_array_allocation.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Access_Array_Allocation is

   type Integer_Access is access Integer;

   type Integer_Access_Array is
     array (Positive range <>) of Integer_Access;

   --  An array of access objects:
   Arr : Integer_Access_Array (1 .. 10);

begin
   --
   --  Allocating 10 access objects and
   --  initializing the corresponding designated
   --  object with zero:
   --
   Arr := (others => new Integer'(0));

   --  Same as:
   for I in Arr'Range loop
      Arr (I) := new Integer'(0);
   end loop;

   Put_Line ("Arr: " & Arr'Image);

   Put_Line ("Arr (designated values): ");
   for E of Arr loop
```

(continues on next page)

(continued from previous page)

```
      Put (E.all'Image);
   end loop;

end Show_Access_Array_Allocation;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_Types_
 ↪Allocation.Integer_Access_Array
MD5: 4afc9358c8aa9426a97ca8932c75d932
```

Runtime output

```
Arr:
[(access 5765481c2510), (access 5765481c2530), (access 5765481c2550),
 (access 5765481c2570), (access 5765481c2590), (access 5765481c25b0),
 (access 5765481c25d0), (access 5765481c25f0), (access 5765481c2610),
 (access 5765481c2630)]
Arr (designated values):
 0 0 0 0 0 0 0 0 0 0
```

In this example, we have the access type `Integer_Access` and an array type of this access type (`Integer_Access_Array`). We also declare an array `Arr` of `Integer_Access_Array` type. This means that each component of `Arr` is an access object. We allocate all ten components of the `Arr` array by simply writing `Arr := (others => new Integer)`. This *array aggregate* (page 527) is syntactic sugar for a loop over `Arr` that allocates each component. (Note that, by writing `Arr := (others => new Integer'(0))`, we're also initializing the designated objects with zero.)

Let's see another code example, this time with task types:

Listing 10: workers.ads

```
package Workers is

   task type Worker is
      entry Start (Id : Positive);
      entry Stop;
   end Worker;

   type Worker_Access is access Worker;

   type Worker_Array is
     array (Positive range <>) of Worker_Access;

end Workers;
```

Listing 11: workers.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Workers is

   task body Worker is
      Id : Positive;
   begin
      accept Start (Id : Positive) do
         Worker.Id := Id;
      end Start;
      Put_Line ("Started Worker #"
```

(continues on next page)

(continued from previous page)

```
                & Id'Image);

      accept Stop;

      Put_Line ("Stopped Worker #"
                & Id'Image);
   end Worker;

end Workers;
```

Listing 12: show_workers.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Workers; use Workers;

procedure Show_Workers is
   Worker_Arr : Worker_Array (1 .. 20);
begin
   --
   --  Allocating 20 workers at once:
   --
   Worker_Arr := (others => new Worker);

   for I in Worker_Arr'Range loop
      Worker_Arr (I).Start (I);
   end loop;

   Put_Line ("Some processing...");
   delay 1.0;

   for W of Worker_Arr loop
      W.Stop;
   end loop;

end Show_Workers;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_Types_
 ↪Allocation.Workers
MD5: d29e3d56585f8d9a63b805c680e5dc54
```

Runtime output

```
Started Worker # 1
Started Worker # 2
Started Worker # 3
Started Worker # 4
Started Worker # 5
Started Worker # 6
Started Worker # 7
Started Worker # 8
Started Worker # 9
Started Worker # 10
Started Worker # 11
Started Worker # 12
Started Worker # 13
Started Worker # 14
Started Worker # 15
Started Worker # 16
```

(continues on next page)

(continued from previous page)

```
Started Worker # 17
Started Worker # 18
Started Worker # 19
Started Worker # 20
Some processing...
Stopped Worker # 1
Stopped Worker # 2
Stopped Worker # 19
Stopped Worker # 13
Stopped Worker # 17
Stopped Worker # 18
Stopped Worker # 14
Stopped Worker # 20
Stopped Worker # 3
Stopped Worker # 16
Stopped Worker # 15
Stopped Worker # 10
Stopped Worker # 4
Stopped Worker # 8
Stopped Worker # 11
Stopped Worker # 7
Stopped Worker # 5
Stopped Worker # 9
Stopped Worker # 6
Stopped Worker # 12
```

In this example, we declare the task type `Worker`, the access type `Worker_Access` and an array of access to tasks `Worker_Array`. Using this approach, a task is only created when we allocate an individual component of an array of `Worker_Array` type. Thus, when we declare the `Worker_Arr` array in this example, we're only preparing a *container* of 20 workers, but we don't have any actual tasks yet. We bring the 20 tasks into existence by writing `Worker_Arr := (others => new Worker)`.

28.1.3 Discriminants as Access Values

We can use access types when declaring discriminants. Let's see an example:

Listing 13: custom_recs.ads

```
1  package Custom_Recs is
2
3     --  Declaring an access type:
4     type Integer_Access is access Integer;
5
6     --  Declaring a discriminant with this
7     --  access type:
8     type Rec (IA : Integer_Access) is record
9
10       I : Integer := IA.all;
11       --           ^^^^^^^^^
12       --  Setting I's default to use the
13       --  designated value of IA:
14    end record;
15
16    procedure Show (R : Rec);
17
18 end Custom_Recs;
```

Listing 14: custom_recs.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Custom_Recs is

   procedure Show (R : Rec) is
   begin
      Put_Line ("R.IA = "
                & Integer'Image (R.IA.all));
      Put_Line ("R.I  = "
                & Integer'Image (R.I));
   end Show;

end Custom_Recs;
```

Listing 15: show_discriminants_as_access_values.adb

```
with Custom_Recs; use Custom_Recs;

procedure Show_Discriminants_As_Access_Values is

   IA : constant Integer_Access :=
          new Integer'(10);
   R  : Rec (IA);

begin
   Show (R);

   IA.all := 20;
   R.I    := 30;
   Show (R);

   --  As expected, we cannot change the
   --  discriminant. The following line is
   --  triggers a compilation error:
   --
   --  R.IA := new Integer;

end Show_Discriminants_As_Access_Values;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Discriminants_As_
 ↪Access_Values.Discriminant_Access_Values
MD5: c7850acefd8e5227f4be654faed13055
```

Runtime output

```
R.IA =  10
R.I  =  10
R.IA =  20
R.I  =  30
```

In the Custom_Recs package from this example, we declare the access type Integer_Access. We then use this type to declare the discriminant (IA) of the Rec type. In the Show_Discriminants_As_Access_Values procedure, we see that (as expected) we cannot change the discriminant of an object of Rec type: an assignment such as R.IA := new Integer would trigger a compilation error.

Note that we can use a default for the discriminant:

Listing 16: custom_recs.ads

```
package Custom_Recs is

   type Integer_Access is access Integer;

   type Rec (IA : Integer_Access
                  := new Integer'(0)) is
      --             ^^^^^^^^^^^^^^^^
      --              default value
   record
      I : Integer := IA.all;
   end record;

   procedure Show (R : Rec);

end Custom_Recs;
```

Listing 17: show_discriminants_as_access_values.adb

```
with Custom_Recs; use Custom_Recs;

procedure Show_Discriminants_As_Access_Values is

   R1 : Rec;
   --   ^^^
   --   no discriminant: use default

   R2 : Rec (new Integer'(20));
   --        ^^^^^^^^^^^^^^^^
   --        allocating an unnamed integer object

begin
   Show (R1);
   Show (R2);
end Show_Discriminants_As_Access_Values;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Discriminants_As_
 ↪Access_Values.Discriminant_Access_Values
MD5: 968cb88ed7e9e6958ab66fb6f5a7ce2d
```

Runtime output

```
R.IA =  0
R.I  =  0
R.IA =  20
R.I  =  20
```

Here, we've changed the declaration of the Rec type to allocate an integer object if the type's discriminant isn't provided — we can see this in the declaration of the R1 object in the Show_Discriminants_As_Access_Values procedure. Also, in this procedure, we're allocating an unnamed integer object in the declaration of R2.

In the Ada Reference Manual

- 3.10 Access Types[240]
- 3.7.1 Discriminant Constraints[241]

Unconstrained type as designated subtype

Notice that we were using a scalar type as the designated subtype of the `Integer_Access` type. We could have used an unconstrained type as well. In fact, this is often used for the sake of having the effect of an unconstrained discriminant type.

Let's see an example:

Listing 18: persons.ads

```
package Persons is

   --  Declaring an access type whose
   --  designated subtype is unconstrained:
   type String_Access is access String;

   --  Declaring a discriminant with this
   --  access type:
   type Person (Name : String_Access) is record
      Age : Integer;
   end record;

   procedure Show (P : Person);

end Persons;
```

Listing 19: persons.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Persons is

   procedure Show (P : Person) is
   begin
      Put_Line ("Name = "
                & P.Name.all);
      Put_Line ("Age  = "
                & Integer'Image (P.Age));
   end Show;

end Persons;
```

Listing 20: show_person.adb

```
with Persons; use Persons;

procedure Show_Person is
   P : Person (new String'("John"));
begin
   P.Age := 30;
   Show (P);
end Show_Person;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Discriminants_As_
 ↪Access_Values.Persons
MD5: 9b1109d076b6f06632c8685a41616210
```

Runtime output

[240] http://www.ada-auth.org/standards/22rm/html/RM-3-10.html
[241] http://www.ada-auth.org/standards/22rm/html/RM-3-7-1.html

```
Name = John
Age  =  30
```

In this example, the discriminant of the Person type has an unconstrained designated type. In the Show_Person procedure, we declare the P object and specify the constraints of the allocated string object — in this case, a four-character string initialized with the name "John".

For further reading...

In the previous code example, we used an array — actually, a string — to demonstrate the advantage of using discriminants as access values, for we can use an unconstrained type as the designated subtype. In fact, as we discussed *earlier in another chapter* (page 463), we can only use discrete types (or access types) as discriminants. Therefore, you wouldn't be able to use a string, for example, directly as a discriminant without using access types:

Listing 21: persons.ads

```
1  package Persons is
2
3     --  ERROR: Declaring a discriminant with an
4     --         unconstrained type:
5     type Person (Name : String) is record
6        Age : Integer;
7     end record;
8
9  end Persons;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Discriminants_As_
 ↪Access_Values.Persons_Error
MD5: 4144852aaf95da62bc4781b1e8dc2717
```

Build output

```
persons.ads:5:24: error: discriminants must have a discrete or access type
gprbuild: *** compilation phase failed
```

As expected, compilation fails for this code because the discriminant of the Person type is indefinite.

However, the advantage of discriminants as access values isn't restricted to being able to use unconstrained types such as arrays: we could really use any type as the designated subtype! In fact, we can generalized this to:

Listing 22: gen_custom_recs.ads

```
1  generic
2     type T (<>);  --  any type
3     type T_Access is access T;
4  package Gen_Custom_Recs is
5     --  Declare a type whose discriminant D can
6     --  access any type:
7     type T_Rec (D : T_Access) is null record;
8  end Gen_Custom_Recs;
```

Listing 23: custom_recs.ads

```
with Gen_Custom_Recs;

package Custom_Recs is

    type Incomp;
    --  Incomplete type declaration!

   type Incomp_Access is access Incomp;

   --  Instantiating package using
   --  incomplete type Incomp:
   package Inst is new
     Gen_Custom_Recs
       (T        => Incomp,
        T_Access => Incomp_Access);
   subtype Rec is Inst.T_Rec;

   --  At this point, Rec (Inst.T_Rec) uses
   --  an incomplete type as the designated
   --  subtype of its discriminant type

   procedure Show (R : Rec) is null;

   --  Now, we complete the Incomp type:
   type Incomp (B : Boolean := True) is private;

private
   --  Finally, we have the full view of the
   --  Incomp type:
   type Incomp (B : Boolean := True) is
     null record;

end Custom_Recs;
```

Listing 24: show_rec.adb

```
with Custom_Recs; use Custom_Recs;

procedure Show_Rec is
   R : Rec (new Incomp);
begin
   Show (R);
end Show_Rec;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Discriminants_As_
 ↪Access_Values.Generic_Access
MD5: c65510e8c6a7625cbd08aa9e68f05115
```

In the Gen_Custom_Recs package, we're using `type T (<>)` — which can be any type — for the designated subtype of the access type T_Access, which is the type of T_Rec's discriminant. In the Custom_Recs package, we use the incomplete type Incomp to instantiate the generic package. Only after the instantiation, we declare the complete type.

Later on, we'll discuss discriminants again when we look into *anonymous access discriminants* (page 973), which provide some advantages in terms of *accessibility rules* (page 894).

Whole object assignments

As expected, we cannot change the discriminant value in whole object assignments. If we do that, the `Constraint_Error` exception is raised at runtime:

Listing 25: show_person.adb

```
with Persons; use Persons;

procedure Show_Person is
   S1 : String_Access := new String'("John");
   S2 : String_Access := new String'("Mark");
   P : Person := (Name => S1,
                  Age  => 30);
begin
   P := (Name => S1, Age => 31);
   --            ^^ OK: we didn't change the
   --                   discriminant.
   Show (P);

   --  We can just repeat the discriminant:
   P := (Name => P.Name, Age => 32);
   --            ^^^^^^ OK: we didn't change the
   --                       discriminant.
   Show (P);

   --  Of course, we can change the string itself:
   S1.all := "Mark";
   Show (P);

   P := (Name => S2, Age => 40);
   --            ^^ ERROR: we changed the
   --                      discriminant!
   Show (P);
end Show_Person;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Discriminants_As_
 ↪Access_Values.Persons
MD5: 96f4742365eb6a07c377a5dec28b5767
```

Runtime output

```
Name = John
Age  =  31
Name = John
Age  =  32
Name = Mark
Age  =  32

raised CONSTRAINT_ERROR : show_person.adb:24 discriminant check failed
```

The first and the second assignments to P are OK because we didn't change the discriminant. However, the last assignment raises the `Constraint_Error` exception at runtime because we're changing the discriminant.

28.1.4 Parameters as Access Values

In addition to *using discriminants as access values* (page 853), we can use access types for subprogram formal parameters. For example, the N parameter of the Show procedure below has an access type:

Listing 26: names.ads

```
package Names is

   type Name is access String;

   procedure Show (N : Name);

end Names;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Parameters_As_
 ↪Access_Values.Names
MD5: 82ce94987dce9026aed54a0deb3cc548
```

This is the complete code example:

Listing 27: names.ads

```
package Names is

   type Name is access String;

   procedure Show (N : Name);

end Names;
```

Listing 28: names.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Names is

   procedure Show (N : Name) is
   begin
      Put_Line ("Name: " & N.all);
   end Show;

end Names;
```

Listing 29: show_names.adb

```
with Names; use Names;

procedure Show_Names is
   N : Name := new String'("John");
begin
   Show (N);
end Show_Names;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Parameters_As_
 ↪Access_Values.Names
MD5: 526baf1996b4a2970c3fa2e3485dcbad
```

Runtime output

```
Name: John
```

Note that in this example, the Show procedure is basically just displaying the string. Since the procedure isn't doing anything that justifies the need for an access type, we could have implemented it with a *simpler* type:

Listing 30: names.ads

```
1  package Names is
2
3     type Name is access String;
4
5     procedure Show (N : String);
6
7  end Names;
```

Listing 31: names.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  package body Names is
4
5     procedure Show (N : String) is
6     begin
7        Put_Line ("Name: " & N);
8     end Show;
9
10 end Names;
```

Listing 32: show_names.adb

```
1  with Names; use Names;
2
3  procedure Show_Names is
4     N : Name := new String'("John");
5  begin
6     Show (N.all);
7  end Show_Names;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Parameters_As_
 ↪Access_Values.Names_String
MD5: 097ec1ff781fda9deed1de23cae39ae5
```

Runtime output

```
Name: John
```

It's important to highlight the difference between passing an access value to a subprogram and passing an object by reference. In both versions of this code example, the compiler will make use of a reference for the actual parameter of the N parameter of the Show procedure. However, the difference between these two cases is that:

- `N : Name` is a reference to an object (because it's an access value) that is passed by value, and
- `N : String` is an object passed by reference.

Changing the referenced object

Since the Name type gives us access to an object in the Show procedure, we could actually change this object inside the procedure. To illustrate this, let's change the Show procedure to lower each character of the string before displaying it (and rename the procedure to Lower_And_Show):

Listing 33: names.ads

```
package Names is

   type Name is access String;

   procedure Lower_And_Show (N : Name);

end Names;
```

Listing 34: names.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Ada.Characters.Handling;
use  Ada.Characters.Handling;

package body Names is

   procedure Lower_And_Show (N : Name) is
   begin
      for I in N'Range loop
         N (I) := To_Lower (N (I));
      end loop;
      Put_Line ("Name: " & N.all);
   end Lower_And_Show;

end Names;
```

Listing 35: show_changed_names.adb

```
with Names; use Names;

procedure Show_Changed_Names is
   N : Name := new String'("John");
begin
   Lower_And_Show (N);
end Show_Changed_Names;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Parameters_As_
 ↪Access_Values.Changed_Names
MD5: 063a507284f5e7ffa669db2c8fdd3d6f
```

Runtime output

```
Name: john
```

Notice that, again, we could have implemented the Lower_And_Show procedure without using an access type:

Listing 36: names.ads

```
package Names is

   type Name is access String;

   procedure Lower_And_Show (N : in out String);

end Names;
```

Listing 37: names.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Ada.Characters.Handling;
use  Ada.Characters.Handling;

package body Names is

   procedure Lower_And_Show (N : in out String) is
   begin
      for I in N'Range loop
         N (I) := To_Lower (N (I));
      end loop;
      Put_Line ("Name: " & N);
   end Lower_And_Show;

end Names;
```

Listing 38: show_changed_names.adb

```
with Names; use Names;

procedure Show_Changed_Names is
   N : Name := new String'("John");
begin
   Lower_And_Show (N.all);
end Show_Changed_Names;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Parameters_As_
 ↪Access_Values.Changed_Names_String
MD5: 783ea8c45ed8ad3e0007524c11b6bcc4
```

Runtime output

```
Name: john
```

Replace the access value

Instead of changing the object in the Lower_And_Show procedure, we could replace the access value by another one — for example, by allocating a new string inside the procedure. In this case, we have to pass the access value by reference using the **in out** parameter mode:

Listing 39: names.ads

```
package Names is

```

(continues on next page)

(continued from previous page)

```
   type Name is access String;

   procedure Lower_And_Show (N : in out Name);

end Names;
```

Listing 40: names.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Ada.Characters.Handling;
use  Ada.Characters.Handling;

package body Names is

   procedure Lower_And_Show (N : in out Name) is
   begin
      N := new String'(To_Lower (N.all));
      Put_Line ("Name: " & N.all);
   end Lower_And_Show;

end Names;
```

Listing 41: show_changed_names.adb

```
with Names; use Names;

procedure Show_Changed_Names is
   N : Name := new String'("John");
begin
   Lower_And_Show (N);
end Show_Changed_Names;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Parameters_As_
 ↪Access_Values.Replaced_Names
MD5: a4abfe6fdb1e5029e8eea17641cd960b
```

Runtime output

```
Name: john
```

Now, instead of changing the object referenced by N, we're actually replacing it with a new object that we allocate inside the Lower_And_Show procedure.

As expected, contrary to the previous examples, we cannot implement this code by relying on parameter modes to replace the object. In fact, we have to use access types for this kind of operations.

Note that this implementation creates a memory leak. In a proper implementation, we should make sure to *deallocate the object* (page 906), as explained later on.

Side-effects on designated objects

In previous code examples from this section, we've seen that passing a parameter by reference using the **in** or **in out** parameter modes is an alternative to using access values as parameters. Let's focus on the subprogram declarations of those code examples and their parameter modes:

Subprogram	Parameter type	Parameter mode
Show	Name	in
Show	String	in
Lower_And_Show	Name	in
Lower_And_Show	String	in out

When we analyze the information from this table, we see that in the case of using strings with different parameter modes, we have a clear indication whether the subprogram might change the object or not. For example, we know that a call to `Show (N : String)` won't change the string object that we're passing as the actual parameter.

In the case of passing an access value, we cannot know whether the designated object is going to be altered by a call to the subprogram. In fact, in both `Show` and `Lower_And_Show` procedures, the parameter is the same: `N : Name` — in other words, the parameter mode is `in` in both cases. Here, there's no clear indication about the effects of a subprogram call on the designated object.

The simplest way to ensure that the object isn't changed in the subprogram is by using *access-to-constant types* (page 887), which we discuss later on. In this case, we're basically saying that the object we're accessing in Show is constant, so we cannot possibly change it:

Listing 42: names.ads

```
package Names is

   type Name is access String;

   type Constant_Name is access constant String;

   procedure Show (N : Constant_Name);

end Names;
```

Listing 43: names.adb

```
with Ada.Text_IO; use Ada.Text_IO;

--  with Ada.Characters.Handling;
--  use  Ada.Characters.Handling;

package body Names is

   procedure Show (N : Constant_Name) is
   begin
      --  for I in N'Range loop
      --     N (I) := To_Lower (N (I));
      --  end loop;
      Put_Line ("Name: " & N.all);
   end Show;

end Names;
```

Listing 44: show_names.adb

```
with Names; use Names;

procedure Show_Names is
   N : Name := new String'("John");
```

(continues on next page)

(continued from previous page)

```
begin
   Show (Constant_Name (N));
end Show_Names;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Parameters_As_
 ↪Access_Values.Names_Constant
MD5: 77526e0a159bf1bcbef08a21be250f3c
```

Runtime output

```
Name: John
```

In this case, the `Constant_Name` type ensures that the `N` parameter won't be changed in the `Show` procedure. Note that we need to convert from `Name` to `Constant_Name` to be able to call the `Show` procedure (in the `Show_Names` procedure). Although using `in String` is still a simpler solution, this approach works fine.

(Feel free to uncomment the call to `To_Lower` in the `Show` procedure and the corresponding with- and use-clauses to see that the compilation fails when trying to change the constant object.)

We could also mitigate the problem by using contracts. For example:

Listing 45: names.ads

```
package Names is

   type Name is access String;

   procedure Show (N : Name)
     with Post => N.all'Old = N.all;
   --             ^^^^^^^^^^^^^^^^^
   --     we promise that we won't change
   --     the object

end Names;
```

Listing 46: names.adb

```
with Ada.Text_IO; use Ada.Text_IO;

--  with Ada.Characters.Handling;
--  use  Ada.Characters.Handling;

package body Names is

   procedure Show (N : Name) is
   begin
      --  for I in N'Range loop
      --     N (I) := To_Lower (N (I));
      --  end loop;
      Put_Line ("Name: " & N.all);
   end Show;

end Names;
```

Listing 47: show_names.adb

```
with Names; use Names;

procedure Show_Names is
   N : Name := new String'("John");
begin
   Show (N);
end Show_Names;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Parameters_As_
 ↪Access_Values.Names_Postcondition
MD5: 2a70993232baca9d58d36e537a6fd32b
```

Runtime output

```
Name: John
```

Although a bit more verbose than a simple `in String`, the information in the specification of Show at least gives us an indication that the object won't be affected by the call to this subprogram. Note that this code actually compiles if we try to modify `N.all` in the Show procedure, but the post-condition fails at runtime when we do that.

(By uncommentating and building the code again, you'll see an exception being raised at runtime when trying to change the object.)

In the postcondition above, we're using `'Old` to refer to the original object before the subprogram call. Unfortunately, we cannot use this attribute when dealing with *limited private types* (page 1033) — or limited types in general. For example, let's change the declaration of Name and have it as a limited private type instead:

Listing 48: names.ads

```
package Names is

   type Name is limited private;

   function Init (S : String) return Name;

   function Equal (N1, N2 : Name)
                   return Boolean;

   procedure Show (N : Name)
     with Post => Equal (N'Old = N);

private

   type Name is access String;

   function Init (S : String) return Name is
     (new String'(S));

   function Equal (N1, N2 : Name)
                   return Boolean is
     (N1.all = N2.all);

end Names;
```

Listing 49: names.adb

```
with Ada.Text_IO; use Ada.Text_IO;

--  with Ada.Characters.Handling;
--  use  Ada.Characters.Handling;

package body Names is

   procedure Show (N : Name) is
   begin
      --  for I in N'Range loop
      --     N (I) := To_Lower (N (I));
      --  end loop;
      Put_Line ("Name: " & N.all);
   end Show;

end Names;
```

Listing 50: show_names.adb

```
with Names; use Names;

procedure Show_Names is
   N : Name := Init ("John");
begin
   Show (N);
end Show_Names;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Parameters_As_
 ↪Access_Values.Names_Limited_Private
MD5: 39691394d7a934869dc569eb72d1bf3a
```

Build output

```
names.ads:11:26: error: attribute "Old" cannot apply to limited objects
gprbuild: *** compilation phase failed
```

In this case, we have no means to indicate that a call to Show won't change the internal state of the actual parameter.

For further reading...

As an alternative, we could declare a new `Constant_Name` type that is also limited private. If we use this type in Show procedure, we're at least indicating (in the type name) that the type is supposed to be constant — even though we're not directly providing means to actually ensure that no modifications occur in a call to the procedure. However, the fact that we declare this type as an access-to-constant (in the private part of the specification) makes it clear that a call to Show won't change the designated object.

Let's look at the adapted code:

Listing 51: names.ads

```
package Names is

   type Name is limited private;

   type Constant_Name is limited private;
```

```
6
7     function Init (S : String) return Name;
8
9     function To_Constant_Name
10      (N : Name)
11       return Constant_Name;
12
13    procedure Show (N : Constant_Name);
14
15 private
16
17    type Name is
18      access String;
19
20    type Constant_Name is
21      access constant String;
22
23    function Init (S : String) return Name is
24      (new String'(S));
25
26    function To_Constant_Name
27      (N : Name)
28       return Constant_Name is
29         (Constant_Name (N));
30
31 end Names;
```

Listing 52: names.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  --  with Ada.Characters.Handling;
4  --  use  Ada.Characters.Handling;
5
6  package body Names is
7
8     procedure Show (N : Constant_Name) is
9     begin
10       --  for I in N'Range loop
11       --     N (I) := To_Lower (N (I));
12       --  end loop;
13       Put_Line ("Name: " & N.all);
14    end Show;
15
16 end Names;
```

Listing 53: show_names.adb

```
1  with Names; use Names;
2
3  procedure Show_Names is
4     N : Name := Init ("John");
5  begin
6     Show (To_Constant_Name (N));
7  end Show_Names;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Parameters_As_
↪Access_Values.Names_Constant_Limited_Private
MD5: 30da588b57e6b4dfbf9934f77d348473
```

Runtime output

```
Name: John
```

In this version of the source code, the Show procedure doesn't have any side-effects, as we cannot modify N inside the procedure.

Having the information about the effects of a subprogram call to an object is very important: we can use this information to set expectations — and avoid unexpected changes to an object. Also, this information can be used to prove that a program works as expected. Therefore, whenever possible, we should avoid access values as parameters. Instead, we can rely on appropriate parameter modes and pass an object by reference.

There are cases, however, where the design of our application doesn't permit replacing the access type with simple parameter modes. Whenever we have an abstract data type encapsulated as a limited private type — such as in the last code example —, we might have no means to avoid access values as parameters. In this case, using the access type is of course justifiable. We'll see such a case in the *next section* (page 870).

28.1.5 Self-reference

As we've discussed in the section about incomplete types <Adv_Ada_Incomplete_Types>, we can use incomplete types to create a recursive, self-referencing type. Let's revisit a code example from that section:

Listing 54: linked_list_example.ads

```
1  package Linked_List_Example is
2
3     type Integer_List;
4
5     type Next is access Integer_List;
6
7     type Integer_List is record
8        I : Integer;
9        N : Next;
10    end record;
11
12 end Linked_List_Example;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Self_Reference.
 ↪Linked_List_Example
MD5: b2d3a048473d498bbe691bc6e38ca1e9
```

Here, we're using the incomplete type `Integer_List` in the declaration of the `Next` type, which we then use in the complete declaration of the `Integer_List` type.

Self-references are useful, for example, to create unbounded containers — such as the linked lists mentioned in the example above. Let's extend this code example and partially implement a generic package for linked lists:

Listing 55: linked_lists.ads

```
1  generic
2     type T is private;
3  package Linked_Lists is
4
5     type List is limited private;
6
7     procedure Append_Front
8        (L : in out List;
9         E :        T);
```

(continues on next page)

(continued from previous page)

```
10
11    procedure Append_Rear
12       (L : in out List;
13        E :        T);
14
15    procedure Show (L : List);
16
17 private
18
19    --  Incomplete type declaration:
20    type Component;
21
22    --  Using incomplete type:
23    type List is access Component;
24
25    type Component is record
26       Value : T;
27       Next  : List;
28       --      ^^^^
29       --   Self-reference via access type
30    end record;
31
32 end Linked_Lists;
```

Listing 56: linked_lists.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  package body Linked_Lists is
4
5     procedure Append_Front
6        (L : in out List;
7         E :        T)
8     is
9        New_First : constant List := new
10         Component'(Value => E,
11                    Next  => L);
12    begin
13       L := New_First;
14    end Append_Front;
15
16    procedure Append_Rear
17       (L : in out List;
18        E :        T)
19    is
20       New_Last : constant List := new
21         Component'(Value => E,
22                    Next  => null);
23    begin
24       if L = null then
25          L := New_Last;
26       else
27          declare
28             Last : List := L;
29          begin
30             while Last.Next /= null loop
31                Last := Last.Next;
32             end loop;
33             Last.Next := New_Last;
34          end;
35       end if;
```

(continues on next page)

(continued from previous page)

```
   end Append_Rear;

   procedure Show (L : List) is
      Curr : List := L;
   begin
      if L = null then
         Put_Line ("[ ]");
      else
         Put ("[");
         loop
            Put (Curr.Value'Image);
            Put (" ");
            exit when Curr.Next = null;
            Curr := Curr.Next;
         end loop;
         Put_Line ("]");
      end if;
   end Show;

end Linked_Lists;
```

Listing 57: test_linked_list.adb

```
with Linked_Lists;

procedure Test_Linked_List is
    package Integer_Lists is new
      Linked_Lists (T => Integer);
    use Integer_Lists;

    L : List;
begin
    Append_Front (L, 3);
    Append_Rear (L, 4);
    Append_Rear (L, 5);
    Append_Front (L, 2);
    Append_Front (L, 1);
    Append_Rear (L, 6);
    Append_Rear (L, 7);

    Show (L);
end Test_Linked_List;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Self_Reference.
 ↪Linked_List_Example
MD5: 6ab1f79c8c3e641eba8057874efc48d7
```

Runtime output

```
[ 1  2  3  4  5  6  7 ]
```

In this example, we declare an incomplete type `Component` in the private part of the generic `Linked_Lists` package. We use this incomplete type to declare the access type `List`, which is then used as a self-reference in the `Next` component of the `Component` type.

Note that we're using the `List` type *as a parameter* (page 860) for the `Append_Front`, `Append_Rear` and `Show` procedures.

In the Ada Reference Manual

- 3.10.1 Incomplete Type Declarations[242]

28.1.6 Mutually dependent types using access types

In the section on *mutually dependent types* (page 444), we've seen a code example where each type depends on the other one. We could rewrite that code example using access types:

Listing 58: mutually_dependent.ads

```
package Mutually_Dependent is

   type T2;
   type T2_Access is access T2;

   type T1 is record
      B : T2_Access;
   end record;

   type T1_Access is access T1;

   type T2 is record
      A : T1_Access;
   end record;

end Mutually_Dependent;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Mutually_Dependent_
 ↪Access_Types.Example
MD5: b21ffc4cdfe3db939dfc841cf8434344
```

In this example, T1 and T2 are mutually dependent types via the access types T1_Access and T2_Access — we're using those access types in the declaration of the B and A components.

28.1.7 Dereferencing

In the *Introduction to Ada course* (page 98), we discussed the `.all` syntax to dereference access values:

Listing 59: show_dereferencing.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Dereferencing is

   --  Declaring access type:
   type Integer_Access is access Integer;

   --  Declaring access object:
   A1 : Integer_Access;

begin
```

(continues on next page)

[242] http://www.ada-auth.org/standards/22rm/html/RM-3-10-1.html

(continued from previous page)

```
12    A1 := new Integer;
13
14    --  Dereferencing access value:
15    A1.all := 22;
16
17    Put_Line ("A1: " & Integer'Image (A1.all));
18 end Show_Dereferencing;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Dereferencing.
 ↪Simple_Dereferencing
MD5: 65655768c17a02991ffeda9a853b6ffb
```

Runtime output

```
A1:  22
```

In this example, we declare A1 as an access object, which allows us to access objects of **Integer** type. We dereference A1 by writing A1.**all**.

Here's another example, this time with an array:

Listing 60: show_dereferencing.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  procedure Show_Dereferencing is
4
5     type Integer_Array is
6       array (Positive range <>) of Integer;
7
8     type Integer_Array_Access is
9       access Integer_Array;
10
11    Arr : constant Integer_Array_Access :=
12                     new Integer_Array (1 .. 6);
13 begin
14    Arr.all := (1, 2, 3, 5, 8, 13);
15
16    for I in Arr'Range loop
17       Put_Line ("Arr (: "
18                 & Integer'Image (I) & "): "
19                 & Integer'Image (Arr.all (I)));
20    end loop;
21 end Show_Dereferencing;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Dereferencing.Array_
 ↪Dereferencing
MD5: 0e533dfd8ec1a74af17c99633c292e95
```

Runtime output

```
Arr (:  1):  1
Arr (:  2):  2
Arr (:  3):  3
Arr (:  4):  5
Arr (:  5):  8
Arr (:  6):  13
```

In this example, we dereference the access value by writing `Arr.all`. We then assign an array aggregate to it — this becomes `Arr.all := (..., ...);`. Similarly, in the loop, we write `Arr.all (I)` to access the `I` component of the array.

In the Ada Reference Manual

- 4.1 Names[243]

Implicit Dereferencing

Implicit dereferencing allows us to omit the `.all` suffix without getting a compilation error. In this case, the compiler *knows* that the dereferenced object is implied, not the access value.

Ada supports implicit dereferencing in these use cases:

- when accessing components of a record or an array — including array slices.
- when accessing subprograms that have at least one parameter (we discuss this topic later in this chapter);
- when accessing some attributes — such as some array and task attributes.

Arrays

Let's start by looking into an example of implicit dereferencing of arrays. We can take the previous code example and replace `Arr.all (I)` by `Arr (I)`:

Listing 61: show_dereferencing.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Dereferencing is

   type Integer_Array is
     array (Positive range <>) of Integer;

   type Integer_Array_Access is
     access Integer_Array;

   Arr : constant Integer_Array_Access :=
                    new Integer_Array (1 .. 6);
begin
   Arr.all := (1, 2, 3, 5, 8, 13);

   Arr (1 .. 6) := (1, 2, 3, 5, 8, 13);

   for I in Arr'Range loop
      Put_Line
        ("Arr (: "
         & Integer'Image (I) & "): "
         & Integer'Image (Arr (I)));
      --                        ^ .all is implicit.
   end loop;
end Show_Dereferencing;
```

Code block metadata

[243] http://www.ada-auth.org/standards/22rm/html/RM-4-1.html

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Dereferencing.Array_
 ↪Implicit_Dereferencing
MD5: ade602a9e6976018e0c00f930a2399f1
```

Runtime output

```
Arr (:  1):  1
Arr (:  2):  2
Arr (:  3):  3
Arr (:  4):  5
Arr (:  5):  8
Arr (:  6):  13
```

Both forms — `Arr.all (I)` and `Arr (I)` — are equivalent. Note, however, that there's no implicit dereferencing when we want to access the whole array. (Therefore, we cannot write `Arr := (1, 2, 3, 5, 8, 13);`.) However, as slices are implicitly dereferenced, we can write `Arr (1 .. 6) := (1, 2, 3, 5, 8, 13);` instead of `Arr.all (1 .. 6) := (1, 2, 3, 5, 8, 13);`. Alternatively, we can assign to the array components individually and use implicit dereferencing for each component:

```
Arr (1) := 1;
Arr (2) := 2;
Arr (3) := 3;
Arr (4) := 5;
Arr (5) := 8;
Arr (6) := 13;
```

Implicit dereferencing isn't available for the whole array because we have to distinguish between assigning to access objects and assigning to actual arrays. For example:

Listing 62: show_array_assignments.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  procedure Show_Array_Assignments is
4
5     type Integer_Array is
6       array (Positive range <>) of Integer;
7
8     type Integer_Array_Access is
9       access Integer_Array;
10
11    procedure Show_Array
12      (Name : String;
13       Arr  : Integer_Array_Access) is
14    begin
15       Put (Name);
16       for E of Arr.all loop
17          Put (Integer'Image (E));
18       end loop;
19       New_Line;
20    end Show_Array;
21
22    Arr_1 : constant Integer_Array_Access :=
23                       new Integer_Array (1 .. 6);
24    Arr_2 :          Integer_Array_Access :=
25                       new Integer_Array (1 .. 6);
26 begin
27    Arr_1.all := (1,   2,  3,  5,   8,  13);
28    Arr_2.all := (21, 34, 55, 89, 144, 233);
29
```

(continues on next page)

(continued from previous page)

```
30    --  Array assignment
31    Arr_2.all := Arr_1.all;
32
33    Show_Array ("Arr_2", Arr_2);
34
35    --  Access value assignment
36    Arr_2 := Arr_1;
37
38    Arr_1.all := (377, 610, 987, 1597, 2584, 4181);
39
40    Show_Array ("Arr_2", Arr_2);
41 end Show_Array_Assignments;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Dereferencing.Array_
 ↪Assignments
MD5: 9b1f99af081000c28a6bf9b033127ea3
```

Runtime output

```
Arr_2 1 2 3 5 8 13
Arr_2 377 610 987 1597 2584 4181
```

Here, `Arr_2.all := Arr_1.all` is an array assignment, while `Arr_2 := Arr_1` is an access value assignment. By forcing the usage of the `.all` suffix, the distinction is clear. Implicit dereferencing, however, could be confusing here. (For example, the `.all` suffix in `Arr_2 := Arr_1.all` is an oversight by the programmer when the intention actually was to use access values on both sides.) Therefore, implicit dereferencing is only supported in those cases where there's no risk of ambiguities or oversights.

Records

Let's see an example of implicit dereferencing of a record:

Listing 63: show_dereferencing.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  procedure Show_Dereferencing is
4
5     type Rec is record
6        I : Integer;
7        F : Float;
8     end record;
9
10    type Rec_Access is access Rec;
11
12    R : constant Rec_Access := new Rec;
13 begin
14    R.all := (I => 1, F => 5.0);
15
16    Put_Line ("R.I: "
17              & Integer'Image (R.I));
18    Put_Line ("R.F: "
19              & Float'Image (R.F));
20 end Show_Dereferencing;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Dereferencing.
 ↪Record_Implicit_Dereferencing
MD5: 9af72502d04f128785f77dcc829d5d48
```

Runtime output

```
R.I:  1
R.F:  5.00000E+00
```

Again, we can replace R.**all**.I by R.I, as record components are implicitly dereferenced. Also, we could use implicit dereference when assigning to record components individually:

```
R.I := 1;
R.F := 5.0;
```

However, we have to write R.**all** when assigning to the whole record R.

Attributes

Finally, let's see an example of implicit dereference when using attributes:

Listing 64: show_dereferencing.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Dereferencing is

   type Integer_Array is
     array (Positive range <>) of Integer;

   type Integer_Array_Access is
     access Integer_Array;

   Arr : constant Integer_Array_Access :=
                    new Integer_Array (1 .. 6);
begin
   Put_Line
     ("Arr'First: "
      & Integer'Image (Arr'First));
   Put_Line
     ("Arr'Last: "
      & Integer'Image (Arr'Last));

   Put_Line
     ("Arr'Component_Size: "
      & Integer'Image (Arr'Component_Size));
   Put_Line
     ("Arr.all'Component_Size: "
      & Integer'Image (Arr.all'Component_Size));

   Put_Line
     ("Arr'Size: "
      & Integer'Image (Arr'Size));
   Put_Line
     ("Arr.all'Size: "
      & Integer'Image (Arr.all'Size));
end Show_Dereferencing;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Dereferencing.Array_
 ↪Implicit_Dereferencing
MD5: 5730e18c8d2ed5e26a4d7d325a46a7e9
```

Runtime output

```
Arr'First:  1
Arr'Last:  6
Arr'Component_Size:  32
Arr.all'Component_Size:  32
Arr'Size:  128
Arr.all'Size:  192
```

Here, we can write `Arr'First` and `Arr'Last` instead of `Arr.all'First` and `Arr.all'Last`, respectively, because `Arr` is implicitly dereferenced. The same applies to `Arr'Component_Size`. Note that we can write both `Arr'Size` and `Arr.all'Size`, but they have different meanings:

- `Arr'Size` is the size of the access object; while
- `Arr.all'Size` indicates the size of the actual array `Arr`.

In other words, the `Size` attribute is *not* implicitly dereferenced. In fact, any attribute that could potentially be ambiguous is not implicitly dereferenced. Therefore, in those cases, we must explicitly indicate (by using `.all` or not) how we want to use the attribute.

Summary

The following table summarizes all instances where implicit dereferencing is supported:

Entities	Standard Usage	Implicit Dereference
Array components	Arr.all (I)	Arr (I)
Array slices	Arr.all (F .. L)	Arr (F .. L)
Record components	Rec.all.C	Rec.C
Array attributes	Arr.all'First	Arr'First
	Arr.all'First (N)	Arr'First (N)
	Arr.all'Last	Arr'Last
	Arr.all'Last (N)	Arr'Last (N)
	Arr.all'Range	Arr'Range
	Arr.all'Range (N)	Arr'Range (N)
	Arr.all'Length	Arr'Length
	Arr.all'Length (N)	Arr'Length (N)
	Arr.all'Component_Size	Arr'Component_Size
Task attributes	T.all'Identity	T'Identity
	T.all'Storage_Size	T'Storage_Size
	T.all'Terminated	T'Terminated
	T.all'Callable	T'Callable
Tagged type attributes	X.all'Tag	X'Tag
Other attributes	X.all'Valid	X'Valid
	X.all'Old	X'Old
	A.all'Constrained	A'Constrained

In the Ada Reference Manual

- 4.1 Names[244]
- 4.1.1 Indexed Components[245]

- 4.1.2 Slices[246]
- 4.1.3 Selected Components[247]
- 4.1.4 Attributes[248]

28.1.8 Ragged arrays

Ragged arrays — also known as jagged arrays — are non-uniform, multidimensional arrays. They can be useful to implement tables with varying number of coefficients, as we discuss as an example in this section.

Uniform multidimensional arrays

Consider an algorithm that processes data based on coefficients that depends on a selected quality level:

Quality level	Number of coefficients	#1	#2	#3	#4	#5
Simplified	1	0.15				
Better	3	0.02	0.16	0.27		
Best	5	0.01	0.08	0.12	0.20	0.34

(Note that this is just a bogus table with no real purpose, as we're not trying to implement any actual algorithm.)

We can implement this table as a two-dimensional array (`Calc_Table`), where each quality level has an associated array:

Listing 65: data_processing.ads

```
package Data_Processing is

   type Quality_Level is
     (Simplified, Better, Best);

private

   Calc_Table : constant array
     (Quality_Level, 1 .. 5) of Float :=
       (Simplified =>
            (0.15, 0.00, 0.00, 0.00, 0.00),
        Better     =>
            (0.02, 0.16, 0.27, 0.00, 0.00),
        Best       =>
            (0.01, 0.08, 0.12, 0.20, 0.34));

   Last : constant array
     (Quality_Level) of Positive :=
       (Simplified => 1,
        Better     => 3,
        Best       => 5);

end Data_Processing;
```

[244] http://www.ada-auth.org/standards/22rm/html/RM-4-1.html
[245] http://www.ada-auth.org/standards/22rm/html/RM-4-1-1.html
[246] http://www.ada-auth.org/standards/22rm/html/RM-4-1-2.html
[247] http://www.ada-auth.org/standards/22rm/html/RM-4-1-3.html
[248] http://www.ada-auth.org/standards/22rm/html/RM-4-1-4.html

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Ragged_Arrays.
 ↪Uniform_Table
MD5: befa8d2b684ee20495f2dd6907dc44d4
```

Note that, in this implementation, we have a separate table `Last` that indicates the actual number of coefficients of each quality level.

Alternatively, we could use a record (`Table_Coefficient`) that stores the number of coefficients and the actual coefficients:

Listing 66: data_processing.ads

```
1  package Data_Processing is
2
3     type Quality_Level is
4       (Simplified, Better, Best);
5
6     type Data is
7       array (Positive range <>) of Float;
8
9  private
10
11    type Table_Coefficient is record
12       Last : Positive;
13       Coef : Data (1 .. 5);
14    end record;
15
16    Calc_Table : constant array
17      (Quality_Level) of Table_Coefficient :=
18        (Simplified =>
19             (1, (0.15, 0.00, 0.00, 0.00, 0.00)),
20         Better     =>
21             (3, (0.02, 0.16, 0.27, 0.00, 0.00)),
22         Best       =>
23             (5, (0.01, 0.08, 0.12, 0.20, 0.34)));
24
25 end Data_Processing;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Ragged_Arrays.
 ↪Uniform_Table
MD5: 4c8602f6ecede0ac1231838c0a0a54b7
```

In this case, we have a unidimensional array where each component (of `Table_Coefficient` type) contains an array (`Coef`) with the coefficients.

This is an example of a `Process` procedure that references the `Calc_Table`:

Listing 67: data_processing-operations.ads

```
1  package Data_Processing.Operations is
2
3    procedure Process (D : in out Data;
4                       Q :        Quality_Level);
5
6  end Data_Processing.Operations;
```

Listing 68: data_processing-operations.adb

```
package body Data_Processing.Operations is

   procedure Process (D : in out Data;
                      Q :        Quality_Level) is
   begin
      for I in D'Range loop
         for J in 1 .. Calc_Table (Q).Last loop
           --  ... * Calc_Table (Q).Coef (J)
           null;
         end loop;
         --  D (I) := ...
         null;
      end loop;
   end Process;

end Data_Processing.Operations;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Ragged_Arrays.
 ↪Uniform_Table
MD5: 2b0d2cee265509e64e507cfa6289bdcc
```

Note that, to loop over the coefficients, we're using `for J in 1 .. Calc_Table (Q).Last loop` instead of `for J in Calc_Table (Q)'Range loop`. As we're trying to make a non-uniform array fit in a uniform array, we cannot simply loop over all elements using the `Range` attribute, but must be careful to use the correct number of elements in the loop instead.

Also, note that `Calc_Table` has 15 coefficients in total. Out of those coefficients, 6 coefficients (or 40 percent of the table) aren't being used. Naturally, this is wasted memory space. We can improve this by using ragged arrays.

Non-uniform multidimensional array

Ragged arrays are declared by using an access type to an array. By doing that, each array can be declared with a different size, thereby creating a non-uniform multidimensional array.

For example, we can declare a constant array `Table` as a ragged array:

Listing 69: data_processing.ads

```
package Data_Processing is

   type Integer_Array is
     array (Positive range <>) of Integer;

private

   type Integer_Array_Access is
     access constant Integer_Array;

   Table : constant array (1 .. 3) of
             Integer_Array_Access :=
     (1 => new Integer_Array'(1 => 15),
      2 => new Integer_Array'(1 => 12,
                              2 => 15,
                              3 => 20),
```

(continues on next page)

(continued from previous page)

```
      3 => new Integer_Array'(1 => 12,
                              2 => 15,
                              3 => 20,
                              4 => 20,
                              5 => 25,
                              6 => 30));

end Data_Processing;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Ragged_Arrays.
 ↪Simple_Ragged_Array
MD5: 28e044a43bf45585a0268c60d63c629e
```

Here, each component of `Table` is an access to another array. As each array is allocated via **new**, those arrays may have different sizes.

We can rewrite the example from the previous subsection using a ragged array for the `Calc_Table`:

Listing 70: data_processing.ads

```
package Data_Processing is

   type Quality_Level is
     (Simplified, Better, Best);

   type Data is
     array (Positive range <>) of Float;

private

   type Coefficients is access constant Data;

   Calc_Table : constant array (Quality_Level) of
                  Coefficients :=
     (Simplified =>
          new Data'(1 => 0.15),
      Better     =>
          new Data'(0.02, 0.16, 0.27),
      Best       =>
          new Data'(0.01, 0.08, 0.12,
                    0.20, 0.34));

end Data_Processing;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Ragged_Arrays.
 ↪Ragged_Table
MD5: 0781b27cba27dbd1e74da54e425a1f4b
```

Now, we aren't wasting memory space because each data component has the right size that is required for each quality level. Also, we don't need to store the number of coefficients, as this information is automatically available from the array initialization — via the allocation of the `Data` array for the `Coefficients` type.

Note that the `Coefficients` type is defined as **access constant**. We discuss *access-to-constant types* (page 887) in more details later on.

This is the adapted `Process` procedure:

Listing 71: data_processing-operations.ads

```
package Data_Processing.Operations is

  procedure Process (D : in out Data;
                     Q :        Quality_Level);

end Data_Processing.Operations;
```

Listing 72: data_processing-operations.adb

```
package body Data_Processing.Operations is

   procedure Process (D : in out Data;
                      Q :        Quality_Level) is
   begin
      for I in D'Range loop
         for J in Calc_Table (Q)'Range loop
           --  ... * Calc_Table (Q).Coef (J)
           null;
         end loop;
         --  D (I) := ...
         null;
      end loop;
   end Process;

end Data_Processing.Operations;
```

Now, we can simply loop over the coefficients by writing `for J in Calc_Table (Q)'Range loop`, as each element of `Calc_Table` automatically has the correct range.

28.1.9 Aliasing

The term aliasing[249] refers to objects in memory that we can access using more than a single reference. In Ada, if we allocate an object via `new`, we have a potentially aliased object. We can then have multiple references to this object:

Listing 73: show_aliasing.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Aliasing is
   type Integer_Access is access Integer;

   A1, A2 : Integer_Access;
begin
   A1 := new Integer;
   A2 := A1;

   A1.all := 22;
   Put_Line ("A1: " & Integer'Image (A1.all));
   Put_Line ("A2: " & Integer'Image (A2.all));

   A2.all := 24;
   Put_Line ("A1: " & Integer'Image (A1.all));
   Put_Line ("A2: " & Integer'Image (A2.all));
end Show_Aliasing;
```

Code block metadata

[249] https://en.wikipedia.org/wiki/Aliasing_(computing)

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Aliasing.Aliasing_
 ↪Via_Access
MD5: 2fde6073cec9823a1a9d93aec82384e1
```

Runtime output

```
A1:  22
A2:  22
A1:  24
A2:  24
```

In this example, we access the object allocated via **new** by using either A1 or A2, as both refer to the same *aliased* object. In other words, A1 or A2 allow us to access the same object in memory.

Important

Note that aliasing is unrelated to renaming. For example, we could use renaming to write a program that looks similar to the one above:

Listing 74: show_renaming.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  procedure Show_Renaming is
4     A1 : Integer;
5     A2 : Integer renames A1;
6  begin
7     A1 := 22;
8     Put_Line ("A1: " & Integer'Image (A1));
9     Put_Line ("A2: " & Integer'Image (A2));
10
11    A2 := 24;
12    Put_Line ("A1: " & Integer'Image (A1));
13    Put_Line ("A2: " & Integer'Image (A2));
14 end Show_Renaming;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Aliasing.Renaming
MD5: 99a47d02000b91f7464dffe994fd8ee6
```

Runtime output

```
A1:  22
A2:  22
A1:  24
A2:  24
```

Here, A1 or A2 are two different names for the same object. However, the object itself isn't aliased.

In the Ada Reference Manual

- 3.10 Access Types[250]

[250] http://www.ada-auth.org/standards/22rm/html/RM-3-10.html

Aliased objects

As we discussed *previously* (page 845), we use **new** to create aliased objects on the heap. We can also use general access types to access objects that were created on the stack.

By default, objects created on the stack aren't aliased. Therefore, we have to indicate that an object is aliased by using the **aliased** keyword in the object's declaration: `Obj : aliased Integer;`.

Let's see an example:

Listing 75: show_aliased_obj.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Aliased_Obj is
   type Integer_Access is access all Integer;

   I_Var : aliased Integer;
   A1    : Integer_Access;
begin
   A1 := I_Var'Access;

   A1.all := 22;
   Put_Line ("A1: " & Integer'Image (A1.all));
end Show_Aliased_Obj;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Aliasing.Access_
 ↪Aliased_Obj
MD5: 98c8e47d7c2b5df8075918b239a8d476
```

Runtime output

```
A1:  22
```

Here, we declare `I_Var` as an aliased integer variable and get a reference to it, which we assign to `A1`. Naturally, we could also have two accesses `A1` and `A2`:

Listing 76: show_aliased_obj.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Aliased_Obj is
   type Integer_Access is access all Integer;

   I_Var  : aliased Integer;
   A1, A2 : Integer_Access;
begin
   A1 := I_Var'Access;
   A2 := A1;

   A1.all := 22;
   Put_Line ("A1: " & Integer'Image (A1.all));
   Put_Line ("A2: " & Integer'Image (A2.all));

   A2.all := 24;
   Put_Line ("A1: " & Integer'Image (A1.all));
   Put_Line ("A2: " & Integer'Image (A2.all));

end Show_Aliased_Obj;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Aliasing.Access_
 ↪Aliased_Obj
MD5: ac331285456462f05abe7e1fd5e3ca2b
```

Runtime output

```
A1:  22
A2:  22
A1:  24
A2:  24
```

In this example, both `A1` and `A2` refer to the `I_Var` variable.

Note that these examples make use of these two features:

1. The declaration of a general access type (`Integer_Access`) using **`access all`**.
2. The retrieval of a reference to `I_Var` using the **`Access`** attribute.

In the next sections, we discuss these features in more details.

In the Ada Reference Manual

- 3.3.1 Object Declarations[251]
- 3.10 Access Types[252]

General access modifiers

Let's now discuss how to declare general access types. In addition to the *standard* (pool-specific) access type declarations, Ada provides two access modifiers:

Type	Declaration
Access-to-variable	`type T_Acc is access all T`
Access-to-constant	`type T_Acc is access constant T`

Let's look at an example:

Listing 77: integer_access_types.ads

```
1  package Integer_Access_Types is
2
3     type Integer_Access is
4       access Integer;
5
6     type Integer_Access_All is
7       access all Integer;
8
9     type Integer_Access_Const is
10      access constant Integer;
11
12 end Integer_Access_Types;
```

Code block metadata

[251] http://www.ada-auth.org/standards/22rm/html/RM-3-3-1.html
[252] http://www.ada-auth.org/standards/22rm/html/RM-3-10.html

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Aliasing.Show_
 ↪Access_Modifiers
MD5: 98ccaa703194ae88222ccc5a4400e967
```

As we've seen previously, we can use a type such as `Integer_Access` to allocate objects dynamically. However, we cannot use this type to refer to declared objects, for example. In this case, we have to use an access-to-variable type such as `Integer_Access_All`. Also, if we want to access constants — or access objects that we want to treat as constants —, we use a type such as `Integer_Access_Const`.

Access attribute

To get access to a variable or a constant, we make use of the **`Access`** attribute. For example, `I_Var'Access` gives us access to the `I_Var` object.

Let's look at an example of how to use the integer access types from the previous code snippet:

Listing 78: integer_access_types.ads

```
1  package Integer_Access_Types is
2
3     type Integer_Access is
4       access Integer;
5
6     type Integer_Access_All is
7       access all Integer;
8
9     type Integer_Access_Const is
10      access constant Integer;
11
12    procedure Show;
13
14 end Integer_Access_Types;
```

Listing 79: integer_access_types.adb

```
1  with Ada.Text_IO;          use Ada.Text_IO;
2
3  package body Integer_Access_Types is
4
5     I_Var : aliased          Integer :=  0;
6     Fact  : aliased constant Integer := 42;
7
8     Dyn_Ptr     : constant Integer_Access
9                      := new Integer'(30);
10    I_Var_Ptr   : constant Integer_Access_All
11                     := I_Var'Access;
12    I_Var_C_Ptr : constant Integer_Access_Const
13                     := I_Var'Access;
14    Fact_Ptr    : constant Integer_Access_Const
15                     := Fact'Access;
16
17    procedure Show is
18    begin
19       Put_Line ("Dyn_Ptr:     "
20                 & Integer'Image (Dyn_Ptr.all));
21       Put_Line ("I_Var_Ptr:   "
22                 & Integer'Image (I_Var_Ptr.all));
23       Put_Line ("I_Var_C_Ptr: "
24                 & Integer'Image
```

(continues on next page)

(continued from previous page)

```
25                      (I_Var_C_Ptr.all));
26       Put_Line ("Fact_Ptr:    "
27                 & Integer'Image (Fact_Ptr.all));
28    end Show;
29
30 end Integer_Access_Types;
```

Listing 80: show_access_modifiers.adb

```
1 with Integer_Access_Types;
2
3 procedure Show_Access_Modifiers is
4 begin
5    Integer_Access_Types.Show;
6 end Show_Access_Modifiers;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Aliasing.Show_
 ↪Access_Modifiers
MD5: c9036f060859207ea14354b26dc8b981
```

Runtime output

```
Dyn_Ptr:      30
I_Var_Ptr:    0
I_Var_C_Ptr:  0
Fact_Ptr:     42
```

In this example, `Dyn_Ptr` refers to a dynamically allocated object, `I_Var_Ptr` refers to the `I_Var` variable, and `Fact_Ptr` refers to the `Fact` constant. We get access to the variable and the constant objects by using the **`Access`** attribute.

Also, we declare `I_Var_C_Ptr` as an access-to-constant, but we get access to the `I_Var` variable. This simply means the object `I_Var_C_Ptr` refers to is treated as a constant. Therefore, we can write `I_Var := 22;`, but we cannot write `I_Var_C_Ptr.all := 22;`.

In the Ada Reference Manual

- 3.10.2 Operations of Access Types[253]

Non-aliased objects

As mentioned earlier, by default, declared objects — which are allocated on the stack — aren't aliased. Therefore, we cannot get a reference to those objects. For example:

Listing 81: show_access_error.adb

```
1 with Ada.Text_IO; use Ada.Text_IO;
2
3 procedure Show_Access_Error is
4    type Integer_Access is access all Integer;
5    I_Var : Integer;
6    A1    : Integer_Access;
7 begin
8    A1 := I_Var'Access;
```

(continues on next page)

[253] http://www.ada-auth.org/standards/22rm/html/RM-3-10-2.html

(continued from previous page)

```
9
10    A1.all := 22;
11    Put_Line ("A1: " & Integer'Image (A1.all));
12 end Show_Access_Error;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Aliasing.Access_Non_
 ↪Aliased_Obj
MD5: 2a9904062eea96ae6dc209493d6f20d4
```

Build output

```
show_access_error.adb:8:10: error: prefix of "Access" attribute must be aliased
gprbuild: *** compilation phase failed
```

In this example, the compiler complains that we cannot get a reference to `I_Var` because `I_Var` is not aliased.

Ragged arrays using aliased objects

We can use aliased objects to declare *ragged arrays* (page 880). For example, we can rewrite a previous program using aliased constant objects:

Listing 82: data_processing.ads

```
1  package Data_Processing is
2
3     type Integer_Array is
4       array (Positive range <>) of Integer;
5
6  private
7
8     type Integer_Array_Access is
9       access constant Integer_Array;
10
11    Tab_1 : aliased constant Integer_Array
12              := (1 => 15);
13    Tab_2 : aliased constant Integer_Array
14              := (12, 15, 20);
15    Tab_3 : aliased constant Integer_Array
16              := (12, 15, 20,
17                  20, 25, 30);
18
19    Table : constant array (1 .. 3) of
20              Integer_Array_Access :=
21      (1 => Tab_1'Access,
22       2 => Tab_2'Access,
23       3 => Tab_3'Access);
24
25 end Data_Processing;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Aliasing.Ragged_
 ↪Array_Aliased_Objs
MD5: 7e284560c447c02628e34bac982d4ad5
```

Here, instead of allocating the constant arrays dynamically via **new**, we declare three aliased arrays (Tab_1, Tab_2 and Tab_3) and get a reference to them in the declaration of `Table`.

Aliased access objects

It's interesting to mention that access objects can be aliased themselves. Consider this example where we declare the `Integer_Access_Access` type to refer to an access object:

Listing 83: show_aliased_access_obj.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Aliased_Access_Obj is

   type Integer_Access        is
     access all Integer;
   type Integer_Access_Access is
     access all Integer_Access;

   I_Var : aliased Integer;
   A     : aliased Integer_Access;
   B     : Integer_Access_Access;
begin
   A := I_Var'Access;
   B := A'Access;

   B.all.all := 22;
   Put_Line ("A: " & Integer'Image (A.all));
   Put_Line ("B: " & Integer'Image (B.all.all));
end Show_Aliased_Access_Obj;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Aliasing.Aliased_
↪Access
MD5: 77e9be5e29cfb99aef9409728202ba9d
```

Runtime output

```
A:  22
B:  22
```

After the assignments in this example, `B` refers to `A`, which in turn refers to `I_Var`. Note that this code only compiles because we declare `A` as an aliased (access) object.

Aliased components

Components of an array or a record can be aliased. This allows us to get access to those components:

Listing 84: show_aliased_components.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Aliased_Components is

   type Integer_Access is access all Integer;

   type Rec is record
      I_Var_1 :         Integer;
      I_Var_2 : aliased Integer;
   end record;

   type Integer_Array is
     array (Positive range <>) of aliased Integer;
```

(continues on next page)

(continued from previous page)

```
14
15    R   : Rec := (22, 24);
16    Arr : Integer_Array (1 .. 3) := (others => 42);
17    A   : Integer_Access;
18 begin
19    --  A := R.I_Var_1'Access;
20    --                 ^ ERROR: cannot access
21    --                          non-aliased
22    --                          component
23
24    A := R.I_Var_2'Access;
25    Put_Line ("A: " & Integer'Image (A.all));
26
27    A := Arr (2)'Access;
28    Put_Line ("A: " & Integer'Image (A.all));
29 end Show_Aliased_Components;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Aliasing.Aliased_
↪Components
MD5: 5dfaa248caf8e37a4a3a1e1a24973777
```

Runtime output

```
A:  24
A:  42
```

In this example, we get access to the `I_Var_2` component of record R. (Note that trying to access the `I_Var_1` component would gives us a compilation error, as this component is not aliased.) Similarly, we get access to the second component of array `Arr`.

Declaring components with the **`aliased`** keyword allows us to specify that those are accessible via other paths besides the component name. Therefore, the compiler won't store them in registers. This can be essential when doing low-level programming — for example, when accessing memory-mapped registers. In this case, we want to ensure that the compiler uses the memory address we're specifying (instead of assigning registers for those components).

In the Ada Reference Manual

- 3.6 Array Types[254]

Aliased parameters

In addition to aliased objects and components, we can declare *aliased parameters* (page 731), as we already discussed in an earlier chapter. As we mentioned there, aliased parameters are always passed by reference, independently of the type we're using.

The parameter mode indicates which type we must use for the access type:

Parameter mode	Type
`aliased in`	Access-to-constant
`aliased out`	Access-to-variable
`aliased in out`	Access-to-variable

[254] http://www.ada-auth.org/standards/22rm/html/RM-3-6.html

Using aliased parameters in a subprogram allows us to get access to those parameters in the body of that subprogram. Let's see an example:

Listing 85: data_processing.ads

```
package Data_Processing is

   procedure Proc (I : aliased in out Integer);

end Data_Processing;
```

Listing 86: data_processing.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Data_Processing is

   procedure Show (I : aliased Integer) is
      --                ^ equivalent to
      --                  "aliased in Integer"

      type Integer_Constant_Access is
        access constant Integer;

      A : constant Integer_Constant_Access
            := I'Access;
   begin
      Put_Line ("Value : I "
                & Integer'Image (A.all));
   end Show;

   procedure Set_One (I : aliased out Integer) is

      type Integer_Access is access all Integer;

      procedure Local_Set_One (A : Integer_Access)
      is
      begin
         A.all := 1;
      end Local_Set_One;

   begin
      Local_Set_One (I'Access);
   end Set_One;

   procedure Proc (I : aliased in out Integer) is

      type Integer_Access is access all Integer;

      procedure Add_One (A : Integer_Access) is
      begin
         A.all := A.all + 1;
      end Add_One;

   begin
      Show (I);
      Add_One (I'Access);
      Show (I);
   end Proc;

end Data_Processing;
```

Listing 87: show_aliased_param.adb

```
with Data_Processing; use Data_Processing;

procedure Show_Aliased_Param is
   I : aliased Integer := 22;
begin
   Proc (I);
end Show_Aliased_Param;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Aliasing.Aliased_
 ↪Rec_Component
MD5: 076238603036aa51cafcc013f38bc8f3
```

Runtime output

```
Value : I  22
Value : I  23
```

Here, `Proc` has an `aliased in out` parameter. In `Proc`'s body, we declare the `Integer_Access` type as an `access all` type. We use the same approach in body of the `Set_One` procedure, which has an `aliased out` parameter. Finally, the `Show` procedure has an `aliased in` parameter. Therefore, we declare the `Integer_Constant_Access` as an `access constant` type.

Note that parameter aliasing has an influence on how arguments are passed to a subprogram when the parameter is of scalar type. When a scalar parameter is declared as aliased, the corresponding argument is passed by reference. For example, if we had declared `procedure Show (I : Integer)`, the argument for `I` would be passed by value. However, since we're declaring it as `aliased Integer`, it is passed by reference.

In the Ada Reference Manual

- 6.1 Subprogram Declarations[255]
- 6.2 Formal Parameter Modes[256]
- 6.4.1 Parameter Associations[257]

28.1.10 Accessibility Levels and Rules: An Introduction

This section provides an introduction to accessibility levels and accessibility rules. This topic can be very complicated, and by no means do we intend to cover all the details here. (In fact, discussing all the details about accessibility levels and rules could be a long chapter on its own. If you're interested in them, please refer to the Ada Reference Manual.) In any case, the goal of this section is to present the intention behind the accessibility rules and build intuition on how to best use access types in your code.

In the Ada Reference Manual

- 3.10.2 Operations of Access Types[258]

[255] http://www.ada-auth.org/standards/22rm/html/RM-6-1.html
[256] http://www.ada-auth.org/standards/22rm/html/RM-6-2.html
[257] http://www.ada-auth.org/standards/22rm/html/RM-6-4-1.html
[258] http://www.ada-auth.org/standards/22rm/html/RM-3-10-2.html

Lifetime of objects

First, let's talk a bit about lifetime of objects[259]. We assume you understand the concept, so this section is very short.

In very simple terms, the lifetime of an object indicates when an object still has relevant information. For example, if a variable V gets out of scope, we say that its lifetime has ended. From this moment on, V no longer exists.

For example:

Listing 88: show_lifetime.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Lifetime is
   I_Var_1 : Integer := 22;
begin

   Inner_Block : declare
      I_Var_2 : Integer := 42;
   begin
      Put_Line ("I_Var_1: "
                & Integer'Image (I_Var_1));
      Put_Line ("I_Var_2: "
                & Integer'Image (I_Var_2));

      --  I_Var_2 will get out of scope
      --  when the block finishes.
   end Inner_Block;

   --  I_Var_2 is now out of scope...

   Put_Line ("I_Var_1: "
             & Integer'Image (I_Var_1));
   Put_Line ("I_Var_2: "
             & Integer'Image (I_Var_2));
   --                          ^^^^^^^
   --  ERROR: lifetime of I_Var_2 has ended!
end Show_Lifetime;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Accessibility_
 ↪Levels_Rules_Introduction.Lifetime
MD5: ebe36f12c832ecfe71399b89801808d4
```

Build output

```
show_lifetime.adb:24:31: error: "I_Var_2" is undefined
gprbuild: *** compilation phase failed
```

In this example, we declare `I_Var_1` in the `Show_Lifetime` procedure, and `I_Var_2` in its `Inner_Block`.

This example doesn't compile because we're trying to use `I_Var_2` after its lifetime has ended. However, if such a code could compile and run, the last call to `Put_Line` would potentially display garbage to the user. (In fact, the actual behavior would be undefined.)

[259] https://en.wikipedia.org/wiki/Variable_(computer_science)#Scope_and_extent

Accessibility Levels

In basic terms, accessibility levels are a mechanism to assess the lifetime of objects (as we've just discussed). The starting point is the library level: this is the base level, and no level can be deeper than that. We start "moving" to deeper levels when we use a library in a subprogram or call other subprograms for example.

Suppose we have a procedure `Proc` that makes use of a package Pkg, and there's a block in the `Proc` procedure:

```
package Pkg is

   --  Library level

end Pkg;

with Pkg; use Pkg;

procedure Proc is

   --  One level deeper than
   --  library level

begin

   declare
      --  Two levels deeper than
      --  library level
  begin
      null;
   end;

end Proc;
```

For this code, we can say that:

- the specification of Pkg is at library level;
- the declarative part of `Proc` is one level deeper than the library level; and
- the block is two levels deeper than the library level.

(Note that this is still a very simplified overview of accessibility levels. Things start getting more complicated when we use information from Pkg in `Proc`. Those details will become more clear in the next sections.)

The levels themselves are not visible to the programmer. For example, there's no `Access_Level` attribute that returns an integer value indicating the level. Also, you cannot write a user message that displays the level at a certain point. In this sense, accessibility levels are assessed relatively to each other: we can only say that a specific operation is at the same or at a deeper level than another one.

Accessibility Rules

The accessibility rules determine whether a specific use of access types or objects is legal (or not). Actually, accessibility rules exist to prevent *dangling references* (page 901), which we discuss later. Also, they are based on the *accessibility levels* (page 896) we discussed earlier.

Code example

As mentioned earlier, the accessibility level at a specific point isn't visible to the programmer. However, to illustrate which level we have at each point in the following code example, we use a prefix (L0, L1, and L2) to indicate whether we're at the library level (L0) or at a deeper level.

Let's now look at the complete code example:

Listing 89: library_level.ads

```
package Library_Level is

   type L0_Integer_Access is
     access all Integer;

   L0_IA  : L0_Integer_Access;

   L0_Var : aliased Integer;

end Library_Level;
```

Listing 90: show_library_level.adb

```
with Library_Level; use Library_Level;

procedure Show_Library_Level is
   type L1_Integer_Access is
     access all Integer;

   L0_IA_2 : L0_Integer_Access;
   L1_IA   : L1_Integer_Access;

   L1_Var : aliased Integer;

   procedure Test is
      type L2_Integer_Access is
        access all Integer;

      L2_IA  : L2_Integer_Access;

      L2_Var : aliased Integer;
   begin
      L1_IA := L2_Var'Access;
      --       ^^^^^^
      --       ILLEGAL: L2 object to
      --                L1 access object

      L2_IA := L2_Var'Access;
      --       ^^^^^^
      --       LEGAL: L2 object to
      --              L2 access object
   end Test;

begin
   L0_IA := new Integer'(22);
   --       ^^^^^^^^^^^
   --       LEGAL: L0 object to
   --              L0 access object

   L0_IA_2 := new Integer'(22);
   --         ^^^^^^^^^^^
```

(continues on next page)

(continued from previous page)

```
39    --         LEGAL: L0 object to
40    --                L0 access object
41
42    L0_IA := L1_Var'Access;
43    --       ^^^^^^
44    --       ILLEGAL: L1 object to
45    --                L0 access object
46
47    L0_IA_2 := L1_Var'Access;
48    --         ^^^^^^
49    --         ILLEGAL: L1 object to
50    --                  L0 access object
51
52    L1_IA := L0_Var'Access;
53    --       ^^^^^^
54    --       LEGAL: L0 object to
55    --              L1 access object
56
57    L1_IA := L1_Var'Access;
58    --       ^^^^^^
59    --       LEGAL: L1 object to
60    --              L1 access object
61
62    L0_IA := L1_IA;
63    --       ^^^^^
64    --       ILLEGAL: type mismatch
65
66    L0_IA := L0_Integer_Access (L1_IA);
67    --       ^^^^^^^^^^^^^^^^^
68    --       ILLEGAL: cannot convert
69    --                L1 access object to
70    --                L0 access object
71
72    Test;
73 end Show_Library_Level;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Accessibility_
 ↪Levels_Rules_Introduction.Accessibility_Library_Level
MD5: b3bed7eb2a8dfc78a2e7a7d2ce99f736
```

Build output

```
show_library_level.adb:20:16: error: non-local pointer cannot point to local object
show_library_level.adb:42:13: error: non-local pointer cannot point to local object
show_library_level.adb:47:15: error: non-local pointer cannot point to local object
show_library_level.adb:62:13: error: expected type "L0_Integer_Access" defined at␣
 ↪library_level.ads:3
show_library_level.adb:62:13: error: found type "L1_Integer_Access" defined at␣
 ↪line 4
show_library_level.adb:66:32: error: cannot convert local pointer to non-local␣
 ↪access type
gprbuild: *** compilation phase failed
```

In this example, we declare

- in the `Library_Level` package: the `L0_Integer_Access` type, the `L0_IA` access object, and the `L0_Var` aliased variable;
- in the `Show_Library_Level` procedure: the `L1_Integer_Access` type, the `L0_IA_2` and `L1_IA` access objects, and the `L1_Var` aliased variable;

- in the nested `Test` procedure: the `L2_Integer_Access` type, the `L2_IA`, and the `L2_Var` aliased variable.

As mentioned earlier, the `Ln` prefix indicates the level of each type or object. Here, the `n` value is zero at library level. We then increment the `n` value each time we refer to a deeper level.

For instance:

- when we declare the `L1_Integer_Access` type in the `Show_Library_Level` procedure, that declaration is one level deeper than the level of the `Library_Level` package — so it has the `L1` prefix.
- when we declare the `L2_Integer_Access` type in the `Test` procedure, that declaration is one level deeper than the level of the `Show_Library_Level` procedure — so it has the `L2` prefix.

Types and Accessibility Levels

It's very important to highlight the fact that:

- types themselves also have an associated level, and
- objects have the same accessibility level as their types.

When we declare the `L0_IA_2` object in the code example, its accessibility level is at library level because its type (the `L0_Integer_Access` type) is at library level. Even though this declaration is in the `Show_Library_Level` procedure — whose declarative part is one level deeper than the library level —, the object itself has the same accessibility level as its type.

Now that we've discussed the accessibility levels of this code example, let's see how the accessibility rules use those levels.

Operations on Access Types

In very simple terms, the accessibility rules say that:

- operations on access types at the same accessibility level are legal;
- assigning or converting to a deeper level is legal;

Otherwise, operations targeting objects at a *less-deep* level are illegal.

For example, `L0_IA := new Integer'(22)` and `L1_IA := L1_Var'Access` are legal because we're operating at the same accessibility level. Also, `L1_IA := L0_Var'Access` is legal because `L1_IA` is at a deeper level than `L0_Var'Access`.

However, many operations in the code example are illegal. For instance, `L0_IA := L1_Var'Access` and `L0_IA_2 := L1_Var'Access` are illegal because the target objects in the assignment are *less* deep.

Note that the `L0_IA := L1_IA` assignment is mainly illegal because the access types don't match. (Of course, in addition to that, assigning `L1_Var'Access` to `L0_IA` is also illegal in terms of accessibility rules.)

Conversion between Access Types

The same rules apply to the conversion between access types. In the code example, the `L0_Integer_Access (L1_IA)` conversion is illegal because the resulting object is less deep. That being said, conversions on the same level are fine:

Listing 91: show_same_level_conversion.adb

```
procedure Show_Same_Level_Conversion is
   type L1_Integer_Access is
     access all Integer;

   type L1_B_Integer_Access is
     access all Integer;

   L1_IA   : L1_Integer_Access;
   L1_B_IA : L1_B_Integer_Access;

   L1_Var  : aliased Integer;
begin
   L1_IA := L1_Var'Access;

   L1_B_IA := L1_B_Integer_Access (L1_IA);
   --         ^^^^^^^^^^^^^^^^^^^
   --         LEGAL: conversion from
   --                L1 access object to
   --                L1 access object
end Show_Same_Level_Conversion;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Accessibility_
 ↪Levels_Rules_Introduction.Same_Level_Conversion
MD5: 7276a06e9f5b634d4f5a10a892071d87
```

Here, we're converting from the `L1_Integer_Access` type to the `L1_B_Integer_Access`, which are both at the same level.

Accessibility rules on parameters

Note that the accessibility rules also apply to access values as subprogram parameters. For example, compilation fails for this example:

Listing 92: names.ads

```
package Names is

   type Name is access all String;

   type Constant_Name is
     access constant String;

   procedure Show (N : Constant_Name);

end Names;
```

Listing 93: names.adb

```
with Ada.Text_IO; use Ada.Text_IO;

--  with Ada.Characters.Handling;
--  use  Ada.Characters.Handling;

package body Names is

   procedure Show (N : Constant_Name) is
   begin
```

(continues on next page)

(continued from previous page)

```
      --  for I in N'Range loop
      --     N (I) := To_Lower (N (I));
      --  end loop;
      Put_Line ("Name: " & N.all);
   end Show;

end Names;
```

Listing 94: show_names.adb

```
with Names; use Names;

procedure Show_Names is
   S : aliased String := "John";
begin
   Show (S'Access);
end Show_Names;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Accessibility_
 ↪Levels_Rules_Introduction.Accessibility_Checks_Parameters
MD5: 6b8bf2799caa32f55d216ac0b58fcd39
```

Build output

```
show_names.adb:6:10: error: non-local pointer cannot point to local object
gprbuild: *** compilation phase failed
```

In this case, the `S'Access` cannot be used as the actual parameter for the `N` parameter of the `Show` procedure because it's in a deeper level. If we allocate the string via **new**, however, the code compiles as expected:

Listing 95: show_names.adb

```
with Names; use Names;

procedure Show_Names is
   S : Name := new String'("John");
begin
   Show (Constant_Name (S));
end Show_Names;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Accessibility_
 ↪Levels_Rules_Introduction.Accessibility_Checks_Parameters
MD5: 30237c83426db758804b802e1953d5d9
```

Runtime output

```
Name: John
```

This version of the code works because both object and access object have the same level.

Dangling References

An access value that points to a non-existent object is called a dangling reference. Later on, we'll discuss how dangling references may occur using *unchecked deallocation* (page 909).

Dangling references are created when we have an access value pointing to an object whose lifetime has ended, so it becomes a non-existent object. This could occur, for example, when an access value still points to an object X that has gone out of scope.

As mentioned in the previous section, the accessibility rules of the Ada language ensure that such situations never happen! In fact, whenever possible, the compiler applies those rules to detect potential dangling references at compile time. When this detection isn't possible at compile time, the compiler introduces an *accessibility check* (page 777). If this check fails at runtime, it raises a `Program_Error` exception — thereby preventing that a dangling reference gets used.

Let's see an example of how dangling references could occur:

Listing 96: show_dangling_reference.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Dangling_Reference is

   type Integer_Access is
     access all Integer;

   I_Var_1 : aliased Integer := 22;

   A1    : Integer_Access;
begin
   A1 := I_Var_1'Access;
   Put_Line ("A1.all: "
             & Integer'Image (A1.all));

   Put_Line ("Inner_Block will start now!");

   Inner_Block : declare
      --
      --  I_Var_2 only exists in Inner_Block
      --
      I_Var_2 : aliased Integer := 42;

      --
      --  A2 only exists in Inner_Block
      --
      A2      : Integer_Access;
   begin
      A2 := I_Var_1'Access;
      Put_Line ("A2.all: "
                & Integer'Image (A2.all));

      A1 := I_Var_2'Access;
      --   PROBLEM: A1 and Integer_Access type
      --            have longer lifetime than
      --            I_Var_2

      Put_Line ("A1.all: "
                & Integer'Image (A1.all));

      A2 := I_Var_2'Access;
      --   PROBLEM: A2 has the same lifetime as
      --            I_Var_2, but Integer_Access
      --            type has a longer lifetime.

      Put_Line ("A2.all: "
                & Integer'Image (A2.all));
   end Inner_Block;
```

(continues on next page)

(continued from previous page)

```
49
50    Put_Line ("Inner_Block has ended!");
51    Put_Line ("A1.all: "
52              & Integer'Image (A1.all));
53
54 end Show_Dangling_Reference;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Accessibility_
 ↪Levels_Rules_Introduction.Dangling_Reference_Rules
MD5: 98e597f3f6a12075c474612bb42f4cb7
```

Build output

```
show_dangling_reference.adb:33:13: error: non-local pointer cannot point to local␣
 ↪object
show_dangling_reference.adb:41:13: error: non-local pointer cannot point to local␣
 ↪object
gprbuild: *** compilation phase failed
```

Here, we declare the access objects A1 and A2 of Integer_Access type, and the I_Var_1 and I_Var_2 objects. Moreover, A1 and I_Var_1 are declared in the scope of the Show_Dangling_Reference procedure, while A2 and I_Var_2 are declared in the Inner_Block.

When we try to compile this code, we get two compilation errors due to violation of accessibility rules. Let's now discuss these accessibility rules in terms of lifetime, and see which problems they are preventing in each case.

1. In the A1 := I_Var_2'Access assignment, the main problem is that A1 has a longer lifetime than I_Var_2. After the Inner_Block finishes — when I_Var_2 gets out of scope and its lifetime has ended —, A1 would still be pointing to an object that does not longer exist.
2. In the A2 := I_Var_2'Access assignment, however, both A2 and I_Var_2 have the same lifetime. In that sense, the assignment may actually look pretty much OK.
   - However, as mentioned in the previous section, Ada also cares about the lifetime of access types. In fact, since the Integer_Access type is declared outside of the Inner_Block, it has a longer lifetime than A2 and I_Var_2.
   - To be more precise, the accessibility rules detect that A2 is an access object of a type that has a longer lifetime than I_Var_2.

At first glance, this last accessibility rule may seem too strict, as both A2 and I_Var_2 have the same lifetime — so nothing bad could occur when dereferencing A2. However, consider the following change to the code:

```
A2 := I_Var_2'Access;

A1 := A2;
--    PROBLEM: A1 will still be referring
--             to I_Var_2 after the
--             Inner_Block, i.e. when the
--             lifetime of I_Var_2 has
--             ended!
```

Here, we're introducing the A1 := A2 assignment. The problem with this is that I_Var_2's lifetime ends when the Inner_Block finishes, but A1 would continue to refer to an I_Var_2 object that doesn't exist anymore — thereby creating a dangling reference.

Even though we're actually not assigning A2 to A1 in the original code, we could have done it. The accessibility rules ensure that such an error is never introduced into the program.

For further reading...

In the original code, we can consider the `A2 := I_Var_2'Access` assignment to be safe, as we're not using the `A1 := A2` assignment there. Since we're confident that no error could ever occur in the `Inner_Block` due to the assignment to A2, we could replace it with `A2 := I_Var_2'Unchecked_Access`, so that the compiler accepts it. We discuss more about the unchecked access attribute *later in this chapter* (page 904).

Alternatively, we could have solved the compilation issue that we see in the `A2 := I_Var_2'Access` assignment by declaring another access type locally in the `Inner_Block`:

```
Inner_Block : declare
   type Integer_Local_Access is
     access all Integer;

   I_Var_2 : aliased Integer := 42;

   A2      : Integer_Local_Access;
begin
   A2 := I_Var_2'Access;
   --   This assignment is fine because
   --   the Integer_Local_Access type has
   --   the same lifetime as I_Var_2.
end Inner_Block;
```

With this change, A2 becomes an access object of a type that has the same lifetime as `I_Var_2`, so that the assignment doesn't violate the rules anymore.

(Note that in the `Inner_Block`, we could have simply named the local access type `Integer_Access` instead of `Integer_Local_Access`, thereby masking the `Integer_Access` type of the outer block.)

We discuss the effects of dereferencing dangling references *later in this chapter* (page 911).

28.1.11 Unchecked Access

In this section, we discuss the `Unchecked_Access` attribute, which we can use to circumvent accessibility issues for objects in specific cases. (Note that this attribute only exists for objects, not for subprograms.)

We've seen *previously* (page 894) that the accessibility levels verify the lifetime of access types. Let's see a simplified version of a code example from that section:

Listing 97: integers.ads

```
1  package Integers is
2
3     type Integer_Access is access all Integer;
4
5  end Integers;
```

Listing 98: show_access_issue.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  with Integers; use Integers;
```

(continues on next page)

(continued from previous page)

```
4
5  procedure Show_Access_Issue is
6     I_Var : aliased Integer := 42;
7
8     A     : Integer_Access;
9  begin
10    A := I_Var'Access;
11    --   PROBLEM: A has the same lifetime as I_Var,
12    --            but Integer_Access type has a
13    --            longer lifetime.
14
15    Put_Line ("A.all: " & Integer'Image (A.all));
16 end Show_Access_Issue;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Unchecked_Access.
 ↪Dangling_Reference_Rules
MD5: 646acabf3f388b52809349463d20d314
```

Build output

```
show_access_issue.adb:10:09: error: non-local pointer cannot point to local object
gprbuild: *** compilation phase failed
```

Here, the compiler complains about the `A := I_Var'Access` assignment because the `Integer_Access` type has a longer lifetime than `A`. However, we know that this assignment to `A` — and further uses of `A` in the code — won't cause dangling references to be created. Therefore, we can assume that assigning the access to `I_Var` to `A` is safe.

When we're sure that an access assignment cannot possibly generate dangling references, we can the use Unchecked_Access attribute. For instance, we can use this attribute to circumvent the compilation error in the previous code example, since we know that the assignment is actually safe:

Listing 99: integers.ads

```
1  package Integers is
2
3     type Integer_Access is access all Integer;
4
5  end Integers;
```

Listing 100: show_access_issue.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  with Integers; use Integers;
4
5  procedure Show_Access_Issue is
6     I_Var : aliased Integer := 42;
7
8     A     : Integer_Access;
9  begin
10    A := I_Var'Unchecked_Access;
11    --   OK: assignment is now accepted.
12
13    Put_Line ("A.all: " & Integer'Image (A.all));
14 end Show_Access_Issue;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Unchecked_Access.
 ↪Dangling_Reference_Rules
MD5: a71b9076d9e2983ffb9811183afdf6c1
```

Runtime output

```
A.all:  42
```

When we use the Unchecked_Access attribute, most rules still apply. The only difference to the standard **Access** attribute is that unchecked access applies the rules as if the object we're getting access to was being declared at library level. (For the code example we've just seen, the check would be performed as if I_Var was declared in the Integers package instead of being declared in the procedure.)

It is strongly recommended to avoid unchecked access in general. You should only use it when you can safely assume that the access object will be discarded before the object we had access to gets out of scope. Therefore, if this situation isn't clear enough, it's best to avoid unchecked access. (Later in this chapter, we'll see some of the nasty issues that arrive from creating dangling references.) Instead, you should work on improving the software design of your application by considering alternatives such as using containers or encapsulating access types in well-designed abstract data types.

In the Ada Reference Manual

- Unchecked Access Value Creation[260]

28.1.12 Unchecked Deallocation

So far, we've seen multiple examples of using **new** to allocate objects. In this section, we discuss how to manually deallocate objects.

Our starting point to manually deallocate an object is the generic Ada.Unchecked_Deallocation procedure. We first instantiate this procedure for an access type whose objects we want to be able to deallocate. For example, let's instantiate it for the Integer_Access type:

Listing 101: integer_types.ads

```
with Ada.Unchecked_Deallocation;

package Integer_Types is

   type Integer_Access is access Integer;

   --
   --  Instantiation of Ada.Unchecked_Deallocation
   --  for the Integer_Access type:
   --
   procedure Free is
     new Ada.Unchecked_Deallocation
       (Object => Integer,
        Name   => Integer_Access);
end Integer_Types;
```

Code block metadata

[260] http://www.ada-auth.org/standards/22rm/html/RM-13-10.html

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Unchecked_
 ↪Deallocation.Simple_Unchecked_Deallocation
MD5: 328b244cf406853e87494c381c9c4c9e
```

Here, we declare the `Free` procedure, which we can then use to deallocate objects that were allocated for the `Integer_Access` type.

`Ada.Unchecked_Deallocation` is a generic procedure that we can instantiate for access types. When declaring an instance of `Ada.Unchecked_Deallocation`, we have to specify arguments for:

- the formal `Object` parameter, which indicates the type of actual objects that we want to deallocate; and
- the formal `Name` parameter, which indicates the access type.

In a type declaration such as `type Integer_Access is access Integer`, `Integer` denotes the `Object`, while `Integer_Access` denotes the `Name`.

Because each instance of `Ada.Unchecked_Deallocation` is bound to a specific access type, we cannot use it for another access type, even if the type we use for the `Object` parameter is the same:

Listing 102: integer_types.ads

```
1  with Ada.Unchecked_Deallocation;
2
3  package Integer_Types is
4
5     type Integer_Access is access Integer;
6
7     procedure Free is
8       new Ada.Unchecked_Deallocation
9         (Object => Integer,
10         Name   => Integer_Access);
11
12    type Another_Integer_Access is access Integer;
13
14    procedure Free is
15      new Ada.Unchecked_Deallocation
16        (Object => Integer,
17         Name   => Another_Integer_Access);
18 end Integer_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Unchecked_
 ↪Deallocation.Simple_Unchecked_Deallocation
MD5: b9bc58ff60632287237e2e322fcbc63e
```

Here, we're declaring two `Free` procedures: one for the `Integer_Access` type, another for the `Another_Integer_Access`. We cannot use the `Free` procedure for the `Integer_Access` type when deallocating objects associated with the `Another_Integer_Access` type, even though both types are declared as `access Integer`.

Note that we can use any name when instantiating the `Ada.Unchecked_Deallocation` procedure. However, naming it `Free` is very common.

Now, let's see a complete example that includes object allocation and deallocation:

Listing 103: integer_types.ads

```
with Ada.Unchecked_Deallocation;

package Integer_Types is

   type Integer_Access is access Integer;

   procedure Free is
     new Ada.Unchecked_Deallocation
       (Object => Integer,
        Name   => Integer_Access);

   procedure Show_Is_Null (I : Integer_Access);

end Integer_Types;
```

Listing 104: integer_types.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Integer_Types is

   procedure Show_Is_Null (I : Integer_Access) is
   begin
      if I = null then
         Put_Line ("access value is null.");
      else
         Put_Line ("access value is NOT null.");
      end if;
   end Show_Is_Null;

end Integer_Types;
```

Listing 105: show_unchecked_deallocation.adb

```
with Ada.Text_IO;   use Ada.Text_IO;
with Integer_Types; use Integer_Types;

procedure Show_Unchecked_Deallocation is

   I : Integer_Access;

begin
   Put ("We haven't called new yet... ");
   Show_Is_Null (I);

   Put ("Calling new... ");
   I := new Integer;
   Show_Is_Null (I);

   Put ("Calling Free... ");
   Free (I);
   Show_Is_Null (I);
end Show_Unchecked_Deallocation;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Unchecked_
 ↪Deallocation.Unchecked_Deallocation
MD5: a9f2df04e2fe0d5ee8c17249b4ae315a
```

Runtime output

```
We haven't called new yet... access value is null.
Calling new... access value is NOT null.
Calling Free... access value is null.
```

In the Show_Unchecked_Deallocation procedure, we first allocate an object for I and then call Free (I) to deallocate it. Also, we call the Show_Is_Null procedure at three different points: before any allocation takes place, after allocating an object for I, and after deallocating that object.

When we deallocate an object via a call to Free, the corresponding access value — which was previously pointing to an existing object — is set to **null**. Therefore, I = **null** after the call to Free, which is exactly what we see when running this example code.

Note that it is OK to call Free multiple times for the same access object:

Listing 106: show_unchecked_deallocation.adb

```
1  with Integer_Types; use Integer_Types;
2
3  procedure Show_Unchecked_Deallocation is
4
5     I : Integer_Access;
6
7  begin
8     I := new Integer;
9
10    Free (I);
11    Free (I);
12    Free (I);
13 end Show_Unchecked_Deallocation;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Unchecked_
 ↪Deallocation.Unchecked_Deallocation
MD5: ce7f4f912f12d723ca673ca36a478765
```

The multiple calls to Free for the same access object don't cause any issues. Because the access value is null after the first call to Free (I), we're actually just passing **null** as an argument in the second and third calls to Free. However, any attempt to deallocate an access value of null is ignored in the Free procedure, so the second and third calls to Free don't have any effect.

In the Ada Reference Manual

- 4.8 Allocators[261]
- 13.11.2 Unchecked Storage Deallocation[262]

Unchecked Deallocation and Dangling References

We've discussed *dangling references* (page 901) before. In this section, we discuss how unchecked deallocation can create dangling references and the issues of having them in an application.

Let's reuse the last example and introduce I_2, which will point to the same object as I:

[261] http://www.ada-auth.org/standards/22rm/html/RM-4-8.html
[262] http://www.ada-auth.org/standards/22rm/html/RM-13-11-2.html

Listing 107: show_unchecked_deallocation.adb

```
with Integer_Types; use Integer_Types;

procedure Show_Unchecked_Deallocation is

   I, I_2 : Integer_Access;

begin
   I := new Integer;

   I_2 := I;

   --  NOTE: I_2 points to the same
   --        object as I.

   --
   --  Use I and I_2...
   --
   --  ... then deallocate memory...
   --

   Free (I);

   --  NOTE: at this point, I_2 is a
   --        dangling reference!

   --  Further calls to Free (I)
   --  are OK!

   Free (I);
   Free (I);

   --  A call to Free (I_2) is
   --  NOT OK:

   Free (I_2);
end Show_Unchecked_Deallocation;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Unchecked_
 ↪Deallocation.Unchecked_Deallocation
MD5: ee5c20209a113a6c1bc7895b8ebdb174
```

Runtime output

```
free(): double free detected in tcache 2

raised PROGRAM_ERROR : unhandled signal
```

As we've seen before, we can have multiple calls to `Free (I)`. However, the call to `Free (I_2)` is bad because `I_2` is not null. In fact, it is a dangling reference — i.e. `I_2` points to an object that doesn't exist anymore. Also, the first call to `Free (I)` will reclaim the storage that was allocated for the object that `I` originally referred to. The call to `Free (I_2)` will then try to reclaim the previously-reclaimed object, but it'll fail in an undefined manner.

Because of these potential errors, you should be very careful when using unchecked deallocation: it is the programmer's responsibility to avoid creating dangling references!

For the example we've just seen, we could avoid creating a dangling reference by explicitly assigning `null` to `I_2` to indicate that it doesn't point to any specific object:

Listing 108: show_unchecked_deallocation.adb

```
with Integer_Types; use Integer_Types;

procedure Show_Unchecked_Deallocation is

   I, I_2 : Integer_Access;

begin
   I := new Integer;

   I_2 := I;

   --  NOTE: I_2 points to the same
   --        object as I.

   --
   --  Use I and I_2...
   --
   --  ... then deallocate memory...
   --

   I_2 := null;

   --  NOTE: now, I_2 doesn't point to
   --        any object, so calling
   --        Free (I_2) is OK.

   Free (I);
   Free (I_2);
end Show_Unchecked_Deallocation;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Unchecked_
 ↪Deallocation.Unchecked_Deallocation
MD5: 3381ba594cbbc0f1547e3f819bae0f97
```

Now, calling `Free (I_2)` doesn't cause any issues because it doesn't point to any object.

Note, however, that this code example is just meant to illustrate the issues of dangling pointers and how we could circumvent them. We're not suggesting to use this approach when designing an implementation. In fact, it's not practical for the programmer to make every possible dangling reference become null if the calls to `Free` are strewn throughout the code.

The suggested design is to not use `Free` in the client code, but instead hide its use within bigger abstractions. In that way, all the occurrences of the calls to `Free` are in one package, and the programmer of that package can then prevent dangling references. We'll discuss these *design strategies* (page 918) later on.

Dereferencing dangling references

Of course, you shouldn't try to dereference a dangling reference because your program becomes erroneous, as we discuss in this section. Let's see an example:

Listing 109: show_unchecked_deallocation.adb

```
with Ada.Text_IO;   use Ada.Text_IO;
with Integer_Types; use Integer_Types;

```

(continues on next page)

(continued from previous page)

```
4  procedure Show_Unchecked_Deallocation is
5
6     I_1, I_2 : Integer_Access;
7
8  begin
9     I_1 := new Integer'(42);
10    I_2 := I_1;
11
12    Put_Line ("I_1.all = "
13              & Integer'Image (I_1.all));
14    Put_Line ("I_2.all = "
15              & Integer'Image (I_2.all));
16
17    Put_Line ("Freeing I_1");
18    Free (I_1);
19
20    if I_1 /= null then
21       Put_Line ("I_1.all = "
22                 & Integer'Image (I_1.all));
23    end if;
24
25    if I_2 /= null then
26       Put_Line ("I_2.all = "
27                 & Integer'Image (I_2.all));
28    end if;
29 end Show_Unchecked_Deallocation;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Unchecked_
↪Deallocation.Unchecked_Deallocation
MD5: 8536190aa5bbafa715ad8153aaeb4889
```

Runtime output

```
I_1.all =  42
I_2.all =  42
Freeing I_1
I_2.all =  983624129
```

In this example, we allocate an object for `I_1` and make `I_2` point to the same object. Then, we call `Free (I)`, which has the following consequences:

- The call to `Free (I_1)` will try to reclaim the storage for the original object (`I_1.all`), so it may be reused for other allocations.
- `I_1 = null` after the call to `Free (I_1)`.
- `I_2` becomes a dangling reference by the call to `Free (I_1)`.
  - In other words, `I_2` is still non-null, and what it points to is now undefined.

In principle, we could check for `null` before trying to dereference the access value. (Remember that when deallocating an object via a call to `Free`, the corresponding access value is set to `null`.) In fact, this strategy works fine for `I_1`, but it doesn't work for `I_2` because the access value is not `null`. As a consequence, the application tries to dereference `I_2`.

Dereferencing a dangling reference is erroneous: the behavior is undefined in this case. For the example we've just seen,

- `I_2.all` might make the application crash;
- `I_2.all` might give us a different value than before;

- `I_2.all` might even give us the same value as before (42) if the original object is still available.

Because the effect is unpredictable, it might be really difficult to debug the application and identify the cause.

Having dangling pointers in an application should be avoided at all costs! Again, it is the programmer's responsibility to be very careful when using unchecked deallocation: avoid creating dangling references!

In the Ada Reference Manual

- 13.9.1 Data Validity[263]
- 13.11.2 Unchecked Storage Deallocation[264]

Restrictions for `Ada.Unchecked_Deallocation`

There are two unsurprising restrictions for `Ada.Unchecked_Deallocation`:

1. It cannot be instantiated for access-to-constant types; and
2. It cannot be used when the `Storage_Size` aspect of a type is zero (i.e. when its storage pool is empty).

(Note that this last restriction also applies to the allocation via `new`.)

Let's see an example of these restrictions:

Listing 110: show_unchecked_deallocation_errors.adb

```
with Ada.Unchecked_Deallocation;

procedure Show_Unchecked_Deallocation_Errors is

   type Integer_Access_Zero is access Integer
     with Storage_Size => 0;

   procedure Free is
     new Ada.Unchecked_Deallocation
       (Object => Integer,
        Name   => Integer_Access_Zero);

   type Constant_Integer_Access is
     access constant Integer;

   --  ERROR: Cannot use access-to-constant type
   --         for Name
   procedure Free is
     new Ada.Unchecked_Deallocation
       (Object => Integer,
        Name   => Constant_Integer_Access);

   I : Integer_Access_Zero;

begin
   --  ERROR: Cannot allocate objects from
   --         empty storage pool
   I := new Integer;

```

(continues on next page)

[263] http://www.ada-auth.org/standards/22rm/html/RM-13-9-1.html
[264] http://www.ada-auth.org/standards/22rm/html/RM-13-11-2.html

(continued from previous page)

```
30    --  ERROR: Cannot deallocate objects from
31    --         empty storage pool
32    Free (I);
33 end Show_Unchecked_Deallocation_Errors;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Unchecked_
 ↪Deallocation.Unchecked_Deallocation_Error
MD5: 5032d13b2eb6b7ca1979282ddd6df98a
```

Build output

```
show_unchecked_deallocation_errors.adb:21:19: error: actual type must be access-to-
 ↪variable type
show_unchecked_deallocation_errors.adb:21:19: error: instantiation abandoned
show_unchecked_deallocation_errors.adb:28:09: error: allocation from empty storage␣
 ↪pool
show_unchecked_deallocation_errors.adb:32:04: error: deallocation from empty␣
 ↪storage pool
gprbuild: *** compilation phase failed
```

Here, we see that trying to instantiate `Ada.Unchecked_Deallocation` for the `Constant_Integer_Access` type is rejected by the compiler. Similarly, we cannot allocate or deallocate an object for the `Integer_Access_Zero` type because its storage pool is empty.

28.1.13 Null & Not Null Access

> **Note**
>
> This section was originally written by Robert A. Duff and published as Gem #23: Null Considered Harmful[265] and Gem #24[266].

Ada, like many languages, defines a special **`null`** value for access types. All values of an access type designate some object of the designated type, except for **`null`**, which does not designate any object. The null value can be used as a special flag. For example, a singly-linked list can be null-terminated. A Lookup function can return **`null`** to mean "not found", presuming the result is of an access type:

Listing 111: show_null_return.ads

```
1  package Show_Null_Return is
2
3     type Ref_Element is access all Element;
4
5     Not_Found : constant Ref_Element := null;
6
7     function Lookup (T : Table) return Ref_Element;
8     --  Returns Not_Found if not found.
9  end Show_Null_Return;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Null_And_Not_Null_
 ↪Access.Null_Return
MD5: 6c4eed750d42685198ec9495805e3e23
```

[265] https://www.adacore.com/gems/ada-gem-23
[266] https://www.adacore.com/gems/ada-gem-24

An alternative design for Lookup would be to raise an exception:

Listing 112: show_not_found_exception.ads

```
package Show_Not_Found_Exception is
   Not_Found : exception;

   function Lookup (T : Table) return Ref_Element;
   --  Raises Not_Found if not found.
   --  Never returns null.
end Show_Not_Found_Exception;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Null_And_Not_Null_
 ↪Access.Not_Found_Exception
MD5: 6ef47b32d4923838ffc28f43e5db323c
```

Neither design is better in all situations; it depends in part on whether we consider the "not found" situation to be exceptional.

Clearly, the client calling Lookup needs to know whether it can return **null**, and if so, what that means. In general, it's a good idea to document whether things can be null or not, especially for formal parameters and function results. Prior to Ada 2005, we would do that with comments. Since Ada 2005, we can use the **not null** syntax:

Listing 113: show_not_null_return.ads

```
package Show_Not_Null_Return is
   type Ref_Element is access all Element;

   Not_Found : constant Ref_Element := null;

   function Lookup (T : Table)
                    return not null Ref_Element;
   --  Possible since Ada 2005.
end Show_Not_Null_Return;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Null_And_Not_Null_
 ↪Access.Not_Null_Return
MD5: 4c0bb95da3b5a7c555a763c4951f7e21
```

This is a complete package for the code snippets above:

Listing 114: example.ads

```
package Example is

   type Element is limited private;
   type Ref_Element is access all Element;

   type Table is limited private;

   Not_Found : constant Ref_Element := null;
   function Lookup (T : Table)
                    return Ref_Element;
   --  Returns Not_Found if not found.

   Not_Found_2 : exception;
   function Lookup_2 (T : Table)
```

(continues on next page)

(continued from previous page)

```
                        return not null Ref_Element;
   --  Raises Not_Found_2 if not found.

   procedure P (X : not null Ref_Element);

   procedure Q (X : not null Ref_Element);

private
   type Element is limited
      record
         Component : Integer;
      end record;
   type Table is limited null record;
end Example;
```

Listing 115: example.adb

```
package body Example is

   An_Element : aliased Element;

   function Lookup (T : Table)
                    return Ref_Element is
      pragma Unreferenced (T);
   begin
      --  ...
      return Not_Found;
   end Lookup;

   function Lookup_2 (T : Table)
                      return not null Ref_Element
   is
   begin
      --  ...
      raise Not_Found_2;

      return An_Element'Access;
      --  suppress error: 'missing "return"
      --  statement in function body'
   end Lookup_2;

   procedure P (X : not null Ref_Element) is
   begin
      X.all.Component := X.all.Component + 1;
   end P;

   procedure Q (X : not null Ref_Element) is
   begin
      for I in 1 .. 1000 loop
         P (X);
      end loop;
   end Q;

   procedure R is
   begin
      Q (An_Element'Access);
   end R;

  pragma Unreferenced (R);

end Example;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Null_And_Not_Null_
 ↪Access.Complete_Null_Return
MD5: 01895c7d5f843fd215dcc21d807d4187
```

In general, it's better to use the language proper for documentation, when possible, rather than comments, because compile-time and/or run-time checks can help ensure that the "documentation" is actually true. With comments, there's a greater danger that the comment will become false during maintenance, and false documentation is obviously a menace.

In many, perhaps most cases, **null** is just a tripping hazard. It's a good idea to put in **not null** when possible. In fact, a good argument can be made that **not null** should be the default, with extra syntax required when **null** is wanted. This is the way Standard ML[267] works, for example — you don't get any special null-like value unless you ask for it. Of course, because Ada 2005 needs to be compatible with previous versions of the language, **not null** cannot be the default for Ada.

One word of caution: access objects are default-initialized to **null**, so if you have a **not null** object (or component) you had better initialize it explicitly, or you will get Constraint_Error. **not null** is more often useful on parameters and function results, for this reason.

Another advantage of **not null** over comments is for efficiency. Consider procedures P and Q in this example:

Listing 116: example-processing.ads

```
1  package Example.Processing is
2
3     procedure P (X : not null Ref_Element);
4
5     procedure Q (X : not null Ref_Element);
6
7  end Example.Processing;
```

Listing 117: example-processing.adb

```
1  package body Example.Processing is
2
3     procedure P (X : not null Ref_Element) is
4     begin
5        X.all.Component := X.all.Component + 1;
6     end P;
7
8     procedure Q (X : not null Ref_Element) is
9     begin
10       for I in 1 .. 1000 loop
11          P (X);
12       end loop;
13    end Q;
14
15 end Example.Processing;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Null_And_Not_Null_
 ↪Access.Complete_Null_Return
MD5: dc34b1a27737d57c041be6260dd577fd
```

[267] https://en.wikipedia.org/wiki/Standard_ML

Without `not null`, the generated code for P will do a check that `X /= null`, which may be costly on some systems. P is called in a loop, so this check will likely occur many times. With `not null`, the check is pushed to the call site. Pushing checks to the call site is usually beneficial because

1. the check might be hoisted out of a loop by the optimizer, or
2. the check might be eliminated altogether, as in the example above, where the compiler knows that `An_Element'Access` cannot be `null`.

This is analogous to the situation with other run-time checks, such as array bounds checks:

Listing 118: show_process_array.ads

```
package Show_Process_Array is

   type My_Index is range 1 .. 10;
   type My_Array is array (My_Index) of Integer;

   procedure Process_Array
     (X     : in out My_Array;
      Index :        My_Index);

end Show_Process_Array;
```

Listing 119: show_process_array.adb

```
package body Show_Process_Array is

   procedure Process_Array
     (X     : in out My_Array;
      Index :        My_Index) is
   begin
      X (Index) := X (Index) + 1;
   end Process_Array;

end Show_Process_Array;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Null_And_Not_Null_
 ↪Access.Process_Array
MD5: 32424432f5b2e3013292680f92a04320
```

If `X (Index)` occurs inside `Process_Array`, there is no need to check that `Index` is in range, because the check is pushed to the caller.

28.1.14 Design strategies for access types

Previously, we learned about *dangling references* (page 901) and discussed the effects of *dereferencing them* (page 911). Also, we've seen the relationship between *unchecked deallocation and dangling references* (page 909). Ensuring that all calls to `Free` for a specific access type will never cause dangling references can become an arduous task — if not impossible — if those calls are located in different parts of the source code.

Although we used access types directly in the main application in many of the previous code examples from this chapter, this approach was in fact selected just for illustration purposes — i.e. to make the code look simpler. In general, however, we should avoid this approach. Instead, our recommendation is to encapsulate the access types in some form of abstraction. In this section, we discuss design strategies for access types that take this recommendation into account.

Abstract data type for access types

The simplest form of abstraction is of course an abstract data type. For example, we could declare a limited private type, which allows us to hide the access type and to avoid copies of references that could potentially become dangling references. (We discuss limited private types later *in another chapter* (page 1033).)

Let's see an example:

Listing 120: access_type_abstraction.ads

```
package Access_Type_Abstraction is

   type Info is limited private;

   function To_Info (S : String) return Info;

   function To_String (Obj : Info)
                       return String;

   function Copy (Obj : Info) return Info;

   procedure Copy (To   : in out Info;
                   From :        Info);

   procedure Append (Obj : in out Info;
                     S   : String);

   procedure Reset (Obj : in out Info);

   procedure Destroy (Obj : in out Info);

private

   type Info is access String;

end Access_Type_Abstraction;
```

Listing 121: access_type_abstraction.adb

```
with Ada.Unchecked_Deallocation;

package body Access_Type_Abstraction is

   function To_Info (S : String) return Info is
     (new String'(S));

   function To_String (Obj : Info)
                       return String is
     (if Obj /= null then Obj.all else "");

   function Copy (Obj : Info) return Info is
     (To_Info (To_String (Obj)));

   procedure Copy (To   : in out Info;
                   From :        Info) is
   begin
      Destroy (To);
      To := Copy (From);
   end Copy;

   procedure Append (Obj : in out Info;
```

(continues on next page)

(continued from previous page)

```
                     S   : String) is
      New_Info : constant Info :=
                   To_Info (To_String (Obj) & S);
   begin
      Destroy (Obj);
      Obj := New_Info;
   end Append;

   procedure Reset (Obj : in out Info) is
   begin
      Destroy (Obj);
   end Reset;

   procedure Destroy (Obj : in out Info) is
      procedure Free is
        new Ada.Unchecked_Deallocation
          (Object => String,
           Name   => Info);
   begin
      Free (Obj);
   end Destroy;

end Access_Type_Abstraction;
```

Listing 122: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Access_Type_Abstraction;
use  Access_Type_Abstraction;

procedure Main is
   Obj_1 : Info := To_Info ("hello");
   Obj_2 : Info := Copy (Obj_1);
begin
   Put_Line ("TO_INFO / COPY");
   Put_Line ("Obj_1 : "
             & To_String (Obj_1));
   Put_Line ("Obj_2 : "
             & To_String (Obj_2));
   Put_Line ("----------");

   Reset (Obj_1);
   Append (Obj_2, " world");

   Put_Line ("RESET / APPEND");
   Put_Line ("Obj_1 : "
             & To_String (Obj_1));
   Put_Line ("Obj_2 : "
             & To_String (Obj_2));
   Put_Line ("----------");

   Copy (From => Obj_2,
         To   => Obj_1);

   Put_Line ("COPY");
   Put_Line ("Obj_1 : "
             & To_String (Obj_1));
   Put_Line ("Obj_2 : "
             & To_String (Obj_2));
   Put_Line ("----------");
```

(continues on next page)

(continued from previous page)

```
36
37    Destroy (Obj_1);
38    Destroy (Obj_2);
39
40    Put_Line ("DESTROY");
41    Put_Line ("Obj_1 : "
42              & To_String (Obj_1));
43    Put_Line ("Obj_2 : "
44              & To_String (Obj_2));
45    Put_Line ("----------");
46
47    Append (Obj_1, "hey");
48
49    Put_Line ("APPEND");
50    Put_Line ("Obj_1 : "
51              & To_String (Obj_1));
52    Put_Line ("----------");
53
54    Put_Line ("APPEND");
55    Append (Obj_1, " there");
56    Put_Line ("Obj_1 : "
57              & To_String (Obj_1));
58
59    Destroy (Obj_1);
60    Destroy (Obj_2);
61 end Main;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Design_Strategies.
 ↪Access_Type_Abstraction
MD5: a335caeba4f1fb952a2e0d8d6bc52f75
```

Runtime output

```
TO_INFO / COPY
Obj_1 : hello
Obj_2 : hello
----------
RESET / APPEND
Obj_1 :
Obj_2 : hello world
----------
COPY
Obj_1 : hello world
Obj_2 : hello world
----------
DESTROY
Obj_1 :
Obj_2 :
----------
APPEND
Obj_1 : hey
----------
APPEND
Obj_1 : hey there
```

In this example, we hide an access type in the `Info` type — a limited private type. We allocate an object of this type in the `To_Info` function and deallocate it in the `Destroy` procedure. Also, we make sure that the reference isn't copied in the `Copy` function — we only copy the designated value in this function. This strategy eliminates the possibility of

dangling references, as each reference is encapsulated in an object of `Info` type.

Controlled type for access types

In the previous code example, the `Destroy` procedure had to be called to deallocate the hidden access object. We could make sure that this deallocation happens automatically by using a controlled (or limited controlled) type. (We discuss *controlled types* (page 1080) in another chapter.)

Let's adapt the previous example and declare `Info` as a limited controlled type:

Listing 123: access_type_abstraction.ads

```
with Ada.Finalization;

package Access_Type_Abstraction is

   type Info is limited private;

   function To_Info (S : String) return Info;

   function To_String (Obj : Info)
                       return String;

   function Copy (Obj : Info) return Info;

   procedure Copy (To   : in out Info;
                   From :        Info);

   procedure Append (Obj : in out Info;
                     S   :        String);

   procedure Reset (Obj : in out Info);

private

   type String_Access is access String;

   type Info is new
     Ada.Finalization.Limited_Controlled with
      record
         Str_A : String_Access;
      end record;

   procedure Initialize (Obj : in out Info);
   procedure Finalize (Obj : in out Info);

end Access_Type_Abstraction;
```

Listing 124: access_type_abstraction.adb

```
with Ada.Unchecked_Deallocation;

package body Access_Type_Abstraction is

   --
   --  STRING_ACCESS SUBPROGRAMS
   --

   function To_String_Access (S : String)
                              return String_Access
   is
```

(continues on next page)

(continued from previous page)

```
12      (new String'(S));
13
14    function To_String (S : String_Access)
15                        return String is
16      (if S /= null then S.all else "");
17
18    procedure Free is
19      new Ada.Unchecked_Deallocation
20        (Object => String,
21         Name   => String_Access);
22
23    --
24    --  PRIVATE SUBPROGRAMS
25    --
26
27    procedure Initialize (Obj : in out Info) is
28    begin
29       --  Put_Line ("Initializing Info");
30       Obj.Str_A := null;
31       --  ^^^^^^^^^^^^^
32       --  NOTE: This line has just been added to
33       --        illustrate the "automatic" call to
34       --        Initialize. Actually, this
35       --        assignment isn't needed, as
36       --        the Str_A component is
37       --        automatically initialized to null
38       --        upon object construction.
39    end Initialize;
40
41    procedure Finalize (Obj : in out Info) is
42    begin
43       --  Put_Line ("Finalizing Info");
44       Free (Obj.Str_A);
45    end Finalize;
46
47    --
48    --  PUBLIC SUBPROGRAMS
49    --
50
51    function To_Info (S : String) return Info is
52      (Ada.Finalization.Limited_Controlled
53       with Str_A => To_String_Access (S));
54
55    function To_String (Obj : Info)
56                        return String is
57      (To_String (Obj.Str_A));
58
59    function Copy (Obj : Info) return Info is
60      (To_Info (To_String (Obj.Str_A)));
61
62    procedure Copy (To   : in out Info;
63                    From :        Info) is
64    begin
65       Free (To.Str_A);
66       To.Str_A := To_String_Access
67                     (To_String (From.Str_A));
68    end Copy;
69
70    procedure Append (Obj : in out Info;
71                      S   :        String) is
72       New_Str_A : constant String_Access :=
```

(continues on next page)

(continued from previous page)

```
                    To_String_Access
                      (To_String (Obj.Str_A) & S);
   begin
      Free (Obj.Str_A);
      Obj.Str_A := New_Str_A;
   end Append;

   procedure Reset (Obj : in out Info) is
   begin
      Free (Obj.Str_A);
   end Reset;

end Access_Type_Abstraction;
```

Listing 125: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Access_Type_Abstraction;
use  Access_Type_Abstraction;

procedure Main is
   Obj_1 : Info := To_Info ("hello");
   Obj_2 : Info := Copy (Obj_1);
begin
   --
   --  TO_INFO / COPY
   --
   Put_Line ("TO_INFO / COPY");

   Put_Line ("Obj_1 : "
             & To_String (Obj_1));
   Put_Line ("Obj_2 : "
             & To_String (Obj_2));
   Put_Line ("----------");

   --
   --  RESET:  Obj_1
   --  APPEND: Obj_2
   --
   Put_Line ("RESET / APPEND");

   Reset (Obj_1);
   Append (Obj_2, " world");

   Put_Line ("Obj_1 : "
             & To_String (Obj_1));
   Put_Line ("Obj_2 : "
             & To_String (Obj_2));
   Put_Line ("----------");

   --
   --  COPY: Obj_2 => Obj_1
   --
   Put_Line ("COPY");

   Copy (From => Obj_2,
         To   => Obj_1);

   Put_Line ("Obj_1 : "
             & To_String (Obj_1));
```

(continues on next page)

(continued from previous page)

```
   Put_Line ("Obj_2 : "
             & To_String (Obj_2));
   Put_Line ("----------");

   --
   --  RESET: Obj_1, Obj_2
   --
   Put_Line ("RESET");

   Reset (Obj_1);
   Reset (Obj_2);

   Put_Line ("Obj_1 : "
             & To_String (Obj_1));
   Put_Line ("Obj_2 : "
             & To_String (Obj_2));
   Put_Line ("----------");

   --
   --  COPY: Obj_2 => Obj_1
   --
   Put_Line ("COPY");

   Copy (From => Obj_2,
         To   => Obj_1);

   Put_Line ("Obj_1 : "
             & To_String (Obj_1));
   Put_Line ("Obj_2 : "
             & To_String (Obj_2));
   Put_Line ("----------");

   --
   --  APPEND: Obj_1 with "hey"
   --
   Put_Line ("APPEND");

   Append (Obj_1, "hey");

   Put_Line ("Obj_1 : "
             & To_String (Obj_1));
   Put_Line ("----------");

   --
   --  APPEND: Obj_1 with "there"
   --
   Put_Line ("APPEND");

   Append (Obj_1, " there");

   Put_Line ("Obj_1 : "
             & To_String (Obj_1));
end Main;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Design_Strategies.
 ↪Access_Type_Limited_Controlled_Abstraction
MD5: e98659ad1b87be56fb173fa407ab7e82
```

Runtime output

```
TO_INFO / COPY
Obj_1 : hello
Obj_2 : hello
----------
RESET / APPEND
Obj_1 :
Obj_2 : hello world
----------
COPY
Obj_1 : hello world
Obj_2 : hello world
----------
RESET
Obj_1 :
Obj_2 :
----------
COPY
Obj_1 :
Obj_2 :
----------
APPEND
Obj_1 : hey
----------
APPEND
Obj_1 : hey there
```

Of course, because we're using the `Limited_Controlled` type from the `Ada.Finalization` package, we had to adapt the prototype of the subprograms from the `Access_Type_Abstraction`. In this version of the code, we only have the allocation taking place in the `To_Info` procedure, but we don't have a `Destroy` procedure for deallocation: this call was moved to the `Finalize` procedure.

Since objects of the `Info` type — such as `Obj_1` in the `Show_Access_Type_Abstraction` procedure — are now controlled, the `Finalize` procedure is automatically called when they go out of scope. In this procedure, which we override for the `Info` type, we perform the deallocation of the internal access object `Str_A`. (You may uncomment the calls to `Put_Line` in the body of the `Initialize` and `Finalize` subprograms to confirm that these subprograms are called in the background.)

28.1.15 Access to subprograms

So far in this chapter, we focused mainly on access-to-objects. However, we can use access types to subprograms. This is the topic of this section.

Static vs. dynamic calls

In a typical subprogram call, we indicate the subprogram we want to call statically. For example, let's say we've implemented a procedure `Proc` that calls a procedure `P`:

Listing 126: p.ads

```
1 procedure P (I : in out Integer);
```

Listing 127: p.adb

```
1 procedure P (I : in out Integer) is
2 begin
3    null;
4 end P;
```

Listing 128: proc.adb

```
with P;

procedure Proc is
   I : Integer := 0;
begin
   P (I);
end Proc;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_To_
 ↪Subprograms.Subprogram_Call
MD5: 0e9547e53d0d02d39920f4d1d6787af6
```

The call to P is statically dispatched: every time Proc runs and calls P, that call is always to the same procedure. In other words, we can determine at compilation time which procedure is called.

In contrast, an access to a subprogram allows us to dynamically indicate which subprogram we want to call. For example, if we change Proc in the code above to receive the access to a subprogram P as a parameter, the actual procedure that would be called when running Proc would be determined at run time, and it might be different for every call to Proc. In this case, we wouldn't be able to determine at compilation time which procedure would be called in every case. (In some cases, however, it could still be possible to determine which procedure is called by analyzing the argument that is passed to Proc.)

Access to subprogram declaration

We declare an access to a subprogram as a type by writing **access procedure** or **access function** and the corresponding prototype:

Listing 129: access_to_subprogram_types.ads

```
package Access_To_Subprogram_Types is

   type Access_To_Procedure is
     access procedure (I : in out Integer);

   type Access_To_Function is
     access function (I : Integer) return Integer;

end Access_To_Subprogram_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_To_
 ↪Subprograms.Access_To_Subprogram_Types
MD5: 5f834c1b2044ba5ea7d4835c3ebdedb1
```

In the designated profile of the access type declarations, we list all the parameters that we expect in the subprogram.

We can use those types to declare access to subprograms — as subprogram parameters, for example:

Listing 130: access_to_subprogram_params.ads

```
with Access_To_Subprogram_Types;
use  Access_To_Subprogram_Types;
```

(continues on next page)

(continued from previous page)

```
3
4  package Access_To_Subprogram_Params is
5
6     procedure Proc (P : Access_To_Procedure);
7
8  end Access_To_Subprogram_Params;
```

Listing 131: access_to_subprogram_params.adb

```
1  package body Access_To_Subprogram_Params is
2
3     procedure Proc (P : Access_To_Procedure) is
4        I : Integer := 0;
5     begin
6        P (I);
7        --  P.all (I);
8     end Proc;
9
10 end Access_To_Subprogram_Params;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_To_
 ↪Subprograms.Access_To_Subprogram_Types
MD5: 17c1a07f48d9fb0efef37aa4c5ec8a51
```

In the implementation of the Proc procedure of the code example, we call the P procedure by simply passing I as a parameter. In this case, P is automatically dereferenced. We may, however, explicitly dereference P by writing `P.all (I)`.

Before we use this package, let's implement a simple procedure that we'll use later on:

Listing 132: add_ten.ads

```
1  procedure Add_Ten (I : in out Integer);
```

Listing 133: add_ten.adb

```
1  procedure Add_Ten (I : in out Integer) is
2  begin
3     I := I + 10;
4  end Add_Ten;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_To_
 ↪Subprograms.Access_To_Subprogram_Types
MD5: 8553ad7329bf1ed727147b47b7355a70
```

Now, we can get access to a subprogram by using the **Access** attribute and pass it as an actual parameter:

Listing 134: show_access_to_subprograms.adb

```
1  with Access_To_Subprogram_Params;
2  use  Access_To_Subprogram_Params;
3
4  with Add_Ten;
5
6  procedure Show_Access_To_Subprograms is
```

(continues on next page)

(continued from previous page)

```
begin
   Proc (Add_Ten'Access);
   --             ^ Getting access to Add_Ten
   --               procedure and passing it
   --               to Proc
end Show_Access_To_Subprograms;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_To_
 ↪Subprograms.Access_To_Subprogram_Types
MD5: 599e9d1306da48e3c532692b34c02a1d
```

Here, we get access to the Add_Ten procedure and pass it to the Proc procedure.

In the Ada Reference Manual

- 3.10 Access Types[268]

Objects of access-to-subprogram type

In the previous example, the Proc procedure had a parameter of access-to-subprogram type. In addition to parameters, we can of course declare *objects* of access-to-subprogram types as well. For example, we can extend our previous test application and declare an object P of access-to-subprogram type. Before we do so, however, let's implement another small procedure that we'll use later on:

Listing 135: add_twenty.ads

```
procedure Add_Twenty (I : in out Integer);
```

Listing 136: add_twenty.adb

```
procedure Add_Twenty (I : in out Integer) is
begin
   I := I + 20;
end Add_Twenty;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_To_
 ↪Subprograms.Access_To_Subprogram_Types
MD5: 697959b806f6f2bfba248ec15c47883b
```

In addition to Add_Ten, we've implemented the Add_Twenty procedure, which we use in our extended test application:

Listing 137: show_access_to_subprograms.adb

```
with Access_To_Subprogram_Types;
use  Access_To_Subprogram_Types;

with Access_To_Subprogram_Params;
use  Access_To_Subprogram_Params;

with Add_Ten;
```

(continues on next page)

[268] http://www.ada-auth.org/standards/22rm/html/RM-3-10.html

(continued from previous page)

```
with Add_Twenty;

procedure Show_Access_To_Subprograms is
   P        : Access_To_Procedure;
   Some_Int : Integer := 0;
begin
   P := Add_Ten'Access;
   --           ^ Getting access to Add_Ten
   --             procedure and assigning it
   --             to P

   Proc (P);
   --    ^ Passing access-to-subprogram as an
   --      actual parameter

   P (Some_Int);
   --  ^ Using access-to-subprogram object in a
   --    subprogram call

   P := Add_Twenty'Access;
   --               ^ Getting access to Add_Twenty
   --                 procedure and assigning it
   --                 to P

   Proc (P);
   P (Some_Int);
end Show_Access_To_Subprograms;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_To_
 ↪Subprograms.Access_To_Subprogram_Types
MD5: 7b4ea19187806e88ba65847876cafb4f
```

In the Show_Access_To_Subprograms procedure, we see the declaration of our access-to-subprogram object P (of Access_To_Procedure type). We get access to the Add_Ten procedure and assign it to P, and we then do the same for the Add_Twenty procedure.

We can use an access-to-subprogram object either as the actual parameter of a subprogram call, or in a subprogram call. In the code example, we're passing P as the actual parameter of the Proc procedure in the Proc (P) calls. Also, we're calling the subprogram assigned to (designated by the current value of) P in the P (Some_Int) calls.

Components of access-to-subprogram type

In addition to declaring subprogram parameters and objects of access-to-subprogram types, we can declare components of these types. For example:

Listing 138: access_to_subprogram_types.ads

```
package Access_To_Subprogram_Types is

   type Access_To_Procedure is
     access procedure (I : in out Integer);

   type Access_To_Function is
     access function (I : Integer) return Integer;

   type Access_To_Procedure_Array is
     array (Positive range <>) of
```

(continues on next page)

(continued from previous page)

```
      Access_To_Procedure;

   type Access_To_Function_Array is
     array (Positive range <>) of
       Access_To_Function;

   type Rec_Access_To_Procedure is record
      AP : Access_To_Procedure;
   end record;

   type Rec_Access_To_Function is record
      AF : Access_To_Function;
   end record;

end Access_To_Subprogram_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_To_
 ↪Subprograms.Access_To_Subprogram_Types
MD5: 32203838b97af66ef6ca3f6b1ce646a5
```

Here, the access-to-procedure type `Access_To_Procedure` is used as a component of the array type `Access_To_Procedure_Array` and the record type `Rec_Access_To_Procedure`. Similarly, the access-to-function type `Access_To_Function` type is used as a component of the array type `Access_To_Function_Array` and the record type `Rec_Access_To_Function`.

Let's see two test applications using these types. First, let's use the `Access_To_Procedure_Array` array type in a test application:

Listing 139: show_access_to_subprograms.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Access_To_Subprogram_Types;
use  Access_To_Subprogram_Types;

with Add_Ten;
with Add_Twenty;

procedure Show_Access_To_Subprograms is
   PA : constant
          Access_To_Procedure_Array (1 .. 2) :=
            (Add_Ten'Access,
             Add_Twenty'Access);

   Some_Int : Integer := 0;
begin
   Put_Line ("Some_Int: " & Some_Int'Image);

   for I in PA'Range loop
      PA (I) (Some_Int);
      Put_Line ("Some_Int: " & Some_Int'Image);
   end loop;
end Show_Access_To_Subprograms;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_To_
 ↪Subprograms.Access_To_Subprogram_Types
MD5: f1d10056b4b3424bd30d954f34caa255
```

Runtime output

```
Some_Int:  0
Some_Int:  10
Some_Int:  30
```

Here, we declare the PA array and use the access to the Add_Ten and Add_Twenty procedures as its components. We can call any of these procedures by simply specifying the index of the component, e.g. PA (2). Once we specify the procedure we want to use, we simply pass the parameters, e.g.: PA (2) (Some_Int).

Now, let's use the Rec_Access_To_Procedure record type in a test application:

Listing 140: show_access_to_subprograms.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  with Access_To_Subprogram_Types;
4  use  Access_To_Subprogram_Types;
5
6  with Add_Ten;
7  with Add_Twenty;
8
9  procedure Show_Access_To_Subprograms is
10    RA       : Rec_Access_To_Procedure;
11    Some_Int : Integer := 0;
12 begin
13    Put_Line ("Some_Int: " & Some_Int'Image);
14
15    RA := (AP => Add_Ten'Access);
16    RA.AP (Some_Int);
17    Put_Line ("Some_Int: " & Some_Int'Image);
18
19    RA := (AP => Add_Twenty'Access);
20    RA.AP (Some_Int);
21    Put_Line ("Some_Int: " & Some_Int'Image);
22 end Show_Access_To_Subprograms;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_To_
 ↪Subprograms.Access_To_Subprogram_Types
MD5: 4b23b5f6a8c252a1a014a2b54fa32c1a
```

Runtime output

```
Some_Int:  0
Some_Int:  10
Some_Int:  30
```

Here, we declare two record aggregates where we specify the AP component, e.g.: (AP => Add_Ten'Access), which indicates the access-to-subprogram we want to use. We can call the subprogram by simply accessing the AP component, i.e.: RA.AP.

Access-to-subprogram as discriminant types

As you might expect, we can use access-to-subprogram types when declaring discriminants. In fact, when we were talking about *discriminants as access values* (page 853) earlier on, we used access-to-object types in our code examples, but we could have used access-to-subprogram types as well. For example:

Listing 141: custom_processing.ads

```
package Custom_Processing is

   --  Declaring an access type:
   type Integer_Processing is
     access procedure (I : in out Integer);

   --  Declaring a discriminant with this
   --  access type:
   type Rec (IP : Integer_Processing) is
     private;

   procedure Init (R     : in out Rec;
                   Value :        Integer);

   procedure Process (R : in out Rec);

   procedure Show (R : Rec);

private

   type Rec (IP : Integer_Processing) is
   record
      I : Integer := 0;
   end record;

end Custom_Processing;
```

Listing 142: custom_processing.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Custom_Processing is

   procedure Init (R     : in out Rec;
                   Value :        Integer) is
   begin
      R.I := Value;
   end Init;

   procedure Process (R : in out Rec) is
   begin
      R.IP (R.I);
      --  ^^^^^^
      --  Calling procedure that we specified as
      --  the record's discriminant
   end Process;

   procedure Show (R : Rec) is
   begin
      Put_Line ("R.I = "
                & Integer'Image (R.I));
   end Show;

end Custom_Processing;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_To_
 ↪Subprograms.Access_To_Subprogram_Types
MD5: 02fc0c51722c321c4ec6115de68d1c06
```

In this example, we declare the access-to-subprogram type `Integer_Processing`, which we use as the `IP` discriminant of the `Rec` type. In the `Process` procedure, we call the `IP` procedure that we specified as the record's discriminant (`R.IP (R.I)`).

Before we look at a test application for this package, let's implement another small procedure:

Listing 143: mult_two.ads

```
procedure Mult_Two (I : in out Integer);
```

Listing 144: mult_two.adb

```
procedure Mult_Two (I : in out Integer) is
begin
   I := I * 2;
end Mult_Two;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_To_
 ↪Subprograms.Access_To_Subprogram_Types
MD5: cd43fa39dac9a1c9182f69d32eab1d26
```

Now, let's look at the test application:

Listing 145: show_access_to_subprogram_discriminants.adb

```
with Ada.Text_IO;       use Ada.Text_IO;

with Custom_Processing; use Custom_Processing;

with Add_Ten;
with Mult_Two;

procedure Show_Access_To_Subprogram_Discriminants
is

   R_Add_Ten  : Rec (IP => Add_Ten'Access);
   --                ^^^^^^^^^^^^^^^^^^^^
   --       Using access-to-subprogram as a
   --       discriminant

   R_Mult_Two : Rec (IP => Mult_Two'Access);
   --                ^^^^^^^^^^^^^^^^^^^^
   --       Using access-to-subprogram as a
   --       discriminant

begin
   Init (R_Add_Ten,  1);
   Init (R_Mult_Two, 2);

   Put_Line ("---- R_Add_Ten ----");
   Show (R_Add_Ten);

   Put_Line ("Calling Process procedure...");
   Process (R_Add_Ten);
   Show (R_Add_Ten);

   Put_Line ("---- R_Mult_Two ----");
   Show (R_Mult_Two);

```

(continues on next page)

(continued from previous page)

```
35    Put_Line ("Calling Process procedure...");
36    Process (R_Mult_Two);
37    Show (R_Mult_Two);
38 end Show_Access_To_Subprogram_Discriminants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_To_
 ↪Subprograms.Access_To_Subprogram_Types
MD5: 544c224f8bc8e6ba2db4914c2a3dcff4
```

Runtime output

```
---- R_Add_Ten ----
R.I =  1
Calling Process procedure...
R.I =  11
---- R_Mult_Two ----
R.I =  2
Calling Process procedure...
R.I =  4
```

In this procedure, we declare the `R_Add_Ten` and `R_Mult_Two` of `Rec` type and specify the access to `Add_Ten` and `Mult_Two`, respectively, as the `IP` discriminant. The procedure we specified here is then called inside a call to the `Process` procedure.

Access-to-subprograms as formal parameters

We can use access-to-subprograms types when declaring formal parameters. For example, let's revisit the `Custom_Processing` package from the previous section and convert it into a generic package.

Listing 146: gen_custom_processing.ads

```
1  generic
2     type T is private;
3
4     --
5     --  Declaring formal access-to-subprogram
6     --  type:
7     --
8     type T_Processing is
9       access procedure (Element : in out T);
10
11    --
12    --  Declaring formal access-to-subprogram
13    --  parameter:
14    --
15    Proc : T_Processing;
16
17    with function Image_T (Element : T)
18                           return String;
19 package Gen_Custom_Processing is
20
21    type Rec is private;
22
23    procedure Init (R     : in out Rec;
24                    Value :        T);
25
26    procedure Process (R : in out Rec);
```

(continues on next page)

(continued from previous page)

```
27
28    procedure Show (R : Rec);
29
30 private
31
32    type Rec is record
33       Comp : T;
34    end record;
35
36 end Gen_Custom_Processing;
```

Listing 147: gen_custom_processing.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  package body Gen_Custom_Processing is
4
5     procedure Init (R     : in out Rec;
6                     Value :        T) is
7     begin
8        R.Comp := Value;
9     end Init;
10
11    procedure Process (R : in out Rec) is
12    begin
13       Proc (R.Comp);
14    end Process;
15
16    procedure Show (R : Rec) is
17    begin
18       Put_Line ("R.Comp = "
19                 & Image_T (R.Comp));
20    end Show;
21
22 end Gen_Custom_Processing;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_To_
 ↪Subprograms.Access_To_Subprogram_Types
MD5: 6f06e066bafa5f02abb3ee1b33ea0831
```

In this version of the procedure, instead of declaring `Proc` as a discriminant of the `Rec` record, we're declaring it as a formal parameter of the `Gen_Custom_Processing` package. Also, we're declaring an access-to-subprogram type (`T_Processing`) as a formal parameter. (Note that, in contrast to these two parameters that we've just mentioned, `Image_T` is not a formal access-to-subprogram parameter: it's actually just a formal subprogram.)

We then instantiate the `Gen_Custom_Processing` package in our test application:

Listing 148: show_access_to_subprogram_as_formal_parameter.adb

```
1  with Gen_Custom_Processing;
2
3  with Add_Ten;
4
5  with Ada.Text_IO; use Ada.Text_IO;
6
7  procedure
8    Show_Access_To_Subprogram_As_Formal_Parameter
9  is
```

(continues on next page)

(continued from previous page)

```
   type Integer_Processing is
     access procedure (I : in out Integer);

   package Custom_Processing is new
     Gen_Custom_Processing
       (T            => Integer,
        T_Processing => Integer_Processing,
        --              ^^^^^^^^^^^^^^^^^^
        --              access-to-subprogram type
        Proc         => Add_Ten'Access,
        --              ^^^^^^^^^^^^^^^^^^
        --              access-to-subprogram
        Image_T      => Integer'Image);
   use Custom_Processing;

   R_Add_Ten  : Rec;

begin
   Init (R_Add_Ten,  1);

   Put_Line ("---- R_Add_Ten ----");
   Show (R_Add_Ten);

   Put_Line ("Calling Process procedure...");
   Process (R_Add_Ten);
   Show (R_Add_Ten);
end Show_Access_To_Subprogram_As_Formal_Parameter;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_To_
 ↪Subprograms.Access_To_Subprogram_Types
MD5: 6ae27ebd59e5307551e9a38f3b94c70c
```

Runtime output

```
---- R_Add_Ten ----
R.Comp =  1
Calling Process procedure...
R.Comp =  11
```

Here, we instantiate the `Gen_Custom_Processing` package as `Custom_Processing` and specify the access-to-subprogram type and the access-to-subprogram.

Selecting subprograms

A practical application of access to subprograms is that it enables us to dynamically select a subprogram and pass it to another subprogram, where it can then be called.

For example, we may have a `Process` procedure that receives a logging procedure as a parameter (`Log_Proc`). Also, this parameter may be **`null`** by default — so that no procedure is called if the parameter isn't specified:

Listing 149: data_processing.ads

```
package Data_Processing is

   type Data_Container is
     array (Positive range <>) of Float;

```

(continues on next page)

(continued from previous page)

```
   type Log_Procedure is
     access procedure (D : Data_Container);

   procedure Process
     (D        : in out Data_Container;
      Log_Proc :        Log_Procedure := null);

end Data_Processing;
```

Listing 150: data_processing.adb

```
package body Data_Processing is

   procedure Process
     (D        : in out Data_Container;
      Log_Proc :        Log_Procedure := null) is
   begin
      --  missing processing part...

      if Log_Proc /= null then
         Log_Proc (D);
      end if;
   end Process;

end Data_Processing;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_To_
↪Subprograms.Log_Procedure
MD5: 59399e0809deb476f608faab7e4398bd
```

In the implementation of Process, we check whether Log_Proc is null or not. (If it's not null, we call the procedure. Otherwise, we just skip the call.)

Now, let's implement two logging procedures that match the expected form of the Log_Procedure type:

Listing 151: log_element_per_line.adb

```
with Ada.Text_IO;     use Ada.Text_IO;
with Data_Processing; use Data_Processing;

procedure Log_Element_Per_Line
  (D : Data_Container) is
begin
   Put_Line ("Elements: ");
   for V of D loop
      Put_Line (V'Image);
   end loop;
   Put_Line ("------");
end Log_Element_Per_Line;
```

Listing 152: log_csv.adb

```
with Ada.Text_IO;     use Ada.Text_IO;
with Data_Processing; use Data_Processing;

procedure Log_Csv (D : Data_Container) is
begin
```

(continues on next page)

(continued from previous page)

```
   for I in D'First .. D'Last - 1 loop
      Put (D (I)'Image & ", ");
   end loop;
   Put (D (D'Last)'Image);
   New_Line;
end Log_Csv;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_To_
 ↪Subprograms.Log_Procedure
MD5: 468789f7331ffcd16f754f7116b076d7
```

Finally, we implement a test application that selects each of the logging procedures that we've just implemented:

Listing 153: show_access_to_subprograms.adb

```
with Ada.Text_IO;     use Ada.Text_IO;
with Data_Processing; use Data_Processing;

with Log_Element_Per_Line;
with Log_Csv;

procedure Show_Access_To_Subprograms is
   D : Data_Container (1 .. 5) := (others => 1.0);
begin
   Put_Line ("==== Log_Element_Per_Line ====");
   Process (D, Log_Element_Per_Line'Access);

   Put_Line ("==== Log_Csv ====");
   Process (D, Log_Csv'Access);

   Put_Line ("==== None ====");
   Process (D);
end Show_Access_To_Subprograms;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_To_
 ↪Subprograms.Log_Procedure
MD5: 134aa682cea1999efa0ea97052f315c8
```

Runtime output

```
==== Log_Element_Per_Line ====
Elements:
 1.00000E+00
 1.00000E+00
 1.00000E+00
 1.00000E+00
 1.00000E+00
------
==== Log_Csv ====
 1.00000E+00,  1.00000E+00,  1.00000E+00,  1.00000E+00,  1.00000E+00
==== None ====
```

Here, we use the **Access** attribute to get access to the Log_Element_Per_Line and Log_Csv procedures. Also, in the third call, we don't pass any access as an argument, which is then **null** by default.

Null exclusion

We can use null exclusion when declaring an access to subprograms. By doing so, we ensure that a subprogram must be specified — either as a parameter or when initializing an access object. Otherwise, an exception is raised. Let's adapt the previous example and introduce the `Init_Function` type:

Listing 154: data_processing.ads

```
package Data_Processing is

   type Data_Container is
     array (Positive range <>) of Float;

   type Init_Function is
     not null access function return Float;

   procedure Process
     (D         : in out Data_Container;
      Init_Func :        Init_Function);

end Data_Processing;
```

Listing 155: data_processing.adb

```
package body Data_Processing is

   procedure Process
     (D         : in out Data_Container;
      Init_Func :        Init_Function) is
   begin
      for I in D'Range loop
         D (I) := Init_Func.all;
      end loop;
   end Process;

end Data_Processing;
```

In this case, we specify that `Init_Function` is **`not null access`** because we want to always be able to call this function in the `Process` procedure (i.e. without raising an exception).

When an access to a subprogram doesn't have parameters — which is the case for the subprograms of `Init_Function` type — we need to explicitly dereference it by writing **`.all`**. (In this case, **`.all`** isn't optional.) Therefore, we have to write `Init_Func`**`.all`** in the implementation of the `Process` procedure of the code example.

Now, let's declare two simple functions — `Init_Zero` and `Init_One` — that return 0.0 and 1.0, respectively:

Listing 156: init_zero.ads

```
function Init_Zero return Float;
```

Listing 157: init_one.ads

```
function Init_One return Float;
```

Listing 158: init_zero.adb

```
function Init_Zero return Float is
begin
   return 0.0;
```

(continues on next page)

(continued from previous page)

```
4 end Init_Zero;
```

Listing 159: init_one.adb

```
1 function Init_One return Float is
2 begin
3    return 1.0;
4 end Init_One;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_To_
 ↪Subprograms.Access_Init_Function
MD5: 444110d50ddb430fd5be31cf1b417fc8
```

Finally, let's see a test application where we select each of the init functions we've just implemented:

Listing 160: log_element_per_line.adb

```
1  with Ada.Text_IO;      use Ada.Text_IO;
2  with Data_Processing; use Data_Processing;
3
4  procedure Log_Element_Per_Line
5    (D : Data_Container) is
6  begin
7     Put_Line ("Elements: ");
8     for V of D loop
9        Put_Line (V'Image);
10    end loop;
11    Put_Line ("------");
12 end Log_Element_Per_Line;
```

Listing 161: show_access_to_subprograms.adb

```
1  with Ada.Text_IO;      use Ada.Text_IO;
2  with Data_Processing; use Data_Processing;
3
4  with Init_Zero;
5  with Init_One;
6
7  with Log_Element_Per_Line;
8
9  procedure Show_Access_To_Subprograms is
10    D : Data_Container (1 .. 5) := (others => 1.0);
11 begin
12    Put_Line ("==== Init_Zero ====");
13    Process (D, Init_Zero'Access);
14    Log_Element_Per_Line (D);
15
16    Put_Line ("==== Init_One ====");
17    Process (D, Init_One'Access);
18    Log_Element_Per_Line (D);
19
20    --  Put_Line ("==== None ====");
21    --  Process (D, null);
22    --  Log_Element_Per_Line (D);
23 end Show_Access_To_Subprograms;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_To_
 ↪Subprograms.Access_Init_Function
MD5: ae0e3fd58e9bb83061248967c709190a
```

Runtime output

```
==== Init_Zero ====
Elements:
 0.00000E+00
 0.00000E+00
 0.00000E+00
 0.00000E+00
 0.00000E+00
------
==== Init_One ====
Elements:
 1.00000E+00
 1.00000E+00
 1.00000E+00
 1.00000E+00
 1.00000E+00
------
```

Here, we use the **Access** attribute to get access to the `Init_Zero` and `Init_One` functions. Also, if we uncomment the call to `Process` with **null** as an argument for the init function, we see that the `Constraint_Error` exception is raised at run time — as the argument cannot be **null** due to the null exclusion.

For further reading...

Note

This example was originally written by Robert A. Duff and was part of the Gem #24[269].

Here's another example, first with **null**:

Listing 162: show_null_procedure.ads

```
1  package Show_Null_Procedure is
2     type Element is limited null record;
3     --  Not implemented yet
4
5     type Ref_Element is access all Element;
6
7     type Table is limited null record;
8     --  Not implemented yet
9
10    type Iterate_Action is
11      access procedure
12        (X : not null Ref_Element);
13
14    procedure Iterate
15      (T      : Table;
16       Action : Iterate_Action := null);
17    --  If Action is null, do nothing.
18
19 end Show_Null_Procedure;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_To_
 ↪Subprograms.Null_Procedure
MD5: ac21dd76ed9fb7f26839c24210cf4425
```

and without **null**:

Listing 163: show_null_procedure.ads

```
package Show_Null_Procedure is
   type Element is limited null record;
   --  Not implemented yet

   type Ref_Element is access all Element;

   type Table is limited null record;
   --  Not implemented yet

   procedure Do_Nothing
     (X : not null Ref_Element) is null;

   type Iterate_Action is
     access procedure
       (X : not null Ref_Element);

   procedure Iterate
     (T      : Table;
      Action : not null Iterate_Action
                  := Do_Nothing'Access);

end Show_Null_Procedure;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_To_
 ↪Subprograms.Null_Procedure
MD5: 7341d8f23cd4efe45698481be452a9e8
```

The style of the second `Iterate` is clearly better because it makes use of the syntax to indicate that a procedure is expected. This is a complete package that includes both versions of the `Iterate` procedure:

Listing 164: example.ads

```
package Example is

   type Element is limited private;
   type Ref_Element is access all Element;

   type Table is limited private;

   type Iterate_Action is
     access procedure
       (X : not null Ref_Element);

   procedure Iterate
     (T : Table;
      Action : Iterate_Action := null);
   --  If Action is null, do nothing.

   procedure Do_Nothing
     (X : not null Ref_Element) is null;
   procedure Iterate_2
     (T : Table;
      Action : not null Iterate_Action
```

```
                  := Do_Nothing'Access);

private
   type Element is limited
      record
         Component : Integer;
      end record;
   type Table is limited null record;
end Example;
```

Listing 165: example.adb

```
package body Example is

   An_Element : aliased Element;

   procedure Iterate
     (T : Table;
      Action : Iterate_Action := null)
   is
   begin
      if Action /= null then
         Action (An_Element'Access);
         --  In a real program, this would do
         --  something more sensible.
      end if;
   end Iterate;

   procedure Iterate_2
     (T : Table;
      Action : not null Iterate_Action
                  := Do_Nothing'Access)
   is
   begin
      Action (An_Element'Access);
      --  In a real program, this would do
      --  something more sensible.
   end Iterate_2;

end Example;
```

Listing 166: show_example.adb

```
with Example; use Example;

procedure Show_Example is
   T : Table;
begin
   Iterate_2 (T);
end Show_Example;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_To_
 ↪Subprograms.Complete_Not_Null_Procedure
MD5: ab0a41e0d39a8a16b0b69f8c6b2a43fd
```

Writing **not null** Iterate_Action might look a bit more complicated, but it's worthwhile, and anyway, as mentioned earlier, the compatibility requirement requires that the **not null** be explicit, rather than the other way around.

[269] https://www.adacore.com/gems/ada-gem-24

Access to protected subprograms

Up to this point, we've discussed access to *normal* Ada subprograms. In some situations, however, we might want to have access to protected subprograms. To do this, we can simply declare a type using **access protected**:

Listing 167: simple_protected_access.ads

```
package Simple_Protected_Access is

   type Access_Proc is
     access protected procedure;

   protected Obj is

      procedure Do_Something;

   end Obj;

   Acc : Access_Proc := Obj.Do_Something'Access;

end Simple_Protected_Access;
```

Listing 168: simple_protected_access.adb

```
package body Simple_Protected_Access is

   protected body Obj is

      procedure Do_Something is
      begin
         --  Not doing anything
         --  for the moment...
         null;
      end Do_Something;

   end Obj;

end Simple_Protected_Access;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_To_
 ↪Subprograms.Simple_Protected_Access
MD5: d82f7c90355e9810bd1e35f65e278626
```

Here, we declare the `Access_Proc` type as an access type to protected procedures. Then, we declare the variable `Acc` and assign to it the access to the `Do_Something` procedure (of the protected object `Obj`).

Now, let's discuss a more useful example: a simple system that allows us to register protected procedures and execute them. This is implemented in `Work_Registry` package:

Listing 169: work_registry.ads

```
package Work_Registry is

   type Work_Id is tagged limited private;

   type Work_Handler is
     access protected procedure (T : Work_Id);

```

(continues on next page)

(continued from previous page)

```
   subtype Valid_Work_Handler is
     not null Work_Handler;

   type Work_Handlers is
     array (Positive range <>) of Work_Handler;

   protected type Work_Handler_Registry
     (Last : Positive)
   is

      procedure Register (T : Valid_Work_Handler);

      procedure Reset;

      procedure Process_All;

   private

      D    : Work_Handlers (1 .. Last);
      Curr : Natural := 0;

   end Work_Handler_Registry;

private

   type Work_Id is tagged limited null record;

end Work_Registry;
```

Listing 170: work_registry.adb

```
package body Work_Registry is

   protected body Work_Handler_Registry is

      procedure Register (T : Valid_Work_Handler)
      is
      begin
         if Curr < Last then
            Curr := Curr + 1;
            D (Curr) := T;
         end if;
      end Register;

      procedure Reset is
      begin
         Curr := 0;
      end Reset;

      procedure Process_All is
         Dummy_ID : Work_Id;
      begin
         for I in D'First .. Curr loop
            D (I).all (Dummy_ID);
         end loop;
      end Process_All;

   end Work_Handler_Registry;

end Work_Registry;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_To_
 ↪Subprograms.Protected_Access_Init_Function
MD5: 5dfa8ab098900ab4f6b7575e1cde5e53
```

Here, we declare the protected `Work_Handler_Registry` type with the following subprograms:

- `Register`, which we can use to register a protected procedure;
- `Reset`, which we can use to reset the system; and
- `Process_All`, which we can use to call all procedures that were registered in the system.

`Work_Handler` is our access to protected subprogram type. Also, we declare the `Valid_Work_Handler` subtype, which excludes **`null`**. By doing so, we can ensure that only valid procedures are passed to the `Register` procedure. In the protected `Work_Handler_Registry` type, we store the procedures in an array (of `Work_Handlers` type).

Important

Note that, in the type declaration `Work_Handler`, we say that the protected procedure must have a parameter of `Work_Id` type. In this example, this parameter is just used to *bind* the procedure to the `Work_Handler_Registry` type. The `Work_Id` type itself is actually declared as a null record (in the private part of the package), and it isn't really useful on its own.

If we had declared **`type Work_Handler is access protected procedure`**; instead, we would be able to register *any* protected procedure into the system, even the ones that might not be suitable for the system. By using a parameter of `Work_Id` type, however, we make use of strong typing to ensure that only procedures that were designed for the system can be registered.

In the next part of the code, we declare the `Integer_Storage` type, which is a simple protected type that we use to store an integer value:

Listing 171: integer_storage_system.ads

```
1  with Work_Registry;
2
3  package Integer_Storage_System is
4
5     protected type Integer_Storage is
6
7        procedure Set (V : Integer);
8
9        procedure Show (T : Work_Registry.Work_Id);
10
11    private
12
13       I : Integer := 0;
14
15    end Integer_Storage;
16
17    type Integer_Storage_Access is
18      access Integer_Storage;
19
20    type Integer_Storage_Array is
```

(continues on next page)

(continued from previous page)

```
     array (Positive range <>) of
       Integer_Storage_Access;

end Integer_Storage_System;
```

Listing 172: integer_storage_system.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Integer_Storage_System is

   protected body Integer_Storage is

      procedure Set (V : Integer) is
      begin
         I := V;
      end Set;

      procedure Show (T : Work_Registry.Work_Id)
      is
         pragma Unreferenced (T);
      begin
         Put_Line ("Value: " & Integer'Image (I));
      end Show;

   end Integer_Storage;

end Integer_Storage_System;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_To_
 ↪Subprograms.Protected_Access_Init_Function
MD5: a388d792bc85709785d324c914d9d236
```

For the `Integer_Storage` type, we declare two procedures:

- Set, which we use to assign a value to the (protected) integer value; and
- Show, which we use to show the integer value that is stored in the protected object.

The Show procedure has a parameter of `Work_Id` type, which indicates that this procedure was designed to be registered in the system of `Work_Handler_Registry` type.

Finally, we have a test application in which we declare a registry (`WHR`) and an array of "protected integer objects" (`Int_Stor`):

Listing 173: show_access_to_protected_subprograms.adb

```
with Work_Registry;
use  Work_Registry;

with Integer_Storage_System;
use  Integer_Storage_System;

procedure Show_Access_To_Protected_Subprograms is

   WHR      : Work_Handler_Registry (5);
   Int_Stor : Integer_Storage_Array (1 .. 3);

begin
   --  Allocate and initialize integer storage
```

(continues on next page)

(continued from previous page)

```
14    --
15    --  (For the initialization, we're just
16    --  assigning the index here, but we could
17    --  really have used any integer value.)
18
19    for I in Int_Stor'Range loop
20       Int_Stor (I) := new Integer_Storage;
21       Int_Stor (I).Set (I);
22    end loop;
23
24    --  Register handlers
25
26    for I in Int_Stor'Range loop
27       WHR.Register (Int_Stor (I).all.Show'Access);
28    end loop;
29
30    --  Now, use Process_All to call the handlers
31    --  (in this case, the Show procedure for
32    --  each protected object from Int_Stor).
33
34    WHR.Process_All;
35
36 end Show_Access_To_Protected_Subprograms;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_To_
↪Subprograms.Protected_Access_Init_Function
MD5: 44c24ef07333e1d31844cc2ea6d91ab6
```

Runtime output

```
Value:  1
Value:  2
Value:  3
```

The work handler registry (`WHR`) has a maximum capacity of five procedures, whereas the `Int_Stor` array has a capacity of three elements. By calling `WHR.Register` and passing `Int_Stor (I).all.Show'Access`, we register the Show procedure of each protected object from `Int_Stor`.

Important

Note that the components of the `Int_Stor` array are of `Integer_Storage_Access` type, which is declared as an access to `Integer_Storage` objects. Therefore, we have to dereference the object (by writing `Int_Stor (I).all`) before getting access to the Show procedure (by writing `.Show'Access`).

We have to use an access type here because we cannot pass the access (to the Show procedure) of a local object in the call to the `Register` procedure. Therefore, the protected objects (of `Integer_Storage` type) cannot be local.

This issue becomes evident if we replace the declaration of `Int_Stor` with a local array (and then adapt the remaining code). If we do this, we get a compilation error in the call to `Register`:

Listing 174: show_access_to_protected_subprograms.adb

```
with Work_Registry;
use  Work_Registry;

with Integer_Storage_System;
use  Integer_Storage_System;

procedure Show_Access_To_Protected_Subprograms
is
   WHR      : Work_Handler_Registry (5);

   Int_Stor : array (1 .. 3) of Integer_Storage;

begin
   --  Allocate and initialize integer storage
   --
   --  (For the initialization, we're just
   --  assigning the index here, but we could
   --  really have used any integer value.)

   for I in Int_Stor'Range loop
      --  Int_Stor (I) := new Integer_Storage;
      Int_Stor (I).Set (I);
   end loop;

   --  Register handlers

   for I in Int_Stor'Range loop
      WHR.Register (Int_Stor (I).Show'Access);
      --            ^ ERROR!
   end loop;

   --  Now, call the handlers
   --  (i.e. the Show procedure of each
   --   protected object).

   WHR.Process_All;

end Show_Access_To_Protected_Subprograms;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_To_
 ↪Subprograms.Protected_Access_Init_Function
MD5: 359241c84cd30313fe2d7701b55f303e
```

Build output

```
show_access_to_protected_subprograms.adb:28:21: error: non-local pointer cannot␣
 ↪point to local object
gprbuild: *** compilation phase failed
```

As we've just discussed, this error is due to the fact that `Int_Stor` is now a "local" protected object, and the accessibility rules don't allow mixing it with non-local accesses in order to prevent the possibility of dangling references.

When we call `WHR.Process_All`, the registry system calls each procedure that has been registered with the system. When looking at the values displayed by the test application, we may notice that each call to Show is referring to a different protected object. In fact, even though we're passing just the access to a protected *procedure* in the call to `Register`, that access is also associated to a specific protected object. (This is different from access to non-protected subprograms we've discussed previously: in that case, there's no object

associated.) If we replace the argument to `Register` by `Int_Stor (2).all.Show'Access`, for example, the three `Show` procedures registered in the system will now refer to the same protected object (stored at `Int_Stor (2)`).

Also, even though we have registered the same procedure (`Show`) of the same type (`Integer_Storage`) in all calls to `Register`, we could have used a different protected procedure — and of a different protected type. As an exercise, we could, for example, create a new type called `Float_Storage` (based on the code that we used for the `Integer_Storage` type) and register some objects of `Float_Storage` type into the system (with a couple of additional calls to `Register`). If we then call `WHR.Process_All`, we'd see that the system is able to cope with objects of both `Integer_Storage` and `Float_Storage` types. In fact, the system implemented with the `Work_Handler_Registry` can be seen as "type agnostic," as it doesn't care about which type the protected objects have — as long as the subprograms we want to register are conformant to the `Valid_Work_Handler` type.

28.1.16 Accessibility Rules and Access-To-Subprograms

In general, the accessibility rules that we discussed *previously for access-to-objects* (page 894) also apply to access-to-subprograms. In this section, we discuss minor differences when applying those rules to access-to-subprograms.

In our discussion about accessibility rules, we've looked into *accessibility levels* (page 896) and the *accessibility rules* (page 896) that are based on those levels. The same accessibility rules apply to access-to-subprograms. *As we said previously* (page 899), operations targeting objects at a *less-deep* level are illegal, as it's the case for subprograms as well:

Listing 175: access_to_subprogram_types.ads

```
package Access_To_Subprogram_Types is

   type Access_To_Procedure is
     access procedure (I : in out Integer);

   type Access_To_Function is
     access function (I : Integer) return Integer;

end Access_To_Subprogram_Types;
```

Listing 176: show_access_to_subprogram_error.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Access_To_Subprogram_Types;
use  Access_To_Subprogram_Types;

procedure Show_Access_To_Subprogram_Error is
   Func : Access_To_Function;

   Value : Integer := 0;
begin
   declare
      function Add_One (I : Integer)
                        return Integer is
        (I + 1);
   begin
      Func := Add_One'Access;
      --  This assignment is illegal because the
      --  Access_To_Function type is less deep
      --  than Add_One.
   end;

```

(continues on next page)

(continued from previous page)

```
   Put_Line ("Value: " & Value'Image);
   Value := Func (Value);
   Put_Line ("Value: " & Value'Image);
end Show_Access_To_Subprogram_Error;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Accessibility_Rules_
 ↪Access_To_Subprograms.Access_To_Subprogram_Accessibility_Error_Less_Deep
MD5: 2a068732606a1fee156e82515febe9c4
```

Build output

```
show_access_to_subprogram_error.adb:16:15: error: subprogram must not be deeper␣
 ↪than access type
gprbuild: *** compilation phase failed
```

Obviously, we can correct this error by putting the Add_One function at the same level as the Access_To_Function type, i.e. at library level:

Listing 177: access_to_subprogram_types.ads

```
package Access_To_Subprogram_Types is

   type Access_To_Procedure is
     access procedure (I : in out Integer);

   type Access_To_Function is
     access function (I : Integer) return Integer;

end Access_To_Subprogram_Types;
```

Listing 178: add_one.ads

```
function Add_One (I : Integer) return Integer;
```

Listing 179: add_one.adb

```
function Add_One (I : Integer) return Integer is
begin
   return I + 1;
end Add_One;
```

Listing 180: show_access_to_subprogram_error.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Access_To_Subprogram_Types;
use  Access_To_Subprogram_Types;

with Add_One;

procedure Show_Access_To_Subprogram_Error is
   Func : Access_To_Function;

   Value : Integer := 0;
begin
   Func := Add_One'Access;

   Put_Line ("Value: " & Value'Image);
```

(continues on next page)

(continued from previous page)

```
16    Value := Func (Value);
17    Put_Line ("Value: " & Value'Image);
18 end Show_Access_To_Subprogram_Error;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Accessibility_Rules_
 ↪Access_To_Subprograms.Access_To_Subprogram_Accessibility_Error_Less_Deep_Fix
MD5: 7f7488c541fb457ced653a2e6cc2fad1
```

Runtime output

```
Value:  0
Value:  1
```

As a recommendation, resolving accessibility issues in the case of access-to-subprograms is best done by refactoring the subprograms of your source code — for example, moving subprograms to a different level.

Unchecked Access

Previously, we discussed about the *Unchecked_Access attribute* (page 904), which we can use to circumvent accessibility issues in specific cases for access-to-objects. We also said in that section that this attribute only exists for objects, not for subprograms. We can use the previous example to illustrate this limitation:

Listing 181: access_to_subprogram_types.ads

```
1  package Access_To_Subprogram_Types is
2
3     type Access_To_Procedure is
4       access procedure (I : in out Integer);
5
6     type Access_To_Function is
7       access function (I : Integer) return Integer;
8
9  end Access_To_Subprogram_Types;
```

Listing 182: show_access_to_subprogram_error.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  with Access_To_Subprogram_Types;
4  use  Access_To_Subprogram_Types;
5
6  procedure Show_Access_To_Subprogram_Error is
7     Func : Access_To_Function;
8
9     function Add_One (I : Integer)
10              return Integer is
11       (I + 1);
12
13    Value : Integer := 0;
14 begin
15    Func := Add_One'Access;
16
17    Put_Line ("Value: " & Value'Image);
18    Value := Func (Value);
19    Put_Line ("Value: " & Value'Image);
20 end Show_Access_To_Subprogram_Error;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Accessibility_Rules_
 ↪Access_To_Subprograms.Access_To_Subprogram_Accessibility_Error_Same_Lifetime
MD5: c1ee1946f0c979eb30fbf2c72c426f50
```

Build output

```
show_access_to_subprogram_error.adb:15:12: error: subprogram must not be deeper␣
 ↪than access type
gprbuild: *** compilation phase failed
```

When we analyze the `Show_Access_To_Subprogram_Error` procedure, we see that the `Func` object and the `Add_One` function have the same lifetime. Therefore, in this very specific case, we could safely assign `Add_One'Access` to `Func` and call `Func` for `Value`. Due to the accessibility rules, however, this assignment is illegal. (Obviously, the accessibility issue here is that the `Access_To_Function` type has a potentially longer lifetime.)

In the case of access-to-objects, we could use `Unchecked_Access` to enforce assignments that we consider safe after careful analysis. However, because this attribute isn't available for access-to-subprograms, the best solution is to move the subprogram to a level that allows the assignment to be legal, as we said before.

In the GNAT toolchain

GNAT offers an equivalent for `Unchecked_Access` that can be used for subprograms: the `Unrestricted_Access` attribute. Note, however, that this attribute is not portable.

Listing 183: access_to_subprogram_types.ads

```
1  package Access_To_Subprogram_Types is
2
3     type Access_To_Procedure is
4       access procedure (I : in out Integer);
5
6     type Access_To_Function is
7       access function (I : Integer) return Integer;
8
9  end Access_To_Subprogram_Types;
```

Listing 184: show_access_to_subprogram_error.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Access_To_Subprogram_Types;
use  Access_To_Subprogram_Types;

procedure Show_Access_To_Subprogram_Error is
   Func : Access_To_Function;

   function Add_One (I : Integer)
            return Integer is
     (I + 1);

   Value : Integer := 0;
begin
   Func := Add_One'Unrestricted_Access;
   --              ^^^^^^^^^^^^^^^^^^^
   --       Allowing access to local function

   Put_Line ("Value: " & Value'Image);
   Value := Func (Value);
   Put_Line ("Value: " & Value'Image);
end Show_Access_To_Subprogram_Error;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Accessibility_
↪Rules_Access_To_Subprograms.Unrestricted_Access
MD5: 90e2c57c01463cbe6efee6e093d01e5b
```

Runtime output

```
Value:  0
Value:  1
```

As we can see, the `Unrestricted_Access` attribute can be safely used in this specific case to circumvent the accessibility rule limitation.

28.1.17 Access and Address

As we know, an access type is not a pointer, and it doesn't just indicate an address in memory. In fact, to represent an address in Ada, we use *the Address type* (page 393). Also, as we discussed earlier, we can use operators such as `<`, `>`, `+` and `-` for addresses. In contrast to that, those operators aren't available for access types — except, of course, for `=` and `/=`.

In certain situations, however, we might need to convert between access types and addresses. In this section, we discuss how to do so.

In the Ada Reference Manual

- 13.3 Operational and Representation Attributes[270]
- 13.7 The Package System[271]

[270] http://www.ada-auth.org/standards/22rm/html/RM-13-3.html
[271] http://www.ada-auth.org/standards/22rm/html/RM-13-7.html

Address and access conversion

The generic System.Address_To_Access_Conversions package allows us to convert between access types and addresses. This might be useful for specific low-level operations. Let's see an example:

Listing 185: show_address_conversion.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with System.Address_To_Access_Conversions;
with System.Address_Image;

procedure Show_Address_Conversion is

   package Integer_AAC is
     new System.Address_To_Access_Conversions
       (Object => Integer);
   use Integer_AAC;

   subtype Integer_Access is
     Integer_AAC.Object_Pointer;
   --  This is similar to:
   --
   --  type Integer_Access is access all Integer;

   I  : aliased Integer := 5;
   AI : Integer_Access  := I'Access;
begin
   Put_Line ("I'Address : "
             & System.Address_Image (I'Address));

   Put_Line ("AI.all'Address : "
             & System.Address_Image
                 (AI.all'Address));

   Put_Line ("To_Address (AI) : "
             & System.Address_Image
                 (To_Address (AI)));
end Show_Address_Conversion;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_Address.
 ↪Address_Conversion
MD5: 717532026247044a667b60f6c1e1c7da
```

Runtime output

```
I'Address : 00007FFE153F2CE4
AI.all'Address : 00007FFE153F2CE4
To_Address (AI) : 00007FFE153F2CE4
```

In this example, we instantiate the generic System.Address_To_Access_Conversions package using **Integer** as our target object type. This new package (Integer_AAC) has an Object_Pointer type, which is equivalent to a declaration such as **type Integer_Access is access all Integer**. (In this example, we declare Integer_Access as a subtype of Integer_AAC.Object_Pointer to illustrate that.)

The Integer_AAC package also includes the To_Address function, which converts an access object to an address. If the actual parameter is not null, To_Address returns the same information as if we were using the **Address** attribute for the designated object. In other words, To_Address (AI) = AI.**all**'Address when AI /= **null**.

If the access value is null, `To_Address` returns `Null_Address`, while `.all'Address` makes the *access check* (page 770) fail because we have to dereference the access object (via `.all`) before retrieving its address (via the **`Address`** attribute).

In addition to the `To_Address` function, the `To_Pointer` function is available to convert from an address to an object of access type. For example:

Listing 186: show_address_conversion.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with System;      use System;

with System.Address_To_Access_Conversions;
with System.Address_Image;

procedure Show_Address_Conversion is

   package Integer_AAC is
     new System.Address_To_Access_Conversions
       (Object => Integer);
   use Integer_AAC;

   subtype Integer_Access is
     Integer_AAC.Object_Pointer;

   I          : aliased Integer := 5;
   AI_1, AI_2 : Integer_Access;
   A          : Address;
begin
   AI_1 := I'Access;
   A    := To_Address (AI_1);
   AI_2 := To_Pointer (A);

   Put_Line ("AI_1.all'Address : "
             & System.Address_Image
                 (AI_1.all'Address));
   Put_Line ("AI_2.all'Address : "
             & System.Address_Image
                 (AI_2.all'Address));

   if AI_1 = AI_2 then
      Put_Line ("AI_1 = AI_2");
   else
      Put_Line ("AI_1 /= AI_2");
   end if;
end Show_Address_Conversion;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_Address.
 ↪Address_Conversion
MD5: 5c6fc19ca1aa227feba97ea610dd9218
```

Runtime output

```
AI_1.all'Address : 00007FFEB76193CC
AI_2.all'Address : 00007FFEB76193CC
AI_1 = AI_2
```

Here, we convert the A address back to an access value by calling `To_Pointer (A)`. (When running this object, we see that `AI_1` and `AI_2` have the same access value.)

Conversion of unbounded designated types

Note that the conversions might not work in all cases. For instance, when the designated type — indicated by the formal `Object` parameter of the generic `Address_To_Access_Conversions` package — is unbounded, the result of a call to `To_Pointer` may not have bounds.

Let's adapt the previous code example and replace the **`Integer`** type by the (unbounded) **`String`** type:

Listing 187: show_address_conversion.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with System;      use System;

with System.Address_To_Access_Conversions;
with System.Address_Image;

procedure Show_Address_Conversion is

   package String_AAC is
     new System.Address_To_Access_Conversions
       (Object => String);
   use String_AAC;

   subtype Integer_Access is
     String_AAC.Object_Pointer;

   S          : aliased String := "Hello";
   AI_1, AI_2 : Integer_Access;
   A          : Address;
begin
   AI_1 := S'Access;
   A    := To_Address (AI_1);

   AI_2 := To_Pointer (A);
   --      ^^^^^^^^^^^^^^
   --   WARNING: Result might not have bounds

   Put_Line ("AI_1.all'Address : "
             & System.Address_Image
                 (AI_1.all'Address));
   Put_Line ("AI_2.all'Address : "
             & System.Address_Image
                 (AI_2.all'Address));

   if AI_1 = AI_2 then
      Put_Line ("AI_1 = AI_2");
   else
      Put_Line ("AI_1 /= AI_2");
   end if;

   Put_Line ("AI_1: " & AI_1.all);
   Put_Line ("AI_2: " & AI_2.all);
   --                   ^^^^^^^^^^
   --   WARNING: As AI_2 might not have bounds
   --            due to the call to To_Pointer
   --            the behavior of this call to
   --            the "&" operator is
   --            unpredictable.
end Show_Address_Conversion;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Access_Address.
 ↪Address_Conversion
MD5: b1adcaa1f2cb4dfbd157aebf7893bd72
```

Build output

```
show_address_conversion.adb:9:04: warning: in instantiation at s-atacco.ads:46␣
 ↪[enabled by default]
show_address_conversion.adb:9:04: warning: Object is unconstrained array type␣
 ↪[enabled by default]
show_address_conversion.adb:9:04: warning: To_Pointer results may not have bounds␣
 ↪[enabled by default]
```

Runtime output

```
AI_1.all'Address : 00007FFF64206218
AI_2.all'Address : 00007FFF64206218
AI_1 = AI_2
AI_1: Hello
AI_2: Hello
```

In this case, the call to `To_Pointer (A)` might not have bounds, so any operation on `AI_2` might lead to unpredictable results.

In the Ada Reference Manual

- 13.7.2 The Package System.Address_To_Access_Conversions[272]

28.2 Anonymous Access Types

28.2.1 Named and Anonymous Access Types

The previous chapter dealt with access type declarations such as this one:

```
type Integer_Access is access all Integer;

procedure Add_One (A : Integer_Access);
```

In addition to named access type declarations such as the one in this example, Ada also supports anonymous access types, which, as the name implies, don't have an actual type declaration.

To declare an access object of anonymous type, we just specify the subtype of the object or subprogram we want to have access to. For example:

```
procedure Add_One (A : access Integer);
```

When we compare this example with the previous one, we see that the declaration `A : Integer_Access` becomes `A : access Integer`. Here, `access Integer` is the anonymous access type declaration, and `A` is an access object of this anonymous type.

To be more precise, `A : access Integer` is an *access parameter* (page 983) and it's specifying an *anonymous access-to-object type* (page 963). Another flavor of anonymous access types are *anonymous access-to-subprograms* (page 1006). We discuss all these topics in more details later.

Let's see a complete example:

[272] http://www.ada-auth.org/standards/22rm/html/RM-13-7-2.html

Listing 188: show_anonymous_access_types.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Anonymous_Access_Types is
   I_Var : aliased Integer;

   A     : access Integer;
   --      ^ Anonymous access type
begin
   A := I_Var'Access;
   --   ^ Assignment to object of
   --     anonymous access type.

   A.all := 22;

   Put_Line ("A.all: " & Integer'Image (A.all));
end Show_Anonymous_Access_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Anonymous_
 ↪Access_Types.Simple_Anonymous_Access_Types
MD5: f0c92c76d970089c1d503c599d6869dd
```

Runtime output

```
A.all:  22
```

Here, A is an access object whose value is initialized with the access to I_Var. Because the declaration of A includes the declaration of an anonymous access type, we don't declare an extra Integer_Access type, as we did in previous code examples.

In the Ada Reference Manual

- 3.10 Access Types[273]

Relation to named types

Anonymous access types were not part of the first version of the Ada standard, which only had support for named access types. They were introduced later to cover some use-cases that were difficult — or even impossible — with access types.

In this sense, anonymous access types aren't just access types without names. Certain accessibility rules for anonymous access types are a bit less strict. In those cases, it might be interesting to consider using them instead of named access types.

In general, however, we should only use anonymous access types in those specific cases where using named access types becomes too cumbersome. As a general recommendation, we should give preference to named access types whenever possible. (Anonymous access-to-object types have *drawbacks that we discuss later* (page 966).)

Benefits of anonymous access types

One of the main benefits of anonymous access types is their flexibility: since there isn't an explicit access type declaration associated with them, we only have to worry about the subtype S we intend to access.

[273] http://www.ada-auth.org/standards/22rm/html/RM-3-10.html

Also, as long as the subtype S in a declaration **access** S is always the same, no conversion is needed between two access objects of that anonymous type, and the S'Access attribute always works.

Let's see an example:

Listing 189: show.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show (Name : String;
                V    : access Integer) is
begin
   Put_Line (Name & ".all: "
             & Integer'Image (V.all));
end Show;
```

Listing 190: show_anonymous_access_types.adb

```
with Show;

procedure Show_Anonymous_Access_Types is
   I_Var : aliased Integer;
   A     : access Integer;
   B     : access Integer;
begin
   A := I_Var'Access;
   B := A;

   A.all := 22;

   Show ("A", A);
   Show ("B", B);
end Show_Anonymous_Access_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Anonymous_
 ↪Access_Types.Anonymous_Access_Object_Assignment
MD5: 2822ca0bd6ac251dccc1ced60747fbe1
```

Runtime output

```
A.all:  22
B.all:  22
```

In this example, we have two access objects A and B. Since they're objects of anonymous access types that refer to the same subtype **Integer**, we can assign A to B without a type conversion, and pass those access objects as an argument to the Show procedure.

(Note that the use of an access parameter in the Show procedure is for demonstration purpose only: a simply **Integer** as the type of this input parameter would have been more than sufficient to implement the procedure. Actually, in this case, avoiding the access parameter would be the recommended approach in terms of clean Ada software design.)

In contrast, if we had used named type declarations, the code would be more complicated and more limited:

Listing 191: aux.ads

```
package Aux is

```

(continues on next page)

(continued from previous page)

```
   type Integer_Access is access all Integer;

   procedure Show (Name : String;
                   V    : Integer_Access);

end Aux;
```

Listing 192: aux.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Aux is

   procedure Show (Name : String;
                   V    : Integer_Access) is
   begin
      Put_Line (Name & ".all: "
                & Integer'Image (V.all));
   end Show;

end Aux;
```

Listing 193: show_anonymous_access_types.adb

```
with Aux; use Aux;

procedure Show_Anonymous_Access_Types is
   --  I_Var : aliased Integer;

   A : Integer_Access;
   B : Integer_Access;
begin
   --  A := I_Var'Access;
   --       ^ ERROR: non-local pointer cannot
   --                point to local object.

   A := new Integer;
   B := A;

   A.all := 22;

   Show ("A", A);
   Show ("B", B);
end Show_Anonymous_Access_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Anonymous_
 ↪Access_Types.Anonymous_Access_Object_Assignment
MD5: 681c2cf7f5e8d520490cc5594484ce69
```

Runtime output

```
A.all:  22
B.all:  22
```

Here, apart from the access type declaration (`Integer_Access`), we had to make two adaptations to convert the previous code example:

1. We had to move the Show procedure to a package (which we simply called Aux) because of the access type declaration.

2. Also, we had to allocate an object for A instead of retrieving the access attribute of `I_Var` because we cannot use a pointer to a local object in the assignment to a non-local pointer, as indicate in the comments.

This restriction regarding non-local pointer assignments is an example of the stricter accessibility rules that apply to named access types. As mentioned earlier, the `S'Access` attribute always works when we use anonymous access types — this is not always the case for named access types.

Important

As mentioned earlier, if we want to use two access objects in an operation, the rule says that the subtype S of the anonymous type used in their corresponding declaration must match. In the following example, we can see how this rule works:

Listing 194: show_anonymous_access_subtype_error.adb

```
procedure Show_Anonymous_Access_Subtype_Error is
   subtype Integer_1_10 is Integer range 1 .. 10;

   I_Var : aliased Integer;
   A     : access Integer := I_Var'Access;
   B     : access Integer_1_10;
begin
   A := I_Var'Access;

   B := A;
   --  ^ ERROR: subtype doesn't match!

   B := I_Var'Access;
   --  ^ ERROR: subtype doesn't match!
end Show_Anonymous_Access_Subtype_Error;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_
 ↪Types.Anonymous_Access_Types.Anonymous_Access_Subtype_Error
MD5: cecfe703ea8b42bad61c45f33cbcb67b
```

Build output

```
show_anonymous_access_subtype_error.adb:10:09: error: target␣
 ↪designated subtype not compatible with type "Standard.Integer"
show_anonymous_access_subtype_error.adb:13:09: error: object subtype␣
 ↪must statically match designated subtype
gprbuild: *** compilation phase failed
```

Even though `Integer_1_10` is a subtype of **`Integer`**, we cannot assign A to B because the subtype that their access type declarations refer to — **`Integer`** and `Integer_1_10`, respectively — doesn't match. The same issue occurs when retrieving the access attribute of `I_Var` in the assignment to B.

The later sections on *anonymous access-to-object type* (page 963) and *anonymous access-to-subprograms* (page 1006) cover more specific details on anonymous access types.

28.2.2 Anonymous Access-To-Object Types

In the *previous chapter* (page 843), we introduced named access-to-object types and used those types throughout the chapter. Also, in the *previous section* (page 959), we've seen some simple examples of anonymous access-to-object types:

```
procedure Add_One (A : access Integer);
--                     ^ Anonymous access type

A : access Integer;
--  ^ Anonymous access type
```

In addition to parameters and objects, we can use anonymous access types in discriminants, components of array and record types, renamings and function return types. (We discuss *anonymous access discriminants* (page 973) and *anonymous access parameters* (page 983) later on.) Let's see a code example that includes all these cases:

Listing 195: all_anonymous_access_to_object_types.ads

```
package All_Anonymous_Access_To_Object_Types is

   procedure Add_One (A : access Integer) is null;
   --                     ^ Anonymous access type

   AI : access Integer;
   --  ^ Anonymous access type

   type Rec (AI : access Integer) is private;
   --             ^ Anonymous access type

   type Access_Array is
      array (Positive range <>) of
        access Integer;
   --   ^ Anonymous access type

   Arr : array (1 .. 5) of access Integer;
   --                      ^ Anonymous access type

   AI_Renaming : access Integer renames AI;
   --            ^ Anonymous access type

   function Init_Access_Integer
     return access Integer is (null);
   --       ^ Anonymous access type

private

   type Rec (AI : access Integer) is record
   --             ^ Anonymous access type
      Internal_AI : access Integer;
   --               ^ Anonymous access type

   end record;

end All_Anonymous_Access_To_Object_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Anonymous_
↪Access_To_Object_Types.All_Anonymous_Access_To_Object_Types
MD5: 6533b22a4e4526702320cb327bf6f69a
```

In this example, we see multiple examples of anonymous access-to-object types:

- as the A parameter of the Add_One procedure;
- in the declaration of the AI access object;
- as the AI discriminant of the Rec type;

- as the component type of the `Access_Array` type;
- as the component type of the `Arr` array;
- in the `AI_Renaming` renaming;
- as the return type of the `Init_Access_Integer`;
- as the `Internal_AI` of component of the Rec type.

In the Ada Reference Manual

- 3.10 Access Types[274]

Not Null Anonymous Access-To-Object Types

As expected, **`null`** is a valid value for an anonymous access type. However, we can forbid **`null`** as a valid value by using **`not null`** in the anonymous access type declaration. For example:

Listing 196: all_anonymous_access_to_object_types.ads

```
1  package All_Anonymous_Access_To_Object_Types is
2
3     procedure Add_One (A : not null access Integer)
4       is null;
5     --                       ^ Anonymous access type
6
7     I : aliased Integer;
8
9     AI : not null access Integer := I'Access;
10    --   ^ Anonymous access type
11    --                                ^^^^^^^^
12    --               Initialization required!
13
14    type Rec (AI : not null access Integer) is
15       private;
16    --              ^ Anonymous access type
17
18    type Access_Array is
19       array (Positive range <>) of
20         not null access Integer;
21    --   ^ Anonymous access type
22
23    Arr : array (1 .. 5) of
24      not null access Integer :=
25    --  ^ Anonymous access type
26        (others => I'Access);
27    --   ^^^^^^^^^^^^^^^^^^
28    --          Initialization required!
29
30    AI_Renaming : not null access Integer
31      renames AI;
32    --             ^ Anonymous access type
33
34    function Init_Access_Integer
35      return not null access Integer is (I'Access);
36    --       ^ Anonymous access type
37    --                                    ^^^^^^^^
38    --                    Initialization required!
```

(continues on next page)

[274] http://www.ada-auth.org/standards/22rm/html/RM-3-10.html

(continued from previous page)

```
39
40 private
41
42    type Rec (AI : not null access Integer) is
43    record
44    --              ^ Anonymous access type
45       Internal_AI : not null access Integer;
46    --               ^ Anonymous access type
47
48    end record;
49
50 end All_Anonymous_Access_To_Object_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Anonymous_
↪Access_To_Object_Types.All_Not_Null_Anonymous_Access_To_Object_Types
MD5: 027430aa9d5e19979206110f5e260d13
```

As you might have noticed, we took the previous code example and used **not null** for each usage instance of the anonymous access type. In this sense, this version of the code example is very similar to the previous one. Note, however, that we now have to explicitly initialize some elements to avoid the `Constraint_Error` exception being raised at runtime. This is the case for example for the `AI` access object:

```
AI : not null access Integer := I'Access;
```

If we hadn't initialized `AI` explicitly with `I'Access`, it would have been set to **null**, which would fail the **not null** constraint of the anonymous access type. Similarly, we also have to initialize the `Arr` array and return a valid access object for the `Init_Access_Integer` function.

Drawbacks of Anonymous Access-To-Object Types

Anonymous access-to-object types have important drawbacks. For example, some features that are available for named access types aren't available for the anonymous access types. Also, most of the drawbacks are related to how anonymous access-to-object types can potentially make the allocation and deallocation quite complicated or even error-prone.

For starters, some pool-related features aren't available for anonymous access-to-object types. For example, we cannot specify which pool is going to be used in the allocation of an anonymous access-to-object. In fact, the memory pool selection is compiler-dependent, so we cannot rely on an object being allocated from a specific pool when using **new** with an anonymous access-to-object type. (In contrast, as we know, each named access type has an associated pool, so objects allocated via **new** will be allocated from that pool.) Also, we cannot identify which pool was selected for the allocation of a specific object, so we don't have any information to use for the deallocation of that object.

Because the pool selection is hidden from us, this makes the memory deallocation more complicated. For example, we cannot instantiate the `Ada.Unchecked_Deallocation` procedure for anonymous access types. Also, some of the methods we could use to circumvent this limitation are error-prone, as we discuss in this section.

Also, storage-related features aren't available: specifying the storage size — especially, specifying that the access type has a storage size of zero — isn't possible.

Missing features

Let's see a code example that shows some of the features that aren't available for anonymous access-to-object types:

Listing 197: missing_features.ads

```
with Ada.Unchecked_Deallocation;

package Missing_Features is

   --  We cannot specify which pool will be used
   --  in the anonymous access-to-object
   --  allocation; the pool is selected by the
   --  compiler:
   IA : access Integer := new Integer;

   --
   --  All the features below aren't available
   --  for an anonymous access-to-object:
   --

   --  Having a specific storage pool associated
   --  with the access type:
   type String_Access is
     access String;
   --  Automatically creates
   --  String_Access'Storage_Pool

   type Integer_Access is
     access Integer
       with Storage_Pool =>
              String_Access'Storage_Pool;
   --       ^^^^^^^^^^^^^^^^^^^^^^^^^^^
   --         Using the pool from another
   --         access type.

   --  Specifying a deallocation function for the
   --  access type:
   procedure Free is
     new Ada.Unchecked_Deallocation
       (Object => Integer,
        Name   => Integer_Access);

   --  Specifying a limited storage size for
   --  the access type:
   type Integer_Access_Store_128 is
      access Integer
        with Storage_Size => 128;

   --  Limiting the storage size for the
   --  access type to zero:
   type Integer_Access_Store_0 is
      access Integer
        with Storage_Size => 0;

end Missing_Features;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Anonymous_
↪Access_To_Object_Types.Missing_Anonymous_Access_To_Object_Features
MD5: 87a5c1413a720da84fab414cf63236ec
```

In the Missing_Features package, we see some of the features that we cannot use for the anonymous **access Integer** type, but that are available for equivalent named access types:

- There's no specific memory pool associated with the access object IA. In contrast, named types — such as String_Access and Integer_Access — have an associated pool, and we can use the Storage_Pool aspect and the Storage_Pool attribute to customize them.
- We cannot instantiate the Ada.Unchecked_Deallocation procedure for the **access Integer** type. However, we can instantiate it for named access types such as the Integer_Access type.
- We cannot use the Storage_Size attribute for the **access Integer** type, but we're allowed to use it with named access types, which we do in the declaration of the Integer_Access_Store_128 and Integer_Access_Store_0 types.

Dangerous memory deallocation

We might think that we could make up for the absence of the Ada.Unchecked_Deallocation procedure for anonymous access-to-object types by converting those access objects (of anonymous access types) to a named type that has the same designated subtype. For example, if we have an access object IA of an anonymous **access Integer** type, we can convert it to the named Integer_Access type, provided this named access type is compatible with the anonymous access type, e.g.:

```
type Integer_Access is access all Integer
```

Let's see a complete code example:

Listing 198: show_dangerous_deallocation.adb

```
with Ada.Unchecked_Deallocation;

procedure Show_Dangerous_Deallocation is
   type Integer_Access is
      access all Integer;

   procedure Free is
     new Ada.Unchecked_Deallocation
       (Object => Integer,
        Name   => Integer_Access);

   IA : access Integer;
begin
   IA := new Integer;
   IA.all := 30;

   --  Potentially erroneous deallocation via type
   --  conversion:
   Free (Integer_Access (IA));

end Show_Dangerous_Deallocation;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Anonymous_
 ↪Access_To_Object_Types.Deallocation_Anonymous_Access_To_Object_Erronoeus
MD5: 91e024a4338e2e4f8d5b308d95499c1c
```

This example declares the IA access object of the anonymous **access Integer** type. After allocating an object for IA via **new**, we try to deallocate it by first converting it to the Inte-

ger_Access type, so that we can call the Free procedure to actually deallocate the object. Although this code compiles, it'll only work if both **access Integer** and Integer_Access types are using the same memory pool. Since we cannot really determine this, the result is potentially erroneous: it'll work if the compiler selected the same pool, but it'll fail otherwise.

Important

Because allocating memory for anonymous access types is potentially dangerous, we can use the No_Anonymous_Allocators restriction — which is available since Ada 2012 — to prevent this kind of memory allocation being used in the code. For example:

Listing 199: show_dangerous_allocation.adb

```
pragma Restrictions (No_Anonymous_Allocators);

procedure Show_Dangerous_Allocation is
   IA : access Integer;
begin
   IA := new Integer;
   IA.all := 30;
end Show_Dangerous_Allocation;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.
 ↪Anonymous_Access_To_Object_Types.No_Anonymous_Allocators
MD5: 0976821ce632f9635e33fd4f79c81ecd
```

Build output

```
show_dangerous_allocation.adb:6:10: error: violation of restriction "No_
 ↪Anonymous_Allocators" at line 1
gprbuild: *** compilation phase failed
```

Possible solution using named access types

A better solution to avoid issues when allocating and deallocating memory for anonymous access-to-object types is to allocate the object using a known pool. As mentioned before, the memory pool associated with a named access type is well-defined, so we can use this kind of types for memory allocation. In fact, we can use a named memory type to allocate an object via **new**, and then associate this allocated object with the access object of anonymous access type.

Let's see a code example:

Listing 200: show_successful_deallocation.adb

```
with Ada.Unchecked_Deallocation;

procedure Show_Successful_Deallocation is

   type Integer_Access is
      access Integer;

   procedure Free is
     new Ada.Unchecked_Deallocation
       (Object => Integer,
        Name   => Integer_Access);

   IA       : access Integer;
```

(continues on next page)

(continued from previous page)

```
14    Typed_IA : Integer_Access;
15
16 begin
17    Typed_IA := new Integer;
18    IA := Typed_IA;
19    IA.all := 30;
20
21    --  Deallocation of the access object that has
22    --  an associated type:
23    Free (Typed_IA);
24
25 end Show_Successful_Deallocation;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Anonymous_
 ↪Access_To_Object_Types.Deallocation_Anonymous_Access_To_Object_1
MD5: eff8b54adfcc8cce10920dc3620ff1b9
```

In this example, all operations related to memory allocation are exclusively making use of the `Integer_Access` type, which is a named access type. In fact, `new Integer` allocates the object from the pool associated with the `Integer_Access` type, and the call to `Free` deallocates this object back into that pool. Therefore, associating this object with the `IA` access object — in the `IA := Typed_IA` assignment — doesn't creates problems afterwards in the object's deallocation. (When calling `Free`, we only refer to the object of named access type, so the object is deallocated from a known pool.)

Of course, a potential issue here is that `IA` becomes a *dangling reference* (page 901) after the call to `Free`. Therefore, we can improve this solution by completely hiding the memory allocation and deallocation for the anonymous access types in subprograms — e.g. as part of a package. By doing so, we don't expose the named access type, thereby reducing the possibility of dangling references.

In fact, we can generalize this approach with the following (generic) package:

Listing 201: hidden_anonymous_allocation.ads

```
1  generic
2     type T is private;
3  package Hidden_Anonymous_Allocation is
4
5     function New_T
6       return not null access T;
7
8     procedure Free (Obj : access T);
9
10 end Hidden_Anonymous_Allocation;
```

Listing 202: hidden_anonymous_allocation.adb

```
1  with Ada.Unchecked_Deallocation;
2
3  package body Hidden_Anonymous_Allocation is
4
5     type T_Access is access all T;
6
7     procedure T_Access_Free is
8       new Ada.Unchecked_Deallocation
9         (Object => T,
10         Name   => T_Access);
```

(continues on next page)

(continued from previous page)

```
11
12    function New_T
13      return not null access T is
14    begin
15       return T_Access'(new T);
16       --  Using allocation of the T_Access type:
17       --  object is allocated from T_Access's pool
18    end New_T;
19
20    procedure Free (Obj : access T) is
21       Tmp : T_Access := T_Access (Obj);
22    begin
23       T_Access_Free (Tmp);
24       --  Using deallocation procedure of the
25       --  T_Access type
26    end Free;
27
28 end Hidden_Anonymous_Allocation;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Anonymous_
 ↪Access_To_Object_Types.Hidden_Alloc_Dealloc_Anonymous_Access_To_Object
MD5: bd3831829f34f06a1d3c25a975c850a3
```

In the generic `Hidden_Anonymous_Allocation` package, `New_T` allocates a new object internally and returns an anonymous access to this object. The `Free` procedure deallocates this object.

In the body of the `Hidden_Anonymous_Allocation` package, we use the named access type `T_Access` to handle the actual memory allocation and deallocation. As expected, because those operations happen on the pool associated with the `T_Access` type, we don't have to worry about potential deallocation issues.

Finally, we can instantiate this package for the type we want to have anonymous access types for, say a type named `Rec`. Then, when using the `Rec` type in the main subprogram, we can simply call the corresponding subprograms for memory allocation and deallocation. For example:

Listing 203: info.ads

```
1  with Hidden_Anonymous_Allocation;
2
3  package Info is
4
5     type Rec is private;
6
7     function New_Rec return not null access Rec;
8
9     procedure Free (Obj : access Rec);
10
11 private
12
13    type Rec is record
14       I : Integer;
15    end record;
16
17    package Rec_Allocation is new
18      Hidden_Anonymous_Allocation (T => Rec);
19
20    function New_Rec return not null access Rec
```

(continues on next page)

(continued from previous page)

```
21       renames Rec_Allocation.New_T;
22
23    procedure Free (Obj : access Rec)
24       renames Rec_Allocation.Free;
25
26 end Info;
```

Listing 204: show_info_allocation_deallocation.adb

```
1  with Info; use Info;
2
3  procedure Show_Info_Allocation_Deallocation is
4     RA : constant not null access Rec := New_Rec;
5  begin
6     Free (RA);
7  end Show_Info_Allocation_Deallocation;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Anonymous_
 ↪Access_To_Object_Types.Hidden_Alloc_Dealloc_Anonymous_Access_To_Object
MD5: d71e8ed70e280c6d5d9fc2d49c1eb6c3
```

In this example, we instantiate the Hidden_Anonymous_Allocation package in the Info package, which also defines the Rec type. We associate the New_T and Free subprograms with the Rec type by using subprogram renaming. Finally, in the Show_Info_Allocation_Deallocation procedure, we use these subprograms to allocate and deallocate the type.

Possible solution using the stack

Another approach that we could consider to avoid memory deallocation issues for anonymous access-to-object types is by simply using the stack for the object creation. For example:

Listing 205: show_automatic_deallocation.adb

```
1  procedure Show_Automatic_Deallocation is
2     I  : aliased Integer;
3     --    ^ Allocating object on the stack
4
5     IA : access Integer;
6  begin
7     IA := I'Access;
8     --  Indirect allocation:
9     --  object creation on the stack.
10
11    IA.all := 30;
12
13    --  Automatic deallocation at the end of the
14    --  procedure because the integer variable is
15    --  on the stack.
16 end Show_Automatic_Deallocation;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Anonymous_
 ↪Access_To_Object_Types.Deallocation_Anonymous_Access_To_Object_2
MD5: 4381db8ba87717978a9629b1e6a5f1fc
```

In this case, we create the `I` object on the stack by simply declaring it. Then, we get access to it and assign it to the `IA` access object.

With this approach, we're indirectly allocating an object for an anonymous access type by creating it on the stack. Also, because we know that the `I` is automatically deallocated when it gets out of scope, we don't have to worry about explicitly deallocating the object referred by `IA`.

When to use anonymous access-to-objects types

In summary, anonymous access-to-object types have many drawbacks that often outweigh *their benefits* (page 960). In fact, allocation for those types can quickly become very complicated. Therefore, in general, they're not a good alternative to named access types. Indeed, the difficulties that we've just seen might make them a much worse option than just using named access types instead.

We might consider using anonymous access-to-objects types only in cases when we reach a point in our implementation work where using named access types becomes impossible — or when using them becomes even more complicated than equivalent solutions using anonymous access types. This scenario, however, is usually the exception rather than the rule. Thus, as a general guideline, we should always aim to use named access types.

That being said, an important exception to this advice is when we're *interfacing to other languages* (page 986). In this case, as we'll discuss later, using anonymous access-to-objects types can be significantly simpler (compared to named access types) without the drawbacks that we've just discussed.

28.2.3 Access discriminants

Previously, we've discussed *discriminants as access values* (page 853). In that section, we only used named access types. Now, in this section, we see how to use anonymous access types as discriminants. This feature is also known as *access discriminants* and it provides some flexibility that can be interesting in terms of software design, as we'll discuss later.

Let's start with an example:

Listing 206: custom_recs.ads

```
package Custom_Recs is

   --  Declaring a discriminant with an anonymous
   --  access type:
   type Rec (IA : access Integer) is record
      I : Integer := IA.all;
   end record;

   procedure Show (R : Rec);

end Custom_Recs;
```

Listing 207: custom_recs.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Custom_Recs is

   procedure Show (R : Rec) is
   begin
      Put_Line ("R.IA = "
                & Integer'Image (R.IA.all));
      Put_Line ("R.I  = "
```

(continues on next page)

(continued from previous page)

```
                & Integer'Image (R.I));
   end Show;

end Custom_Recs;
```

Listing 208: show_access_discriminants.adb

```
with Custom_Recs; use Custom_Recs;

procedure Show_Access_Discriminants is
   I  : aliased Integer := 10;
   R  : Rec (I'Access);
begin
   Show (R);

   I   := 20;
   R.I := 30;
   Show (R);
end Show_Access_Discriminants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Access_
 ↪Discriminants.Simple_Example
MD5: f8e127fda4f7ea0f1593165d6a966df6
```

Runtime output

```
R.IA =  10
R.I  =  10
R.IA =  20
R.I  =  30
```

In this example, we use an anonymous access type for the discriminant in the declaration of the Rec type of the `Custom_Recs` package. In the `Show_Access_Discriminants` procedure, we declare R and provide access to the local `I` integer.

Similarly, we can use unconstrained designated subtypes:

Listing 209: persons.ads

```
package Persons is

   --  Declaring a discriminant with an anonymous
   --  access type whose designated subtype is
   --  unconstrained:
   type Person (Name : access String) is record
      Age : Integer;
   end record;

   procedure Show (P : Person);

end Persons;
```

Listing 210: persons.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Persons is

```

(continues on next page)

(continued from previous page)

```
   procedure Show (P : Person) is
   begin
      Put_Line ("Name = "
                & P.Name.all);
      Put_Line ("Age  = "
                & Integer'Image (P.Age));
   end Show;

end Persons;
```

Listing 211: show_person.adb

```
with Persons; use Persons;

procedure Show_Person is
   S : aliased String := "John";
   P : Person (S'Access);
begin
   P.Age := 30;
   Show (P);
end Show_Person;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Access_
↪Discriminants.Persons
MD5: f0149d572e0ec192476836bfdf00dd9e
```

Runtime output

```
Name = John
Age  =  30
```

In this example, for the discriminant of the Person type, we use an anonymous access type whose designated subtype is unconstrained. In the Show_Person procedure, we declare the P object and provide access to the S string.

In the Ada Reference Manual

- 3.7 Discriminants[275]
- 3.10.2 Operations of Access Types[276]

Default Value of Access Discriminants

In contrast to named access types, we cannot use a default value for the access discriminant of a non-limited type:

Listing 212: custom_recs.ads

```
package Custom_Recs is

   --  Declaring a discriminant with an anonymous
   --  access type and a default value:
   type Rec (IA : access Integer :=
                    new Integer'(0)) is
```

(continues on next page)

[275] http://www.ada-auth.org/standards/22rm/html/RM-3-7.html
[276] http://www.ada-auth.org/standards/22rm/html/RM-3-10-2.html

(continued from previous page)

```
   record
      I : Integer := IA.all;
   end record;

end Custom_Recs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Access_
 ↪Discriminants.Default_Expression_Non_Limited_Type
MD5: c3ddf1cdfdaefa873ad66b9e47e03058
```

Build output

```
custom_recs.ads:6:21: warning: coextension will not be deallocated when its␣
 ↪associated owner is deallocated [enabled by default]
custom_recs.ads:6:21: error: (Ada 2005) access discriminants of nonlimited types␣
 ↪cannot have defaults
gprbuild: *** compilation phase failed
```

However, if we change the type declaration to be a limited type, having a default value for the access discriminant is OK:

Listing 213: custom_recs.ads

```
package Custom_Recs is

   --  Declaring a discriminant with an anonymous
   --  access type and a default value:
   type Rec (IA : access Integer :=
                    new Integer'(0)) is limited
   record
      I : Integer := IA.all;
   end record;

   procedure Show (R : Rec);

end Custom_Recs;
```

Listing 214: custom_recs.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Custom_Recs is

   procedure Show (R : Rec) is
   begin
      Put_Line ("R.IA = "
                & Integer'Image (R.IA.all));
      Put_Line ("R.I  = "
                & Integer'Image (R.I));
   end Show;

end Custom_Recs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Access_
 ↪Discriminants.Default_Expression_Limited_Type
MD5: ae872f1dec64b8e955f04789ca4db218
```

Build output

```
custom_recs.ads:6:21: warning: coextension will not be deallocated when its␣
 ↪associated owner is deallocated [enabled by default]
```

Note that, if we don't provide a value for the access discriminant when declaring an object R, the default value is allocated (via **new**) during R's creation.

Listing 215: show_access_discriminants.adb

```
1  with Custom_Recs; use Custom_Recs;
2
3  procedure Show_Access_Discriminants is
4     R : Rec;
5     --  ^^^
6     --  This triggers "new Integer'(0)", so an
7     --  integer object is allocated and stored in
8     --  the R.IA discriminant.
9  begin
10    Show (R);
11
12    --  R gets out of scope here, and the object
13    --  allocated via new hasn't been deallocated.
14 end Show_Access_Discriminants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Access_
 ↪Discriminants.Default_Expression_Limited_Type
MD5: f5d9dee26044ccab2193ab419638de79
```

Build output

```
show_access_discriminants.adb:4:04: warning: coextension will not be deallocated␣
 ↪when its associated owner is deallocated [enabled by default]
custom_recs.ads:6:21: warning: coextension will not be deallocated when its␣
 ↪associated owner is deallocated [enabled by default]
```

Runtime output

```
R.IA =  0
R.I  =  0
```

In this case, the allocated object won't be deallocated when R gets out of scope!

Benefits of Access Discriminants

Access discriminants have the same benefits that we've already seen earlier while discussing *discriminants as access values* (page 853). An additional benefit is its extended flexibility: access discriminants are compatible with any access T'Access, as long as T is of the designated subtype.

Consider the following example using the named access type Access_String:

Listing 216: persons.ads

```
1  package Persons is
2
3     type Access_String is access all String;
4
5     --  Declaring a discriminant with a named
6     --  access type:
```

(continues on next page)

(continued from previous page)

```
   type Person (Name : Access_String) is record
      Age : Integer;
   end record;

   procedure Show (P : Person);

end Persons;
```

Listing 217: persons.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Persons is

   procedure Show (P : Person) is
   begin
      Put_Line ("Name = "
                & P.Name.all);
      Put_Line ("Age  = "
                & Integer'Image (P.Age));
   end Show;

end Persons;
```

Listing 218: show_person.adb

```
with Persons; use Persons;

procedure Show_Person is
   S : aliased String := "John";
   P : Person (S'Access);
   --          ^^^^^^^^ ERROR: cannot use local
   --                           object
   --
   --  We can, however, allocate the string via
   --  new:
   --
   --  S : Access_String := new String'("John");
   --  P : Person (S);
begin
   P.Age := 30;
   Show (P);
end Show_Person;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Access_
 ↪Discriminants.Persons
MD5: e918db3790c7ffeeb7c0f54ced9f48b9
```

Build output

```
show_person.adb:5:16: error: non-local pointer cannot point to local object
gprbuild: *** compilation phase failed
```

This code doesn't compile because we cannot have a non-local pointer (`Access_String`) pointing to the local object S. The only way to make this work is by allocating the string via **new** (i.e.: `S : Access_String := new String`).

However, if we use an access discriminant in the declaration of `Person`, the code compiles fine:

Listing 219: persons.ads

```
package Persons is

   --  Declaring a discriminant with an anonymous
   --  access type:
   type Person (Name : access String) is record
      Age : Integer;
   end record;

   procedure Show (P : Person);

end Persons;
```

Listing 220: show_person.adb

```
with Persons; use Persons;

procedure Show_Person is
   S : aliased String := "John";
   P : Person (S'Access);
   --          ^^^^^^^^ OK

   --  Allocating the string via new and using it
   --  in P's declaration is OK as well, but we
   --  should manually deallocate it before S
   --  gets out of scope:
   --
   --  S : access String := new String'("John");
   --  P : Person (S);
begin
   P.Age := 30;
   Show (P);
end Show_Person;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Access_
 ↪Discriminants.Persons
MD5: 6516fb4e0cbbac9cfe07a56e48ea9ff3
```

Runtime output

```
Name = John
Age  =  30
```

In this case, getting access to the local object S and using it for P's discriminant is perfectly fine.

Preventing dangling pointers

Note that the usual rules that prevent dangling pointers still apply here. This ensures that we can safely use access discriminants. For example:

Listing 221: show_person.adb

```
with Persons; use Persons;

procedure Show_Person is

```

(continues on next page)

(continued from previous page)

```
   function Local_Init return Person is
      S : aliased String := "John";
   begin
      return (Name => S'Access, Age => 30);
      --      ^^^^^^^^^^^^^^^^
      --      ERROR: dangling reference!
   end Local_Init;

   P : Person := Local_Init;
begin
   Show (P);
end Show_Person;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Access_
 ↪Discriminants.Persons
MD5: 9c8d2aebf60b8bb19e455cb6bc5730eb
```

Build output

```
show_person.adb:8:07: error: access discriminant in return object would be a␣
 ↪dangling reference
gprbuild: *** compilation phase failed
```

In this example, compilation fails in the `Local_Init` function when trying to return an object of `Person` type because `S'Access` would be a dangling reference.

28.2.4 Self-reference

Previously, we've seen that we can declare *self-references* (page 870) using named access types. We can do the same with anonymous access types. Let's revisit the code example that implements linked lists:

Listing 222: linked_lists.ads

```
generic
   type T is private;
package Linked_Lists is

   type List is limited private;

   procedure Append_Front
      (L : in out List;
       E :        T);

   procedure Append_Rear
      (L : in out List;
       E :        T);

   procedure Show (L : List);

private

   type Component is record
      Next  : access Component;
      --      ^^^^^^^^^^^^^^^^
      --       Self-reference
      --
      --       (Note that we haven't finished the
```

(continues on next page)

(continued from previous page)

```
      --       declaration of the "Component" type
      --       yet, but we're already referring to
      --       it.)

      Value : T;
   end record;

   type List is access all Component;

end Linked_Lists;
```

Listing 223: linked_lists.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Linked_Lists is

   procedure Append_Front
      (L : in out List;
       E :        T)
   is
      New_First : constant List := new
        Component'(Value => E,
                   Next  => L);
   begin
      L := New_First;
   end Append_Front;

   procedure Append_Rear
      (L : in out List;
       E :        T)
   is
      New_Last : constant List := new
        Component'(Value => E,
                   Next  => null);
   begin
      if L = null then
         L := New_Last;
      else
         declare
            Last : List := L;
         begin
            while Last.Next /= null loop
               Last := List (Last.Next);
               --      ^^^^
               --   type conversion:
               --      "access Component" to
               --      "List"
            end loop;
            Last.Next := New_Last;
         end;
      end if;
   end Append_Rear;

   procedure Show (L : List) is
      Curr : List := L;
   begin
      if L = null then
         Put_Line ("[ ]");
      else
         Put ("[");
```

(continues on next page)

(continued from previous page)

```
         loop
            Put (Curr.Value'Image);
            Put (" ");
            exit when Curr.Next = null;
            Curr := Curr.Next;
         end loop;
         Put_Line ("]");
      end if;
   end Show;

end Linked_Lists;
```

Listing 224: test_linked_list.adb

```
with Linked_Lists;

procedure Test_Linked_List is
    package Integer_Lists is new
      Linked_Lists (T => Integer);
    use Integer_Lists;

    L : List;
begin
    Append_Front (L, 3);
    Append_Rear (L, 4);
    Append_Rear (L, 5);
    Append_Front (L, 2);
    Append_Front (L, 1);
    Append_Rear (L, 6);
    Append_Rear (L, 7);

    Show (L);
end Test_Linked_List;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Self_
 ↪Reference.Linked_List_Example
MD5: 98b9b2ce6fac3064326e6345520dc650
```

Runtime output

```
[ 1  2  3  4  5  6  7 ]
```

Here, in the declaration of the `Component` type (in the private part of the generic `Linked_Lists` package), we declare `Next` as an anonymous access type that refers to the `Component` type. (Note that at this point, we haven't finished the declaration of the `Component` type yet, but we're already using it as the designated subtype of an anonymous access type.) Then, we declare `List` as a general access type (with `Component` as the designated subtype).

It's worth mentioning that the `List` type and the anonymous **`access`** `Component` type aren't the same type, although they share the same designated subtype. Therefore, in the implementation of the `Append_Rear` procedure, we have to use type conversion to convert from the anonymous **`access`** `Component` type to the (named) `List` type.

28.2.5 Mutually dependent types using anonymous access types

In the section on *mutually dependent types using access types* (page 873), we've seen a code example that was using named access types. We could now rewrite it using anonymous access types:

Listing 225: mutually_dependent.ads

```
package Mutually_Dependent is

   type T2;

   type T1 is record
      B : access T2;
   end record;

   type T2 is record
      A : access T1;
   end record;

end Mutually_Dependent;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Mutually_
 ↪Dependent_Anonymous_Access_Types.Example
MD5: 09f869d99b9c16882554588bb806a113
```

In this example, T1 and T2 are mutually dependent types. We're using anonymous access types in the declaration of the B and A components.

28.2.6 Access parameters

In the previous chapter, we talked about *parameters as access values* (page 860). As you might have expected, we can also use anonymous access types as parameters of a subprogram. However, they're limited to be **in** parameters of a subprogram or return type of a function (also called the access result type):

Listing 226: names.ads

```
package Names is

   function Init (S1, S2 : String)
                  return access String;
   --             ^^^^^^^^^^^^^^^^^^^^
   --  Anonymous access type as the access
   --  result type.

   procedure Show (N : access constant String);
   --                  ^^^^^^^^^^^^^^^^^^^^^^
   --  Anonymous access type as a parameter type.

end Names;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Anonymous_
 ↪Access_Parameters.Names
MD5: 622a76c4b133ed2715f18c175694cbe2
```

In this example, we have a string as the access result type of the `Init` function, and another string as the access parameter of the Show procedure.

This is the complete code example:

Listing 227: names.ads

```
package Names is

   function Init (S1, S2 : String)
                  return access String;

   procedure Show (N : access constant String);

private

   function Init (S1, S2 : String)
                  return access String is
     (new String'(S1 & "-" & S2));

end Names;
```

Listing 228: names.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Names is

   procedure Show (N : access constant String) is
   begin
      Put_Line ("Name: " & N.all);
   end Show;

end Names;
```

Listing 229: show_names.adb

```
with Names; use Names;

procedure Show_Names is
   N : access String := Init ("Lily", "Ann");
begin
   Show (N);
end Show_Names;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Anonymous_
 ↪Access_Parameters.Names
MD5: 9fe629f29de2898f2b82d9146b22fd1a
```

Runtime output

```
Name: Lily-Ann
```

Note that we're not using the **in** parameter mode in the Show procedure above. Usually, this parameter mode can be omitted, as it is the default parameter mode — `procedure P (I : Integer)` is the same as `procedure P (I : in Integer)`. However, in the case of the Show procedure, the **in** parameter mode isn't just optionally absent. In fact, for access parameters, the parameter mode is always implied as **in**, so writing it explicitly is actually forbidden. In other words, we can only write `N : access String` or `N : access constant String`, but we cannot write `N : in access String` or `N : in access constant String`.

For further reading...

When we discussed *parameters as access values* (page 860) in the previous chapter, we saw how we can simply use different parameter modes to write a program instead of using access types. Basically, to implement the same functionality, we just replaced the access types by selecting the correct parameter modes instead and used *simpler* data types.

Let's do the same exercise again, this time by adapting the previous code example with anonymous access types:

Listing 230: names.ads

```
package Names is

   function Init (S1, S2 : String)
                  return String;

   procedure Show (N : String);

private

   function Init (S1, S2 : String)
                  return String is
     (S1 & "-" & S2);

end Names;
```

Listing 231: names.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Names is

   procedure Show (N : String) is
   begin
      Put_Line ("Name: " & N);
   end Show;

end Names;
```

Listing 232: show_names.adb

```
with Names; use Names;

procedure Show_Names is
   N : String := Init ("Lily", "Ann");
begin
   Show (N);
end Show_Names;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.
 ↪Anonymous_Access_Parameters.Names_String
MD5: 643f193999ef8de9bcefb11d9bdd21d7
```

Runtime output

```
Name: Lily-Ann
```

Although we're using simple strings instead of access types in this version of the code example, we're still getting a similar behavior. However, there is a small, yet important difference in the way the string returned by `Init` is being allocated: while the previous

implementation (which was using an access result type) was allocating the string on the heap, we're now allocating the string on the stack.

Later on, we talk about the *accessibility rules in the case of access parameters* (page 1005).

In general, we should avoid access parameters whenever possible and simply use objects and parameter modes directly, as it makes the design simpler and less error-prone. One exception is when we're interfacing to other languages, especially C: this is our *next topic* (page 986). Another time when access parameters are vital is for inherited primitive operations for tagged types. We discuss this *later on* (page 989).

In the Ada Reference Manual

- 3.10 Access Types[277]

Interfacing To Other Languages

We can use access parameters to interface to other languages. This can be particularly useful when interfacing to C code that makes use of pointers. For example, let's assume we want to call the add_one function below in our Ada implementation:

Listing 233: operations_c.h

```
void add_one(int *p_i);
```

Listing 234: operations_c.c

```
void add_one(int *p_i)
{
    *p_i = *p_i + 1;
}
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Anonymous_
 ↪Access_Parameters.C_Interfacing
MD5: 3270f3b2415266a203a6f4c605c3831b
```

We could map the **int** * parameter of add_one to **access Integer** in the Ada specification:

```
procedure Add_One (IA : access Integer)
  with Import, Convention => C;
```

This is a complete code example:

Listing 235: operations.ads

```
package Operations is

   procedure Add_One (IA : access Integer)
     with Import, Convention => C;

end Operations;
```

[277] http://www.ada-auth.org/standards/22rm/html/RM-3-10.html

Listing 236: show_operations.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Operations;  use Operations;

procedure Show_Operations is
   I : aliased Integer := 42;
begin
   Put_Line (I'Image);
   Add_One (I'Access);
   Put_Line (I'Image);
end Show_Operations;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Anonymous_
 ↪Access_Parameters.C_Interfacing
MD5: 0219acdbd2dad69962875199ffdd930e
```

Once again, we can replace access parameters with simpler types by using the appropriate parameter mode. In this case, we could replace **access Integer** by **aliased in out Integer**. This is the modified version of the code:

Listing 237: operations.ads

```
package Operations is

   procedure Add_One
    (IA : aliased in out Integer)
       with Import, Convention => C;

end Operations;
```

Listing 238: show_operations.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Operations;  use Operations;

procedure Show_Operations is
   I : aliased Integer := 42;
begin
   Put_Line (I'Image);
   Add_One (I);
   Put_Line (I'Image);
end Show_Operations;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Anonymous_
 ↪Access_Parameters.C_Interfacing
MD5: 2c5a81b8d77f0fff8a73f7912be6b6fe
```

However, there are situations where aliased objects cannot be used. For example, suppose we want to allocate memory inside a C function. In this case, the pointer to that memory block must be mapped to an access type in Ada.

Let's extend the previous C code example and introduce the `alloc_integer` and `dealloc_integer` functions, which allocate and deallocate an integer value:

Listing 239: operations_c.h

```
int * alloc_integer();

void dealloc_integer(int *p_i);

void add_one(int *p_i);
```

Listing 240: operations_c.c

```
#include <stdlib.h>

int * alloc_integer()
{
    return malloc(sizeof(int));
}

void dealloc_integer(int *p_i)
{
    free (p_i);
}

void add_one(int *p_i)
{
    *p_i = *p_i + 1;
}
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Anonymous_
 ↪Access_Parameters.C_Interfacing
MD5: ec6dea12d0a948489cce21b0cc0a1ad2
```

In this case, we really have to use access types to interface to these C functions. In fact, we need an access result type to interface to the `alloc_integer()` function, and an access parameter in the case of the `dealloc_integer()` function. This is the corresponding specification in Ada:

Listing 241: operations.ads

```
package Operations is

   function Alloc_Integer return access Integer
     with Import, Convention => C;

   procedure Dealloc_Integer (IA : access Integer)
     with Import, Convention => C;

   procedure Add_One
    (IA : aliased in out Integer)
       with Import, Convention => C;

end Operations;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Anonymous_
 ↪Access_Parameters.C_Interfacing
MD5: bcbc8a87037b64fc6469e67b928e6172
```

Note that we're still using an aliased integer type for the Add_One procedure, while we're using access types for the other two subprograms.

Finally, as expected, we can use this specification in a test application:

Listing 242: show_operations.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Operations;  use Operations;

procedure Show_Operations is
   I : access Integer := Alloc_Integer;
begin
   I.all := 42;
   Put_Line (I.all'Image);

   Add_One (I.all);
   Put_Line (I.all'Image);

   Dealloc_Integer (I);
end Show_Operations;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Anonymous_
 ↪Access_Parameters.C_Interfacing
MD5: b2b96a166926528bc44059b56e31fb55
```

In this application, we get a C pointer from the `alloc_integer` function and encapsulate it in an Ada access type, which we then assign to `I`. In the last line of the procedure, we call `Dealloc_Integer` and pass `I` to it, which deallocates the memory block indicated by the C pointer.

In the Ada Reference Manual

- 3.10 Access Types[278]

Inherited Primitive Operations For Tagged Types

In order to declare inherited primitive operations for tagged types that use access types, we need to use access parameters. The reason is that, to be a primitive operation for some tagged type — and hence inheritable — the subprogram must reference the tagged type name directly in the parameter profile. This means that a named access type won't suffice, because only the access type name would appear in the profile. For example:

Listing 243: inherited_primitives.ads

```
package Inherited_Primitives is

   type T is tagged private;

   type T_Access is access all T;

   procedure Proc (N : T_Access);
   --  Proc is not a primitive of type T.

   type T_Child is new T with private;

   type T_Child_Access is access all T_Child;

```

(continues on next page)

[278] http://www.ada-auth.org/standards/22rm/html/RM-3-10.html

(continued from previous page)

```
private

   type T is tagged null record;

   type T_Child is new T with null record;

end Inherited_Primitives;
```

Listing 244: inherited_primitives.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Inherited_Primitives is

   procedure Proc (N : T_Access) is null;

end Inherited_Primitives;
```

Listing 245: show_inherited_primitives.adb

```
with Inherited_Primitives;
use  Inherited_Primitives;

procedure Show_Inherited_Primitives is
   Obj       : T_Access       := new T;
   Obj_Child : T_Child_Access := new T_Child;
begin
   Proc (Obj);
   Proc (Obj_Child);
   --    ^^^^^^^^^^
   --    ERROR: Proc is not inherited!
end Show_Inherited_Primitives;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Anonymous_
 ↪Access_Parameters.Inherited_Primitives
MD5: 8235b21caa9f1f105f533d74d891adfe
```

Build output

```
show_inherited_primitives.adb:9:10: error: expected type "T_Access" defined at␣
 ↪inherited_primitives.ads:5
show_inherited_primitives.adb:9:10: error: found type "T_Child_Access" defined at␣
 ↪inherited_primitives.ads:12
gprbuild: *** compilation phase failed
```

In this example, `Proc` is not a primitive of type `T` because it's referring to type `T_Access`, not type `T`. This means that `Proc` isn't inherited when we derive the `T_Child` type. Therefore, when we call `Proc (Obj_Child)`, a compilation error occurs because the compiler expects type `T_Access` — there's no `Proc (N : T_Child_Access)` that could be used here.

If we replace `T_Access` in the `Proc` procedure with an an access parameter (`access T`), the subprogram becomes a primitive of `T`:

Listing 246: inherited_primitives.ads

```
package Inherited_Primitives is

   type T is tagged private;
```

(continues on next page)

(continued from previous page)

```
4
5     procedure Proc (N : access T);
6     --  Proc is a primitive of type T.
7
8     type T_Child is new T with private;
9
10 private
11
12    type T is tagged null record;
13
14    type T_Child is new T with null record;
15
16 end Inherited_Primitives;
```

Listing 247: inherited_primitives.adb

```
1  package body Inherited_Primitives is
2
3     procedure Proc (N : access T) is null;
4
5  end Inherited_Primitives;
```

Listing 248: show_inherited_primitives.adb

```
1  with Inherited_Primitives;
2  use  Inherited_Primitives;
3
4  procedure Show_Inherited_Primitives is
5     Obj       : access T       := new T;
6     Obj_Child : access T_Child := new T_Child;
7  begin
8     Proc (Obj);
9     Proc (Obj_Child);
10    --    ^^^^^^^^^
11    --    OK: Proc is inherited!
12 end Show_Inherited_Primitives;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Anonymous_
 ↪Access_Parameters.Inherited_Primitives
MD5: a7e9b8bc92e346758cc4ade43bb4b02d
```

Now, the child type `T_Child` (derived from the T) inherits the primitive operation `Proc`. This inherited operation has an access parameter designating the child type:

```
type T_Child is new T with private;

procedure Proc (N : access T_Child);
--  Implicitly inherited primitive operation
```

In the Ada Reference Manual

- 3.9.2 Dispatching Operations of Tagged Types[279]

[279] http://www.ada-auth.org/standards/22rm/html/RM-3-9-2.html

28.2.7 User-Defined References

Implicit dereferencing (page 875) isn't limited to the contexts that Ada supports by default: we can also add implicit dereferencing to our own types by using the `Implicit_Dereference` aspect.

To do this, we have to declare:

- a reference type, where we use the `Implicit_Dereference` aspect to specify the reference discriminant, which is the record discriminant that will be dereferenced; and
- a reference object, which contains an access value that will be dereferenced.

Also, for the reference type, we have to:

- specify the reference discriminant as an *access discriminant* (page 973); and
- indicate the name of the reference discriminant when specifying the `Implicit_Dereference` aspect.

Let's see a simple example:

Listing 249: show_user_defined_reference.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_User_Defined_Reference is

   type Id_Number is record
      Id : Positive;
   end record;

   --
   --  Reference type:
   --
   type Id_Ref (Ref : access Id_Number) is
   --           ^ reference discriminant
     null record
       with Implicit_Dereference => Ref;
     --                             ^^^
     --               name of the reference
     --               discriminant

   --
   --  Access value:
   --
   I : constant access Id_Number :=
         new Id_Number'(Id => 42);

   --
   --  Reference object:
   --
   R : Id_Ref (I);
begin
   Put_Line ("ID: "
             & Positive'Image (R.Id));
   --                           ^ Equivalent to:
   --                              R.Ref.Id
   --                            or:
   --                             R.Ref.all.Id
end Show_User_Defined_Reference;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.User_
 ↪Defined_References.Simple_User_Defined_References
MD5: 33eaa7e8e75b4eb56d64dcc17e2932aa
```

Runtime output

```
ID:  42
```

Here, we declare a simple record type (`Id_Number`) and a corresponding reference type (`Id_Ref`). Note that:

- the reference discriminant `Ref` has an access to the `Id_Number` type; and
- we indicate this reference discriminant in the `Implicit_Dereference` aspect.

Then, we declare an access value (the `I` constant) and use it for the `Ref` discriminant in the declaration of the reference object `R`.

Finally, we implicitly dereference `R` and access the `Id` component by simply writing `R.Id` — instead of the extended forms `R.Ref.Id` or `R.Ref.all.Id`.

Important

The extended form mentioned in the example that we just saw (`R.Ref.all.Id`) makes it clear that two steps happen when evaluating `R.Id`:

- First, `R.Ref` is implied from `R` because of the `Implicit_Dereference` aspect.
- Then, `R.Ref` is implicitly dereferenced to `R.Ref.all`.

After these two steps, we can access the actual object. (In our case, we can access the `Id` component.)

Note that we cannot use access types directly for the reference discriminant. For example, if we made the following change in the previous code example, it wouldn't compile:

```
type Id_Number_Access is access Id_Number;

--  Reference type:
type Id_Ref (Ref : Id_Number_Access) is
--                 ^ ERROR: it must be
--                          an access
--                          discriminant!
  null record
    with Implicit_Dereference => Ref;
```

However, we could use other forms — such as `not null access` — in the reference discriminant:

```
--  Reference type:
type Id_Ref (Ref : not null access Id_Number) is
  null record
    with Implicit_Dereference => Ref;
```

In the Ada Reference Manual

- 4.1.5 User-Defined References[280]

[280] http://www.ada-auth.org/standards/22rm/html/RM-4-1-5.html

Dereferencing of tagged types

Naturally, implicit dereferencing is also possible when calling primitives of a tagged type. For example, let's change the declaration of the `Id_Number` type from the previous code example and add a Show primitive.

Listing 250: info.ads

```
package Info is
   type Id_Number (Id : Positive) is
     tagged private;

   procedure Show (R : Id_Number);
private
   type Id_Number (Id : Positive) is
     tagged null record;
end Info;
```

Listing 251: info.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Info is

   procedure Show (R : Id_Number) is
   begin
      Put_Line ("ID: " & Positive'Image (R.Id));
   end Show;

end Info;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.User_
 ↪Defined_References.Dereferencing_Tagged_Types
MD5: 4de65094963450dc3a7505dbf93c2551
```

Then, let's declare a reference type and a reference object in the test application:

Listing 252: show_user_defined_reference.adb

```
with Info; use Info;

procedure Show_User_Defined_Reference is

   --  Reference type:
   type Id_Ref (Ref : access Id_Number) is
     null record
       with Implicit_Dereference => Ref;

   --  Access value:
   I : constant access Id_Number :=
         new Id_Number (42);

   --  Reference object:
   R : Id_Ref (I);
begin

   R.Show;
   --  Equivalent to:
   --  R.Ref.all.Show;

```

(continues on next page)

(continued from previous page)

```
22 end Show_User_Defined_Reference;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.User_
 ↪Defined_References.Dereferencing_Tagged_Types
MD5: 9c5dfc4f2b8e085efde9e61689243f70
```

Runtime output

```
ID:  42
```

Here, we can call the Show procedure by simply writing `R.Show` instead of `R.Ref.all.Show`.

Simple container

A typical application of user-defined references is to create cursors when iterating over a container. As an example, let's implement the `National_Date_Info` package to store the national day of a country:

Listing 253: national_date_info.ads

```
1  package National_Date_Info is
2
3     subtype Country_Code is String (1 .. 3);
4
5     type Time is record
6        Year  : Integer;
7        Month : Positive range 1 .. 12;
8        Day   : Positive range 1 .. 31;
9     end record;
10
11    type National_Date is tagged record
12       Country : Country_Code;
13       Date    : Time;
14    end record;
15
16    type National_Date_Access is
17      access National_Date;
18
19    procedure Show (Nat_Date : National_Date);
20
21 end National_Date_Info;
```

Listing 254: national_date_info.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  package body National_Date_Info is
4
5     procedure Show (Nat_Date : National_Date) is
6     begin
7        Put_Line ("Country: "
8                  & Nat_Date.Country);
9        Put_Line ("Year:    "
10                 & Integer'Image
11                    (Nat_Date.Date.Year));
12    end Show;
13
14 end National_Date_Info;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.User_
 ↪Defined_References.National_Dates
MD5: 90fd6740d701025e1d5f30c9751a528d
```

Here, `National_Date` is a record type that we use to store the national day information. We can call the Show procedure to display this information.

Now, let's implement the `National_Date_Containers` with a container for national days:

Listing 255: national_date_containers.ads

```
with National_Date_Info; use National_Date_Info;

package National_Date_Containers is

   --  Reference type:
   type National_Date_Reference
     (Ref : access National_Date) is
       tagged limited null record
         with Implicit_Dereference => Ref;

   --  Container (as an array):
   type National_Dates is
     array (Positive range <>) of
       National_Date_Access;

   --  The Find function scans the container to
   --  find a specific country, which is returned
   --  as a reference object.
   function Find (Nat_Dates : National_Dates;
                  Country   : Country_Code)
                  return National_Date_Reference;

end National_Date_Containers;
```

Listing 256: national_date_containers.adb

```
package body National_Date_Containers is

   function Find (Nat_Dates : National_Dates;
                  Country   : Country_Code)
                  return National_Date_Reference
   is
   begin
      for I in Nat_Dates'Range loop
         if Nat_Dates (I).Country = Country then
            return National_Date_Reference'(
                     Ref => Nat_Dates (I));
            --      ^^^^^^^^^^^^^^^^^^^^^^^^^
            --   Returning reference object with a
            --   reference to the national day we
            --   found.
         end if;
      end loop;

      return
        National_Date_Reference'(Ref => null);
      --  ^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^
      --   Returning reference object with a null
      --   reference in case the country wasn't
```

(continues on next page)

(continued from previous page)

```
      --    found. This will trigger an exception
      --    if we try to dereference it.
   end Find;

end National_Date_Containers;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.User_
 ↪Defined_References.National_Dates
MD5: ec37ae93a7052c4bc731b2a7be0763ab
```

Package `National_Date_Containers` contains the `National_Dates` type, which is an array type for declaring containers that we use to store the national day information. We can also see the declaration of the `National_Date_Reference` type, which is the reference type returned by the `Find` function when looking for a specific country in the container.

Important

We're declaring the container type (`National_Dates`) as an array type just to simplify the code. In many cases, however, this approach isn't recommended! Instead, we should use a private type in order to encapsulate — and better protect — the information stored in the actual container.

Finally, let's see a test application that stores information for some countries into the `Nat_Dates` container and displays the information for a specific country:

Listing 257: show_national_dates.adb

```
with National_Date_Info;
use  National_Date_Info;

with National_Date_Containers;
use  National_Date_Containers;

procedure Show_National_Dates is

   Nat_Dates : constant National_Dates (1 .. 5) :=
     (new National_Date'("USA",
                         Time'(1776,  7,  4)),
      new National_Date'("FRA",
                         Time'(1789,  7, 14)),
      new National_Date'("DEU",
                         Time'(1990, 10,  3)),
      new National_Date'("SPA",
                         Time'(1492, 10, 12)),
      new National_Date'("BRA",
                         Time'(1822,  9,  7)));

begin
   Find (Nat_Dates, "FRA").Show;
   --                      ^ implicit dereference
end Show_National_Dates;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.User_
 ↪Defined_References.National_Dates
MD5: 771ecb91e8f890d4bb9b08115ae833f4
```

Runtime output

```
Country: FRA
Year:     1789
```

Here, we call the Find function to retrieve a reference object, whose reference (access value) has the national day information of France. We then implicitly dereference it to get the tagged object (of National_Date type) and display its information by calling the Show procedure.

Relevant topics

The National_Date_Containers package was implemented specifically as an accompanying package for the National_Date_Info package. It is possible, however, to generalize it, so that we can reuse the container for other record types. In fact, this is actually very straightforward:

Listing 258: generic_containers.ads

```
generic
   type T is private;
   type T_Access is access T;
   type T_Cmp is private;
   with function Matches (E    : T_Access;
                          Elem : T_Cmp)
                          return Boolean;
package Generic_Containers is

   type Ref_Type (Ref : access T) is
     tagged limited null record
       with Implicit_Dereference => Ref;

   type Container is
     array (Positive range <>) of
       T_Access;

   function Find (Cont : Container;
                  Elem : T_Cmp)
                  return Ref_Type;

end Generic_Containers;
```

Listing 259: generic_containers.adb

```
package body Generic_Containers is

   function Find (Cont : Container;
                  Elem : T_Cmp)
                  return Ref_Type is
   begin
      for I in Cont'Range loop
         if Matches (Cont (I), Elem) then
            return Ref_Type'(Ref => Cont (I));
         end if;
      end loop;

      return Ref_Type'(Ref => null);
   end Find;

end Generic_Containers;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.User_
 ↪Defined_References.National_Dates
MD5: 94c23a48131a47439b5b41e985c3d6c1
```

When comparing the `Generic_Containers` package to the `National_Date_Containers` package, we see that the main difference is the addition of the `Matches` function, which indicates whether the current element we're evaluating in the for-loop of the `Find` function is the one we're looking for.

In the main application, we can implement the `Matches` function and declare the `National_Date_Containers` package as an instance of the `Generic_Containers` package:

Listing 260: show_national_dates.adb

```
with Generic_Containers;
with National_Date_Info; use National_Date_Info;

procedure Show_National_Dates is

   function Matches_Country
     (E    : National_Date_Access;
      Elem : Country_Code)
      return Boolean is
        (E.Country = Elem);

   package National_Date_Containers is new
     Generic_Containers
       (T        => National_Date,
        T_Access => National_Date_Access,
        T_Cmp    => Country_Code,
        Matches  => Matches_Country);

   use National_Date_Containers;

   subtype National_Dates is Container;

   Nat_Dates : constant
                 National_Dates (1 .. 5) :=
     (new National_Date'("USA",
                         Time'(1776,  7,  4)),
      new National_Date'("FRA",
                         Time'(1789,  7, 14)),
      new National_Date'("DEU",
                         Time'(1990, 10,  3)),
      new National_Date'("SPA",
                         Time'(1492, 10, 12)),
      new National_Date'("BRA",
                         Time'(1822,  9,  7)));

begin
   Find (Nat_Dates, "FRA").Show;
end Show_National_Dates;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.User_
 ↪Defined_References.National_Dates
MD5: f4dac1fed69b9bccce5dccbf17844adc
```

Runtime output

```
Country: FRA
Year:     1789
```

Here, we instantiate the `Generic_Containers` package with the `Matches_Country` function, which is an expression function that compares the country component of the current `National_Date` reference with the name of the country we desire to learn about.

This generalized approach is actually used for the standard containers from the `Ada.Containers` packages. For example, the `Ada.Containers.Vectors` is specified as follows:

```
with Ada.Iterator_Interfaces;

generic
   type Index_Type is range <>;
   type Element_Type is private;
   with function "=" (Left, Right : Element_Type)
                     return Boolean is <>;
package Ada.Containers.Vectors
  with Preelaborate, Remote_Types,
       Nonblocking,
       Global => in out synchronized is

   -- OMITTED

   type Reference_Type
     (Element : not null access Element_Type) is
      private
        with Implicit_Dereference => Element,
             Nonblocking,
             Global => in out synchronized,
             Default_Initial_Condition =>
               (raise Program_Error);

   -- OMITTED

   function Reference
     (Container : aliased in out Vector;
      Index     : in Index_Type)
      return Reference_Type
        with Pre  => Index in
                       First_Index (Container) ..
                       Last_Index (Container)
                     or else raise
                             Constraint_Error,
          Post =>
            Tampering_With_Cursors_Prohibited
              (Container),
          Nonblocking,
          Global => null,
          Use_Formal => null;

   -- OMITTED

   function Reference
     (Container : aliased in out Vector;
      Position  : in Cursor)
      return Reference_Type
        with Pre  => (Position /= No_Element
                      or else raise
                              Constraint_Error)
                      and then
                        (Has_Element
                          (Container, Position)
                         or else raise
                                 Program_Error),
```

```
            Post   =>
              Tampering_With_Cursors_Prohibited
                (Container),
            Nonblocking,
            Global => null,
            Use_Formal => null;

   -- OMITTED

end Ada.Containers.Vectors;
```

(Note that most parts of the `Vectors` package were omitted for clarity. Please refer to the Ada Reference Manual for the complete package specification.)

Here, we see that the `Implicit_Dereference` aspect is used in the declaration of **`Reference_Type`**, which is the reference type returned by the `Reference` functions for an index or a cursor.

Also, note that the `Vectors` package has a formal equality function (`=`) instead of the `Matches` function we were using in our **`Generic`**`_Containers` package. The purpose of the formal function, however, is basically the same.

In the Ada Reference Manual

- A.18.2 The Generic Package Containers.Vectors[281]

28.2.8 Anonymous Access Types and Accessibility Rules

In general, the *accessibility rules* (page 896) we've seen earlier also apply to anonymous access types. However, there are some subtle differences, which we discuss in this section.

Let's adapt the *code example from that section* (page 897) to make use of anonymous access types:

Listing 261: library_level.ads

```
1  package Library_Level is
2
3     L0_A0  : access Integer;
4
5     L0_Var : aliased Integer;
6
7  end Library_Level;
```

Listing 262: show_library_level.adb

```
1  with Library_Level; use Library_Level;
2
3  procedure Show_Library_Level is
4     L1_Var : aliased Integer;
5
6     L1_A0  : access Integer;
7
8     procedure Test is
9        L2_A0  : access Integer;
10
11       L2_Var : aliased Integer;
12    begin
```

(continues on next page)

[281] http://www.ada-auth.org/standards/22rm/html/RM-A-18-2.html

(continued from previous page)

```
      L1_A0 := L2_Var'Access;
      --       ^^^^^^
      --       ILLEGAL: L2 object to
      --                L1 access object

      L2_A0 := L2_Var'Access;
      --       ^^^^^^
      --       LEGAL: L2 object to
      --              L2 access object
   end Test;

begin
   L0_A0 := new Integer'(22);
   --       ^^^^^^^^^^^
   --       LEGAL: L0 object to
   --              L0 access object

   L0_A0 := L1_Var'Access;
   --       ^^^^^^
   --       ILLEGAL: L1 object to
   --                L0 access object

   L1_A0 := L0_Var'Access;
   --       ^^^^^^
   --       LEGAL: L0 object to
   --              L1 access object

   L1_A0 := L1_Var'Access;
   --       ^^^^^^
   --       LEGAL: L1 object to
   --              L1 access object

   L0_A0 := L1_A0;  -- legal!!
   --       ^^^^^
   --       LEGAL:   L1 access object to
   --                L0 access object
   --
   --       ILLEGAL: L1 object
   --                (L1_A0 = L1_Var'Access)
   --                to
   --                L0 access object
   --
   --       This is actually OK at compile time,
   --       but the accessibility check fails at
   --       runtime.

   Test;
end Show_Library_Level;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.
 ↪Accessibility_Levels_Rules_Introduction.Accessibility_Library_Level
MD5: 255bdecebdaa735408db082edd583a0c
```

Build output

```
show_library_level.adb:13:16: error: non-local pointer cannot point to local object
show_library_level.adb:30:13: error: non-local pointer cannot point to local object
gprbuild: *** compilation phase failed
```

As we see in the code, in general, most accessibility rules are the same as the ones we've

discussed when using named access types. For example, an assignment such as `L0_A0 := L1_Var'Access` is illegal because we're trying to assign to an access object of less deep level.

However, assignment such as `L0_A0 := L1_A0` are possible now: we don't get a type mismatch — as we did with named access types — because both objects are of anonymous access types. Note that the accessibility level cannot be determined at compile time: `L1_A0` can hold an access value at library level (which would make the assignment legal) or at a deeper level. Therefore, the compiler introduces an accessibility check here.

However, the accessibility check used in `L0_A0 := L1_A0` fails at runtime because the corresponding access value (`L1_Var'Access`) is of a deeper level than `L0_A0`, which is illegal. (If you comment out the `L1_A0 := L1_Var'Access` assignment prior to the `L0_A0 := L1_A0` assignment, this accessibility check doesn't fail anymore.)

Conversions between Anonymous and Named Access Types

In the previous sections, we've discussed accessibility rules for named and anonymous access types separately. In this section, we see that the same accessibility rules apply when mixing both flavors together and converting objects of anonymous to named access types.

Let's adapt parts of the previous *code example* (page 897) and add anonymous access types to it:

Listing 263: library_level.ads

```
package Library_Level is

   type L0_Integer_Access is
     access all Integer;

   L0_Var : aliased Integer;

   L0_IA  : L0_Integer_Access;
   L0_AO  : access Integer;

end Library_Level;
```

Listing 264: show_library_level.adb

```
with Library_Level; use Library_Level;

procedure Show_Library_Level is
   type L1_Integer_Access is
     access all Integer;

   L1_IA  : L1_Integer_Access;
   L1_AO  : access Integer;

   L1_Var : aliased Integer;

begin
   ----------------------------------------
   --  From named type to anonymous type
   ----------------------------------------

   L0_IA := new Integer'(22);
   L1_IA := new Integer'(42);

   L0_AO := L0_IA;
   --       ^^^^^
```

(continues on next page)

(continued from previous page)

```
   --       LEGAL: assignment from
   --              L0 access object (named type)
   --              to
   --              L0 access object
   --                (anonymous type)

   L0_AO := L1_IA;
   --       ^^^^^
   --       ILLEGAL: assignment from
   --                L1 access object (named type)
   --                to
   --                L0 access object
   --                  (anonymous type)

   L1_AO := L0_IA;
   --       ^^^^^
   --       LEGAL: assignment from
   --              L0 access object (named type)
   --              to
   --              L1 access object
   --                (anonymous type)

   L1_AO := L1_IA;
   --       ^^^^^
   --       LEGAL: assignment from
   --              L1 access object (named type)
   --              to
   --              L1 access object
   --                (anonymous type)

   ---------------------------------------
   --  From anonymous type to named type
   ---------------------------------------

   L0_AO := L0_Var'Access;
   L1_AO := L1_Var'Access;

   L0_IA := L0_Integer_Access (L0_AO);
   --       ^^^^^^^^^^^^^^^^^
   --       LEGAL: conversion / assignment from
   --              L0 access object
   --                (anonymous type)
   --              to
   --              L0 access object (named type)

   L0_IA := L0_Integer_Access (L1_AO);
   --       ^^^^^^^^^^^^^^^^^
   --       ILLEGAL: conversion / assignment from
   --                L1 access object
   --                  (anonymous type)
   --                to
   --                L0 access object (named type)
   --                (accessibility check fails)

   L1_IA := L1_Integer_Access (L0_AO);
   --       ^^^^^^^^^^^^^^^^^
   --       LEGAL: conversion / assignment from
   --              L0 access object
   --                (anonymous type)
   --              to
   --              L1 access object (named type)
```

(continues on next page)

(continued from previous page)

```
83
84    L1_IA := L1_Integer_Access (L1_A0);
85    --       ^^^^^^^^^^^^^^^^^^
86    --       LEGAL: conversion / assignment from
87    --              L1 access object
88    --                (anonymous type)
89    --              to
90    --              L1 access object (named type)
91 end Show_Library_Level;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.
 ↪Accessibility_Levels_Rules_Introduction.Accessibility_Named_Anonymous_Access_
 ↪Type_Conversions
MD5: a2e73bb0ed543bc4973850c80f951039
```

Build output

```
show_library_level.adb:28:13: error: cannot convert local pointer to non-local␣
 ↪access type
gprbuild: *** compilation phase failed
```

As we can see in this code example, mixing access objects of named and anonymous access types doesn't change the accessibility rules. Again, the rules are only violated when the target object in the assignment is *less* deep. This is the case in the `L0_A0 := L1_IA` and the `L0_IA := L0_Integer_Access (L1_A0)` assignments. Otherwise, mixing those access objects doesn't impose additional hurdles.

Accessibility rules on access parameters

In the previous chapter, we saw that the accessibility rules also apply to *access values as subprogram parameters* (page 900). In the case of access parameters, the rules are a bit less strict (as you may generally expect for anonymous access types), and the accessibility rules are checked at runtime. This allows use to use access values that would be illegal in the case of named access types because of their accessibility levels.

Let's adapt a previous code example to make use of access parameters:

Listing 265: names.ads

```
1  package Names is
2
3     procedure Show (N : access constant String);
4
5  end Names;
```

Listing 266: names.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  --  with Ada.Characters.Handling;
4  --  use  Ada.Characters.Handling;
5
6  package body Names is
7
8     procedure Show (N : access constant String) is
9     begin
10       --  for I in N'Range loop
11       --     N (I) := To_Lower (N (I));
```

(continues on next page)

(continued from previous page)

```
      --  end loop;
      Put_Line ("Name: " & N.all);
   end Show;

end Names;
```

Listing 267: show_names.adb

```
with Names; use Names;

procedure Show_Names is
   S : aliased String := "John";
begin
   Show (S'Access);
end Show_Names;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Access_Types.Accessibility_
↪Levels_Rules_Introduction.Accessibility_Checks_Parameters
MD5: aa930ba9be3264d01eb9115d27b884eb
```

Runtime output

```
Name: John
```

As we've seen in the previous chapter, compilation fails when we use named access types in this code example. In the case of access parameters, using `S'Access` doesn't make the compilation fail, nor does the accessibility check fail at runtime because S is still in scope when we call the Show procedure.

28.2.9 Anonymous Access-To-Subprograms

In the previous chapter, we talked about *named access-to-subprogram types* (page 926). Now, we'll see that the anonymous version of those types isn't much different from the named version.

Let's start our discussion by declaring a subprogram parameter using an anonymous access-to-procedure type:

Listing 268: anonymous_access_to_subprogram.ads

```
package Anonymous_Access_To_Subprogram is

   procedure Proc
     (P : access procedure (I : in out Integer));

end Anonymous_Access_To_Subprogram;
```

Listing 269: anonymous_access_to_subprogram.adb

```
package body Anonymous_Access_To_Subprogram is

   procedure Proc
     (P : access procedure (I : in out Integer))
   is
      I : Integer := 0;
   begin
      P (I);
```

(continues on next page)

(continued from previous page)

```
   end Proc;

end Anonymous_Access_To_Subprogram;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Anonymous_
 ↪Access_To_Subprograms.Anonymous_Access_To_Subprogram_Example
MD5: 2cbe76d7e23905d575bd27e29d5e3175
```

In this example, we use the anonymous `access procedure (I : in out Integer)` type as a parameter of the Proc procedure. Note that we need an identifier in the declaration: we cannot leave I out and write `access procedure (in out Integer)`.

Before we look at a test application that makes use of the Anonymous_Access_To_Subprogram package, let's implement two simple procedures that we'll use later on:

Listing 270: add_ten.ads

```
procedure Add_Ten (I : in out Integer);
```

Listing 271: add_ten.adb

```
procedure Add_Ten (I : in out Integer) is
begin
   I := I + 10;
end Add_Ten;
```

Listing 272: add_twenty.ads

```
procedure Add_Twenty (I : in out Integer);
```

Listing 273: add_twenty.adb

```
procedure Add_Twenty (I : in out Integer) is
begin
   I := I + 20;
end Add_Twenty;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Anonymous_
 ↪Access_To_Subprograms.Anonymous_Access_To_Subprogram_Example
MD5: 50eaeaf27caaa9618b35ecdf8acc11fe
```

Finally, this is our test application:

Listing 274: show_anonymous_access_to_subprograms.adb

```
with Anonymous_Access_To_Subprogram;
use  Anonymous_Access_To_Subprogram;

with Add_Ten;

procedure Show_Anonymous_Access_To_Subprograms is
begin
   Proc (Add_Ten'Access);
   --            ^ Getting access to Add_Ten
   --              procedure and passing it
```

(continues on next page)

(continued from previous page)

```
   --              to Proc
end Show_Anonymous_Access_To_Subprograms;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Anonymous_
↪Access_To_Subprograms.Anonymous_Access_To_Subprogram_Example
MD5: 13143ccf9620d26031484ba160a58fe1
```

Here, we get access to the Add_Ten procedure and pass it to the Proc procedure. Note that this implementation is not different from the *example for named access-to-subprogram types* (page 928). In fact, in terms of usage, anonymous access-to-subprogram types are very similar to named access-to-subprogram types. The major differences can be found in the corresponding *accessibility rules* (page 1015).

In the Ada Reference Manual

- 3.10 Access Types[282]

Examples of anonymous access-to-subprogram usage

In the section about *named access-to-subprogram types* (page 926), we've seen a couple of different usages for those types. In all those examples we discussed, we could instead have used anonymous access-to-subprogram types. Let's see a code example that illustrates that:

Listing 275: all_anonymous_access_to_subprogram.ads

```
package All_Anonymous_Access_To_Subprogram is

   --
   --  Anonymous access-to-subprogram as
   --  subprogram parameter:
   --
   procedure Proc
     (P : access procedure (I : in out Integer));

   --
   --  Anonymous access-to-subprogram in
   --  array type declaration:
   --
   type Access_To_Procedure_Array is
     array (Positive range <>) of
       access procedure (I : in out Integer);

   protected type Protected_Integer is

     procedure Mult_Ten;

     procedure Mult_Twenty;

   private
     I : Integer := 1;
   end Protected_Integer;

   --
```

(continues on next page)

[282] http://www.ada-auth.org/standards/22rm/html/RM-3-10.html

(continued from previous page)

```
   --  Anonymous access-to-subprogram as
   --  component of a record type.
   --
   type Rec_Access_To_Procedure is record
      AP  : access procedure (I : in out Integer);
   end record;

   --
   --  Anonymous access-to-subprogram as
   --  discriminant:
   --
   type Rec_Access_To_Procedure_Discriminant
          (AP : access procedure
                  (I : in out Integer)) is
   record
      I : Integer := 0;
   end record;

   procedure Process
     (R : in out
            Rec_Access_To_Procedure_Discriminant);

   generic
      type T is private;

      --
      --  Anonymous access-to-subprogram as
      --  formal parameter:
      --
      Proc_T : access procedure
                 (Element : in out T);
   procedure Gen_Process (Element : in out T);

end All_Anonymous_Access_To_Subprogram;
```

Listing 276: all_anonymous_access_to_subprogram.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body All_Anonymous_Access_To_Subprogram is

   procedure Proc
     (P : access procedure (I : in out Integer))
   is
      I : Integer := 0;
   begin
      Put_Line
        ("Calling procedure for Proc...");
      P (I);
      Put_Line ("Finished.");
   end Proc;

   procedure Process
     (R : in out
            Rec_Access_To_Procedure_Discriminant)
   is
   begin
      Put_Line
        ("Calling procedure for"
         & " Rec_Access_To_Procedure_Discriminant"
         & " type...");
```

(continues on next page)

(continued from previous page)

```
      R.AP (R.I);
      Put_Line ("Finished.");
   end Process;

   procedure Gen_Process (Element : in out T) is
   begin
      Put_Line
        ("Calling procedure for Gen_Process...");
      Proc_T (Element);
      Put_Line ("Finished.");
   end Gen_Process;

   protected body Protected_Integer is

      procedure Mult_Ten is
      begin
         I := I * 10;
      end Mult_Ten;

      procedure Mult_Twenty is
      begin
         I := I * 20;
      end Mult_Twenty;

   end Protected_Integer;

end All_Anonymous_Access_To_Subprogram;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Anonymous_
 ↪Access_To_Subprograms.Anonymous_Access_To_Subprogram_Example
MD5: 628dcfdc5fe9b712f33fa044057093c2
```

In the `All_Anonymous_Access_To_Subprogram` package, we see examples of anonymous access-to-subprogram types:

- as a subprogram parameter;
- in an array type declaration;
- as a component of a record type;
- as a record type discriminant;
- as a formal parameter of a generic procedure.

Let's implement a test application that makes use of this package:

Listing 277: show_anonymous_access_to_subprograms.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Add_Ten;
with Add_Twenty;

with All_Anonymous_Access_To_Subprogram;
use  All_Anonymous_Access_To_Subprogram;

procedure Show_Anonymous_Access_To_Subprograms is
   --
   --  Anonymous access-to-subprogram as
   --  an object:
```

(continues on next page)

(continued from previous page)

```
   --
   P   : access procedure (I : in out Integer);

   --
   --  Array of anonymous access-to-subprogram
   --  components
   --
   PA  : constant
          Access_To_Procedure_Array (1 .. 2) :=
            (Add_Ten'Access,
             Add_Twenty'Access);

   --
   --  Anonymous array of anonymous
   --  access-to-subprogram components:
   --
   PAA : constant
          array (1 .. 2) of access
            procedure (I : in out Integer) :=
              (Add_Ten'Access,
               Add_Twenty'Access);

   --
   --  Record with anonymous
   --  access-to-subprogram components:
   --
   RA : constant Rec_Access_To_Procedure :=
          (AP => Add_Ten'Access);

   --
   --  Record with anonymous
   --  access-to-subprogram discriminant:
   --
   RD : Rec_Access_To_Procedure_Discriminant
          (AP => Add_Twenty'Access) :=
            (AP => Add_Twenty'Access, I => 0);

   --
   --  Generic procedure with formal anonymous
   --  access-to-subprogram:
   --
   procedure Process_Integer is new
     Gen_Process (T      => Integer,
                  Proc_T => Add_Twenty'Access);

   --
   --  Object (APP) of anonymous
   --  access-to-protected-subprogram:
   --
   PI  : Protected_Integer;
   APP : constant access protected procedure :=
           PI.Mult_Ten'Access;

   Some_Int : Integer := 0;
begin
   Put_Line ("Some_Int: " & Some_Int'Image);

   --
   --  Using object of
   --  anonymous access-to-subprogram type:
   --
```

(continues on next page)

(continued from previous page)

```
   P := Add_Ten'Access;
   Proc (P);
   P (Some_Int);

   P := Add_Twenty'Access;
   Proc (P);
   P (Some_Int);

   Put_Line ("Some_Int: " & Some_Int'Image);

   --
   --  Using array with component of
   --  anonymous access-to-subprogram type:
   --
    Put_Line
      ("Calling procedure from PA array...");

   for I in PA'Range loop
      PA (I) (Some_Int);
      Put_Line ("Some_Int: " & Some_Int'Image);
   end loop;

   Put_Line ("Finished.");

   Put_Line
     ("Calling procedure from PAA array...");

   for I in PA'Range loop
      PAA (I) (Some_Int);
      Put_Line ("Some_Int: " & Some_Int'Image);
   end loop;

   Put_Line ("Finished.");

   Put_Line ("Some_Int: " & Some_Int'Image);

   --
   --  Using record with component of
   --  anonymous access-to-subprogram type:
   --
   RA.AP (Some_Int);
   Put_Line ("Some_Int: " & Some_Int'Image);

   --
   --  Using record with discriminant of
   --  anonymous access-to-subprogram type:
   --
   Process (RD);
   Put_Line ("RD.I: " & RD.I'Image);

   --
   --  Using procedure instantiated with
   --  formal anonymous access-to-subprogram:
   --
   Process_Integer (Some_Int);
   Put_Line ("Some_Int: " & Some_Int'Image);

   --
   --  Using object of anonymous
   --  access-to-protected-subprogram type:
   --
```

(continues on next page)

(continued from previous page)

```
135    APP.all;
136 end Show_Anonymous_Access_To_Subprograms;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Anonymous_
 ↪Access_To_Subprograms.Anonymous_Access_To_Subprogram_Example
MD5: ec770c17e880a98fd2e9ab0110d4a858
```

Runtime output

```
Some_Int:  0
Calling procedure for Proc...
Finished.
Calling procedure for Proc...
Finished.
Some_Int:  30
Calling procedure from PA array...
Some_Int:  40
Some_Int:  60
Finished.
Calling procedure from PAA array...
Some_Int:  70
Some_Int:  90
Finished.
Some_Int:  90
Some_Int:  100
Calling procedure for Rec_Access_To_Procedure_Discriminant type...
Finished.
RD.I:  20
Calling procedure for Gen_Process...
Finished.
Some_Int:  120
```

In the Show_Anonymous_Access_To_Subprograms procedure, we see examples of anonymous access-to-subprogram types in:

- in objects (P) and (APP);
- in arrays (PA and PAA);
- in records (RA and RD);
- in the binding to a formal parameter (Proc_T) of an instantiated procedure (Process_Integer);
- as a parameter of a procedure (Proc).

Because we already discussed all these usages in the section about *named access-to-subprogram types* (page 926), we won't repeat this discussion here. If anything in this code example is still unclear to you, make sure to revisit that section from the previous chapter.

Application of anonymous access-to-subprogram types

In general, there isn't much that speaks against using anonymous access-to-subprogram types. We can say, for example, that they're much more useful than *anonymous access-to-objects types* (page 963), which have *many drawbacks* (page 966) — as we discussed earlier.

There isn't much to be concerned when using anonymous access-to-subprogram types. For example, we cannot allocate or deallocate a subprogram. As a consequence, we won't

have storage management issues affecting these types because the access to those subprograms will always be available and no memory leak can occur.

Also, anonymous access-to-subprogram types can be easier to use than named access-to-subprogram types because of their less strict *accessibility rules* (page 1015). Some of the accessibility issues we might encounter when using named access-to-subprogram types can be solved by declaring them as anonymous types. (We discuss the accessibility rules of anonymous access-to-subprogram types in the next section.)

Readability

Note that readability suffers if you use a *cascade* of anonymous access-to-subprograms. For example:

Listing 278: readability_issue.ads

```
package Readability_Issue is

   function F
     return access
       function (A : Integer)
                 return access
                   function (B : Float)
                             return Integer;

end Readability_Issue;
```

Listing 279: readability_issue-functions.ads

```
package Readability_Issue.Functions is

   function To_Integer (V : Float)
                        return Integer is
     (Integer (V));

   function Select_Conversion
     (A : Integer)
      return access
        function (B : Float)
                  return Integer is
     (To_Integer'Access);

end Readability_Issue.Functions;
```

Listing 280: readability_issue.adb

```
with Readability_Issue.Functions;
use  Readability_Issue.Functions;

package body Readability_Issue is

   function F
     return access
       function (A : Integer)
                 return access
                   function (B : Float)
                       return Integer is
     (Select_Conversion'Access);

end Readability_Issue;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Anonymous_
 ↪Access_To_Subprograms.Readability_Issue
MD5: 9e2ac58942c97b44c0d847c28e39bd11
```

In this example, the definition of F might compile fine, but it's simply too long to be readable. Not only that: we need to carry this *chain* to other functions as well — such as the `Select_Conversion` function above. Also, using these functions in an application is not straightforward:

Listing 281: show_readability_issue.adb

```
1  with Readability_Issue;
2  use  Readability_Issue;
3
4  procedure Show_Readability_Issue is
5     F1 : access
6             function (A : Integer)
7                       return access
8                         function (B : Float)
9                                   return Integer
10          := F;
11    F2 : access function (B : Float)
12                          return Integer
13          := F1 (2);
14    I  : Integer := F2 (0.1);
15 begin
16    I := F1 (2) (0.1);
17 end Show_Readability_Issue;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.Anonymous_
 ↪Access_To_Subprograms.Readability_Issue
MD5: 80267b1d673663e3cacba0c4978e6abf
```

Therefore, our recommendation is to avoid this kind of *access cascading* by carefully designing your application. In general, you won't need that.

28.2.10 Accessibility Rules and Anonymous Access-To-Subprograms

In principle, the *accessibility rules for anonymous access types* (page 1001) that we've seen before apply to anonymous access-to-subprograms as well. Also, we had a discussion about *accessibility rules and access-to-subprograms* (page 951) in the previous chapter. In this section, we review some of the rules that we already know and discuss how they relate to anonymous access-to-subprograms.

In the Ada Reference Manual

- 3.10 Access Types[283]

Named vs. anonymous access-to-subprograms

Let's see an example of a named access-to-subprogram type:

[283] http://www.ada-auth.org/standards/22rm/html/RM-3-10.html

Listing 282: show_access_to_subprogram_error.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Access_To_Subprogram_Error is

   type PI is access
     procedure (I : in out Integer);

   P : PI;

   I : Integer := 0;
begin
   declare
      procedure Add_One (I : in out Integer) is
      begin
         I := I + 1;
      end Add_One;
   begin
      P := Add_One'Access;
   end;
end Show_Access_To_Subprogram_Error;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.
 ↪Accessibility_Rules_Anonymous_Access_To_Subprograms.Simple_Example_Named
MD5: 41c36426112e799210b7704dd43b6217
```

Build output

```
show_access_to_subprogram_error.adb:18:12: error: subprogram must not be deeper␣
 ↪than access type
gprbuild: *** compilation phase failed
```

In this example, we get a compilation error because the lifetime of the Add_One procedure is shorter than the access type PI.

In contrast, using an anonymous access-to-subprogram type eliminates the compilation error, i.e. the assignment `P := Add_One'Access` becomes legal:

Listing 283: show_access_to_subprogram_error.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Access_To_Subprogram_Error is
   P : access procedure (I : in out Integer);

   I : Integer := 0;
begin
   declare
      procedure Add_One (I : in out Integer) is
      begin
         I := I + 1;
      end Add_One;
   begin
      P := Add_One'Access;
      --  RUNTIME ERROR: Add_One is out-of-scope
      --                 after this line.
   end;
end Show_Access_To_Subprogram_Error;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.
 ↪Accessibility_Rules_Anonymous_Access_To_Subprograms.Simple_Example_Anonymous
MD5: a5eeb4a716b4f6a932dd74c580a07b66
```

Runtime output

```
raised PROGRAM_ERROR : show_access_to_subprogram_error.adb:14 accessibility check␣
 ↪failed
```

In this case, the compiler introduces an accessibility check, which fails at runtime because the lifetime of Add_One is shorter than the lifetime of the access object P.

Named vs. anonymous access-to-subprograms as parameters

Using anonymous access-to-subprograms as parameters allows us to pass subprograms at any level. For certain applications, the restrictions that are applied to named access types might be too strict, so using anonymous access-to-subprograms might be a good way to circumvent those restrictions. They also allow the component developer to be independent of the clients' specific access types.

Note that the increased flexibility for anonymous access-to-subprograms means that some of the checks that are performed at compile time for named access-to-subprograms are done at runtime for anonymous access-to-subprograms.

Named access-to-subprograms as a parameter

Let's see an example using a named access-to-procedure type:

Listing 284: access_to_subprogram_types.ads

```
1  package Access_To_Subprogram_Types is
2
3     type Integer_Array is
4       array (Positive range <>) of Integer;
5
6     type Process_Procedure is
7       access
8         procedure (Arr : in out Integer_Array);
9
10    procedure Process
11      (Arr : in out Integer_Array;
12       P   :        Process_Procedure);
13
14 end Access_To_Subprogram_Types;
```

Listing 285: access_to_subprogram_types.adb

```
1  package body Access_To_Subprogram_Types is
2
3     procedure Process
4       (Arr : in out Integer_Array;
5        P   :        Process_Procedure) is
6     begin
7        P (Arr);
8     end Process;
9
10 end Access_To_Subprogram_Types;
```

Listing 286: show_access_to_subprogram_error.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Access_To_Subprogram_Types;
use  Access_To_Subprogram_Types;

procedure Show_Access_To_Subprogram_Error is

   procedure Add_One
     (Arr : in out Integer_Array) is
   begin
      for E of Arr loop
         E := E + 1;
      end loop;
   end Add_One;

   procedure Display
     (Arr : in out Integer_Array) is
   begin
      for I in Arr'Range loop
         Put_Line ("Arr (" &
                   Integer'Image (I)
                   & "): "
                  & Integer'Image (Arr (I)));
      end loop;
   end Display;

   Arr : Integer_Array (1 .. 3) := (1, 2, 3);
begin
   Process (Arr, Display'Access);

   Put_Line ("Add_One...");
   Process (Arr, Add_One'Access);

   Process (Arr, Display'Access);
end Show_Access_To_Subprogram_Error;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.
 ↪Accessibility_Rules_Anonymous_Access_To_Subprograms.Access_To_Subprogram_
 ↪Parameter_Named
MD5: 76b70b52a0374fe0fd398024fe869876
```

Build output

```
show_access_to_subprogram_error.adb:29:18: error: subprogram must not be deeper␣
 ↪than access type
show_access_to_subprogram_error.adb:32:18: error: subprogram must not be deeper␣
 ↪than access type
show_access_to_subprogram_error.adb:34:18: error: subprogram must not be deeper␣
 ↪than access type
gprbuild: *** compilation phase failed
```

In this example, we declare the Process_Procedure type in the Access_To_Subprogram_Types package and use it in the Process procedure, which we call in the Show_Access_To_Subprogram_Error procedure. The accessibility rules trigger a compilation error because the accesses (Add_One'Access and Display'Access) are at a deeper level than the access-to-procedure type (Process_Procedure).

As we know already, there's no Unchecked_Access attribute that we could use here. An

easy way to make this code compile could be to move `Add_One` and `Display` to the library level.

Anonymous access-to-subprograms as a parameter

To circumvent the compilation error, we could also use anonymous access-to-subprograms instead:

Listing 287: access_to_subprogram_types.ads

```
package Access_To_Subprogram_Types is

   type Integer_Array is
     array (Positive range <>) of Integer;

   procedure Process
     (Arr : in out Integer_Array;
      P   : access procedure
               (Arr : in out Integer_Array));

end Access_To_Subprogram_Types;
```

Listing 288: access_to_subprogram_types.adb

```
package body Access_To_Subprogram_Types is

   procedure Process
     (Arr : in out Integer_Array;
      P   : access procedure
               (Arr : in out Integer_Array)) is
   begin
      P (Arr);
   end Process;

end Access_To_Subprogram_Types;
```

Listing 289: show_access_to_subprogram_error.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Access_To_Subprogram_Types;
use  Access_To_Subprogram_Types;

procedure Show_Access_To_Subprogram_Error is

   procedure Add_One
     (Arr : in out Integer_Array) is
   begin
      for E of Arr loop
         E := E + 1;
      end loop;
   end Add_One;

   procedure Display
     (Arr : in out Integer_Array) is
   begin
      for I in Arr'Range loop
         Put_Line ("Arr (" &
                   Integer'Image (I)
                   & "): "
                  & Integer'Image (Arr (I)));
```

(continues on next page)

(continued from previous page)

```
      end loop;
   end Display;

   Arr : Integer_Array (1 .. 3) := (1, 2, 3);
begin
   Process (Arr, Display'Access);

   Put_Line ("Add_One...");
   Process (Arr, Add_One'Access);

   Process (Arr, Display'Access);
end Show_Access_To_Subprogram_Error;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.
 ↪Accessibility_Rules_Anonymous_Access_To_Subprograms.Access_To_Subprogram_
 ↪Parameter_Anonymous
MD5: a500e0a864f0adadc1d6823c1f50bd64
```

Runtime output

```
Arr ( 1):  1
Arr ( 2):  2
Arr ( 3):  3
Add_One...
Arr ( 1):  2
Arr ( 2):  3
Arr ( 3):  4
```

Now, the code is accepted by the compiler because anonymous access-to-subprograms used as parameters allow passing of subprograms at any level. Also, we don't see a run-time exception because the subprograms are still *accessible* when we call `Process`.

Iterator

A typical example that illustrates well the necessity of using anonymous access-to-subprograms is that of a container iterator. In fact, many of the standard Ada containers — the child packages of `Ada.Containers` — make use of anonymous access-to-subprograms for their `Iterate` subprograms.

In the Ada Reference Manual

- A.18.2 The Package Containers.Vectors[284]
- A.18.4 Maps[285]
- A.18.7 Sets[286]

Using named access-to-subprograms

Let's start with a simplified container type (`Data_Container`) using a named access-to-subprogram type (`Process_Element`) for iteration:

[284] http://www.ada-auth.org/standards/22rm/html/RM-A-18-2.html
[285] http://www.ada-auth.org/standards/22rm/html/RM-A-18-4.html
[286] http://www.ada-auth.org/standards/22rm/html/RM-A-18-7.html

Listing 290: data_processing.ads

```
generic
   type Element is private;
package Data_Processing is

   type Data_Container (Last : Positive) is
     private;

   Data_Container_Full : exception;

   procedure Append (D : in out Data_Container;
                     E :        Element);

   type Process_Element is
     not null access procedure (E : Element);

   procedure Iterate
     (D    : Data_Container;
      Proc : Process_Element);

private

   type Data_Container_Storage is
     array (Positive range <>) of Element;

   type Data_Container (Last : Positive) is
   record
      S    : Data_Container_Storage (1 .. Last);
      Curr : Natural := 0;
   end record;

end Data_Processing;
```

Listing 291: data_processing.adb

```
package body Data_Processing is

   procedure Append (D : in out Data_Container;
                     E :        Element) is
   begin
      if D.Curr < D.S'Last then
         D.Curr := D.Curr + 1;
         D.S (D.Curr) := E;
      else
         raise Data_Container_Full;
         --  NOTE: This is just a dummy
         --        implementation. A better
         --        strategy is to add actual error
         --        handling when the container is
         --        full.
      end if;
   end Append;

   procedure Iterate
     (D    : Data_Container;
      Proc : Process_Element) is
   begin
      for I in D.S'First .. D.Curr loop
         Proc (D.S (I));
      end loop;
```

(continues on next page)

(continued from previous page)

```
   end Iterate;

end Data_Processing;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.
 ↪Accessibility_Rules_Anonymous_Access_To_Subprograms.Iterator_Named
MD5: e48e8200e571b62d027753ee96c47fcb
```

In this example, we declare the `Process_Element` type in the generic `Data_Processing` package, and we use it in the `Iterate` procedure. We then instantiate this package as `Float_Data_Processing`, and we use it in the `Show_Access_To_Subprograms` procedure:

Listing 292: float_data_processing.ads

```
with Data_Processing;

package Float_Data_Processing is
  new Data_Processing (Element => Float);
```

Listing 293: show_access_to_subprograms.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Float_Data_Processing;
use  Float_Data_Processing;

procedure Show_Access_To_Subprograms is

   procedure Display (F : Float) is
   begin
      Put_Line ("F :" & Float'Image (F));
   end Display;

   D : Data_Container (5);
begin
    Append (D, 1.0);
    Append (D, 2.0);
    Append (D, 3.0);

    Iterate (D, Display'Access);
end Show_Access_To_Subprograms;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.
 ↪Accessibility_Rules_Anonymous_Access_To_Subprograms.Iterator_Named
MD5: 64ee435aac5f2817b7d9cecf538a1e4c
```

Build output

```
show_access_to_subprograms.adb:19:17: error: subprogram must not be deeper than␣
 ↪access type
gprbuild: *** compilation phase failed
```

Using `Display'Access` in the call to `Iterate` triggers a compilation error because its lifetime is shorter than the lifetime of the `Process_Element` type.

Using anonymous access-to-subprograms

Now, let's use an anonymous access-to-subprogram type in the `Iterate` procedure:

Listing 294: data_processing.ads

```
generic
   type Element is private;
package Data_Processing is

   type Data_Container (Last : Positive) is
     private;

   Data_Container_Full : exception;

   procedure Append (D : in out Data_Container;
                     E :        Element);

   procedure Iterate
     (D    : Data_Container;
      Proc : not null access
                procedure (E : Element));

private

   type Data_Container_Storage is
     array (Positive range <>) of Element;

   type Data_Container (Last : Positive) is
   record
      S    : Data_Container_Storage (1 .. Last);
      Curr : Natural := 0;
   end record;

end Data_Processing;
```

Listing 295: data_processing.adb

```
package body Data_Processing is

   procedure Append (D : in out Data_Container;
                     E :        Element) is
   begin
      if D.Curr < D.S'Last then
         D.Curr := D.Curr + 1;
         D.S (D.Curr) := E;
      else
         raise Data_Container_Full;
         --  NOTE: This is just a dummy
         --        implementation. A better
         --        strategy is to add actual error
         --        handling when the container is
         --        full.
      end if;
   end Append;

   procedure Iterate
     (D    : Data_Container;
      Proc : not null access
                procedure (E : Element)) is
   begin
      for I in D.S'First .. D.Curr loop
```

(continues on next page)

(continued from previous page)

```
         Proc (D.S (I));
      end loop;
   end Iterate;

end Data_Processing;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.
 ↪Accessibility_Rules_Anonymous_Access_To_Subprograms.Iterator_Anonymous
MD5: fa56595ef1734f2f07ad719c36dfd8b5
```

Note that the only changes we did to the package were to remove the `Process_Element` type and replace the type of the `Proc` parameter of the `Iterate` procedure from a named type (`Process_Element`) to an anonymous type (`not null access procedure (E : Element)`).

Now, the same test application we used before (`Show_Access_To_Subprograms`) compiles as expected:

Listing 296: float_data_processing.ads

```
with Data_Processing;

package Float_Data_Processing is
  new Data_Processing (Element => Float);
```

Listing 297: show_access_to_subprograms.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Float_Data_Processing;
use  Float_Data_Processing;

procedure Show_Access_To_Subprograms is

   procedure Display (F : Float) is
   begin
      Put_Line ("F :" & Float'Image (F));
   end Display;

   D : Data_Container (5);
begin
    Append (D, 1.0);
    Append (D, 2.0);
    Append (D, 3.0);

    Iterate (D, Display'Access);
end Show_Access_To_Subprograms;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Anonymous_Access_Types.
 ↪Accessibility_Rules_Anonymous_Access_To_Subprograms.Iterator_Anonymous
MD5: 64ee435aac5f2817b7d9cecf538a1e4c
```

Runtime output

```
F : 1.00000E+00
F : 2.00000E+00
F : 3.00000E+00
```

Remember that the compiler introduces an accessibility check in the call to `Iterate`, which is successful because the lifetime of `Display'Access` is the same as the lifetime of the `Proc` parameter of `Iterate`.

28.3 Limited Types

So far, we discussed nonlimited types in most cases. In this chapter, we discuss limited types.

We can think of limited types as an easy way to avoid inappropriate semantics. For example, a lock should not be copied — neither directly, via assignment, nor with pass-by-copy. Similarly, a *file*, which is really a file descriptor, should not be copied. In this chapter, we'll see example of unwanted side-effects that arise if we don't use limited types for these cases.

28.3.1 Assignment and equality

Limited types have the following restrictions, which we discussed in the *Introduction to Ada* (page 116) course:

- copying objects of limited types via direct assignments is forbidden; and
- there's no predefined equality operator for limited types.

(Of course, in the case of nonlimited types, assignments are possible and the equality operator is available.)

By having these restrictions for limited types, we avoid inappropriate side-effects for assignment and equality operations. As an example of inappropriate side-effects, consider the case when we apply those operations on record types that have components of access types:

Listing 298: nonlimited_types.ads

```
package Nonlimited_Types is

   type Simple_Rec is private;

   type Integer_Access is access Integer;

   function Init (I : Integer) return Simple_Rec;

   procedure Set (E : Simple_Rec;
                  I : Integer);

   procedure Show (E      : Simple_Rec;
                   E_Name : String);

private

   type Simple_Rec is record
      V : Integer_Access;
   end record;

end Nonlimited_Types;
```

Listing 299: nonlimited_types.adb

```
with Ada.Text_IO; use Ada.Text_IO;

```

(continues on next page)

(continued from previous page)

```
package body Nonlimited_Types is

   function Init (I : Integer) return Simple_Rec
   is
   begin
      return E : Simple_Rec do
         E.V := new Integer'(I);
      end return;
   end Init;

   procedure Set (E : Simple_Rec;
                  I : Integer) is
   begin
      E.V.all := I;
   end Set;

   procedure Show (E      : Simple_Rec;
                   E_Name : String) is
   begin
      Put_Line (E_Name
                & ".V.all = "
                & Integer'Image (E.V.all));
   end Show;

end Nonlimited_Types;
```

Listing 300: show_wrong_assignment_equality.adb

```
with Ada.Text_IO;      use Ada.Text_IO;
with Nonlimited_Types; use Nonlimited_Types;

procedure Show_Wrong_Assignment_Equality is
   A, B : Simple_Rec := Init (0);

   procedure Show_Compare is
   begin
      if A = B then
         Put_Line ("A = B");
      else
         Put_Line ("A /= B");
      end if;
   end Show_Compare;
begin

   Put_Line ("A := Init (0); A := Init (0);");
   Show (A, "A");
   Show (B, "B");
   Show_Compare;
   Put_Line ("--------");

   Put_Line ("Set (A, 2); Set (B, 3);");
   Set (A, 2);
   Set (B, 3);

   Show (A, "A");
   Show (B, "B");
   Put_Line ("--------");

   Put_Line ("B := A");
   B := A;

```

(continues on next page)

(continued from previous page)

```
34    Show (A, "A");
35    Show (B, "B");
36    Show_Compare;
37    Put_Line ("--------");
38
39    Put_Line ("Set (B, 7);");
40    Set (B, 7);
41
42    Show (A, "A");
43    Show (B, "B");
44    Show_Compare;
45    Put_Line ("--------");
46
47 end Show_Wrong_Assignment_Equality;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Assignment_
 ↪Equality.Wrong_Assignment_Equality
MD5: 72cf7145cd26a8628580c5a837d9cb61
```

Runtime output

```
A := Init (0); A := Init (0);
A.V.all =  0
B.V.all =  0
A /= B
--------
Set (A, 2); Set (B, 3);
A.V.all =  2
B.V.all =  3
--------
B := A
A.V.all =  2
B.V.all =  2
A = B
--------
Set (B, 7);
A.V.all =  7
B.V.all =  7
A = B
--------
```

In this code, we declare the `Simple_Rec` type in the `Nonlimited_Types` package and use it in the `Show_Wrong_Assignment_Equality` procedure. In principle, we're already doing many things right here. For example, we're declaring the `Simple_Rec` type private, so that the component `V` of access type is encapsulated. Programmers that declare objects of this type cannot simply mess up with the `V` component. Instead, they have to call the `Init` function and the `Set` procedure to initialize and change, respectively, objects of the `Simple_Rec` type. That being said, there are two problems with this code, which we discuss next.

The first problem we can identify is that the first call to `Show_Compare` shows that `A` and `B` are different, although both have the same value in the `V` component (`A.V.all = 0` and `B.V.all = 0`) — this was set by the call to the `Init` function. What's happening here is that the `A = B` expression is comparing the access values (`A.V = B.V`), while we might have been expecting it to compare the actual integer values after dereferencing (`A.V.all = B.V.all`). Therefore, the predefined equality function of the `Simple_Rec` type is useless and dangerous for us, as it misleads us to expect something that it doesn't do.

After the assignment of `A` to `B` (`B := A`), the information that the application displays seems

to be correct — both `A.V.all` and `B.V.all` have the same value of two. However, when assigning the value seven to B by calling `Set (B, 7)`, we see that the value of `A.V.all` has also changed. What's happening here is that the previous assignment (`B := A`) has actually assigned access values (`B.V := A.V`), while we might have been expecting it to assign the dereferenced values (`B.V.all := A.V.all`). Therefore, we cannot simply directly assign objects of `Simple_Rec` type, as this operation changes the internal structure of the type due to the presence of components of access type.

For these reasons, forbidding these operations for the `Simple_Rec` type is the most appropriate software design decision. If we still need assignment and equality operators, we can implement custom subprograms for the limited type. We'll discuss this topic in the next sections.

In addition to the case when we have components of access types, limited types are useful for example when we want to avoid the situation in which the same information is copied to multiple objects of the same type.

In the Ada Reference Manual

- 7.5 Limited Types[287]

Assignments

Assignments are forbidden when using objects of limited types. For example:

Listing 301: limited_types.ads

```
package Limited_Types is

   type Simple_Rec is limited private;

   type Integer_Access is access Integer;

   function Init (I : Integer) return Simple_Rec;

private

   type Simple_Rec is limited record
      V : Integer_Access;
   end record;

end Limited_Types;
```

Listing 302: limited_types.adb

```
package body Limited_Types is

   function Init (I : Integer) return Simple_Rec
   is
   begin
      return E : Simple_Rec do
         E.V := new Integer'(I);
      end return;
   end Init;

end Limited_Types;
```

[287] http://www.ada-auth.org/standards/22rm/html/RM-7-5.html

Listing 303: show_limited_assignment.adb

```
with Limited_Types; use Limited_Types;

procedure Show_Limited_Assignment is
   A, B : Simple_Rec := Init (0);
begin
   B := A;
end Show_Limited_Assignment;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Assignment_
 ↪Equality.Assignment
MD5: 019c16f7feac896fd8c37d40d0522dc8
```

Build output

```
show_limited_assignment.adb:6:04: error: left hand of assignment must not be␣
 ↪limited type
gprbuild: *** compilation phase failed
```

In this example, we declare the limited private type Simple_Rec and two objects of this type (A and B) in the Show_Limited_Assignment procedure. (We discuss more about limited private types *later* (page 1033)).

As expected, we get a compilation error for the B := A statement (in the Show_Limited_Assignment procedure). If we need to copy two objects of limited type, we have to provide a custom procedure to do that. For example, we can implement a Copy procedure for the Simple_Rec type:

Listing 304: limited_types.ads

```
package Limited_Types is

   type Integer_Access is access Integer;

   type Simple_Rec is limited private;

   function Init (I : Integer) return Simple_Rec;

   procedure Copy (From :        Simple_Rec;
                   To   : in out Simple_Rec);

private

   type Simple_Rec is limited record
      V : Integer_Access;
   end record;

end Limited_Types;
```

Listing 305: limited_types.adb

```
package body Limited_Types is

   function Init (I : Integer) return Simple_Rec
   is
   begin
      return E : Simple_Rec do
         E.V := new Integer'(I);
```

(continues on next page)

(continued from previous page)

```
      end return;
   end Init;

   procedure Copy (From :        Simple_Rec;
                   To   : in out Simple_Rec)
   is
   begin
      --  Copying record components
      To.V.all := From.V.all;
   end Copy;

end Limited_Types;
```

Listing 306: show_limited_assignment.adb

```
with Limited_Types; use Limited_Types;

procedure Show_Limited_Assignment is
   A, B : Simple_Rec := Init (0);
begin
   Copy (From => A, To => B);
end Show_Limited_Assignment;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Assignment_
 ↪Equality.Assignment
MD5: 2c017c3592c93be8c19fe247e9241fcb
```

The Copy procedure from this example copies the dereferenced values of `From` to `To`, which matches our expectation for the `Simple_Rec`. Note that we could have also implemented a `Shallow_Copy` procedure to copy the actual access values (i.e. `To.V := From.V`). However, having this kind of procedure can be dangerous in many case, so this design decision must be made carefully. In any case, using limited types ensures that only the assignment subprograms that are explicitly declared in the package specification are available.

Equality

Limited types don't have a predefined equality operator. For example:

Listing 307: limited_types.ads

```
package Limited_Types is

   type Integer_Access is access Integer;

   type Simple_Rec is limited private;

   function Init (I : Integer) return Simple_Rec;

private

   type Simple_Rec is limited record
      V : Integer_Access;
   end record;

end Limited_Types;
```

Listing 308: limited_types.adb

```
package body Limited_Types is

   function Init (I : Integer) return Simple_Rec
   is
   begin
      return E : Simple_Rec do
         E.V := new Integer'(I);
      end return;
   end Init;

end Limited_Types;
```

Listing 309: show_limited_equality.adb

```
with Ada.Text_IO;   use Ada.Text_IO;
with Limited_Types; use Limited_Types;

procedure Show_Limited_Equality is
   A : Simple_Rec := Init (5);
   B : Simple_Rec := Init (6);
begin
   if A = B then
      Put_Line ("A = B");
   else
      Put_Line ("A /= B");
   end if;
end Show_Limited_Equality;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Assignment_
 ↪Equality.Equality
MD5: dad31b5e36de0b3b7824f723a60e5aa0
```

Build output

```
show_limited_equality.adb:8:09: error: there is no applicable operator "=" for␣
 ↪private type "Simple_Rec" defined at limited_types.ads:5
gprbuild: *** compilation phase failed
```

As expected, the comparison `A = B` triggers a compilation error because no predefined `=` operator is available for the `Simple_Rec` type. If we want to be able to compare objects of this type, we have to implement the `=` operator ourselves. For example, we can do that for the `Simple_Rec` type:

Listing 310: limited_types.ads

```
package Limited_Types is

   type Integer_Access is access Integer;

   type Simple_Rec is limited private;

   function Init (I : Integer) return Simple_Rec;

   function "=" (Left, Right : Simple_Rec)
                 return Boolean;

private
```

(continues on next page)

(continued from previous page)

```
13
14    type Simple_Rec is limited record
15       V : Integer_Access;
16    end record;
17
18 end Limited_Types;
```

Listing 311: limited_types.adb

```
1  package body Limited_Types is
2
3     function Init (I : Integer) return Simple_Rec
4     is
5     begin
6        return E : Simple_Rec do
7           E.V := new Integer'(I);
8        end return;
9     end Init;
10
11    function "=" (Left, Right : Simple_Rec)
12                  return Boolean is
13    begin
14       --  Comparing record components
15       return Left.V.all = Right.V.all;
16    end "=";
17
18 end Limited_Types;
```

Listing 312: show_limited_equality.adb

```
1  with Ada.Text_IO;   use Ada.Text_IO;
2  with Limited_Types; use Limited_Types;
3
4  procedure Show_Limited_Equality is
5     A : Simple_Rec := Init (5);
6     B : Simple_Rec := Init (6);
7  begin
8     if A = B then
9        Put_Line ("A = B");
10    else
11       Put_Line ("A /= B");
12    end if;
13 end Show_Limited_Equality;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Assignment_
 ↪Equality.Equality
MD5: f56b2229443a5e4e33c402b41b02d318
```

Runtime output

```
A /= B
```

Here, the = operator compares the dereferenced values of Left.V and Right.V, which matches our expectation for the Simple_Rec type. Declaring types as limited ensures that we don't have unreasonable equality comparisons, and allows us to create reasonable replacements when required.

In other languages

In C++, you can overload the assignment operator. For example:

```
class Simple_Rec
{
public:
    // Overloaded assignment
    Simple_Rec& operator= (const Simple_Rec& obj);
private:
int *V;
};
```

In Ada, however, we can only define the equality operator (=). Defining the assignment operator (:=) is not possible. The following code triggers a compilation error as expected:

```
package Limited_Types is

   type Integer_Access is access Integer;

   type Simple_Rec is limited private;

   procedure ":=" (To   : in out Simple_Rec
                   From :        Simple_Rec);

   -- ...

end Limited_Types;
```

28.3.2 Limited private types

As we've seen in code examples from the previous section, we can apply *information hiding* (page 310) to limited types. In other words, we can declare a type as **limited private** instead of just **limited**. For example:

Listing 313: simple_recs.ads

```
1  package Simple_Recs is
2
3     type Rec is limited private;
4
5  private
6
7     type Rec is limited record
8        I : Integer;
9     end record;
10
11 end Simple_Recs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Limited_Private_
 ↪Types.Limited_Private
MD5: ececb364f5365a74db43952e9421dee0
```

In this case, in addition to the fact that assignments are forbidden for objects of this type (because Rec is limited), we cannot access the record components.

Note that in this example, both partial and full views of the Rec record are of limited type. In the next sections, we discuss how the partial and full views can have non-matching declarations.

In the Ada Reference Manual

- 7.5 Limited Types[288]

Non-Record Limited Types

In principle, only record types can be declared limited, so we cannot use scalar or array types. For example, the following declarations won't compile:

Listing 314: non_record_limited_error.ads

```
package Non_Record_Limited_Error is

   type Limited_Enumeration is
     limited (Off, On);

   type Limited_Integer is new
     limited Integer;

   type Integer_Array is
     array (Positive range <>) of Integer;

   type Rec is new
     limited Integer_Array (1 .. 2);

end Non_Record_Limited_Error;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Limited_Private_
 ↪Types.Non_Record_Limited_Error
MD5: c155e02d809caf28352cbbb579deb861
```

However, we've mentioned *in a previous chapter* (page 313) that private types don't have to be record types necessarily. In this sense, limited private types makes it possible for us to use types other than record types in the full view and still benefit from the restrictions of limited types. For example:

Listing 315: simple_recs.ads

```
package Simple_Recs is

   type Limited_Enumeration is
     limited private;

   type Limited_Integer is
     limited private;

   type Limited_Integer_Array_2 is
     limited private;

private

   type Limited_Enumeration is (Off, On);

   type Limited_Integer is new Integer;

   type Integer_Array is
```

(continues on next page)

[288] http://www.ada-auth.org/standards/22rm/html/RM-7-5.html

(continued from previous page)

```
19       array (Positive range <>) of Integer;
20
21    type Limited_Integer_Array_2 is
22       new Integer_Array (1 .. 2);
23
24 end Simple_Recs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Limited_Private_
 ↪Types.Non_Record_Limited
MD5: 9e65b56a5cb3d7a3da11c7f63ee9bb19
```

Here, `Limited_Enumeration`, `Limited_Integer`, and `Limited_Integer_Array_2` are limited private types that encapsulate an enumeration type, an integer type, and a constrained array type, respectively.

Partial and full view of limited types

In the previous example, both partial and full views of the Rec type were limited. We may actually declare a type as **`limited private`** (in the public part of a package), while its full view is nonlimited. For example:

Listing 316: simple_recs.ads

```
1  package Simple_Recs is
2
3     type Rec is limited private;
4     --  Partial view of Rec is limited
5
6  private
7
8     type Rec is record
9     --  Full view of Rec is nonlimited
10       I : Integer;
11    end record;
12
13 end Simple_Recs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Limited_Private_
 ↪Types.Limited_Partial_Full_View
MD5: 5d0dbc3e87531476856f0ac1f9b22c78
```

In this case, only the partial view of Rec is limited, while its full view is nonlimited. When deriving from Rec, the view of the derived type is the same as for the parent type:

Listing 317: simple_recs-child.ads

```
1  package Simple_Recs.Child
2  is
3     type Rec_Derived is new Rec;
4     --  As for its parent, the
5     --  partial view of Rec_Derived
6     --  is limited, but the full view
7     --  is nonlimited.
8
9  end Simple_Recs.Child;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Limited_Private_
 ↪Types.Limited_Partial_Full_View
MD5: fdf0ffa87ac2b8766830bf8e17ac7b5e
```

Clients must nevertheless comply with their partial view, and treat the type as if it is in fact limited. In other words, if you use the Rec type in a subprogram or package outside of the Simple_Recs package (or its child packages), the type is limited from that perspective:

Listing 318: use_rec_in_subprogram.adb

```
with Simple_Recs; use Simple_Recs;

procedure Use_Rec_In_Subprogram is
   R1, R2 : Rec;
begin
   R1.I := 1;
   R2   := R1;
end Use_Rec_In_Subprogram;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Limited_Private_
 ↪Types.Limited_Partial_Full_View
MD5: f0af323a951853b97a2b67ce9b13e732
```

Build output

```
use_rec_in_subprogram.adb:6:04: error: invalid prefix in selected component "R1"
use_rec_in_subprogram.adb:7:04: error: left hand of assignment must not be limited␣
 ↪type
gprbuild: *** compilation phase failed
```

Here, compilation fails because the type Rec is limited from the procedure's perspective.

Limitations

Note that the opposite — declaring a type as **private** and its full full view as **limited private** — is not possible. For example:

Listing 319: simple_recs.ads

```
package Simple_Recs is

   type Rec is private;

private

   type Rec is limited record
      I : Integer;
   end record;

end Simple_Recs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Limited_Private_
 ↪Types.Limited_Partial_Full_View
MD5: ec1c8a2dcf3cc2c49b1497cf4c9d3a5a
```

Build output

```
use_rec_in_subprogram.adb:6:04: error: invalid prefix in selected component "R1"
simple_recs.ads:7:09: error: completion of nonlimited type cannot be limited
gprbuild: *** compilation phase failed
```

As expected, we get a compilation error in this case. The issue is that the partial view cannot be allowed to mislead the client about what's possible. In this case, if the partial view allows assignment, then the full view must actually provide assignment. But the partial view can restrict what is actually possible, so a limited partial view need not be completed in the full view as a limited type.

In addition, tagged limited private types cannot have a nonlimited full view. For example:

Listing 320: simple_recs.ads

```
1  package Simple_Recs is
2
3     type Rec is tagged limited private;
4
5  private
6
7     type Rec is tagged record
8        I : Integer;
9     end record;
10
11 end Simple_Recs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Limited_Private_
 ↪Types.Limited_Partial_Full_View
MD5: cadb9ca1346a98fb65f9059fdb29f865
```

Build output

```
use_rec_in_subprogram.adb:6:06: error: no selector "I" for private type "Rec"␣
 ↪defined at simple_recs.ads:3
use_rec_in_subprogram.adb:7:04: error: left hand of assignment must not be limited␣
 ↪type
simple_recs.ads:7:09: error: completion of limited tagged type must be limited
gprbuild: *** compilation phase failed
```

Here, compilation fails because the type Rec is nonlimited in its full view.

Limited and nonlimited in full view

Declaring the full view of a type as limited or nonlimited has implications in the way we can use objects of this type in the package body. For example:

Listing 321: simple_recs.ads

```
1  package Simple_Recs is
2
3     type Rec_Limited_Full is limited private;
4     type Rec_Nonlimited_Full is limited private;
5
6     procedure Copy
7       (From :        Rec_Limited_Full;
8        To   : in out Rec_Limited_Full);
9     procedure Copy
10      (From :        Rec_Nonlimited_Full;
11       To   : in out Rec_Nonlimited_Full);
```

(continues on next page)

(continued from previous page)

```
12
13 private
14
15    type Rec_Limited_Full is limited record
16       I : Integer;
17    end record;
18
19    type Rec_Nonlimited_Full is record
20       I : Integer;
21    end record;
22
23 end Simple_Recs;
```

Listing 322: simple_recs.adb

```
1  package body Simple_Recs is
2
3     procedure Copy
4       (From :        Rec_Limited_Full;
5        To   : in out Rec_Limited_Full)
6     is
7     begin
8        To := From;
9        --  ERROR: assignment is forbidden because
10       --         Rec_Limited_Full is limited in
11       --         its full view.
12    end Copy;
13
14    procedure Copy
15      (From :        Rec_Nonlimited_Full;
16       To   : in out Rec_Nonlimited_Full)
17    is
18    begin
19       To := From;
20       --  OK: assignment is allowed because
21       --      Rec_Nonlimited_Full is
22       --      nonlimited in its full view.
23    end Copy;
24
25 end Simple_Recs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Limited_Private_
↪Types.Limited_Non_Limited_Partial_Full_View
MD5: 24b75bb97ddd485bd6825bb8647607c1
```

Build output

```
simple_recs.adb:8:07: error: left hand of assignment must not be limited type
gprbuild: *** compilation phase failed
```

Here, both Rec_Limited_Full and Rec_Nonlimited_Full are declared as **private limited**. However, Rec_Limited_Full type is limited in its full view, while Rec_Nonlimited_Full is nonlimited. As expected, the compiler complains about the To := From assignment in the Copy procedure for the Rec_Limited_Full type because its full view is limited (so no assignment is possible). Of course, in the case of the objects of Rec_Nonlimited_Full type, this assignment is perfectly fine.

Limited private component

Another example mentioned by the Ada Reference Manual (7.3.1[289], 5/1) is about an array type whose component type is limited private, but nonlimited in its full view. Let's see a complete code example for that:

Listing 323: limited_nonlimited_arrays.ads

```
package Limited_Nonlimited_Arrays is

   type Limited_Private is
     limited private;

   function Init return Limited_Private;

   --  The array type Limited_Private_Array
   --  is limited because the type of its
   --  component is limited.
   type Limited_Private_Array is
     array (Positive range <>) of
       Limited_Private;

private

   type Limited_Private is
   record
      A : Integer;
   end record;

   --  Limited_Private_Array type is
   --  nonlimited at this point because
   --  its component is nonlimited.
   --
   --  The assignments below are OK:
   A1 : Limited_Private_Array (1 .. 5);

   A2 : Limited_Private_Array := A1;

end Limited_Nonlimited_Arrays;
```

Listing 324: limited_nonlimited_arrays.adb

```
package body Limited_Nonlimited_Arrays is

   function Init return Limited_Private is
     ((A => 1));

end Limited_Nonlimited_Arrays;
```

Listing 325: show_limited_nonlimited_array.adb

```
with Limited_Nonlimited_Arrays;
use  Limited_Nonlimited_Arrays;

procedure Show_Limited_Nonlimited_Array is
   A3 : Limited_Private_Array (1 .. 2) :=
          (others => Init);
   A4 : Limited_Private_Array (1 .. 2);
begin
   --  ERROR: this assignment is illegal because
```

(continues on next page)

[289] http://www.ada-auth.org/standards/22rm/html/RM-7-3-1.html

(continued from previous page)

```
10    --  Limited_Private_Array is limited, as
11    --  its component is limited at this point.
12    A4 := A3;
13 end Show_Limited_Nonlimited_Array;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Limited_Private_
 ↪Types.Limited_Nonlimited_Array
MD5: 211670e99e6e3a63a785bb2dde255b58
```

Build output

```
show_limited_nonlimited_array.adb:12:04: error: left hand of assignment must not␣
 ↪be limited type
show_limited_nonlimited_array.adb:12:04: error: component type "Limited_Private"␣
 ↪of subtype of "Limited_Private_Array" is limited
gprbuild: *** compilation phase failed
```

As we can see in this example, the limitedness of the array type `Limited_Private_Array` depends on the limitedness of its component type `Limited_Private`. In the private part of `Limited_Nonlimited_Arrays` package, where `Limited_Private` is nonlimited, the array type `Limited_Private_Array` becomes nonlimited as well. In contrast, in the `Show_Limited_Nonlimited_Array`, the array type is limited because its component is limited in that scope.

In the Ada Reference Manual

- 7.3.1 Private Operations[290]

Tagged limited private types

For tagged private types, the partial and full views must match: if a tagged type is limited in the partial view, it must be limited in the full view. For example:

Listing 326: simple_recs.ads

```
1  package Simple_Recs is
2
3     type Rec is tagged limited private;
4
5  private
6
7     type Rec is tagged limited record
8        I : Integer;
9     end record;
10
11 end Simple_Recs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Limited_Private_
 ↪Types.Tagged_Limited_Private_Types
MD5: bee48bd7e0d70ddfd288c0de5e21b039
```

Here, the tagged Rec type is limited both in its partial and full views. Any mismatch in one of the views triggers a compilation error. (As an exercise, you may remove any of the

[290] http://www.ada-auth.org/standards/22rm/html/RM-7-3-1.html

`limited` keywords from the code example and try to compile it.)

> **For further reading...**
>
> This rule is for the sake of dynamic dispatching and classwide types. The compiler must not allow any of the types in a derivation class — the set of types related by inheritance — to be different regarding assignment and equality (and thus inequality). That's necessary because we are meant to be able to manipulate objects of any type in the entire set of types via the partial view presented by the root type, without knowing which specific tagged type is involved.

28.3.3 Explicitly limited types

Under certain conditions, limited types can be called explicitly limited — note that using the `limited` keyword in a part of the declaration doesn't necessary ensure this, as we'll see later.

Let's start with an example of an explicitly limited type:

Listing 327: simple_recs.ads

```
package Simple_Recs is

   type Rec is limited record
      I : Integer;
   end record;

end Simple_Recs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Explicitly_Limited_
 ↪Types.Explicitly_Limited_Types
MD5: de73a20140628420830ed9fe0b2dedb5
```

The Rec type is also explicitly limited when it's declared limited in the private type's completion (in the package's private part):

Listing 328: simple_recs.ads

```
package Simple_Recs is

   type Rec is limited private;

private

   type Rec is limited record
      I : Integer;
   end record;

end Simple_Recs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Explicitly_Limited_
 ↪Types.Explicitly_Limited_Types
MD5: ececb364f5365a74db43952e9421dee0
```

In this case, Rec is limited both in the partial and in the full view, so it's considered explicitly limited.

However, *as we've learned before* (page 1035), we may actually declare a type as **limited private** in the public part of a package, while its full view is nonlimited. In this case, the limited type is not considered explicitly limited anymore.

For example, if we make the full view of the Rec nonlimited (by removing the **limited** keyword in the private part), then the Rec type isn't explicitly limited anymore:

Listing 329: simple_recs.ads

```
1  package Simple_Recs is
2
3     type Rec is limited private;
4
5  private
6
7     type Rec is record
8        I : Integer;
9     end record;
10
11 end Simple_Recs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Explicitly_Limited_
 ↪Types.Explicitly_Limited_Types
MD5: bd54dec4f9b67d3d14d80511b3ac311f
```

Now, even though the Rec type was declared as limited private, the full view indicates that it's actually a nonlimited type, so it isn't explicitly limited.

Note that *tagged limited private types* (page 1040) are always explicitly limited types — because, as we've learned before, they cannot have a nonlimited type declaration in its full view.

In the Ada Reference Manual

- 6.2 Formal Parameter Modes[291]
- 6.4.1 Parameter Associations[292]
- 7.5 Limited Types[293]

28.3.4 Subtypes of Limited Types

We can declare subtypes of limited types. For example:

Listing 330: simple_recs.ads

```
1  package Simple_Recs is
2
3     type Limited_Integer_Array (L : Positive) is
4       limited private;
5
6     subtype Limited_Integer_Array_2 is
7       Limited_Integer_Array (2);
8
9  private
```

(continues on next page)

[291] http://www.ada-auth.org/standards/22rm/html/RM-6-2.html
[292] http://www.ada-auth.org/standards/22rm/html/RM-6-4-1.html
[293] http://www.ada-auth.org/standards/22rm/html/RM-7-5.html

(continued from previous page)

```
10
11    type Integer_Array is
12      array (Positive range <>) of Integer;
13
14    type Limited_Integer_Array (L : Positive) is
15      limited record
16       Arr : Integer_Array (1 .. L);
17    end record;
18
19 end Simple_Recs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Deriving_From_
 ↪Limited_Types.Limited_Subtype
MD5: 2a82c3c96fad2a01b9a8c15912d4b974
```

Here, `Limited_Integer_Array_2` is a subtype of the `Limited_Integer_Array` type. Since `Limited_Integer_Array` is a limited type, the `Limited_Integer_Array_2` subtype is limited as well. A subtype just introduces a name for some constraints on an existing type. As such, a subtype doesn't change the limitedness of the constrained type.

We can test this in a small application:

Listing 331: test_limitedness.adb

```
1 with Simple_Recs; use Simple_Recs;
2
3 procedure Test_Limitedness is
4    Dummy_1, Dummy_2 : Limited_Integer_Array_2;
5 begin
6    Dummy_2 := Dummy_1;
7 end Test_Limitedness;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Deriving_From_
 ↪Limited_Types.Limited_Subtype
MD5: c24d07be96f27298a97e18d955cc6161
```

Build output

```
test_limitedness.adb:6:04: error: left hand of assignment must not be limited type
gprbuild: *** compilation phase failed
```

As expected, compilations fails because `Limited_Integer_Array_2` is a limited (sub)type.

28.3.5 Deriving from limited types

In this section, we discuss the implications of deriving from limited types. As usual, let's start with a simple example:

Listing 332: simple_recs.ads

```
1 package Simple_Recs is
2
3    type Rec is limited null record;
4
5    type Rec_Derived is new Rec;
6
7 end Simple_Recs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Deriving_From_
 ↪Limited_Types.Derived_Limited_Type
MD5: cd23dfb69645ba5f1ebfdd65ee761ebe
```

In this example, the Rec_Derived type is derived from the Rec type. Note that the Rec_Derived type is limited because its ancestor is limited, even though the **limited** keyword doesn't show up in the declaration of the Rec_Derived type. Note that we could have actually used the **limited** keyword here:

```
type Rec_Derived is limited new Rec;
```

Therefore, we cannot use the assignment operator for objects of Rec_Derived type:

Listing 333: test_limitedness.adb

```
1 with Simple_Recs; use Simple_Recs;
2
3 procedure Test_Limitedness is
4    Dummy_1, Dummy_2 : Rec_Derived;
5 begin
6    Dummy_2 := Dummy_1;
7 end Test_Limitedness;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Deriving_From_
 ↪Limited_Types.Derived_Limited_Type
MD5: ce1b5fc8c96c4ede0cc6768b84296b51
```

Build output

```
test_limitedness.adb:6:04: error: left hand of assignment must not be limited type
gprbuild: *** compilation phase failed
```

Note that we cannot derive a limited type from a nonlimited ancestor:

Listing 334: simple_recs.ads

```
1 package Simple_Recs is
2
3    type Rec is null record;
4
5    type Rec_Derived is limited new Rec;
6
7 end Simple_Recs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Deriving_From_
 ↪Limited_Types.Derived_Limited_Type_Nonlimited_Ancestor
MD5: 78a7574cc6233ddc826359acb6e644ee
```

Build output

```
simple_recs.ads:5:04: error: parent type "Rec" of limited type must be limited
gprbuild: *** compilation phase failed
```

As expected, the compiler indicates that the ancestor Rec should be of limited type.

In fact, all types in a derivation class are the same — either limited or not. (That is especially important with dynamic dispatching via tagged types. We discuss this topic in another

chapter.)

In the Ada Reference Manual

- 7.3 Private Types and Private Extensions[294]
- 7.5 Limited Types[295]

Deriving from limited private types

Of course, we can also derive from limited private types. However, there are more rules in this case than the ones we've seen so far. Let's start with an example:

Listing 335: simple_recs.ads

```
package Simple_Recs is

   type Rec is limited private;

private

   type Rec is limited null record;

end Simple_Recs;
```

Listing 336: simple_recs-ext.ads

```
package Simple_Recs.Ext is

   type Rec_Derived is new Rec;

   --  OR:
   --
   --  type Rec_Derived is
   --    limited new Rec;

end Simple_Recs.Ext;
```

Listing 337: test_limitedness.adb

```
with Simple_Recs.Ext; use Simple_Recs.Ext;

procedure Test_Limitedness is
   Dummy_1, Dummy_2 : Rec_Derived;
begin
   Dummy_2 := Dummy_1;
end Test_Limitedness;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Deriving_From_
 ↪Limited_Types.Derived_Limited_Private_Type
MD5: c6eed14520589b9c1e11c17bd6179c19
```

Build output

```
test_limitedness.adb:6:04: error: left hand of assignment must not be limited type
gprbuild: *** compilation phase failed
```

[294] http://www.ada-auth.org/standards/22rm/html/RM-7-3.html
[295] http://www.ada-auth.org/standards/22rm/html/RM-7-5.html

Here, Rec_Derived is a limited type derived from the (limited private) Rec type. We can verify that Rec_Derived type is limited because the compilation of the Test_Limitedness procedure fails.

Deriving from non-explicitly limited private types

Up to this point, we have discussed *explicitly limited types* (page 1041). Now, let's see how derivation works with *non-explicitly* limited types.

Any type derived from a limited type is always limited, even if the full view of its ancestor is nonlimited. For example, let's modify the full view of Rec and make it nonlimited (i.e. make it *not explicitly* limited):

Listing 338: simple_recs.ads

```
package Simple_Recs is

   type Rec is limited private;

private

   type Rec is null record;

end Simple_Recs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Deriving_From_
 ↪Limited_Types.Derived_Limited_Private_Type
MD5: 30a2a88ff46b7e528bb8d75d3d6ad6ce
```

Build output

```
simple_recs.ads:1: Simple_Recs cannot be used as a main program
gprbind: invocation of gnatbind failed
gprbuild: unable to bind simple_recs.ads
```

Here, Rec_Derived is a limited type because the partial view of Rec is limited. The fact that the full view of Rec is nonlimited doesn't affect the Rec_Derived type — as we can verify with the compilation error in the Test_Limitedness procedure.

Note, however, that a derived type becomes nonlimited in the **private part or the body** of a child package if it isn't explicitly limited. In this sense, the derived type inherits the *nonlimitedness* of the parent's full view. For example, because we're declaring Rec_Derived as **is new** Rec in the child package (Simple_Recs.Ext), we're saying that Rec_Derived is limited *outside* this package, but nonlimited in the private part and body of the Simple_Recs.Ext package. We can verify this by copying the code from the Test_Limitedness procedure to a new procedure in the body of the Simple_Recs.Ext package:

Listing 339: simple_recs-ext.ads

```
package Simple_Recs.Ext
  with Elaborate_Body is

   --  Rec_Derived is derived from Rec, which is a
   --  limited private type that is nonlimited in
   --  its full view.
   --
   --  Rec_Derived isn't explicitly limited.
   --  Therefore, it's nonlimited in the private
   --  part of Simple_Recs.Ext and its package
```

(continues on next page)

(continued from previous page)

```
  --  body.
  --
  type Rec_Derived is new Rec;

end Simple_Recs.Ext;
```

Listing 340: simple_recs-ext.adb

```
package body Simple_Recs.Ext is

   procedure Test_Child_Limitedness is
      Dummy_1, Dummy_2 : Rec_Derived;
   begin
      --  Here, Rec_Derived is a nonlimited
      --  type because Rec is nonlimited in
      --  its full view.

      Dummy_2 := Dummy_1;
   end Test_Child_Limitedness;

end Simple_Recs.Ext;
```

Listing 341: test_limitedness.adb

```
--  We copied the code to the
--  Test_Child_Limitedness procedure (in the
--  body of the Simple_Recs.Ext package) and
--  commented it out here.
--
--  You may uncomment the code to verify
--  that Rec_Derived is limited in this
--  procedure.
--


--  with Simple_Recs.Ext; use Simple_Recs.Ext;

procedure Test_Limitedness is
   --  Dummy_1, Dummy_2 : Rec_Derived;
begin
   --  Dummy_2 := Dummy_1;
   null;
end Test_Limitedness;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Deriving_From_
 ↪Limited_Types.Derived_Limited_Private_Type
MD5: f480cd05afff622e451684a0293cb982
```

In the `Test_Child_Limitedness` procedure of the `Simple_Recs.Ext` package, we can use the `Rec_Derived` as a nonlimited type because its ancestor `Rec` is nonlimited in its full view. (*As we've learned before* (page 1037), if a limited type is nonlimited in its full view, we can copy objects of this type in the private part of the package specification or in the package body.)

Outside of the package, both `Rec` and `Rec_Derived` types are limited types. Therefore, if we uncomment the code in the `Test_Limitedness` procedure, compilation fails there (because `Rec_Derived` is viewed as descending from a limited type).

Deriving from tagged limited private types

The rules for deriving from tagged limited private types are slightly different than the rules we've seen so far. This is because tagged limited types are always *explicitly limited types* (page 1041).

Let's look at an example:

Listing 342: simple_recs.ads

```
package Simple_Recs is

   type Tagged_Rec is tagged limited private;

private

   type Tagged_Rec is tagged limited null record;

end Simple_Recs;
```

Listing 343: simple_recs-ext.ads

```
package Simple_Recs.Ext is

   type Rec_Derived is new
     Tagged_Rec with private;

private

   type Rec_Derived is new
     Tagged_Rec with null record;

end Simple_Recs.Ext;
```

Listing 344: test_limitedness.adb

```
with Simple_Recs.Ext; use Simple_Recs.Ext;

procedure Test_Limitedness is
   Dummy_1, Dummy_2 : Rec_Derived;
begin
   Dummy_2 := Dummy_1;
end Test_Limitedness;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Deriving_From_
 ↪Limited_Types.Derived_Tagged_Limited_Private_Type
MD5: 81c8a010f093d8823b84bb6e69c4114e
```

Build output

```
test_limitedness.adb:6:04: error: left hand of assignment must not be limited type
gprbuild: *** compilation phase failed
```

In this example, Rec_Derived is a tagged limited type derived from the Tagged_Rec type. (Again, we can verify the limitedness of the Rec_Derived type with the Test_Limitedness procedure.)

As explained previously, the derived type (Rec_Derived) is a limited type, even though the **limited** keyword doesn't appear in its declaration. We could, of course, include the **limited** keyword in the declaration of Rec_Derived:

Listing 345: simple_recs-ext.ads

```
package Simple_Recs.Ext is

   type Rec_Derived is limited new
     Tagged_Rec with private;

private

   type Rec_Derived is limited new
     Tagged_Rec with null record;

end Simple_Recs.Ext;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Deriving_From_
 ↪Limited_Types.Derived_Tagged_Limited_Private_Type
MD5: b82a58a4bf9701b321000c52bf121977
```

Build output

```
simple_recs-ext.ads:1: Simple_Recs.ext cannot be used as a main program
gprbind: invocation of gnatbind failed
gprbuild: unable to bind simple_recs-ext.ads
```

(Obviously, if we include the **limited** keyword in the partial view of the derived type, we must include it in its full view as well.)

Deriving from limited interfaces

The rules for limited interfaces are different from the ones for limited tagged types. In contrast to the rule we've seen in the previous section, a type that is derived from a limited type isn't automatically limited. In other words, it does **not** inherit the *limitedness* from the interface. For example:

Listing 346: simple_recs.ads

```
package Simple_Recs is

   type Limited_IF is limited interface;

end Simple_Recs;
```

Listing 347: simple_recs-ext.ads

```
package Simple_Recs.Ext is

   type Rec_Derived is new
     Limited_IF with private;

private

   type Rec_Derived is new
     Limited_IF with null record;

end Simple_Recs.Ext;
```

Listing 348: test_limitedness.adb

```
with Simple_Recs.Ext; use Simple_Recs.Ext;

procedure Test_Limitedness is
   Dummy_1, Dummy_2 : Rec_Derived;
begin
   Dummy_2 := Dummy_1;
end Test_Limitedness;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Deriving_From_
 ↪Limited_Types.Derived_Interface_Limited_Private
MD5: d9cf0bd26b86d0caec82eff2a2ec6ead
```

Here, Rec_Derived is derived from the limited Limited_IF interface. As we can see, the Test_Limitedness compiles fine because Rec_Derived is nonlimited.

Of course, if we want Rec_Derived to be limited, we can make this explicit in the type declaration:

Listing 349: simple_recs-ext.ads

```
package Simple_Recs.Ext is

   type Rec_Derived is limited new
     Limited_IF with private;

private

   type Rec_Derived is limited new
     Limited_IF with null record;

end Simple_Recs.Ext;
```

Listing 350: test_limitedness.adb

```
with Simple_Recs.Ext; use Simple_Recs.Ext;

procedure Test_Limitedness is
   Dummy_1, Dummy_2 : Rec_Derived;
begin
   Dummy_2 := Dummy_1;
end Test_Limitedness;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Deriving_From_
 ↪Limited_Types.Derived_Interface_Limited_Private
MD5: abb295cbfd5ade5f351991c2fbaf519c
```

Build output

```
test_limitedness.adb:6:04: error: left hand of assignment must not be limited type
gprbuild: *** compilation phase failed
```

Now, compilation of Test_Limitedness fails because Rec_Derived is explicitly limited.

28.3.6 Immutably Limited Types

According to the Annotated Ada Reference Manual (7.5, 8.b/3)[296], "an immutably limited type is a type that cannot become nonlimited subsequently in a private part or in a child unit." In fact, while we were talking about *partial and full view of limited types* (page 1035), we've seen that limited private types can become nonlimited in their full view. Such limited types are *not* immutably limited.

The Annotated Ada Reference Manual also says that "if a view of the type makes it immutably limited, then no copying (assignment) operations are ever available for objects of the type. This allows other properties; for instance, it is safe for such objects to have access discriminants that have defaults or designate other limited objects." We'll see examples of this later on.

Immutably limited types include:

- *explicitly limited types* (page 1041)
- tagged limited types (i.e. with the keywords **tagged limited**);
- *tagged limited private types* (page 1040);
- limited private type that have at least one *access discriminant* (page 973) with a default expression;
- task types, protected types, and synchronized interfaces;
- any types derived from immutably limited types.

Let's look at a code example that shows instances of immutably limited types:

Listing 351: show_immutably_limited_types.ads

```
1  package Show_Immutably_Limited_Types is
2
3     --
4     --  Explicitly limited type
5     --
6     type Explicitly_Limited_Rec is limited
7     record
8        A : Integer;
9     end record;
10
11    --
12    --  Tagged limited type
13    --
14    type Limited_Tagged_Rec is tagged limited
15    record
16       A : Integer;
17    end record;
18
19    --
20    --  Tagged limited private type
21    --
22    type Limited_Tagged_Private is
23      tagged limited private;
24
25    --
26    --  Limited private type with an access
27    --  discriminant that has a default
28    --  expression
29    --
30    type Limited_Rec_Access_D
```

(continues on next page)

[296] http://www.ada-auth.org/standards/22aarm/html/AA-7-5.html

(continued from previous page)

```
      (AI : access Integer := new Integer) is
        limited private;

   --
   --  Task type
   --
   task type TT is
     entry Start;
     entry Stop;
   end TT;

   --
   --  Protected type
   --
   protected type PT is
     function Value return Integer;
   private
     A : Integer;
   end PT;

  --
  --  Synchronized interface
  --
  type SI is synchronized interface;

  --
  --  A type derived from an immutably
  --  limited type
  --
  type Derived_Immutable is new
    Explicitly_Limited_Rec;

private

   type Limited_Tagged_Private is tagged limited
   record
      A : Integer;
   end record;

   type Limited_Rec_Access_D
     (AI : access Integer := new Integer)
   is limited
     record
       A : Integer;
     end record;

end Show_Immutably_Limited_Types;
```

Listing 352: show_immutably_limited_types.adb

```
package body Show_Immutably_Limited_Types is

   task body TT is
   begin
     accept Start;
     accept Stop;
   end TT;

   protected body PT is
     function Value return Integer is
       (PT.A);
```

(continues on next page)

(continued from previous page)

```
12    end PT;
13
14 end Show_Immutably_Limited_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Immutably_Limited_
 ↪Types.Example
MD5: 6bcb9582a10eedc96040ab11cd320153
```

Build output

```
show_immutably_limited_types.ads:31:30: warning: coextension will not be␣
 ↪deallocated when its associated owner is deallocated [enabled by default]
```

In the Show_Immutably_Limited_Types package above, we see multiple instances of immutably limited types. (The comments in the source code indicate each type.)

In the Ada Reference Manual

- 7.5 Limited Types[297]

Non immutably limited types

Not every limited type is immutably limited. We already mentioned untagged private limited types, which can *become nonlimited in their full view* (page 1035). In addition, we have nonsynchronized limited interface types. As mentioned earlier in this chapter, a *type derived from a nonsynchronized limited interface* (page 1049), can be nonlimited, so it's not immutably limited.

In the Ada Reference Manual

- 7.3.1 Private Operations[298]
- 7.5 Limited Types[299]

28.3.7 Limited Types with Discriminants

In this section, we look into the implications of using discriminants with limited types. Actually, most of the topics mentioned here have already been covered in different sections of previous chapters, as well as in this chapter. Therefore, this section is in most parts just a review of what we've already discussed.

Let's start with a simple example:

Listing 353: simple_recs.ads

```
1 package Simple_Recs is
2
3    type Rec (L : Positive)
4      is limited null record;
5
6 end Simple_Recs;
```

[297] http://www.ada-auth.org/standards/22rm/html/RM-7-5.html
[298] http://www.ada-auth.org/standards/22rm/html/RM-7-3-1.html
[299] http://www.ada-auth.org/standards/22rm/html/RM-7-5.html

Listing 354: test_limitedness.adb

```
with Simple_Recs; use Simple_Recs;

procedure Test_Limitedness is
   Dummy_1 : Rec (2);
   Dummy_2 : Rec (3);
begin
   Dummy_2 := Dummy_1;
   --  ^^^^^^^^^^^^^^
   --  ERRORS:
   --    1. Cannot assign objects of
   --       limited types.
   --    2. Cannot assign objects with
   --       different discriminants.
end Test_Limitedness;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Discriminants.
 ↪Simple_Example
MD5: 7b4a62c0341becf16f59e163b4359397
```

Build output

```
test_limitedness.adb:7:04: error: left hand of assignment must not be limited type
gprbuild: *** compilation phase failed
```

In this example, we see the declaration of the limited type Rec, which has the discriminant L. For objects of type Rec, we not only have the typical restrictions that *equality and assignment aren't available* (page 1028), but we also have the restriction that we won't be able to assign objects with different discriminants.

In the Ada Reference Manual

- 3.7 Discriminants[300]

Default Expressions

On the other hand, there are restrictions that apply to nonlimited types with discriminants, but not to limited types with discriminants. This concerns mostly default expressions, which are generally allowed for discriminants of limited types.

Discriminants of tagged limited types

As we've discussed previously, we can use default expressions for discriminants of tagged limited types. Let's see an example:

Listing 355: recs.ads

```
package Recs is

   type LTT (L : Positive := 1;
             M : Positive := 2) is
     tagged limited null record;

end Recs;
```

[300] http://www.ada-auth.org/standards/12rm/html/RM-3-7.html

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Discriminants.
 ↪Discriminant_Default_Value_Tagged_TYpe
MD5: ebd28ee124c6a84765c61ea609ba0595
```

Obviously, the same applies to *tagged limited private types* (page 1040):

Listing 356: recs.ads

```
package Recs is

   type LTT (L : Positive := 1;
             M : Positive := 2) is
     tagged limited private;

private

   type LTT (L : Positive := 1;
             M : Positive := 2) is
     tagged limited null record;

end Recs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Discriminants.
 ↪Discriminant_Default_Value_Tagged_TYpe
MD5: dd3d5a25ad9d050f7e7467d859dd9e14
```

In the case of tagged, nonlimited types, using default expressions in this context isn't allowed.

Access discriminant

Similarly, when using limited types, we can specify default expressions for *access discriminants* (page 973):

Listing 357: custom_recs.ads

```
package Custom_Recs is

   --  Specifying a default expression for
   --  an access discriminant:
   type Rec (IA : access Integer :=
                    new Integer'(0)) is limited
   record
      I : Integer := IA.all;
   end record;

end Custom_Recs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Discriminants.
 ↪Access_Discriminant_Default_Expression
MD5: 23703d9dc80e9f1c8fe237c76b9dd6b0
```

Build output

```
custom_recs.ads:6:21: warning: coextension will not be deallocated when its␣
 ↪associated owner is deallocated [enabled by default]
```

In fact, *as we've discussed before* (page 975), this isn't possible for nonlimited types.

Note, however, that we can only assign a default expression to an access discriminant of an *immutably limited type* (page 1051).

Discriminants of nontagged limited types

In addition to tagged limited types, we can use default expressions for discriminants of nontagged limited types. Let's see an example:

Listing 358: recs.ads

```
package Recs is

   type LTT (L : Positive := 1;
             M : Positive := 2) is
     limited null record;

end Recs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Discriminants.
 ↪Discriminant_Default_Value_Tagged_TYpe
MD5: 8d189b814c6afb4f060e9a41558c18c6
```

Obviously, the same applies to *limited private types* (page 1033):

Listing 359: recs.ads

```
package Recs is

   type LTT (L : Positive := 1;
             M : Positive := 2) is
     limited private;

private

   type LTT (L : Positive := 1;
             M : Positive := 2) is
     limited null record;

end Recs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Discriminants.
 ↪Discriminant_Default_Value_Tagged_TYpe
MD5: 536d7dfbe84c818cb94a8b972e3d77cb
```

Note that using default expressions for discriminants of nonlimited, nontagged types is OK as well.

Mutable subtypes and Limitedness

As we've mentioned before, an unconstrained discriminated subtype with defaults is called a mutable subtype. An important feature of mutable subtypes is that it allows changing the discriminants of an object, e.g. via assignments. However, as we know, we cannot assign to objects of limited types. Therefore, in essence, a type should be nonlimited to be considered a mutable subtype.

Let's look at a code example:

Listing 360: recs.ads

```
package Recs is

   type LTT (L : Positive := 1;
             M : Positive := 2) is
     limited null record;

   function Init (L : Positive;
                  M : Positive)
                  return LTT is
     ((L => L, M => M));

   procedure Copy (From :        LTT;
                   To   : in out LTT);

end Recs;
```

Listing 361: recs.adb

```
package body Recs is

   procedure Copy (From :        LTT;
                   To   : in out LTT) is
   begin
      To := Init (L => From.L,
                  M => From.M);
      --  ERROR: cannot assign to object of
      --         limited type

      To.L := From.L;
      To.M := From.M;
      --  ERROR: cannot change discriminants
   end Copy;

end Recs;
```

Listing 362: show.adb

```
with Recs; use Recs;

procedure Show is
   A : LTT;
   B : LTT := Init (10, 12);
begin
   Copy (From => B, To => A);
end Show;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Discriminants.
 ↪Discriminant_Default_Value_Tagged_TYpe
MD5: e8dfb1e99e33923aa4023428ecb17372
```

Build output

```
recs.adb:6:07: error: left hand of assignment must not be limited type
recs.adb:11:09: error: assignment to discriminant not allowed
recs.adb:12:09: error: assignment to discriminant not allowed
gprbuild: *** compilation phase failed
```

As we can see in the Copy procedure, it's not possible to properly assign to the target

object. Using `Init` is forbidden because the assignment is not initializing the target object — as we're not declaring `To` at this point. Also, changing the individual discriminants is forbidden as well. Therefore, we don't have any means to change the discriminants of the target object. (In contrast, if LTT was a nonlimited type, we would be able to implement Copy by using the call to the `Init` function.)

Limited private type with unknown discriminants

We can declare limited private types with *unknown discriminants* (page 484). Let's see an example:

Listing 363: limited_private_unknown_discriminants.ads

```
package Limited_Private_Unknown_Discriminants is

   type Rec (<>) is limited private;

private

   type Rec is limited
   record
      I : Integer;
   end record;

end Limited_Private_Unknown_Discriminants;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Discriminants.
 ↪Limited_Private_Unknown_Discriminants
MD5: 74184919132a084da76bd3e1445c22e5
```

In this example, we declare type Rec, which has unknown discriminants.

As we mentioned earlier, when we use a private type with unknown discriminants, we gain extra control over its initialization. In addition, if we declare those types as limited, we gain even more control. In fact, this is what the Annotated Ada Reference Manual (3.7, 26.b/2)[301] says:

> "A subtype with unknown discriminants is indefinite, and hence an object of such a subtype needs explicit initialization. A limited private type with unknown discriminants is 'extremely' limited; objects of such a type can be initialized only by subprograms (either procedures with a parameter of the type, or a function returning the type) declared in the package. Subprograms declared elsewhere can operate on and even return the type, but they can only initialize the object by calling (ultimately) a subprogram in the package declaring the type. Such a type is useful for keeping complete control over object creation within the package declaring the type."

Let's reuse a code example from the *previous section on unknown discriminants* (page 486) and use limited types:

Listing 364: limited_private_unknown_discriminants.ads

```
package Limited_Private_Unknown_Discriminants is

   type Rec (<>) is limited private;

   function Init return Rec;

```

(continues on next page)

[301] http://www.ada-auth.org/standards/22aarm/html/AA-3-7.html

(continued from previous page)

```
private

   type Rec is limited
   record
      I : Integer;
   end record;

   function Init return Rec is
     ((I => 0));

end Limited_Private_Unknown_Discriminants;
```

Listing 365: show_constructor_function.adb

```
with Limited_Private_Unknown_Discriminants;
use  Limited_Private_Unknown_Discriminants;

procedure Show_Constructor_Function is
   R : Rec := Init;
begin
   null;
end Show_Constructor_Function;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Discriminants.
 ↪Limited_Private_Unknown_Discriminants
MD5: f4b1de2a83837e2e52b0b57214f0eaf9
```

A function such as `Init` is called a *constructor function for limited types* (page 1064). We discuss this topic in more detail later on.

28.3.8 Record components of limited type

In this section, we discuss the implications of using components of limited type. Let's start by declaring a record component of limited type:

Listing 366: simple_recs.ads

```
package Simple_Recs is

   type Int_Rec is limited record
      V : Integer;
   end record;

   type Rec is limited record
      IR : Int_Rec;
   end record;

end Simple_Recs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Record_Components_
 ↪Limited_Type.Record_Components_Limited_Type
MD5: 71badd1e38cc4ff37f16d99dd203614b
```

As soon as we declare a record component of some limited type, the whole record is limited. In this example, the Rec record is limited due to the presence of the `IR` component of limited type.

Also, if we change the declaration of the Rec record from the previous example and remove the **limited** keyword, the type itself remains implicitly limited. We can see that when trying to assign to objects of Rec type in the Show_Implicitly_Limited procedure:

Listing 367: simple_recs.ads

```
package Simple_Recs is

   type Int_Rec is limited record
      V : Integer;
   end record;

   type Rec is record
      IR : Int_Rec;
   end record;

end Simple_Recs;
```

Listing 368: show_implicitly_limited.adb

```
with Simple_Recs; use Simple_Recs;

procedure Show_Implicitly_Limited is
   A, B : Rec;
begin
   B := A;
end Show_Implicitly_Limited;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Record_Components_
 ↪Limited_Type.Record_Components_Limited_Type
MD5: 39770daecfc4579407a799e14f9feff9
```

Build output

```
show_implicitly_limited.adb:6:04: error: left hand of assignment must not be␣
 ↪limited type
show_implicitly_limited.adb:6:04: error: component "IR" of type "Rec" has limited␣
 ↪type
gprbuild: *** compilation phase failed
```

Here, the compiler indicates that the assignment is forbidden because the Rec type has a component of limited type. The rationale for this rule is that an object of a limited type doesn't allow assignment or equality, including the case in which that object is a component of some enclosing composite object. If we allowed the enclosing object to be copied or tested for equality, we'd be doing it for all the components, too.

In the Ada Reference Manual

- 3.8 Record Types[302]

28.3.9 Limited types and aggregates

Note

[302] http://www.ada-auth.org/standards/22rm/html/RM-3-8.html

This section was originally written by Robert A. Duff and published as Gem #1: Limited Types in Ada 2005[303] and Gem #2[304].

In this section, we focus on using aggregates to initialize limited types.

Historically

Prior to Ada 2005, aggregates were illegal for limited types. Therefore, we would be faced with a difficult choice: Make the type limited, and initialize it like this:

Listing 369: persons.ads

```
with Ada.Strings.Unbounded;
use  Ada.Strings.Unbounded;

package Persons is

   type Limited_Person;
   type Limited_Person_Access is
     access all Limited_Person;

   type Limited_Person is limited record
      Name      : Unbounded_String;
      Age       : Natural;
   end record;

end Persons;
```

Listing 370: show_non_aggregate_init.adb

```
with Ada.Strings.Unbounded;
use  Ada.Strings.Unbounded;

with Persons; use Persons;

procedure Show_Non_Aggregate_Init is
   X : Limited_Person;
begin
   X.Name := To_Unbounded_String ("John Doe");
   X.Age := 25;
end Show_Non_Aggregate_Init;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Limited_Types_
 ↪Aggregates.Full_Coverage_Rules_Limited_Ada95
MD5: fd3dcb6251f7b6912dafcca052932be2
```

which has the maintenance problem the full coverage rules are supposed to prevent. Or, make the type nonlimited, and gain the benefits of aggregates, but lose the ability to prevent copies.

Full coverage rules for limited types

Previously, we discussed *full coverage rules for aggregates* (page 525). They also apply to limited types.

[303] https://www.adacore.com/gems/gem-1
[304] https://www.adacore.com/gems/gem-2

Historically

The full coverage rules have been aiding maintenance since Ada 83. However, prior to Ada 2005, we couldn't use them for limited types.

Suppose we have the following limited type:

Listing 371: persons.ads

```
with Ada.Strings.Unbounded;
use  Ada.Strings.Unbounded;

package Persons is

   type Limited_Person;
   type Limited_Person_Access is
     access all Limited_Person;

   type Limited_Person is limited record
      Self : Limited_Person_Access :=
               Limited_Person'Unchecked_Access;
      Name : Unbounded_String;
      Age  : Natural;
      Shoe_Size : Positive;
   end record;

end Persons;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Limited_Types_
 ↪Aggregates.Full_Coverage_Rules_Limited
MD5: b8ece44a10d512061cb138be21e42034
```

This type has a self-reference; it doesn't make sense to copy objects, because `Self` would end up pointing to the wrong place. Therefore, we would like to make the type limited, to prevent developers from accidentally making copies. After all, the type is probably private, so developers using this package might not be aware of the problem. We could also solve that problem with controlled types, but controlled types are expensive, and add unnecessary complexity if not needed.

We can initialize objects of limited type with an aggregate. Here, we can say:

Listing 372: show_aggregate_box_init.adb

```
with Ada.Strings.Unbounded;
use  Ada.Strings.Unbounded;

with Persons; use Persons;

procedure Show_Aggregate_Box_Init is
   X : aliased Limited_Person :=
         (Self      => <>,
          Name      =>
            To_Unbounded_String ("John Doe"),
          Age       => 25,
          Shoe_Size => 10);
begin
   null;
end Show_Aggregate_Box_Init;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Limited_Types_
 ↪Aggregates.Full_Coverage_Rules_Limited
MD5: ded40ff29b53ea5528efba94efaadbec
```

The `Self => <>` means use the default value of `Limited_Person'Unchecked_Access`. Since `Limited_Person` appears inside the type declaration, it refers to the "current instance" of the type, which in this case is X. Thus, we are setting `X.Self` to be `X'Unchecked_Access`.

One very important requirement should be noted: the implementation is required to build the value of X *in place*; it cannot construct the aggregate in a temporary variable and then copy it into X, because that would violate the whole point of limited objects — you can't copy them.

Historically

Since Ada 2005, an aggregate is allowed to be limited; we can say:

Listing 373: show_aggregate_init.adb

```
with Ada.Strings.Unbounded;
use  Ada.Strings.Unbounded;
with Persons; use Persons;

procedure Show_Aggregate_Init is

   X : aliased Limited_Person :=
         (Self      => null, -- Wrong!
          Name      =>
            To_Unbounded_String ("John Doe"),
          Age       => 25,
          Shoe_Size => 10);
begin
   X.Self := X'Unchecked_Access;
end Show_Aggregate_Init;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Limited_Types_
 ↪Aggregates.Full_Coverage_Rules_Limited
MD5: 793ee000fd777d0aa5c15e16132ec411
```

It seems uncomfortable to set the value of `Self` to the wrong value (`null`) and then correct it. It also seems annoying that we have a (correct) default value for `Self`, but prior to Ada 2005, we couldn't use defaults with aggregates. Since Ada 2005, a new syntax in aggregates is available: `<>` means "use the default value, if any". Therefore, we can replace `Self => null` by `Self => <>`.

Important

Note that using `<>` in an aggregate can be dangerous, because it can leave some components uninitialized. `<>` means "use the default value". If the type of a component is scalar, and there is no record-component default, then there is no default value.

For example, if we have an aggregate of type `String`, like this:

Listing 374: show_string_box_init.adb

```
procedure Show_String_Box_Init is
    Uninitialized_Const_Str : constant String :=
                                (1 .. 10 => <>);
begin
   null;
end Show_String_Box_Init;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Limited_Types_
 ↪Aggregates.String_Box_Init
MD5: 28931ced4e1113d55bdc9dc64b42f70a
```

we end up with a 10-character string all of whose characters are invalid values. Note that this is no more nor less dangerous than this:

Listing 375: show_dangerous_string.adb

```
procedure Show_Dangerous_String is
    Uninitialized_String_Var : String (1 .. 10);
    --  ^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^
    --  no initialization

    Uninitialized_Const_Str : constant String :=
        Uninitialized_String_Var;
begin
   null;
end Show_Dangerous_String;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Limited_Types_
 ↪Aggregates.Dangerous_String
MD5: 6c26e9c8d5d031d4e6eac1ac8458f17e
```

Build output

```
show_dangerous_string.adb:2:05: warning: variable "Uninitialized_String_Var" is␣
 ↪read but never assigned [-gnatwv]
```

As always, one must be careful about uninitialized scalar objects.

28.3.10 Constructor functions for limited types

Note

This section was originally written by Robert A. Duff and published as Gem #3[305].

Given that we can use build-in-place aggregates for limited types, the obvious next step is to allow such aggregates to be wrapped in an abstraction — namely, to return them from functions. After all, interesting types are usually private, and we need some way for clients to create and initialize objects.

Historically

Prior to Ada 2005, constructor functions (that is, functions that create new objects and return them) were not allowed for limited types. Since Ada 2005, fully-general construc-

[305] https://www.adacore.com/gems/gem-3

tor functions are allowed.

Let's see an example:

Listing 376: p.ads

```
with Ada.Strings.Unbounded;
use  Ada.Strings.Unbounded;

package P is
   task type Some_Task_Type;

   protected type Some_Protected_Type is
      --  dummy type
   end Some_Protected_Type;

   type T (<>) is limited private;
   function Make_T (Name : String) return T;
   --       ^^^^^^
   --  constructor function
private
   type T is limited
      record
         Name    : Unbounded_String;
         My_Task : Some_Task_Type;
         My_Prot : Some_Protected_Type;
      end record;
end P;
```

Listing 377: p.adb

```
package body P is

   task body Some_Task_Type is
   begin
      null;
   end Some_Task_Type;

   protected body Some_Protected_Type is
   end Some_Protected_Type;

   function Make_T (Name : String) return T is
   begin
      return (Name   =>
                 To_Unbounded_String (Name),
              others => <>);
   end Make_T;

end P;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Constructor_
 ↪Functions_Limited_Types.Constructor_Functions
MD5: 2e73eea0ba7852d45ba96dc1f6fae14d
```

Given the above, clients can say:

Listing 378: show_constructor_function.adb

```
with P; use P;

procedure Show_Constructor_Function is
   My_T : T := Make_T
                  (Name => "Bartholomew Cubbins");
begin
   null;
end Show_Constructor_Function;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Constructor_
 ↪Functions_Limited_Types.Constructor_Functions
MD5: 52801fafbd58fedbf268a6704008627b
```

As for aggregates, the result of Make_T is built in place (that is, in My_T), rather than being created and then copied into My_T. Adding another level of function call, we can do:

Listing 379: show_rumplestiltskin_constructor.adb

```
with P; use P;

procedure Show_Rumplestiltskin_Constructor is

   function Make_Rumplestiltskin return T is
   begin
       return Make_T (Name => "Rumplestiltskin");
   end Make_Rumplestiltskin;

   Rumplestiltskin_Is_My_Name : constant T :=
     Make_Rumplestiltskin;
begin
   null;
end Show_Rumplestiltskin_Constructor;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Constructor_
 ↪Functions_Limited_Types.Constructor_Functions
MD5: d8d9e9f22a0f2f034057fe97f75eacfe
```

It might help to understand the implementation model: In this case, Rumplestiltskin_Is_My_Name is allocated in the usual way (on the stack, presuming it is declared local to some subprogram). Its address is passed as an extra implicit parameter to Make_Rumplestiltskin, which then passes that same address on to Make_T, which then builds the aggregate in place at that address. Limited objects must never be copied! In this case, Make_T will initialize the Name component, and create the My_Task and My_Prot components, all directly in Rumplestiltskin_Is_My_Name.

Historically

Note that Rumplestiltskin_Is_My_Name is constant. Prior to Ada 2005, it was impossible to create a constant limited object, because there was no way to initialize it.

As we discussed before (page 1058), the (<>) on type T means that it has *unknown discriminants* from the point of view of the client. This is a trick that prevents clients from creating default-initialized objects (that is, X : T; is illegal). Thus clients must call Make_T

whenever an object of type T is created, giving package P full control over initialization of objects.

Ideally, limited and nonlimited types should be just the same, except for the essential difference: you can't copy limited objects (and there's no language-defined equality operator). By allowing functions and aggregates for limited types, we're very close to this goal. Some languages have a specific feature called *constructor*. In Ada, a *constructor* is just a function that creates a new object.

Historically

Prior to Ada 2005, *constructors* only worked for nonlimited types. For limited types, the only way to *construct* on declaration was via default values, which limits you to one constructor. And the only way to pass parameters to that construction was via discriminants.

Consider the following package:

Listing 380: aux.ads

```
with Ada.Containers.Ordered_Sets;

package Aux is
   generic
      with package OS is new
        Ada.Containers.Ordered_Sets (<>);
   function Gen_Singleton_Set
     (Element : OS.Element_Type)
      return OS.Set;
end Aux;
```

Listing 381: aux.adb

```
package body Aux is
   function Gen_Singleton_Set
     (Element : OS.Element_Type)
      return OS.Set
   is
   begin
      return S : OS.Set := OS.Empty_Set do
         S.Insert (Element);
      end return;
   end Gen_Singleton_Set;
end Aux;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Constructor_
↪Functions_Limited_Types.Constructor_Functions_2
MD5: b715ae504c49ed59b7fd5ead4cc7bbb4
```

Since Ada 2005, we can say:

Listing 382: show_set_decl.adb

```
with Ada.Containers.Ordered_Sets;
with Aux;

procedure Show_Set_Decl is

   package Integer_Sets is new
     Ada.Containers.Ordered_Sets
       (Element_Type => Integer);
   use Integer_Sets;

   function Singleton_Set is new
     Aux.Gen_Singleton_Set
       (OS => Integer_Sets);

   This_Set : Set := Empty_Set;
   That_Set : Set := Singleton_Set
                       (Element => 42);
begin
   null;
end Show_Set_Decl;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Constructor_
 ↪Functions_Limited_Types.Constructor_Functions_2
MD5: 443fc3390b0f3e5516d91c80f16bed3f
```

whether or not Set is limited. `This_Set : Set := Empty_Set;` seems clearer than:

Listing 383: show_set_decl.adb

```
with Ada.Containers.Ordered_Sets;

procedure Show_Set_Decl is

   package Integer_Sets is new
     Ada.Containers.Ordered_Sets
       (Element_Type => Integer);
   use Integer_Sets;

   This_Set : Set;
begin
   null;
end Show_Set_Decl;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Constructor_
 ↪Functions_Limited_Types.Constructor_Functions_2
MD5: e5b6c0e148cfdb1987ab3002ec1f53bd
```

which might mean "default-initialize to the empty set" or might mean "leave it uninitialized, and we'll initialize it in later".

28.3.11 Return objects

Extended return statements for limited types

> **Note**
>
> This section was originally written by Robert A. Duff and published as Gem #10: Limited Types in Ada 2005[306].

Previously, we discussed *extended return statements* (page 721). For most types, extended return statements are no big deal — it's just syntactic sugar. But for limited types, this syntax is almost essential:

Listing 384: task_construct_error.ads

```
package Task_Construct_Error is

   task type Task_Type (Discriminant : Integer);

   function Make_Task (Val : Integer)
                       return Task_Type;

end Task_Construct_Error;
```

Listing 385: task_construct_error.adb

```
package body Task_Construct_Error is

   task body Task_Type is
   begin
      null;
   end Task_Type;

   function Make_Task (Val : Integer)
                       return Task_Type
   is
      Result : Task_Type
                 (Discriminant => Val * 3);
   begin
      --  some statements...
      return Result; -- Illegal!
   end Make_Task;

end Task_Construct_Error;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Extended_Return_
 ↪Statements_Limited_Types.Extended_Return_Limited_Error
MD5: f55b1c367d2931ece4d352d209fe6b3b
```

The return statement here is illegal, because `Result` is local to `Make_Task`, and returning it would involve a copy, which makes no sense (which is why task types are limited). Since Ada 2005, we can write constructor functions for task types:

Listing 386: task_construct.ads

```
package Task_Construct is

   task type Task_Type (Discriminant : Integer);
```

(continues on next page)

[306] https://www.adacore.com/gems/ada-gem-10

(continued from previous page)

```
4
5     function Make_Task (Val : Integer)
6                         return Task_Type;
7
8  end Task_Construct;
```

Listing 387: task_construct.adb

```
1  package body Task_Construct is
2
3     task body Task_Type is
4     begin
5        null;
6     end Task_Type;
7
8     function Make_Task (Val : Integer)
9                         return Task_Type is
10    begin
11       return Result : Task_Type
12                        (Discriminant => Val * 3)
13       do
14          --  some statements...
15          null;
16       end return;
17    end Make_Task;
18
19 end Task_Construct;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Extended_Return_
 ↪Statements_Limited_Types.Extended_Return_Limited
MD5: c91a24f09a76aef1c25d1a55bcbee910
```

If we call it like this:

Listing 388: show_task_construct.adb

```
1  with Task_Construct; use Task_Construct;
2
3  procedure Show_Task_Construct is
4     My_Task : Task_Type := Make_Task (Val => 42);
5  begin
6     null;
7  end Show_Task_Construct;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Extended_Return_
 ↪Statements_Limited_Types.Extended_Return_Limited
MD5: 01809b031a844c829f2ead253864ca75
```

`Result` is created *in place* in `My_Task`. `Result` is temporarily considered local to `Make_Task` during the `-- some statements` part, but as soon as `Make_Task` returns, the task becomes more global. `Result` and `My_Task` really are one and the same object.

When returning a task from a function, it is activated after the function returns. The `-- some statements` part had better not try to call one of the task's entries, because that would deadlock. That is, the entry call would wait until the task reaches an accept statement, which will never happen, because the task will never be activated.

Initialization and function return

As mentioned in the previous section, the object of limited type returned by the initialization function is built *in place*. In other words, the return object is built in the object that is the target of the assignment statement.

For example, we can see this when looking at the address of the object *returned* by the `Init` function, which we call to initialize the limited type `Simple_Rec`:

Listing 389: limited_types.ads

```
package Limited_Types is

   type Integer_Access is access Integer;

   type Simple_Rec is limited private;

   function Init (I : Integer) return Simple_Rec;

private

   type Simple_Rec is limited record
      V : Integer_Access;
   end record;

end Limited_Types;
```

Listing 390: limited_types.adb

```
with Ada.Text_IO;           use Ada.Text_IO;
with System;
with System.Address_Image;

package body Limited_Types is

   function Init (I : Integer) return Simple_Rec
   is
   begin
      return E : Simple_Rec do
         E.V := new Integer'(I);

         Put_Line ("E'Address (Init):  "
                   & System.Address_Image
                       (E'Address));
      end return;
   end Init;

end Limited_Types;
```

Listing 391: show_limited_init.adb

```
with Ada.Text_IO;           use Ada.Text_IO;
with System;
with System.Address_Image;

with Limited_Types;         use Limited_Types;

procedure Show_Limited_Init is
begin
   declare
      A : Simple_Rec := Init (0);
   begin
```

(continues on next page)

(continued from previous page)

```
12       Put_Line ("A'Address (local): "
13                 & System.Address_Image
14                     (A'Address));
15    end;
16    Put_Line ("----");
17
18    declare
19       B : Simple_Rec := Init (0);
20    begin
21       Put_Line ("B'Address (local): "
22                 & System.Address_Image
23                     (B'Address));
24    end;
25 end Show_Limited_Init;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Extended_Return_
 ↪Statements_Limited_Types.Initialization_Return_Do
MD5: 67235f804206e07fa4eba3a45cc1096f
```

Runtime output

```
E'Address (Init):  00007FFE104B4EF8
A'Address (local): 00007FFE104B4EF8
----
E'Address (Init):  00007FFE104B4EF0
B'Address (local): 00007FFE104B4EF0
```

When running this code example and comparing the address of the object E in the `Init` function and the object that is being initialized in the `Show_Limited_Init` procedure, we see that the return object E (of the `Init` function) and the local object in the `Show_Limited_Init` procedure are the same object.

Important

When we use nonlimited types, we're actually copying the returned object — which was locally created in the function — to the object that we're assigning the function to.

For example, let's modify the previous code and make `Simple_Rec` nonlimited:

Listing 392: non_limited_types.ads

```
1  package Non_Limited_Types is
2
3     type Integer_Access is access Integer;
4
5     type Simple_Rec is private;
6
7     function Init (I : Integer)
8                    return Simple_Rec;
9
10 private
11
12    type Simple_Rec is record
13       V : Integer_Access;
14    end record;
15
16 end Non_Limited_Types;
```

Listing 393: non_limited_types.adb

```
with Ada.Text_IO;           use Ada.Text_IO;
with System;
with System.Address_Image;

package body Non_Limited_Types is

   function Init (I : Integer)
                  return Simple_Rec is
   begin
      return E : Simple_Rec do
         E.V := new Integer'(I);

         Put_Line ("E'Address (Init):  "
                   & System.Address_Image
                       (E'Address));
      end return;
   end Init;

end Non_Limited_Types;
```

Listing 394: show_non_limited_init_by_copy.adb

```
with Ada.Text_IO;           use Ada.Text_IO;
with System;
with System.Address_Image;

with Non_Limited_Types;
use  Non_Limited_Types;

procedure Show_Non_Limited_Init_By_Copy is
   A, B : Simple_Rec;
begin
   declare
      A : Simple_Rec := Init (0);
   begin
      Put_Line ("A'Address (local): "
                & System.Address_Image
                    (A'Address));
   end;
   Put_Line ("----");

   declare
      B : Simple_Rec := Init (0);
   begin
      Put_Line ("B'Address (local): "
                & System.Address_Image
                    (B'Address));
   end;
end Show_Non_Limited_Init_By_Copy;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_
 ↪Types.Extended_Return_Statements_Limited_Types.
 ↪Initialization_Return_Copy
MD5: 6e224b64b90dabdf5064c70364fa80cb
```

Runtime output

```
E'Address (Init):  00007FFF9072E2A0
A'Address (local): 00007FFF9072E398
----
E'Address (Init):  00007FFF9072E2A0
B'Address (local): 00007FFF9072E390
```

In this case, we see that the local object E in the `Init` function is not the same as the object it's being assigned to in the `Show_Non_Limited_Init_By_Copy` procedure. In fact, E is being copied to A and B.

28.3.12 Building objects from constructors

Note

This section was originally written by Robert A. Duff and published as Gem #11: Limited Types in Ada 2005[307].

We've earlier seen examples of constructor functions for limited types similar to this:

Listing 395: p.ads

```
with Ada.Strings.Unbounded;
use  Ada.Strings.Unbounded;

package P is
   task type Some_Task_Type;

   protected type Some_Protected_Type is
      --  dummy type
   end Some_Protected_Type;

   type T is limited private;
   function Make_T (Name : String) return T;
   --       ^^^^^^
   --  constructor function
private
   type T is limited
      record
         Name    : Unbounded_String;
         My_Task : Some_Task_Type;
         My_Prot : Some_Protected_Type;
      end record;
end P;
```

Listing 396: p.adb

```
package body P is

   task body Some_Task_Type is
   begin
      null;
   end Some_Task_Type;

   protected body Some_Protected_Type is
   end Some_Protected_Type;

   function Make_T (Name : String) return T is
   begin
      return (Name   =>
                 To_Unbounded_String (Name),
              others => <>);
   end Make_T;
```

(continues on next page)

[307] https://www.adacore.com/gems/ada-gem-11

(continued from previous page)

```
17
18 end P;
```

Listing 397: p-aux.ads

```
1 package P.Aux is
2    function Make_Rumplestiltskin return T;
3 end P.Aux;
```

Listing 398: p-aux.adb

```
1 package body P.Aux is
2
3    function Make_Rumplestiltskin return T is
4    begin
5       return Make_T (Name => "Rumplestiltskin");
6    end Make_Rumplestiltskin;
7
8 end P.Aux;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Building_Objects_
 ↪From_Constructors.Building_Objs_From_Constructors
MD5: 1956721292a82899d244afcd10ff63ed
```

It is useful to consider the various contexts in which these functions may be called. We've already seen things like:

Listing 399: show_rumplestiltskin_constructor.adb

```
1 with P;     use P;
2 with P.Aux; use P.Aux;
3
4 procedure Show_Rumplestiltskin_Constructor is
5    Rumplestiltskin_Is_My_Name : constant T :=
6      Make_Rumplestiltskin;
7 begin
8    null;
9 end Show_Rumplestiltskin_Constructor;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Building_Objects_
 ↪From_Constructors.Building_Objs_From_Constructors
MD5: 2fe193516df6452eccece8132660f8e5
```

in which case the limited object is built directly in a standalone object. This object will be finalized whenever the surrounding scope is left.

We can also do:

Listing 400: show_parameter_constructor.adb

```
1 with P;     use P;
2 with P.Aux; use P.Aux;
3
4 procedure Show_Parameter_Constructor is
5    procedure Do_Something (X : T) is null;
6 begin
```

(continues on next page)

(continued from previous page)

```
   Do_Something (X => Make_Rumplestiltskin);
end Show_Parameter_Constructor;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Building_Objects_
 ↪From_Constructors.Building_Objs_From_Constructors
MD5: 61ccaefb4b7cfc42c065aa15543fc13b
```

Here, the result of the function is built directly in the formal parameter X of `Do_Something`. X will be finalized as soon as we return from `Do_Something`.

We can allocate initialized objects on the heap:

Listing 401: show_heap_constructor.adb

```
with P;     use P;
with P.Aux; use P.Aux;

procedure Show_Heap_Constructor is

   type T_Ref is access all T;

   Global : T_Ref;

   procedure Heap_Alloc is
      Local : T_Ref;
      To_Global : Boolean := True;
   begin
      Local := new T'(Make_Rumplestiltskin);
      if To_Global then
         Global := Local;
      end if;
   end Heap_Alloc;

begin
   null;
end Show_Heap_Constructor;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Building_Objects_
 ↪From_Constructors.Building_Objs_From_Constructors
MD5: 8eb794884f1dfbdbedf1bc4369f45cf8
```

The result of the function is built directly in the heap-allocated object, which will be finalized when the scope of `T_Ref` is left (long after `Heap_Alloc` returns).

We can create another limited type with a component of type T, and use an aggregate:

Listing 402: show_outer_type.adb

```
with P;     use P;
with P.Aux; use P.Aux;

procedure Show_Outer_Type is

   type Outer_Type is limited record
      This : T;
      That : T;
   end record;

```

(continues on next page)

(continued from previous page)

```
   Outer_Obj : Outer_Type :=
                (This => Make_Rumplestiltskin,
                 That => Make_T (Name => ""));

begin
   null;
end Show_Outer_Type;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Building_Objects_
 ↪From_Constructors.Building_Objs_From_Constructors
MD5: 00817649406492b79977d67eb0fd3955
```

As usual, the function results are built in place, directly in `Outer_Obj.This` and `Outer_Obj.That`, with no copying involved.

The one case where we *cannot* call such constructor functions is in an assignment statement:

Listing 403: show_illegal_constructor.adb

```
with P;     use P;
with P.Aux; use P.Aux;

procedure Show_Illegal_Constructor is
   Rumplestiltskin_Is_My_Name : T;
begin
   Rumplestiltskin_Is_My_Name :=
     Make_T (Name => "");  --  Illegal!
end Show_Illegal_Constructor;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Building_Objects_
 ↪From_Constructors.Building_Objs_From_Constructors
MD5: f7b0c78e9fbe2e104b82dfff25ac3e3a
```

Build output

```
show_illegal_constructor.adb:7:04: error: left hand of assignment must not be␣
 ↪limited type
gprbuild: *** compilation phase failed
```

which is illegal because assignment statements involve copying. Likewise, we can't copy a limited object into some other object:

Listing 404: show_illegal_constructor.adb

```
with P;     use P;
with P.Aux; use P.Aux;

procedure Show_Illegal_Constructor is
   Rumplestiltskin_Is_My_Name : constant T :=
     Make_T (Name => "");
   Other : T :=
     Rumplestiltskin_Is_My_Name; -- Illegal!
begin
   null;
end Show_Illegal_Constructor;
```

28.3.13 Limited types as parameter

Previously, we saw that *parameters can be passed by copy or by reference* (page 723). Also, we discussed the concept of by-copy and by-reference types. *Explicitly limited types* (page 1041) are by-reference types. Consequently, parameters of these types are always passed by reference.

For further reading...

As an example of the importance of this rule, consider the case of a lock (as an abstract data type). If such a lock object were passed by copy, the `Acquire` and `Release` operations would be working on copies of this object, not on the original one. This would lead to timing-dependent bugs.

Let's reuse an example of an explicitly limited type:

Listing 405: simple_recs.ads

```
1  package Simple_Recs is
2
3     type Rec is limited record
4        I : Integer;
5     end record;
6
7  end Simple_Recs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Limited_Types_
 ↪Parameters.Explicitly_Limited_Types
MD5: de73a20140628420830ed9fe0b2dedb5
```

In this example, Rec is a by-reference type because the type declaration is an explicit limited record. Therefore, the parameter R of the `Proc` procedure is passed by reference.

We can run the `Test` application below and compare the address of the R object from `Test` to the address of the R parameter of `Proc` to determine whether both R s refer to the same object or not:

Listing 406: simple_recs.ads

```
1  with System;
2
3  package Simple_Recs is
4
5     type Rec is limited record
6        I : Integer;
7     end record;
8
9     procedure Proc (R : in out Rec;
10                    A :    out System.Address);
11
12 end Simple_Recs;
```

Listing 407: simple_recs.adb

```
1  package body Simple_Recs is
2
3     procedure Proc (R : in out Rec;
4                     A :    out System.Address) is
```

(continues on next page)

(continued from previous page)

```
   begin
      R.I := 0;
      A   := R'Address;
   end Proc;

end Simple_Recs;
```

Listing 408: test.adb

```
with Ada.Text_IO;           use Ada.Text_IO;
with System;                use System;
with System.Address_Image;
with Simple_Recs;           use Simple_Recs;

procedure Test is
   R : Rec;

   AR_Proc, AR_Test : System.Address;
begin
   AR_Proc := R'Address;

   Proc (R, AR_Test);

   Put_Line ("R'Address (Proc): "
             & System.Address_Image (AR_Proc));
   Put_Line ("R'Address (Test): "
             & System.Address_Image (AR_Test));

   if AR_Proc = AR_Test then
      Put_Line ("R was passed by reference.");
   else
      Put_Line ("R was passed by copy.");
   end if;

end Test;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Limited_Types.Limited_Types_
 ↪Parameters.Explicitly_Limited_Types
MD5: d4fe2bb47d2223ef013d22aa305403e5
```

Runtime output

```
R'Address (Proc): 00007FFD1D79963C
R'Address (Test): 00007FFD1D79963C
R was passed by reference.
```

When running the Test application, we confirm that R was passed by reference. Note, however, that the fact that R was passed by reference doesn't automatically imply that Rec is a by-reference type: the type could have been ambiguous, and the compiler could have just decided to pass the parameter by reference in this case.

Therefore, we have to rely on the rules specified in the Ada Reference Manual:

1. If a limited type is explicitly limited, a parameter of this type is a by-reference type.

   - The rule applies to all kinds of explicitly limited types. For example, consider private limited types where the type is declared limited in the private type's completion (in the package's private part): a parameter of this type is a by-reference type.

2. If a limited type is not *explicitly* limited, a parameter of this type is neither a by-copy nor a by-reference type.
    - In this case, the decision whether the parameter is passed by reference or by copy is made by the compiler.

In the Ada Reference Manual

- 6.2 Formal Parameter Modes[308]
- 6.4.1 Parameter Associations[309]
- 7.5 Limited Types[310]

28.4 Controlled Types

28.4.1 Overview

In this section, we introduce the concept of controlled types. We start with a review of lifetime of objects and discuss how controlled types allow us to control the initialization, post-copy (e.g. assignment) adjustment and finalization of objects.

Relevant topics

- Assignment and Finalization[311]

Lifetime of objects

We already talked about the lifetime of objects[312] previously in the context of *access types* (page 895). Again, we assume you understand the concept. In any case, let's quickly review the typical lifetime of an object:

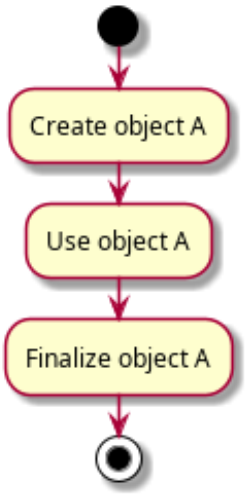

In simple terms, an object A is first created before we can make use of it. When object A is

[308] http://www.ada-auth.org/standards/22rm/html/RM-6-2.html
[309] http://www.ada-auth.org/standards/22rm/html/RM-6-4-1.html
[310] http://www.ada-auth.org/standards/22rm/html/RM-7-5.html
[311] http://www.ada-auth.org/standards/22rm/html/RM-7-6.html
[312] https://en.wikipedia.org/wiki/Variable_(computer_science)#Scope_and_extent

about to get out of scope, it is finalized. Note that finalization might not entail any actual code execution — but it often does.

Let's analyze the lifetime of object A in a procedure P:

```
procedure P is
   A : T;
begin
   P2 (A);
end P;
```

We could visualize the lifetime as follows:

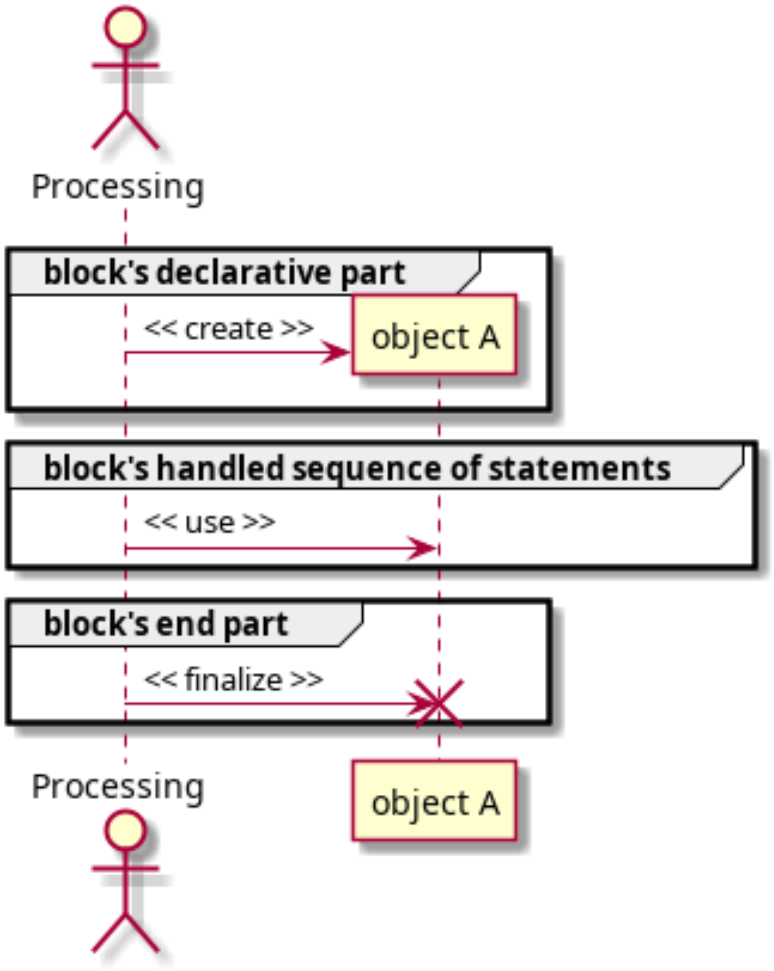

In other words, object A is created in the declarative part of P and then it's used in P's sequence of statements. Finally, A is finalized when P ends.

Initialization of objects

Typically, right after an object A is created, it is still uninitialized. Therefore, we have to explicitly initialize it with a meaningful initial value — or with the value returned by a function call, for example. Similarly, when an object A is about to get out of scope, it is going to be finalized (i.e. destroyed) and its contents are then lost forever.

As we know, for some standard Ada types, objects are initialized by default. For example, objects of access types are initialized by default to `null`. Likewise, we can declare *types with default initial value* (page 337):

Listing 409: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is
   type Int is new Integer
     with Default_Value => 42;

   I  : Int;
   AI : access Int;
begin
   Put_Line ("I : "
             & I'Image);
   Put_Line ("AI : "
             & AI'Image);
end Main;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Controlled_Types.Overview.
 ↪Default_Initialization
MD5: 14a5929f0635f0f7843c883bab9021d8
```

Build output

```
main.adb:8:04: warning: variable "AI" is read but never assigned [-gnatwv]
```

Runtime output

```
I :  42
AI : null
```

In this case, we can visualize the lifetime of those objects as follows:

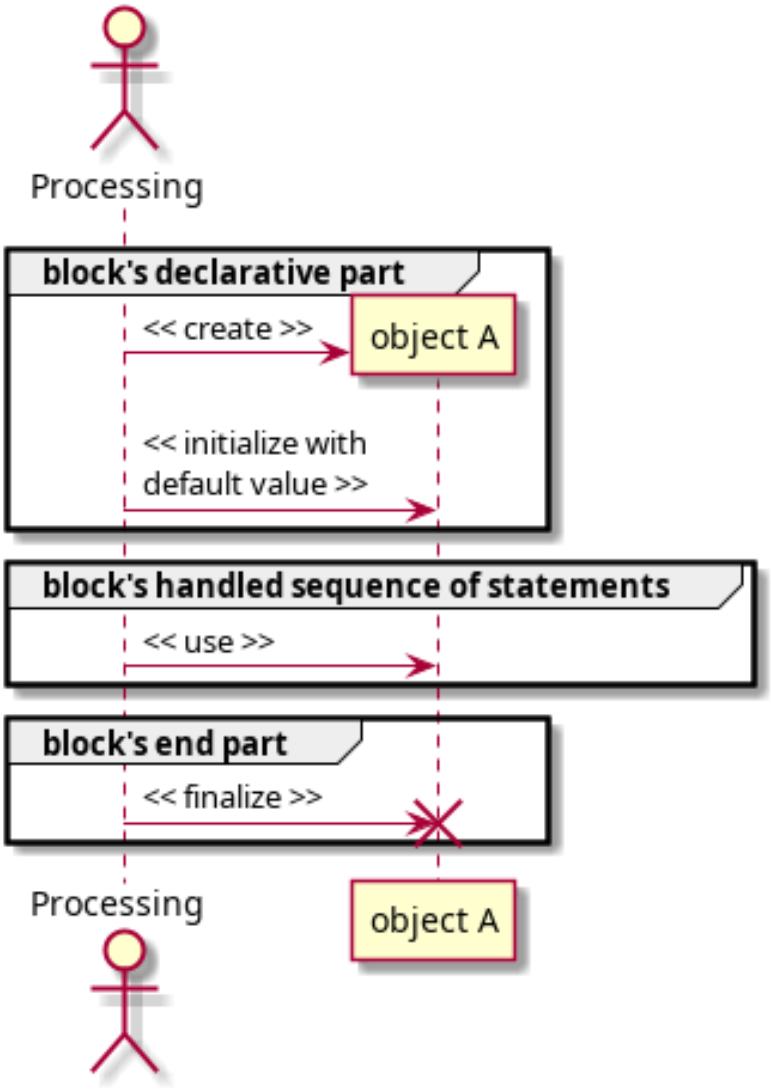

Even though these default initialization methods provide some control over the objects, they might not be enough in certain situations. Also, we don't have any means to perform useful operations right before an object gets out of scope.

For further reading...

In general, record types have a very good default initialization capability. They're the most common completion for private types, so the facility is often used. In this sense, default initialization is the first choice, as it's guaranteed and requires nothing of the client. In addition, it's cheap at run-time compared to controlled types.

Controlled objects

Controlled objects allow us to better control the initialization and finalization of an object. For any controlled object `A`, an `Initialize (A)` procedure is called right *after* the object is created, and a `Finalize (A)` procedure is called right *before* the object is actually finalized.

We can visualize the lifetime of controlled objects as follows:

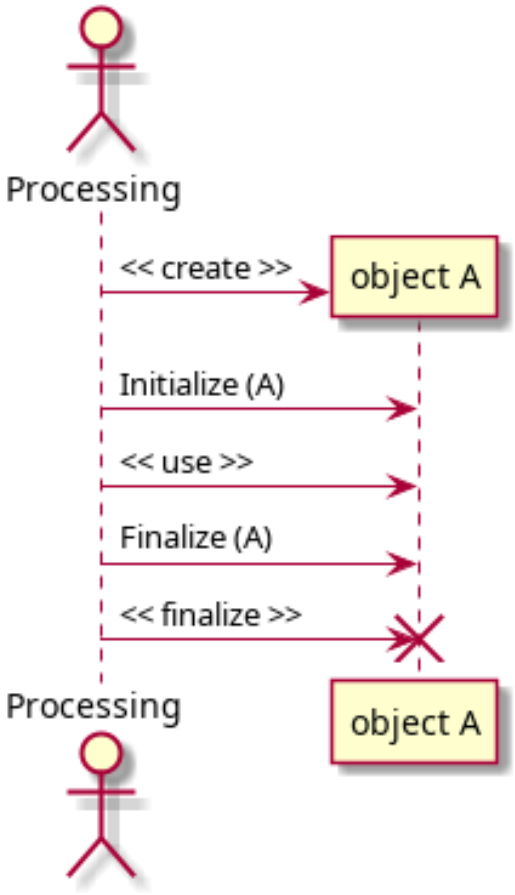

In the context of a block statement, the lifetime becomes:

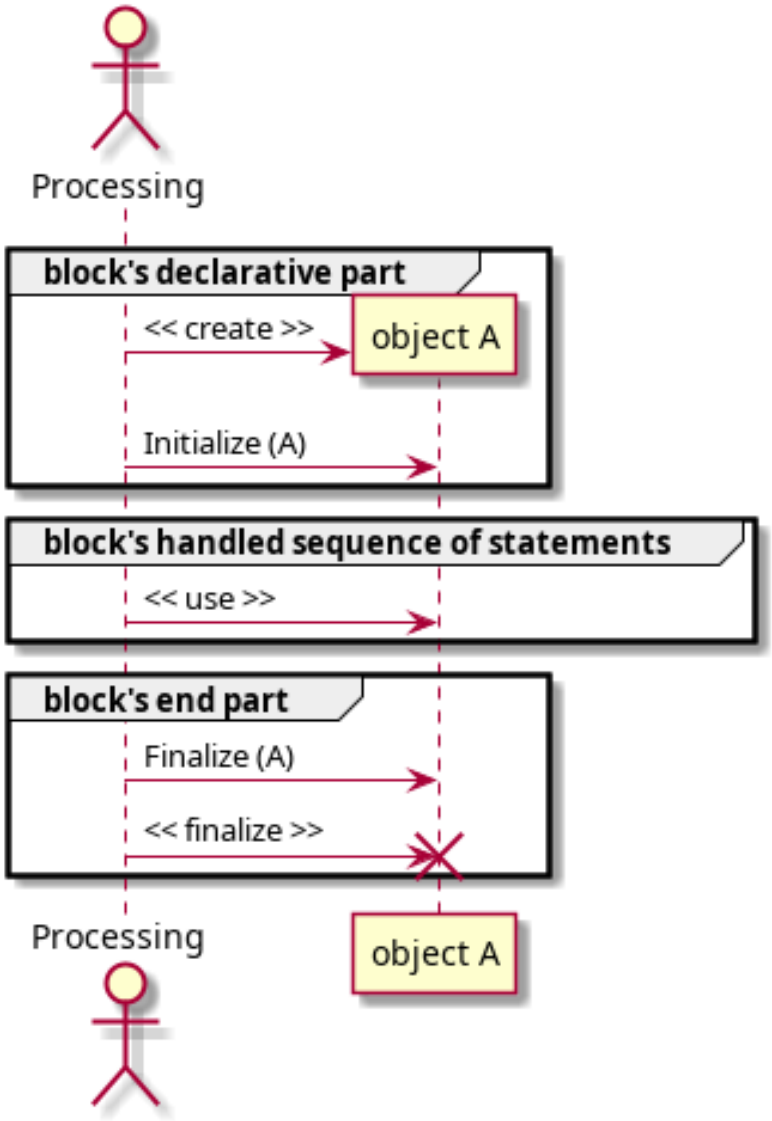

Let's look at a simple example:

Listing 410: simple_controlled_types.ads

```
with Ada.Finalization;

package Simple_Controlled_Types is

   type T is tagged private;

   procedure Dummy (E : T);

private

   type T is new
     Ada.Finalization.Controlled
       with null record;

   overriding
   procedure Initialize (E : in out T);

   overriding
```

(continues on next page)

(continued from previous page)

```
   procedure Finalize (E : in out T);

end Simple_Controlled_Types;
```

Listing 411: simple_controlled_types.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Simple_Controlled_Types is

   procedure Dummy (E : T) is
   begin
      Put_Line ("(Dummy...)");
   end Dummy;

   procedure Initialize (E : in out T) is
   begin
      Put_Line ("Initialize...");
   end Initialize;

   procedure Finalize (E : in out T) is
   begin
      Put_Line ("Finalize...");
   end Finalize;

end Simple_Controlled_Types;
```

Listing 412: show_controlled_types.adb

```
with Simple_Controlled_Types;
use  Simple_Controlled_Types;

procedure Show_Controlled_Types is
   A : T;
   --
   --  This declaration roughly
   --  corresponds to:
   --
   --     A : T;
   --  begin
   --     Initialize (A);
   --
begin
   Dummy (A);

   --  When A is about to get out of
   --  scope:
   --
   --  Finalize (A);
   --
end Show_Controlled_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Controlled_Types.Overview.Simple_
 ↪Example
MD5: 24f95418bb8c439648ab9dba9f0c953a
```

Runtime output

```
Initialize...
(Dummy...)
Finalize...
```

When we run this application, we see the user messages indicating the calls to `Initialize` and `Finalize`.

For further reading...

Note that if a controlled object isn't used in the application, the compiler might optimize it out. In this case, procedures `Initialize` and `Finalize` won't be called for this object, as it doesn't actually exist. You can see this effect by replacing the call to `Dummy (A)` in the `Show_Controlled_Types` procedure by a null statement (`null`).

Adjustment of controlled objects

An assignment is a full bit-wise copy of the entire right-hand side to the entire left-hand side. When copying controlled objects, however, we might need to adjust the target object. This is made possible by overriding the `Adjust` procedure, which is called right after the copy to an object has been performed. (As we'll see later on, *limited controlled types* (page 1089) do not offer an `Adjust` procedure.)

The deep copy[313] of objects is a typical example where adjustments are necessary. When we assign an object B to an object A, we're essentially doing a shallow copy[314]. If we have references to other objects in the source object B, those references will be copied as well, so both target A and source B will be referring to the same objects. When performing a deep copy, however, we want the information from the dereferenced objects to be copied, not the references themselves. Therefore, we have to first allocate new objects for the target object A and copy the information from the original references — the ones we copied from the source object B — to the new objects. This kind of processing can be performed in the `Adjust` procedure.

As an example, let's extend the previous code example and override the `Adjust` procedure:

Listing 413: simple_controlled_types.ads

```
1  with Ada.Finalization;
2
3  package Simple_Controlled_Types is
4
5     type T is tagged private;
6
7     procedure Dummy (E : T);
8
9  private
10
11    type T is new
12      Ada.Finalization.Controlled
13        with null record;
14
15    overriding
16    procedure Initialize (E : in out T);
17
18    overriding
19    procedure Adjust (E : in out T);
20
```

(continues on next page)

[313] https://en.wikipedia.org/wiki/Object_copying#Deep_copy
[314] https://en.wikipedia.org/wiki/Object_copying#Shallow_copy

(continued from previous page)

```
   overriding
   procedure Finalize (E : in out T);

end Simple_Controlled_Types;
```

Listing 414: simple_controlled_types.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Simple_Controlled_Types is

   procedure Dummy (E : T) is
   begin
      Put_Line ("(Dummy...)");
   end Dummy;

   procedure Initialize (E : in out T) is
   begin
      Put_Line ("Initialize...");
   end Initialize;

   procedure Adjust (E : in out T) is
   begin
      Put_Line ("Adjust...");
   end Adjust;

   procedure Finalize (E : in out T) is
   begin
      Put_Line ("Finalize...");
   end Finalize;

end Simple_Controlled_Types;
```

Listing 415: show_controlled_types.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Simple_Controlled_Types;
use  Simple_Controlled_Types;

procedure Show_Controlled_Types is
   A, B : T;
begin
   Put_Line ("A := B");
   A := B;

   Dummy (A);
   Dummy (B);
end Show_Controlled_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Controlled_Types.Overview.Simple_
 ↪Example_2
MD5: 4f4575dab6c9b384ea0cbd8bf9701850
```

Runtime output

```
Initialize...
Initialize...
```

(continues on next page)

(continued from previous page)

```
A := B
Finalize...
Adjust...
(Dummy...)
(Dummy...)
Finalize...
Finalize...
```

When running this application, we see that the `Adjust` procedure is called for object `A` — right after `B` is copied to `A` as part of the `A := B` assignment. We discuss more about this procedure *later on* (page 1103).

Limited controlled types

Ada offers controlled types in two flavors: nonlimited controlled types — such as the ones we've seen so far — and limited controlled types. Both types are declared in the `Ada.Finalization` package.

The only difference between these types is that limited controlled types don't have an `Adjust` procedure that could be overridden, as limited types *do not permit direct copies of objects to be made via assignments* (page 1028). (Obviously, both controlled and limited controlled types provide `Initialize` and `Finalize` procedures.)

The following table summarizes the information:

Type	Name	Initialize	Finalize	Adjust
Nonlimited Controlled	**`Controlled`**	Yes	Yes	Yes
Limited controlled	`Limited_Controlled`	Yes	Yes	Not available

Simple Example with ID

Although the previous code examples indicated that `Initialize`, `Finalize` and `Adjust` are called as we expect for controlled objects, they didn't show us exactly how those objects are actually handled. In this section, we discuss this by analyzing a code example that assigns a unique ID to each controlled object.

Let's start with the complete code example:

Listing 416: simple_controlled_types.ads

```
1  with Ada.Finalization;
2
3  package Simple_Controlled_Types is
4
5     type T is tagged private;
6
7     procedure Show (E    : T;
8                     Name : String);
9
10 private
11
12    protected Id_Gen is
13       procedure New_Id (Id_Out : out Positive);
14    private
15       Id : Natural := 0;
16    end Id_Gen;
17
18    type T is new
```

(continues on next page)

(continued from previous page)

```
     Ada.Finalization.Controlled with
   record
      Id : Positive;
   end record;

   overriding
   procedure Initialize (E : in out T);

   overriding
   procedure Adjust (E : in out T);

   overriding
   procedure Finalize (E : in out T);

end Simple_Controlled_Types;
```

Listing 417: simple_controlled_types.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Simple_Controlled_Types is

   protected body Id_Gen is

      procedure New_Id (Id_Out : out Positive) is
      begin
         Id := Id + 1;
         Id_Out := Id;
      end New_Id;

   end Id_Gen;

   procedure Initialize (E : in out T) is
   begin
      Id_Gen.New_Id (E.Id);
      Put_Line ("Initialize: ID => "
                & E.Id'Image);
   end Initialize;

   procedure Adjust (E : in out T) is
      Prev_Id : constant Positive := E.Id;
   begin
      Id_Gen.New_Id (E.Id);
      Put_Line ("Adjust:     ID => "
                & E.Id'Image);
      Put_Line ("    (Previous ID => "
                & Prev_Id'Image
                & ")");
   end Adjust;

   procedure Finalize (E : in out T) is
   begin
      Put_Line ("Finalize:   ID => "
                & E.Id'Image);
   end Finalize;

   procedure Show (E    : T;
                   Name : String) is
   begin
      Put_Line ("Obj. " & Name
                & ": ID => "
```

(continues on next page)

(continued from previous page)

```
                & E.Id'Image);
   end Show;

end Simple_Controlled_Types;
```

Listing 418: show_controlled_types.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Simple_Controlled_Types;
use  Simple_Controlled_Types;

procedure Show_Controlled_Types is
   A, B : T;
   --
   --  Declaration corresponds to:
   --
   --  declare
   --     A, B : T;
   --  begin
   --     Initialize (A);
   --     Initialize (B);
   --  end;
begin
   Put_Line ("--------");
   Show (A, "A");
   Show (B, "B");

   Put_Line ("--------");
   Put_Line ("A := B;");

   A := B;
   --  Statement corresponds to:
   --
   --  Finalize (A);
   --  A := B;
   --  Adjust (A);

   Put_Line ("--------");
   Show (A, "A");
   Show (B, "B");
   Put_Line ("--------");

   --  When A and B get out of scope::
   --
   --  Finalize (A);
   --  Finalize (B);
   --
end Show_Controlled_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Controlled_Types.Overview.Simple_
 ↪Example_With_Id
MD5: f7b490041616a1b309184086ceef1b24
```

Runtime output

```
Initialize: ID =>  1
Initialize: ID =>  2
--------
```

(continues on next page)

(continued from previous page)

```
Obj. A: ID =>  1
Obj. B: ID =>  2
--------
A := B;
Finalize:   ID =>  1
Adjust:     ID =>  3
    (Previous ID =>  2)
--------
Obj. A: ID =>  3
Obj. B: ID =>  2
--------
Finalize:   ID =>  2
Finalize:   ID =>  3
```

In contrast to the previous versions of the `Simple_Controlled_Types` package, type `T` now has an `Id` component. Moreover, we use a protected object `Id_Gen` that provides us with a unique ID to keep track of each controlled object. Basically, we assign an ID to each controlled object (right after it is created) via the call to `Initialize`. Similarly, this ID is updated via the calls to `Adjust`. Besides, we now have a `Show` procedure that displays the ID of a controlled object.

When running the application, we see that the calls to `Initialize`, `Adjust` and `Finalize` happen as expected. In addition, we see the objects' ID, which we will now analyze in order to understand how each object is actually handled.

First, we see the two calls to `Initialize` for objects `A` and `B`. Object `A`'s ID is 1, and object `B`'s ID is 2. This is later confirmed by the calls to `Show`.

The `A := B` assignment triggers two procedure calls: a call to `Finalize (A)` and a call to `Adjust (A)`. In fact, this assignment can be described as follows:

1. `Finalize (A)` is called before the actual copy;
2. `B`'s data is copied to object `A`;
3. `Adjust (A)` is called after that copy.

We can confirm this via the object ID: the object we handle in the call to `Finalize (A)` has an ID of 1, and the object we handle in the call to `Adjust (A)` has an ID of 2 (which originates from the copy of `B` to `A`) and is later changed (*adjusted*) to 3. Again, we can verify the correct IDs by looking at the output of the calls to `Show`.

Note that the call to `Finalize (A)` (before the copy of `B`'s data) indicates that the previous version of object `A` is being finalized, i.e. it's as though the original object `A` is going to be destroyed and its contents are going to be lost. Actually, the object's contents are just overwritten, but the call to `Finalize` allows us to make proper adjustments to the object before the previous information is lost.

Finally, the new version of object `A` (the one whose ID is 3) and object `B` are finalized via the calls to `Finalize (A)` and `Finalize (B)` before the `Show_Controlled_Types` procedure ends.

28.4.2 Initialization

In this section, we cover some details about the initialization of controlled types. Most of those details are related to the initialization order. In principle, as stated in the Ada Reference Manual, "`Initialize` and other initialization operations are done in an arbitrary order," except in the situations that we describe later on.

Relevant topics

- Assignment and Finalization[315]

Subcomponents

We've seen before that default initialization is a way of controlling the initialization of arbitrary types. In the case of controlled types, the default initialization of its subcomponents always takes places before the call to `Initialize`.

Similarly, a controlled type might have subcomponents of controlled types. These subcomponents are initialized by a call to the `Initialize` procedure of each of those controlled types.

We can visualize the lifetime as follows:

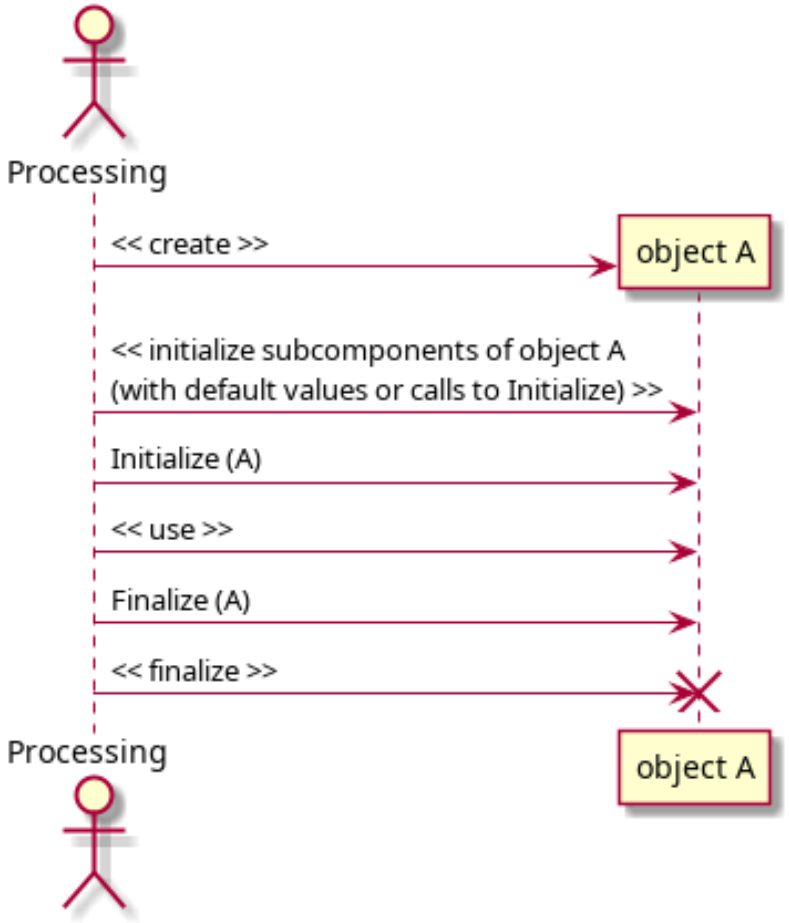

In order to see this effect, let's start by implementing two controlled types: Sub_1 and Sub_2:

Listing 419: subs.ads

```
1  with Ada.Finalization;
2
3  package Subs is
4
5     type Sub_1 is tagged private;
6
```

(continues on next page)

[315] http://www.ada-auth.org/standards/22rm/html/RM-7-6.html

(continued from previous page)

```
   type Sub_2 is tagged private;

private

   type Sub_1 is new
     Ada.Finalization.Controlled
       with null record;

   overriding
   procedure Initialize (E : in out Sub_1);

   type Sub_2 is new
     Ada.Finalization.Controlled
       with null record;

   overriding
   procedure Initialize (E : in out Sub_2);

end Subs;
```

Listing 420: subs.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Subs is

   procedure Initialize (E : in out Sub_1) is
   begin
      Put_Line ("Initialize: Sub_1...");
   end Initialize;

   procedure Initialize (E : in out Sub_2) is
   begin
      Put_Line ("Initialize: Sub_2...");
   end Initialize;

end Subs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Controlled_Types.Initialization.
 ↪Controlled_Initialization
MD5: f6a7676e82294a62965157d2ffd4ae3b
```

Now, let's use those controlled types as components of a type T. In addition, let's declare an integer component I with default initialization. This is how the complete code looks like:

Listing 421: simple_controlled_types.ads

```
with Ada.Finalization;

with Subs; use Subs;

package Simple_Controlled_Types is

   type T is tagged private;

   procedure Dummy (E : T);

private

```

(continues on next page)

(continued from previous page)

```
   function Default_Init return Integer;

   type T is new
     Ada.Finalization.Controlled with
   record
      S1 : Sub_1;
      S2 : Sub_2;
      I  : Integer := Default_Init;
   end record;

   overriding
   procedure Initialize (E : in out T);

end Simple_Controlled_Types;
```

Listing 422: simple_controlled_types.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Simple_Controlled_Types is

   function Default_Init return Integer is
   begin
      Put_Line ("Default_Init: Integer...");
      return 42;
   end Default_Init;

   procedure Dummy (E : T) is
   begin
      Put_Line ("(Dummy: T...)");
   end Dummy;

   procedure Initialize (E : in out T) is
   begin
      Put_Line ("Initialize: T...");
   end Initialize;

end Simple_Controlled_Types;
```

Listing 423: show_controlled_types.adb

```
with Simple_Controlled_Types;
use  Simple_Controlled_Types;

procedure Show_Controlled_Types is
   A : T;
begin
   Dummy (A);
end Show_Controlled_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Controlled_Types.Initialization.
 ↪Controlled_Initialization
MD5: 39d0efa76c056ac8190573c86f17c890
```

Runtime output

```
Initialize: Sub_1...
Initialize: Sub_2...
```

(continues on next page)

(continued from previous page)

```
Default_Init: Integer...
Initialize: T...
(Dummy: T...)
```

When we run this application, we see that the Sub_1 and Sub_2 components are initialized by calls to their respective `Initialize` procedures, and the `I` component is initialized with its default value (via a call to the `Default_Init` function). Finally, after all subcomponents of type T have been initialized, the `Initialize` procedure is called for the type T itself.

This diagram shows the initialization sequence:

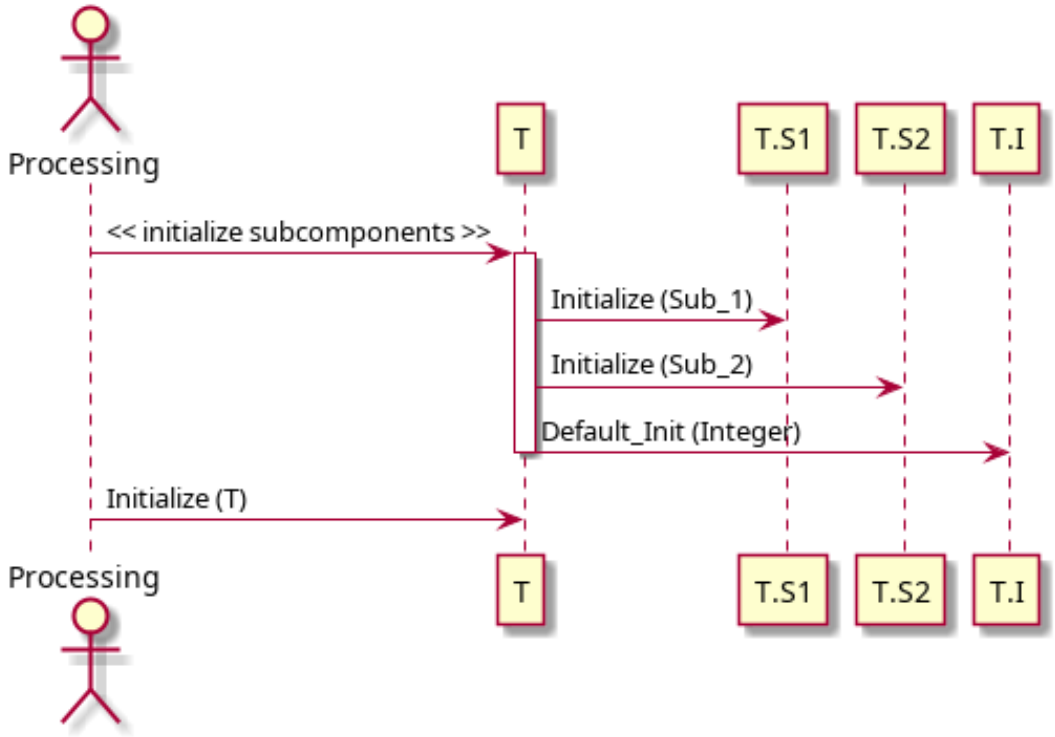

Components with access discriminants

Record types with access discriminants are a special case. In fact, according to the Ada Reference Manual, "if an object has a component with an access discriminant constrained by a *per-object expression* (page 507), `Initialize` is applied to this component after any components that do not have such discriminants. For an object with several components with such a discriminant, `Initialize` is applied to them in order of their component declarations."

Let's see a code example. First, we implement another package with controlled types:

Listing 424: selections.ads

```
1  with Ada.Finalization;
2
3  package Selections is
4
5     type Selection is private;
6
7     type Selection_1 (S : access Selection) is
8       tagged private;
9
10    type Selection_2 (S : access Selection) is
```

(continues on next page)

(continued from previous page)

```
     tagged private;

private

   type Selection is null record;

   type Selection_1 (S : access Selection) is new
     Ada.Finalization.Controlled
       with null record;

   overriding
   procedure Initialize
     (E : in out Selection_1);

   type Selection_2 (S : access Selection) is new
     Ada.Finalization.Controlled
       with null record;

   overriding
   procedure Initialize
     (E : in out Selection_2);

end Selections;
```

Listing 425: selections.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Selections is

   procedure Initialize
     (E : in out Selection_1) is
   begin
      Put_Line ("Initialize: Selection_1...");
   end Initialize;

   procedure Initialize
     (E : in out Selection_2) is
   begin
      Put_Line ("Initialize: Selection_2...");
   end Initialize;

end Selections;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Controlled_Types.Initialization.
↪Controlled_Initialization
MD5: 01c3639ebd52d37856e77ccfeb057d1b
```

In this example, we see the declaration of the `Selection_1` and `Selection_2` types, which are controlled types with an access discriminant of `Selection` type. Now, let's use these types in the declaration of the T type from the *previous example* (page 1093) and add two new components (`Sel_1` and `Sel_2`):

Listing 426: simple_controlled_types.ads

```
with Ada.Finalization;

with Subs;       use Subs;
```

(continues on next page)

(continued from previous page)

```
with Selections; use Selections;

package Simple_Controlled_Types is

   type T (S1 : access Selection;
           S2 : access Selection) is
     tagged private;

   procedure Dummy (E : T);

private

   function Default_Init return Integer;

   type T (S1 : access Selection;
           S2 : access Selection) is new
     Ada.Finalization.Controlled with
   record
      Sel_1 : Selection_1 (S1);
      Sel_2 : Selection_2 (S2);
      S_1   : Sub_1;
      I     : Integer := Default_Init;
   end record;

   overriding
   procedure Initialize (E : in out T);

end Simple_Controlled_Types;
```

Listing 427: simple_controlled_types.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Simple_Controlled_Types is

   function Default_Init return Integer is
   begin
      Put_Line ("Default_Init: Integer...");
      return 42;
   end Default_Init;

   procedure Dummy (E : T) is
   begin
      Put_Line ("(Dummy: T...)");
   end Dummy;

   procedure Initialize (E : in out T) is
   begin
      Put_Line ("Initialize: T...");
   end Initialize;

end Simple_Controlled_Types;
```

Listing 428: show_controlled_types.adb

```
with Simple_Controlled_Types;
use  Simple_Controlled_Types;

with Selections;
use  Selections;
```

(continues on next page)

(continued from previous page)

```
6
7  procedure Show_Controlled_Types is
8     S1, S2 : aliased Selection;
9     A : T (S1'Access, S2'Access);
10 begin
11    Dummy (A);
12 end Show_Controlled_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Controlled_Types.Initialization.
 ↪Controlled_Initialization
MD5: 74f507b912ab746b70aec451a9bc8f74
```

Runtime output

```
Initialize: Sub_1...
Default_Init: Integer...
Initialize: Selection_1...
Initialize: Selection_2...
Initialize: T...
(Dummy: T...)
```

When running this example, we see that all other subcomponents — to be more precise, those subcomponents that require initialization — are initialized before the Sub_1 and Sub_2 components are initialized via calls to their corresponding `Initialize` procedure. Note that, although Sub_1 and Sub_2 are the last components to be initialized, they are still initialized before the call to the `Initialize` procedure of type T.

This diagram shows the initialization sequence:

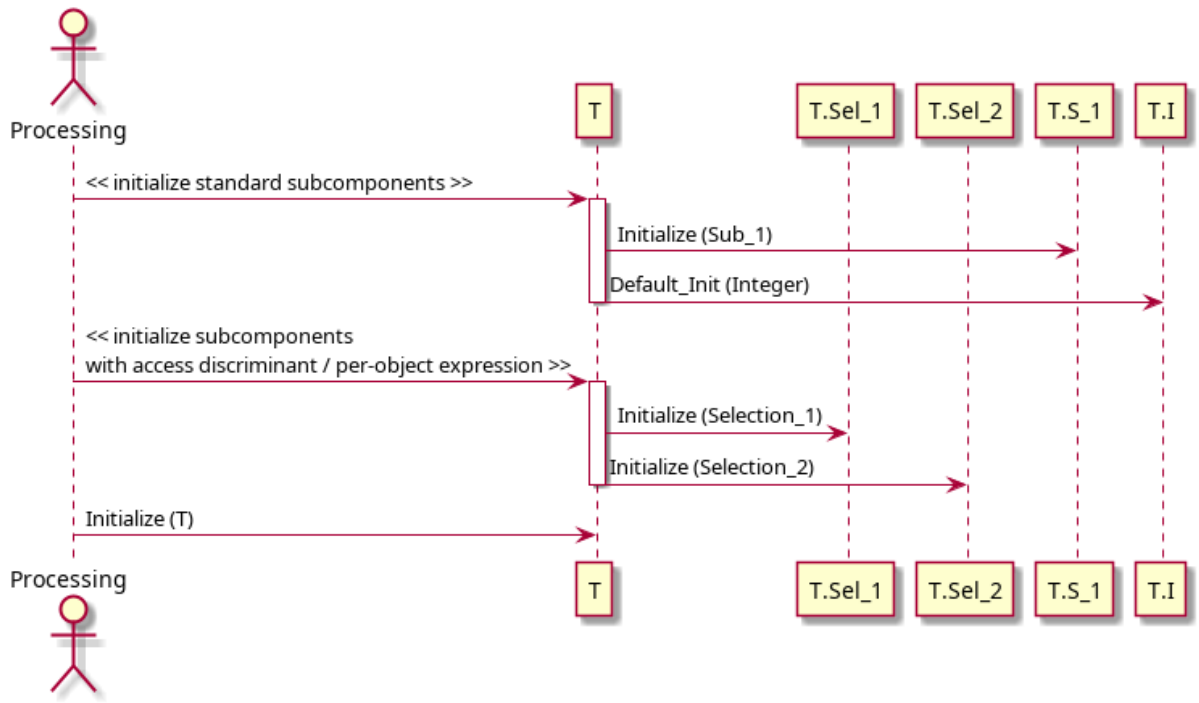

Task activation

Components of task types also require special treatment. According to the Ada Reference Manual, "for an allocator, any task activations follow all calls on `Initialize`."

As always, let's analyze an example that illustrates this. First, we implement another package called `Workers` with a simple task type:

Listing 429: workers.ads

```
package Workers is

   task type Worker is
      entry Start;
      entry Stop;
   end Worker;

end Workers;
```

Listing 430: workers.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Workers is

   task body Worker is

      function Init return Integer is
      begin
         Put_Line ("Activating Worker task...");
         return 0;
      end Init;

      I : Integer := Init;
   begin

      accept Start do
        Put_Line ("Worker.Start accepted...");
         I := I + 1;
      end Start;

      accept Stop do
        Put_Line ("Worker.Stop accepted...");
         I := I - 1;
      end Stop;
   end Worker;

end Workers;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Controlled_Types.Initialization.
 ↪Controlled_Initialization
MD5: 1d48a78f14a496c8cdadeab9d1bc9070
```

Let's extend the declaration of the T type from the *previous example* (page 1096) and declare a new component of `Worker` type. Note that we have to change T to a limited controlled type because of this new component of task type. This is the updated code:

Listing 431: simple_controlled_types.ads

```
with Ada.Finalization;

with Subs;       use Subs;
with Selections; use Selections;
with Workers;    use Workers;

package Simple_Controlled_Types is

   type T (S : access Selection) is
     tagged limited private;

   procedure Start_Work (E : T);
   procedure Stop_Work (E : T);

private

   function Default_Init return Integer;

   type T (S : access Selection) is new
     Ada.Finalization.Limited_Controlled with
   record
      W     : Worker;
      Sel_1 : Selection_1 (S);
      S1    : Sub_1;
      I     : Integer := Default_Init;
   end record;

   overriding
   procedure Initialize (E : in out T);

end Simple_Controlled_Types;
```

Listing 432: simple_controlled_types.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Simple_Controlled_Types is

   function Default_Init return Integer is
   begin
      Put_Line ("Default_Init: Integer...");
      return 42;
   end Default_Init;

   procedure Start_Work (E : T) is
   begin
      --  Starting Worker task:
      E.W.Start;

   end Start_Work;

   procedure Stop_Work (E : T) is
   begin
      --  Stopping Worker task:
      E.W.Stop;
   end Stop_Work;

   procedure Initialize (E : in out T) is
   begin
```

(continues on next page)

(continued from previous page)

```
      Put_Line ("Initialize: T...");
   end Initialize;

end Simple_Controlled_Types;
```

Listing 433: show_controlled_types.adb

```
with Simple_Controlled_Types;
use  Simple_Controlled_Types;

with Selections; use Selections;

procedure Show_Controlled_Types is
   type T_Access is access T;

   S : aliased Selection;
   A : constant T_Access := new T (S'Access);
begin
   Start_Work (A.all);
   Stop_Work (A.all);
end Show_Controlled_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Controlled_Types.Initialization.
 ↪Controlled_Initialization
MD5: f87adac74205d590ee66ce971918e642
```

Runtime output

```
Initialize: Sub_1...
Default_Init: Integer...
Initialize: Selection_1...
Initialize: T...
Activating Worker task...
Worker.Start accepted...
Worker.Stop accepted...
```

When we run this application, we see that the `W` component is activated only after all other subcomponents of type `T` have been initialized.

This diagram shows the initialization sequence:

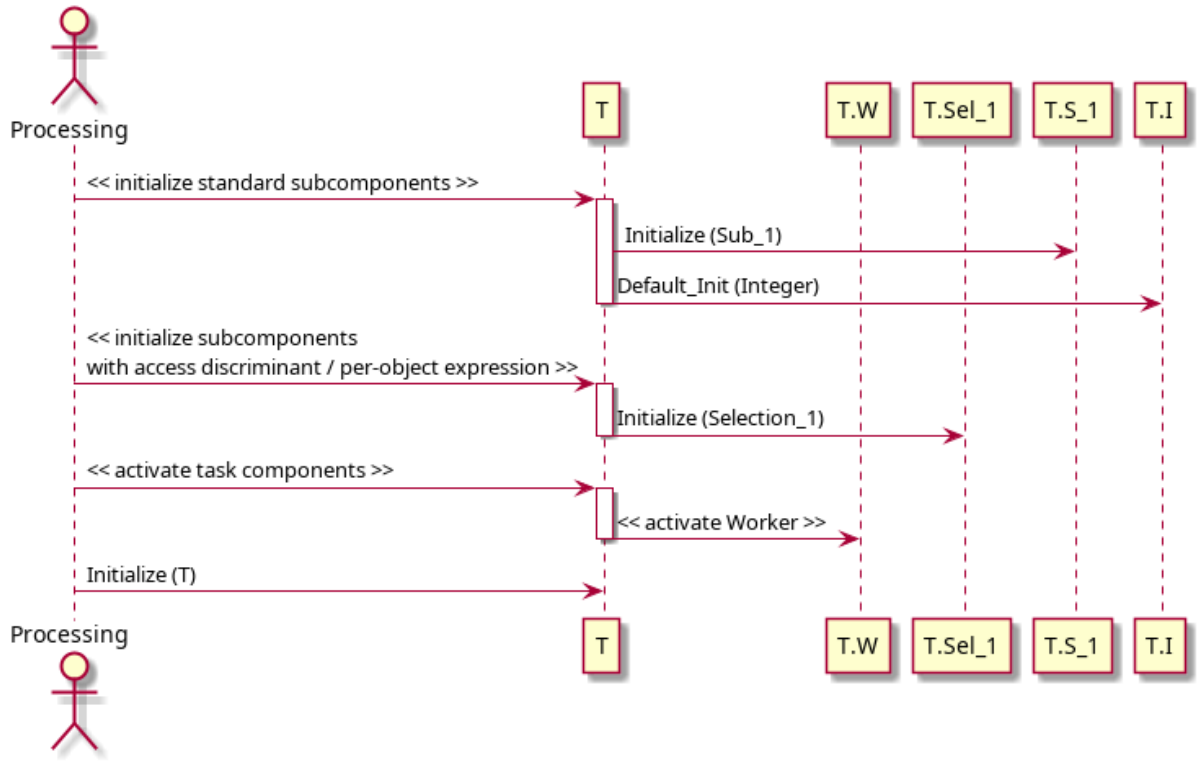

28.4.3 Assignment

We already talked about *adjustments* (page 1087) previously. As we already mentioned, an actual assignment is a full bit-wise copy of the entire right-hand side to the entire left-hand side, so the adjustment (via a call to `Adjust`) is a way to "work around" that, when necessary. In this section, we'll look into some details about the adjustment of controlled types.

Relevant topics

- Assignment and Finalization[316]

Assignment using anonymous object

The Ada Reference Manual[317] mentions that an anonymous object is created during the assignment of objects of controlled type. A simple `A := B` operation for nonlimited controlled types can be expanded to the following illustrative code:

```
procedure P is
   A, B: Some_Controlled_Type;
begin
   --
   --  A := B;
   --
   B_To_A_Assignment : declare
      Anon_Obj : Some_Controlled_Type;
   begin
      Anon_Obj := B;
      Adjust (Anon_Obj);
```

(continues on next page)

[316] http://www.ada-auth.org/standards/22rm/html/RM-7-6.html
[317] http://www.ada-auth.org/standards/22rm/html/RM-7-6.html

(continued from previous page)

```
      Finalize (A);
      A := Anon_Obj;
      Finalize (Anon_Obj);
   end B_To_A_Assignment;
end P;
```

The first assignment happens to the anonymous object `Anon_Obj`. After the adjustment of `Anon_Obj` and the finalization of the original version of `A`, the actual assignment to `A` can take place — and `Anon_Obj` can be discarded after it has been properly finalized. With this strategy, we have a chance to finalize the original version of `A` before the assignment overwrites the object.

Of course, this expanded code isn't really efficient, and the compiler has some freedom to improve the performance of the generated machine code. Whenever possible, it'll typically optimize the anonymous object out and build the object in place. (The Ada Reference Manual[318] describes the rules when this is possible or not.)

Also, the `A := Anon_Obj` statement in the code above doesn't necessarily translate to an actual assignment in the generated machine code. Typically, a compiler may treat `Anon_Obj` as the new `A` and destroy the original version of `A` (i.e. the object that used to be `A`). In this case, the code becomes something like this:

```
procedure P is
   A, B: Some_Controlled_Type;
begin
   --
   --  A := B;
   --
   B_To_A_Assignment : declare
      Anon_Obj : Some_Controlled_Type;
   begin
      Anon_Obj := B;
      Finalize (A);
      Adjust (Anon_Obj);
      declare
         A : Some_Controlled_Type renames Anon_Obj;
      begin
         --  Now, we treat Anon_Obj as the new A.
         --  Further processing continues here...

      end;
   end B_To_A_Assignment;
end P;
```

In some cases, the compiler is required to build the object in place. A typical example is when an object of controlled type is initialized by assigning an aggregate to it:

```
C: constant Some_Controlled_Type :=
    (Ada.Finalization.Controlled with ...);
--  C is built in place,
--  no anonymous object is used here.
```

Also, it's possible that `Adjust` and `Finalize` aren't called at all. Consider an assignment like this: `A := A;`. In this case, since the object on both sides is the same, the compiler is allowed to simply skip the assignment and not do anything.

For more details about possible optimizations and compiler behavior, please refer to the Ada Reference Manual[319] .

[318] http://www.ada-auth.org/standards/22rm/html/RM-7-6.html
[319] http://www.ada-auth.org/standards/22rm/html/RM-7-6.html

In general, the advice is simple: use `Adjust` and `Finalize` solely for their intended purposes. In other words, don't implement extraneous side-effects into those procedures, as they might not be called at run-time.

Adjustment of subcomponents

In principle, the order in which components are adjusted is arbitrary. However, adjustments of subcomponents will happen before the adjustment of the component itself. The subcomponents must be adjusted before the enclosing object because the semantics of the adjustment of the whole might depend on the states of the parts (the subcomponents), so those states must already be in place.

Let's revisit a *previous code example* (page 1093). First, we override the `Adjust` procedure of the Sub_1 and Sub_2 types from the Subs package.

Listing 434: subs.ads

```
with Ada.Finalization;

package Subs is

   type Sub_1 is tagged private;

   type Sub_2 is tagged private;

private

   type Sub_1 is new
     Ada.Finalization.Controlled
       with null record;

   overriding
   procedure Initialize (E : in out Sub_1);

   overriding
   procedure Adjust (E : in out Sub_1);

   overriding
   procedure Finalize (E : in out Sub_1);

   type Sub_2 is new
     Ada.Finalization.Controlled
       with null record;

   overriding
   procedure Initialize (E : in out Sub_2);

   overriding
   procedure Adjust (E : in out Sub_2);

   overriding
   procedure Finalize (E : in out Sub_2);

end Subs;
```

Listing 435: subs.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Subs is

```

(continues on next page)

(continued from previous page)

```
   procedure Initialize (E : in out Sub_1) is
   begin
      Put_Line ("Initialize: Sub_1...");
   end Initialize;

   procedure Adjust (E : in out Sub_1) is
   begin
      Put_Line ("Adjust: Sub_1...");
   end Adjust;

   procedure Finalize (E : in out Sub_1) is
   begin
      Put_Line ("Finalize: Sub_1...");
   end Finalize;

   procedure Initialize (E : in out Sub_2) is
   begin
      Put_Line ("Initialize: Sub_2...");
   end Initialize;

   procedure Adjust (E : in out Sub_2) is
   begin
      Put_Line ("Adjust: Sub_2...");
   end Adjust;

   procedure Finalize (E : in out Sub_2) is
   begin
      Put_Line ("Finalize: Sub_2...");
   end Finalize;

end Subs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Controlled_Types.Adjustment.
 ↪Controlled_Initialization
MD5: 110d88543a7a897ba433c90f6c2a881c
```

Next, we override the `Adjust` procedure of the T type from the `Simple_Controlled_Types` package:

Listing 436: simple_controlled_types.ads

```
with Ada.Finalization;

with Subs; use Subs;

package Simple_Controlled_Types is

   type T is tagged private;

   procedure Dummy (E : T);

private

   function Default_Init return Integer;

   type T is new
     Ada.Finalization.Controlled with
   record
      S1 : Sub_1;
```

(continues on next page)

(continued from previous page)

```
      S2 : Sub_2;
      I  : Integer := Default_Init;
   end record;

   overriding
   procedure Initialize (E : in out T);

   overriding
   procedure Adjust (E : in out T);

   overriding
   procedure Finalize (E : in out T);

end Simple_Controlled_Types;
```

Listing 437: simple_controlled_types.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Simple_Controlled_Types is

   function Default_Init return Integer is
   begin
      Put_Line ("Default_Init: Integer...");
      return 42;
   end Default_Init;

   procedure Dummy (E : T) is
   begin
      Put_Line ("(Dummy: T...)");
   end Dummy;

   procedure Initialize (E : in out T) is
   begin
      Put_Line ("Initialize: T...");
   end Initialize;

   procedure Adjust (E : in out T) is
   begin
      Put_Line ("Adjust: T...");
   end Adjust;

   procedure Finalize (E : in out T) is
   begin
      Put_Line ("Finalize: T...");
   end Finalize;

end Simple_Controlled_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Controlled_Types.Adjustment.
 ↪Controlled_Initialization
MD5: 9fb392305df70734994cffe612cb3869
```

Finally, this is the main application:

Listing 438: show_controlled_types.adb

```
with Ada.Text_IO; use Ada.Text_IO;

```

(continues on next page)

(continued from previous page)

```
with Simple_Controlled_Types;
use  Simple_Controlled_Types;

procedure Show_Controlled_Types is
   A, B : T;
begin
   Dummy (A);

   Put_Line ("----------");
   Put_Line ("A := B");
   A := B;
   Put_Line ("----------");
end Show_Controlled_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Controlled_Types.Adjustment.
 ↪Controlled_Initialization
MD5: 1ceaa50cbb18b9f1f997246a614e3a90
```

Runtime output

```
Initialize: Sub_1...
Initialize: Sub_2...
Default_Init: Integer...
Initialize: T...
Initialize: Sub_1...
Initialize: Sub_2...
Default_Init: Integer...
Initialize: T...
(Dummy: T...)
----------
A := B
Finalize: T...
Finalize: Sub_2...
Finalize: Sub_1...
Adjust: Sub_1...
Adjust: Sub_2...
Adjust: T...
----------
Finalize: T...
Finalize: Sub_2...
Finalize: Sub_1...
Finalize: T...
Finalize: Sub_2...
Finalize: Sub_1...
```

When running this code, we see that the S1 and S2 components are adjusted before the adjustment of the parent type T takes place.

This diagram shows the adjustment sequence:

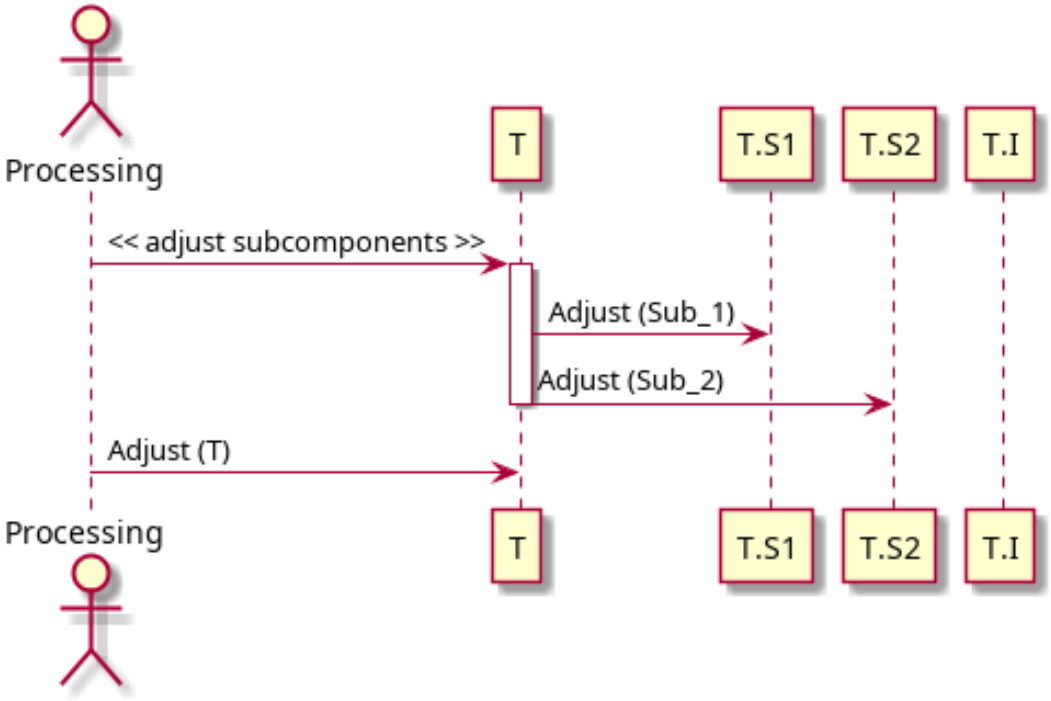

28.4.4 Finalization

We mentioned finalization — and the `Finalize` procedure — at the *beginning of the chapter* (page 1083). In this section, we discuss the topic in more detail.

Relevant topics

- Assignment and Finalization[320]
- Completion and Finalization[321]

Normal and abnormal completion

When a subprogram has just executed its last statement, normal completion of this subprogram has been reached. At this point, finalization starts. In the case of controlled objects, this means that the `Finalize` procedure is called for those objects. (As we've already seen *an example of normal completion* (page 1085) at the beginning of the chapter, we won't repeat it here, as we assume you are already familiar with the concept.)

When an exception is raised or due to an abort, however, a subprogram has an abnormal completion. We discuss more about exception handling and finalization *later on* (page 1118).

Finalization via unchecked deallocation

When performing unchecked deallocation of a controlled type, the `Finalize` procedure is called right before the actual memory for the controlled object is deallocated.

Let's see a simple example:

[320] http://www.ada-auth.org/standards/22rm/html/RM-7-6.html
[321] http://www.ada-auth.org/standards/22rm/html/RM-7-6-1.html

Listing 439: simple_controlled_types.ads

```
with Ada.Finalization;
with Ada.Unchecked_Deallocation;

package Simple_Controlled_Types is

   type T is tagged private;

   procedure Dummy (E : T);

   type T_Access is access T;

   procedure Free (A : in out T_Access);

private

   type T is new
     Ada.Finalization.Controlled
       with null record;

   overriding
   procedure Finalize (E : in out T);

   procedure Free_T_Access is
     new Ada.Unchecked_Deallocation
       (Object => T,
        Name   => T_Access);

   procedure Free (A : in out T_Access)
     renames Free_T_Access;

end Simple_Controlled_Types;
```

Listing 440: simple_controlled_types.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Simple_Controlled_Types is

   procedure Dummy (E : T) is
   begin
      Put_Line ("(Dummy T...)");
   end Dummy;

   procedure Finalize (E : in out T) is
   begin
      Put_Line ("Finalize T...");
   end Finalize;

end Simple_Controlled_Types;
```

Listing 441: show_controlled_types.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Simple_Controlled_Types;
use  Simple_Controlled_Types;

procedure Show_Controlled_Types is
   A : T_Access := new T;
```

(continues on next page)

(continued from previous page)

```
8  begin
9     Dummy (A.all);
10
11    Free (A);
12    --  At this point, Finalize (A.all)
13    --  will be called before the actual
14    --  deallocation.
15
16    Put_Line ("We've just freed A.");
17 end Show_Controlled_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Controlled_Types.Finalization.
 ↪Unchecked_Deallocation
MD5: b9388699ee396430f689fe88df41fc32
```

Runtime output

```
(Dummy T...)
Finalize T...
We've just freed A.
```

In this example, we see that a call to `Finalize` (for type `T`) is triggered by the call to `Free` for the `A` object — at this point, we haven't reached the end of the main procedure (`Show_Controlled_Types`) yet. After the call to `Free`, the object originally referenced by `A` has been completely finalized — and deallocated.

When the main procedure completes (after the call to `Put_Line` in that procedure), we would normally see the calls to `Finalize` for controlled objects. However, at this point, we obviously don't have a second call to the `Finalize` procedure for type `T`, as the object referenced by `A` has already been finalized and freed.

Subcomponents

As we've seen in the section about *initialization of subcomponents* (page 1093), subcomponents of a controlled type are initialized by a call to their corresponding `Initialize` procedure before the call to `Initialize` for the parent controlled type. In the case of finalization, the reverse order is applied: first, finalization of the parent type takes place, and then the finalization of the subcomponents.

We can visualize the lifetime as follows:

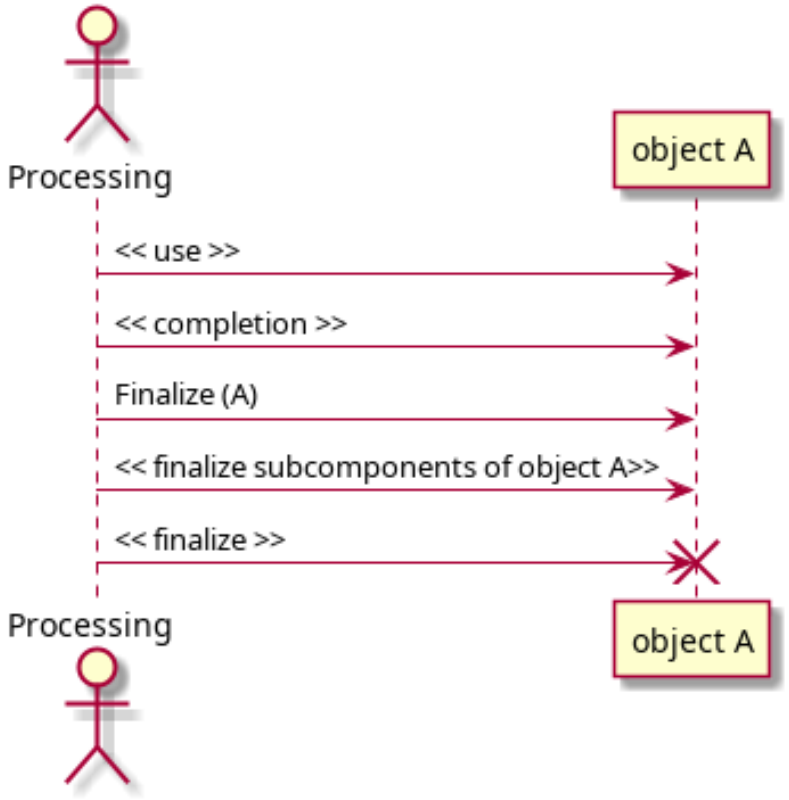

Let's show a code example by revisiting the previous implementation of the controlled types Sub_1 and Sub_2, and adapting it:

Listing 442: subs.ads

```
with Ada.Finalization;

package Subs is

   type Sub_1 is tagged private;

   type Sub_2 is tagged private;

private

   type Sub_1 is new
     Ada.Finalization.Controlled
       with null record;

   overriding
   procedure Finalize (E : in out Sub_1);

   type Sub_2 is new
     Ada.Finalization.Controlled
       with null record;

   overriding
   procedure Finalize (E : in out Sub_2);

end Subs;
```

Listing 443: subs.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Subs is

   procedure Finalize (E : in out Sub_1) is
   begin
      Put_Line ("Finalize: Sub_1...");
   end Finalize;

   procedure Finalize (E : in out Sub_2) is
   begin
      Put_Line ("Finalize: Sub_2...");
   end Finalize;

end Subs;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Controlled_Types.Finalization.
 ↪Controlled_Initialization
MD5: 565f0b13586c08e0cdfdc119bcb28780
```

Now, let's use those controlled types as components of a type T:

Listing 444: simple_controlled_types.ads

```
with Ada.Finalization;

with Subs; use Subs;

package Simple_Controlled_Types is

   type T is tagged private;

   procedure Dummy (E : T);

private

   type T is new
     Ada.Finalization.Controlled with
   record
      S1 : Sub_1;
      S2 : Sub_2;
   end record;

   overriding
   procedure Finalize (E : in out T);

end Simple_Controlled_Types;
```

Listing 445: simple_controlled_types.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Simple_Controlled_Types is

   procedure Dummy (E : T) is
   begin
      Put_Line ("(Dummy: T...)");
```

(continues on next page)

(continued from previous page)

```
   end Dummy;

   procedure Finalize (E : in out T) is
   begin
      Put_Line ("Finalize: T...");
   end Finalize;

end Simple_Controlled_Types;
```

Listing 446: show_controlled_types.adb

```
with Simple_Controlled_Types;
use  Simple_Controlled_Types;

procedure Show_Controlled_Types is
   A : T;
begin
   Dummy (A);
end Show_Controlled_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Controlled_Types.Finalization.
 ↪Controlled_Initialization
MD5: 6feecb7c544f340bf4841034d7ab5f71
```

Runtime output

```
(Dummy: T...)
Finalize: T...
Finalize: Sub_2...
Finalize: Sub_1...
```

When we run this application, we see that the `Finalize` procedure is called for the type T itself — as the first step of the finalization of type T. Then, the Sub_2 and Sub_1 components are finalized by calls to their respective `Finalize` procedures.

This diagram shows the finalization sequence:

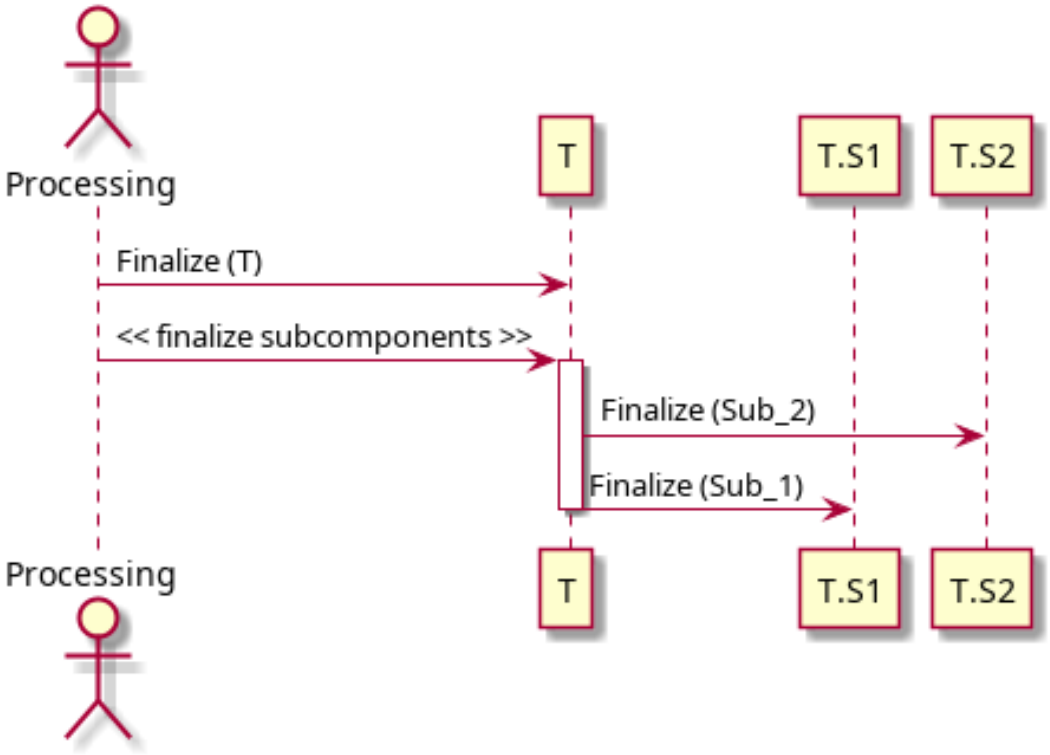

Components with access discriminants

We already discussed the *initialization of components with access discriminants constrained by a per-object expression* (page 1096). In the case of the finalization of such components, they are finalized before any components that do not fall into this category — in the reverse order of their component declarations — but after the finalization of the parent type.

Let's revisit a *previous code example* (page 1096) and adapt it to demonstrate the finalization of components with access discriminants. First, we implement another package with controlled types:

Listing 447: selections.ads

```
with Ada.Finalization;

package Selections is

   type Selection is private;

   type Selection_1 (S : access Selection) is
     tagged private;

   type Selection_2 (S : access Selection) is
     tagged private;

private

   type Selection is null record;

   type Selection_1 (S : access Selection) is new
     Ada.Finalization.Controlled
       with null record;

   overriding
   procedure Finalize
```

(continues on next page)

(continued from previous page)

```
      (E : in out Selection_1);

   type Selection_2 (S : access Selection) is new
     Ada.Finalization.Controlled
       with null record;

   overriding
   procedure Finalize
     (E : in out Selection_2);

end Selections;
```

Listing 448: selections.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Selections is

   procedure Finalize
     (E : in out Selection_1) is
   begin
      Put_Line ("Finalize: Selection_1...");
   end Finalize;

   procedure Finalize
     (E : in out Selection_2) is
   begin
      Put_Line ("Finalize: Selection_2...");
   end Finalize;

end Selections;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Controlled_Types.Finalization.
 ↪Controlled_Initialization
MD5: d1d35eb7ea62742fb130fbf05d898989
```

In this example, we see the declaration of the `Selection_1` and `Selection_2` types, which are controlled types with an access discriminant of `Selection` type. Now, let's use these types in the declaration of a type T and add two new components — `Sel_1` and `Sel_2`:

Listing 449: simple_controlled_types.ads

```
with Ada.Finalization;

with Subs;       use Subs;
with Selections; use Selections;

package Simple_Controlled_Types is

   type T (S1 : access Selection;
           S2 : access Selection) is
     tagged private;

   procedure Dummy (E : T);

private

   type T (S1 : access Selection;
```

(continues on next page)

(continued from previous page)

```
            S2 : access Selection) is new
     Ada.Finalization.Controlled with
   record
      Sel_1 : Selection_1 (S1);
      Sel_2 : Selection_2 (S2);
      S_1   : Sub_1;
   end record;

   overriding
   procedure Finalize (E : in out T);

end Simple_Controlled_Types;
```

Listing 450: simple_controlled_types.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Simple_Controlled_Types is

   procedure Dummy (E : T) is
   begin
      Put_Line ("(Dummy: T...)");
   end Dummy;

   procedure Finalize (E : in out T) is
   begin
      Put_Line ("Finalize: T...");
   end Finalize;

end Simple_Controlled_Types;
```

Listing 451: show_controlled_types.adb

```
with Simple_Controlled_Types;
use  Simple_Controlled_Types;

with Selections;
use  Selections;

procedure Show_Controlled_Types is
   S1, S2 : aliased Selection;
   A : T (S1'Access, S2'Access);
begin
   Dummy (A);
end Show_Controlled_Types;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Controlled_Types.Finalization.
 ↪Controlled_Initialization
MD5: e421a750f11ade3b4df98569c71b904a
```

Runtime output

```
(Dummy: T...)
Finalize: T...
Finalize: Selection_2...
Finalize: Selection_1...
Finalize: Sub_1...
```

When we run this example, we see that the `Finalize` procedure of type `T` is called as

the first step. Then, the `Finalize` procedure is called for the components with an access discriminant constrained by a *per-object expression* (page 507) — in this case, `Sel_2` and `Sel_1` (of `Selection_2` and `Selection_1` types, respectively). Finally, the `Sub_1` component is finalized.

This diagram shows the finalization sequence:

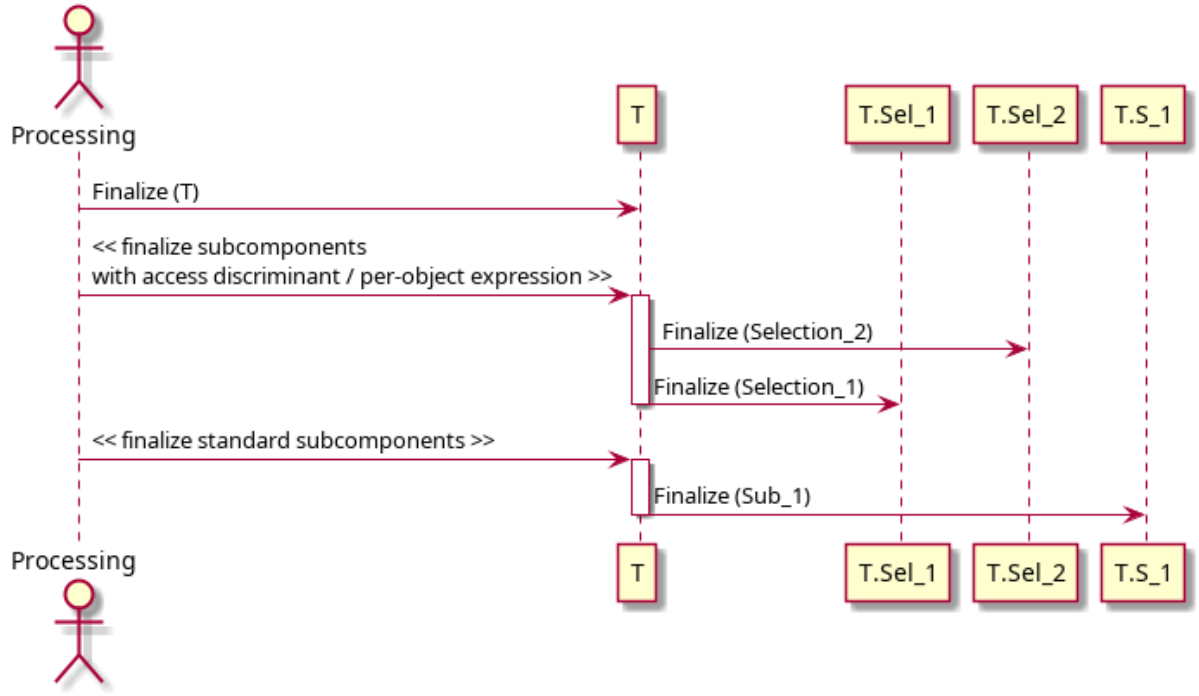

28.4.5 Controlled Types and Exception Handling

In the previous section, we mainly focused on the normal completion of controlled types. However, when control is transferred out of the normal execution path due to an abort or an exception being raised, we speak of abnormal completion. In this section, we focus on those cases.

Let's start with a simple example:

Listing 452: simple_controlled_types.ads

```
1  with Ada.Finalization;
2
3  package Simple_Controlled_Types is
4
5     type T is tagged private;
6
7     procedure Dummy (E : T);
8
9  private
10
11    type T is new
12      Ada.Finalization.Controlled
13        with null record;
14
15    overriding
16    procedure Initialize (E : in out T);
17
18    overriding
19    procedure Finalize (E : in out T);
```

(continues on next page)

(continued from previous page)

```
20
21 end Simple_Controlled_Types;
```

Listing 453: simple_controlled_types.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  package body Simple_Controlled_Types is
4
5     procedure Dummy (E : T) is
6     begin
7        Put_Line ("(Dummy...)");
8     end Dummy;
9
10    procedure Initialize (E : in out T) is
11    begin
12       Put_Line ("Initialize...");
13    end Initialize;
14
15    procedure Finalize (E : in out T) is
16    begin
17       Put_Line ("Finalize...");
18    end Finalize;
19
20 end Simple_Controlled_Types;
```

Listing 454: show_simple_exception.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  with Simple_Controlled_Types;
4  use  Simple_Controlled_Types;
5
6  procedure Show_Simple_Exception is
7     A : T;
8
9     function Int_Last return Integer is
10      (Integer'Last);
11
12    Cnt : Positive := Int_Last;
13 begin
14    Cnt := Cnt + 1;
15
16    Dummy (A);
17
18    Put_Line (Cnt'Image);
19
20    --  When A is about to get out of
21    --  scope:
22    --
23    --  Finalize (A);
24    --
25 end Show_Simple_Exception;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Controlled_Types.Exception_
↪Handling.Simple_Exception
MD5: 9461f420f091f058e6ea1ee419b2a5c6
```

Runtime output

```
Initialize...
Finalize...

raised CONSTRAINT_ERROR : show_simple_exception.adb:14 overflow check failed
```

In this example, we're forcing an overflow to happen in the Show_Simple_Exception by adding one to the integer variable Cnt, which already has the value **Integer**'Last. The corresponding *overflow check* (page 775) raises the Constraint_Error.

However, *before* this exception is raised, the finalization of the controlled object A is performed. In this sense, we have normal completion of the controlled type — even though an exception is being raised.

For further reading...

We already talked about the *allocation check* (page 779), which may raise a Program_Error exception. In the code example for that section, we used controlled types. Feel free to revisit the example.

Relevant topics

- Completion and Finalization[322]

Exception raising in Initialize

If an exception is raised in the Initialize procedure, we have abnormal completion. Let's see an example:

Listing 455: ct_initialize_exception.ads

```
1  with Ada.Finalization;
2
3  package CT_Initialize_Exception is
4
5     type T is tagged private;
6
7     procedure Dummy (E : T);
8
9  private
10
11    type T is new
12      Ada.Finalization.Controlled
13        with null record;
14
15    overriding
16    procedure Initialize (E : in out T);
17
18    overriding
19    procedure Finalize (E : in out T);
20
21 end CT_Initialize_Exception;
```

[322] http://www.ada-auth.org/standards/22rm/html/RM-7-6-1.html

Listing 456: ct_initialize_exception.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body CT_Initialize_Exception is

   function Int_Last return Integer is
     (Integer'Last);

   Cnt : Positive := Int_Last;

   procedure Dummy (E : T) is
   begin
      Put_Line ("(Dummy...)");
   end Dummy;

   procedure Initialize (E : in out T) is
   begin
      Put_Line ("Initialize...");
      Cnt := Cnt + 1;
   end Initialize;

   procedure Finalize (E : in out T) is
   begin
      Put_Line ("Finalize...");
   end Finalize;

end CT_Initialize_Exception;
```

Listing 457: show_initialize_exception.adb

```
with CT_Initialize_Exception;
use  CT_Initialize_Exception;

procedure Show_Initialize_Exception is
   A : T;
begin
   Dummy (A);
end Show_Initialize_Exception;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Controlled_Types.Exception_
 ↪Handling.CT_Initialize_Exception
MD5: 189a5fafafb01eba31a73c9237fa7aff
```

Runtime output

```
Initialize...

raised CONSTRAINT_ERROR : ct_initialize_exception.adb:18 overflow check failed
```

In the Show_Initialize_Exception procedure, we declare an object A of controlled type T. As we know, this declaration triggers a call to the Initialize procedure that we've implemented in the body of the CT_Initialize_Exception package. In the Initialize procedure, we're forcing an overflow to happen — by adding one to the Cnt variable, which already has the Integer'Last value.

This is an example of abnormal completion, as the control is transferred out of the Initialize procedure, and the corresponding Finalize procedure is never called for object A.

Bounded errors of controlled types

Bounded errors (page 762) are an important topic when talking about exception and controlled types. In general, if an exception is raised in the `Adjust` or `Finalize` procedure, this is considered a bounded error. If the bounded error is detected, the `Program_Error` exception is raised.

Note that the original exception raised in the `Adjust` or `Finalize` procedures could be any possible exception. For example, one of those procedures could raise a `Constraint_Error` exception. However, the actual exception that is raised at runtime is the `Program_Error` exception. This is because the bounded error, which raises the `Program_Error` exception, is more severe than the original exception coming from those procedures.

(The behavior is different when the `Adjust` or `Finalize` procedure is called explicitly, as we'll see later.)

Not every exception raised during an operation on controlled types is considered a bounded error. In fact, the case we've seen before, an *exception raised in the Initialize procedure* (page 1120) is not a bounded error.

Here's a code example of a `Constraint_Error` exception being raised in the `Finalize` procedure:

Listing 458: ct_finalize_exception.ads

```
with Ada.Finalization;

package CT_Finalize_Exception is

   type T is tagged private;

   procedure Dummy (E : T);

   procedure Reset_Counter;

private

   type T is new
     Ada.Finalization.Controlled
       with null record;

   overriding
   procedure Initialize (E : in out T);

   overriding
   procedure Adjust (E : in out T);

   overriding
   procedure Finalize (E : in out T);

end CT_Finalize_Exception;
```

Listing 459: ct_finalize_exception.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body CT_Finalize_Exception is

   Cnt : Integer := Integer'Last;

   procedure Dummy (E : T) is
   begin
      Put_Line ("(Dummy...)");
```

(continues on next page)

(continued from previous page)

```
   end Dummy;

   procedure Initialize (E : in out T) is
   begin
      Put_Line ("Initialize...");
   end Initialize;

   overriding
   procedure Adjust (E : in out T) is
   begin
      Put_Line ("Adjust...");
   end Adjust;

   procedure Finalize (E : in out T) is
   begin
      Put_Line ("Finalize...");
      Cnt := Cnt + 1;
   end Finalize;

   procedure Reset_Counter is
   begin
      Cnt := 0;
   end Reset_Counter;

end CT_Finalize_Exception;
```

Listing 460: show_finalize_exception.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with CT_Finalize_Exception;
use  CT_Finalize_Exception;

procedure Show_Finalize_Exception is
   A, B : T;
begin
   Dummy (A);

   --  When A is about to get out of
   --  scope:
   --
   --  Finalize (A);
   --
end Show_Finalize_Exception;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Controlled_Types.Exception_
 ↪Handling.CT_Finalize_Exception
MD5: eacb64b0a9d68ce3484a3bda9b633495
```

Runtime output

```
Initialize...
Initialize...
(Dummy...)
Finalize...
Finalize...

raised PROGRAM_ERROR : show_finalize_exception.adb:6 finalize/adjust raised␣
 ↪exception
```

In this example, we're again forcing an overflow to happen (by adding one to the integer variable `Cnt`), this time in the `Finalize` procedure. When this procedure is implicitly called — when object `A` is about to get out of scope in the `Show_Finalize_Exception` procedure — the `Constraint_Error` exception is raised.

As we've just seen, having an exception be raised during an implicit call to the `Finalize` procedure is a bounded error. Therefore, we see that the `Program_Error` exception is raised at runtime instead of the original `Constraint_Error` exception.

As we hinted in the beginning, when the `Adjust` or the `Finalize` procedure is called *explicitly*, the exception raised in that procedure is *not* considered a bounded error. In this case, the original exception is raised.

To show an example of such an explicit call, let's first move the overriden procedures for type `T` (`Initialize`, `Adjust` and `Finalize`) out of the private part of the package `CT_Finalize_Exception`, so they are now visible to clients. This allows us to call the `Finalize` procedure explicitly:

Listing 461: ct_finalize_exception.ads

```
with Ada.Finalization;

package CT_Finalize_Exception is

   type T is new
     Ada.Finalization.Controlled
   with null record;

   overriding
   procedure Initialize (E : in out T);

   overriding
   procedure Adjust (E : in out T);

   overriding
   procedure Finalize (E : in out T);

   procedure Dummy (E : T);

   procedure Reset_Counter;

end CT_Finalize_Exception;
```

Listing 462: show_finalize_exception.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with CT_Finalize_Exception;
use  CT_Finalize_Exception;

procedure Show_Finalize_Exception is
   A : T;
begin
   Dummy (A);

   Finalize (A);

   Put_Line ("After Finalize");
exception
   when Constraint_Error =>
      Put_Line
        ("Constraint_Error is being handled...");
```

(continues on next page)

(continued from previous page)

```
18       Reset_Counter;
19   end Show_Finalize_Exception;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Controlled_Types.Exception_
 ↪Handling.CT_Finalize_Exception
MD5: f43133c997076c491a20117960be8807
```

Runtime output

```
Initialize...
(Dummy...)
Finalize...
Constraint_Error is being handled...
Finalize...
```

Now, we're calling the `Finalize` procedure explicitly in the `Show_Finalize_Exception` procedure. As we know, due to the operation on `I` in the `Finalize` procedure, the `Constraint_Error` exception is raised in the procedure. Because we're handling this exception in the `Show_Finalize_Exception` procedure, we see the corresponding user message ("Constraint_Error is being handled...") at runtime.

(Note that in the exception handling block, we're calling the `Reset_Counter` procedure. This prevents `Constraint_Error` from being raised in the next call to `Finalize`.)

Memory allocation and exceptions

When a memory block is allocated for controlled types and a bounded error occurs, there is no guarantee that this memory block will be deallocated. Roughly speaking, the compiler has the freedom — but not the obligation — to generate appropriate calls to `Finalize`, which may deallocate memory blocks.

For example, we've seen that *subcomponents of controlled type* (page 1093) of a controlled object `A` are initialized before the initialization of object `A` takes place. Because memory might have been allocated for the subcomponents, the compiler can insert code that attempts to finalize those subcomponents, which in turn deallocates the memory blocks (if they were allocated in the first place).

We can visualize this strategy in the following diagram:

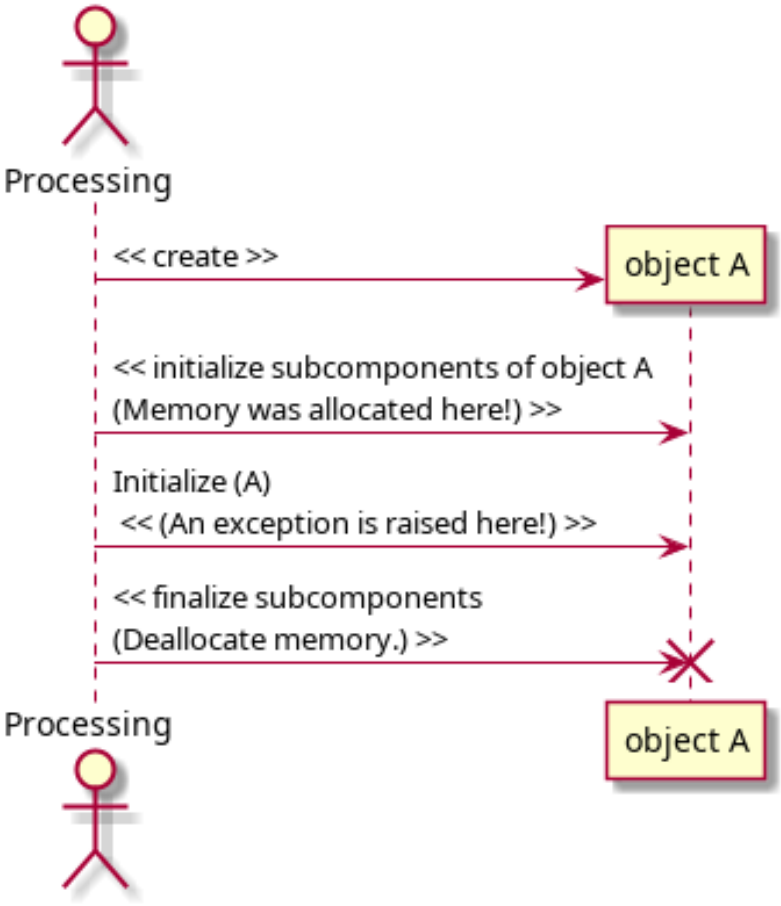

This strategy (of finalizing subcomponents that haven't raised exceptions) prevents memory leaks. However, this behavior very much depends on the compiler implementation. The Ada Reference Manual[323] delineates (in the "Implementation Permissions" section) the cases where the compiler is allowed — but not required — to finalize objects when exceptions are raised.

Because the actual behavior isn't defined, custom implementation of `Adjust` and `Finalize` procedures for controlled types should be designed very carefully in order to avoid exceptions, especially when memory is allocated in the `Initialize` procedure.

28.4.6 Applications of Controlled Types

In this section, we discuss applications of controlled types. In this context, it's important to remember that controlled types have an associated overhead, which can become non-negligible depending in which context the controlled objects are used. However, there are applications where utilizing controlled types is the best approach.

(Note that this overhead we've just mentioned is not specific to Ada. In fact, types similar to controlled types will be relatively expensive in any programming language. As an example, destructors in C++ may require a similar maintenance of state at run-time.)

Encapsulating access type handling

Previously, when discussing *design strategies for access types* (page 918), we saw an example on using *limited controlled types to encapsulate access types* (page 922).

[323] http://www.ada-auth.org/standards/22rm/html/RM-7-6-1.html

A more generalized example is the one of an unbounded stack. Because it's unbounded, it allows for increasing the stack's size *on demand*. We can implement this kind of stack by using access types. Let's look at a simple (unoptimized) implementation:

Listing 463: unbounded_stacks.ads

```
with Ada.Finalization;

generic
   Default_Chunk_Size : Positive := 5;
   type Element is private;
package Unbounded_Stacks is

   Stack_Underflow : exception;

   type Unbounded_Stack is private;

   procedure Push (S : in out Unbounded_Stack;
                   E :        Element);

   function Pop (S : in out Unbounded_Stack)
                 return Element;

   function Is_Empty (S : Unbounded_Stack)
                      return Boolean;

private

   type Element_Array is
     array (Positive range <>) of
       Element;

   type Element_Array_Access is
     access Element_Array;

   type Unbounded_Stack is new
     Ada.Finalization.Controlled with
      record
         Chunk_Size : Positive
           := Default_Chunk_Size;
         Data       : Element_Array_Access;
         Top        : Natural := 0;
      end record;

   procedure Initialize
     (S : in out Unbounded_Stack);

   procedure Adjust
     (S : in out Unbounded_Stack);

   procedure Finalize
     (S : in out Unbounded_Stack);

end Unbounded_Stacks;
```

Listing 464: unbounded_stacks.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Ada.Unchecked_Deallocation;

package body Unbounded_Stacks is
```

(continues on next page)

(continued from previous page)

```
   --
   --  LOCAL SUBPROGRAMS
   --

   procedure Free is
     new Ada.Unchecked_Deallocation
       (Object => Element_Array,
        Name   => Element_Array_Access);

   function Is_Full (S : Unbounded_Stack)
                     return Boolean is
   begin
      return S.Top = S.Data'Last;
   end Is_Full;

   procedure Reallocate_Data
     (To         : in out Element_Array_Access;
      From       :        Element_Array_Access;
      Max_Last   :        Positive;
      Valid_Last :        Positive) is
   begin
      To := new Element_Array (1 .. Max_Last);

      for I in 1 .. Valid_Last loop
         To (I) := From (I);
      end loop;
   end Reallocate_Data;

   procedure Increase_Size
     (S : in out Unbounded_Stack)
   is
      Old_Data : Element_Array_Access := S.Data;
      Old_Last : constant Positive
                 := Old_Data'Last;
      New_Last : constant Positive
                 := Old_Data'Last + S.Chunk_Size;
   begin
      Put_Line ("Increasing Unbounded_Stack "
                & "(1 .. "
                & Old_Last'Image
                & ") to (1 .. "
                & New_Last'Image
                & ")");

      Reallocate_Data
        (To         => S.Data,
         From       => Old_Data,
         Max_Last   => New_Last,
         Valid_Last => S.Top);

      Free (Old_Data);
   end Increase_Size;

   --
   --  SUBPROGRAMS
   --

   procedure Push (S : in out Unbounded_Stack;
                   E :        Element) is
   begin
```

(continues on next page)

(continued from previous page)

```
67       if Is_Full (S) then
68          Increase_Size (S);
69       end if;
70
71       S.Top := S.Top + 1;
72       S.Data (S.Top) := E;
73    end Push;
74
75    function Pop (S : in out Unbounded_Stack)
76                  return Element is
77    begin
78       return E : Element do
79          if Is_Empty (S) then
80             raise Stack_Underflow;
81          end if;
82
83          E := S.Data (S.Top);
84          S.Top := S.Top - 1;
85       end return;
86    end Pop;
87
88    function Is_Empty (S : Unbounded_Stack)
89                       return Boolean is
90    begin
91       return S.Top = 0;
92    end Is_Empty;
93
94    --
95    --  PRIVATE SUBPROGRAMS
96    --
97
98    procedure Initialize
99      (S : in out Unbounded_Stack)
100   is
101      Last : constant Positive
102             := S.Chunk_Size;
103   begin
104      Put_Line ("Initializing Unbounded_Stack "
105                & "(1 .. "
106                & Last'Image
107                & ")");
108      S.Data := new Element_Array
109                      (1 .. S.Chunk_Size);
110   end Initialize;
111
112   procedure Allocate_Duplicate_Data
113     (S : in out Unbounded_Stack)
114   is
115      Last : constant Positive
116             := S.Data'Last;
117   begin
118      Put_Line ("Duplicating data for new "
119                & "Unbounded_Stack (1 .. "
120                & Last'Image
121                & ")");
122
123      Reallocate_Data
124        (To         => S.Data,
125         From       => S.Data,
126         Max_Last   => Last,
127         Valid_Last => S.Top);
```

(continues on next page)

(continued from previous page)

```
   end Allocate_Duplicate_Data;

   procedure Adjust
     (S : in out Unbounded_Stack)
   is
   begin
      Put_Line ("Adjusting Unbounded_Stack...");
      Allocate_Duplicate_Data (S);
   end Adjust;

   procedure Finalize
     (S : in out Unbounded_Stack)
   is
      Last : constant Positive
             := S.Data'Last;
   begin
      Put_Line ("Finalizing Unbounded_Stack "
                & "(1 .. "
                & Last'Image
                & ")");
      if S.Data /= null then
        Free (S.Data);
      end if;
   end Finalize;

end Unbounded_Stacks;
```

Listing 465: show_unbounded_stack.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Unbounded_Stacks;

procedure Show_Unbounded_Stack is

   package Unbounded_Integer_Stacks is new
     Unbounded_Stacks (Element => Integer);
   use Unbounded_Integer_Stacks;

   procedure Print_Pop_Stack
      (S    : in out Unbounded_Stack;
       Name :        String)
   is
      V : Integer;
   begin
      Put_Line ("STACK: " & Name);
      Put ("= ");
      while not Is_Empty (S) loop
         V := Pop (S);
         Put (V'Image & " ");
      end loop;
      New_Line;
   end Print_Pop_Stack;

   Stack   : Unbounded_Stack;
   Stack_2 : Unbounded_Stack;
begin
   for I in 1 .. 10 loop
      Push (Stack, I);
   end loop;

```

(continues on next page)

(continued from previous page)

```
33    Stack_2 := Stack;
34
35    for I in 11 .. 20 loop
36       Push (Stack, I);
37    end loop;
38
39    Print_Pop_Stack (Stack, "Stack");
40    Print_Pop_Stack (Stack_2, "Stack_2");
41
42 end Show_Unbounded_Stack;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Controlled_Types.Applications.
 ↪Unbounded_Stacks
MD5: 22c795f2dfd2fbdf5468b54722d7126b
```

Runtime output

```
Initializing Unbounded_Stack (1 ..  5)
Initializing Unbounded_Stack (1 ..  5)
Increasing Unbounded_Stack (1 ..  5) to (1 ..  10)
Finalizing Unbounded_Stack (1 ..  5)
Adjusting Unbounded_Stack...
Duplicating data for new Unbounded_Stack (1 ..  10)
Increasing Unbounded_Stack (1 ..  10) to (1 ..  15)
Increasing Unbounded_Stack (1 ..  15) to (1 ..  20)
STACK: Stack
=  20  19  18  17  16  15  14  13  12  11  10  9  8  7  6  5  4  3  2  1
STACK: Stack_2
=  10  9  8  7  6  5  4  3  2  1
Finalizing Unbounded_Stack (1 ..  10)
Finalizing Unbounded_Stack (1 ..  20)
```

Let's first focus on the `Unbounded_Stack` type from the `Unbounded_Stacks` package. The actual stack is implemented via the array that we allocate for the `Data` component. The initial allocation takes place in the `Initialize` procedure, which is called when an object of `Unbounded_Stack` type is created. The corresponding deallocation of the stack happens in the `Finalize` procedure.

In the `Push` procedure, we check whether the stack is full or not before storing a new element into the stack. If the stack is full, we call the `Increase_Size` procedure to *increase* the size of the array. This is actually done by calling the `Reallocate_Data` procedure, which allocates a new array for the stack and copies the original data to the new array.

Also, when copying an unbounded stack object to another object of this type, a call to the `Adjust` procedure is triggered — we do this by the assignment `Stack_2 := Stack` in the `Show_Unbounded_Stack` procedure. In the `Adjust` procedure, we call the `Allocate_Duplicate_Data` procedure to allocate a new array for the stack data and copy the data from the original stack. (Internally, the `Allocate_Duplicate_Data` procedure calls the `Reallocate_Data` procedure, which we already mentioned.)

By encapsulating the access type handling in controlled types, we can ensure that the access objects are handled correctly: no incorrect pointer usage or memory leak can happen when we use this strategy.

Encapsulating file handling

Controlled types can be used to encapsulate file handling, so that files are automatically created and closed. A common use-case is when a new file is expected to be created or opened when we declare the controlled object, and closed when the controlled object gets out of scope.

A simple example is the one of a logger, which we can use to write to a logfile by simple calls to Put_Line:

Listing 466: loggers.ads

```
with Ada.Text_IO; use Ada.Text_IO;
with Ada.Finalization;

package Loggers is

   type Logger (<>) is
     limited private;

   function Init (Filename : String)
                  return Logger;

   procedure Put_Line (L : Logger;
                       S : String);

private

   type Logger is new
     Ada.Finalization.Limited_Controlled with
      record
         Logfile : File_Type;
      end record;

   procedure Finalize
     (L : in out Logger);

end Loggers;
```

Listing 467: loggers.adb

```
package body Loggers is

   --
   --  SUBPROGRAMS
   --

   function Init (Filename : String)
                  return Logger is
   begin
      return L : Logger do
         Create (L.Logfile, Out_File, Filename);
      end return;
   end Init;

   procedure Put_Line (L : Logger;
                       S : String) is
   begin
      Put_Line ("Logger: Put_Line");
      Put_Line (L.Logfile, S);
   end Put_Line;

```

(continues on next page)

(continued from previous page)

```
   --
   --  PRIVATE SUBPROGRAMS
   --

   procedure Finalize
     (L : in out Logger) is
   begin
      Put_Line ("Finalizing Logger...");
      if Is_Open (L.Logfile) then
         Close (L.Logfile);
      end if;
   end Finalize;

end Loggers;
```

Listing 468: some_processing.adb

```
with Loggers; use Loggers;

procedure Some_Processing (Log : Logger) is
begin
   Put_Line (Log, "Some processing...");
end Some_Processing;
```

Listing 469: show_logger.adb

```
with Loggers;         use Loggers;
with Some_Processing;

procedure Show_Logger is
   Log : constant Logger := Init ("report.log");
begin
   Put_Line (Log, "Some info...");
   Some_Processing (Log);
end Show_Logger;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Controlled_Types.Applications.
 ↪Logger
MD5: 0ac4b5dff9ded8b64cb2b1f001e763fa
```

```
Some info...
Some processing...
```

Runtime output

```
Logger: Put_Line
Logger: Put_Line
Finalizing Logger...
```

The `Logger` type from the `Loggers` package has two subprograms:

- `Init`, which creates a logger object and creates a logfile *in the background*, and
- `Put_Line`, which writes a message to the logfile.

Note that we use the `(<>)` in the declaration of the `Logger` type to ensure that clients call the `Init` function. This allows us to specify the location of the logfile (as the `Filename` parameter).

Also, we can pass the logger to other subprograms and use it there. In this example, we

pass the logger to the `Some_Processing` procedure and there, we the call `Put_Line` using the logger object.

Finally, as soon as the logger goes out of scope, the log is automatically closed via the call to `Finalize`.

For further reading...

Instead of enforcing a call to `Init`, we could have overridden the `Initialize` procedure and opened the logfile there. This approach, however, would have prevented the client from specifying the location of the logfile in a simple way. Specifying the filename as a type discriminant wouldn't work because we cannot use a string as a discriminant — as we mentioned *in a previous chapter* (page 463), we cannot use indefinite subtypes as discriminants.

If we had preferred this approach, we could generate a random name for the file in the `Initialize` procedure and store the file itself in a temporary directory indicated by the operating system. Alternatively, we could use the access to a string as a discriminant:

Listing 470: loggers.ads

```
with Ada.Text_IO; use Ada.Text_IO;
with Ada.Finalization;

package Loggers is

   type Logger (Filename : access String) is
     limited private;

   procedure Put_Line (L : Logger;
                       S : String);

private

   type Logger (Filename : access String) is new
     Ada.Finalization.Limited_Controlled with
      record
         Logfile : File_Type;
      end record;

   procedure Initialize
     (L : in out Logger);

   procedure Finalize
     (L : in out Logger);

end Loggers;
```

Listing 471: loggers.adb

```
package body Loggers is

   --
   --  SUBPROGRAMS
   --

   procedure Put_Line (L : Logger;
                       S : String) is
   begin
      Put_Line ("Logger: Put_Line");
      Put_Line (L.Logfile, S);
   end Put_Line;

   --
   --  PRIVATE SUBPROGRAMS
   --

   procedure Initialize
     (L : in out Logger) is
   begin
      Create (L.Logfile,
              Out_File,
              L.Filename.all);
   end Initialize;

   procedure Finalize
     (L : in out Logger) is
   begin
      Put_Line ("Finalizing Logger...");
      if Is_Open (L.Logfile) then
         Close (L.Logfile);
      end if;
   end Finalize;

end Loggers;
```

Listing 472: show_logger.adb

```
with Loggers;         use Loggers;
with Some_Processing;

procedure Show_Logger is
   Name : aliased String := "report.log";
   Log : Logger (Name'Access);
begin
   Put_Line (Log, "Some info...");
   Some_Processing (Log);
end Show_Logger;
```

Code block metadata

```
Project: Courses.Advanced_Ada.Resource_Management.Controlled_Types.Applications.
 ↪Logger
MD5: d60ffbafd26d3d70a3d7807487dd95ab
```

```
Some info...
Some processing...
```

Runtime output

```
Logger: Put_Line
Logger: Put_Line
Finalizing Logger...
```

This approach works, but requires us to declare an aliased string (`Name`), which we can give access to in the declaration of the Log object.

By encapsulating the file handling in controlled types, we ensure that files are properly opened when we want to use them, and that the files are closed when they're not going to be used anymore.

Part III

Ada In Practice

Copyright © 2025, AdaCore

This book is published under a CC BY-SA license, which means that you can copy, redistribute, remix, transform, and build upon the content for any purpose, even commercially, as long as you give appropriate credit, provide a link to the license, and indicate if changes were made. If you remix, transform, or build upon the material, you must distribute your contributions under the same license as the original. You can find license details on this page[324]



This course describes how to implement selected programming idioms in the Ada language. Prior knowledge of Ada is required, although some explanations of the underlying semantics are provided when appropriate.

This document was written by Patrick Rogers and reviewed by Gustavo A. Hoffmann, Richard Kenner, Robert A. Duff, and Tucker Taft.

Note

The code examples in this course use an 80-column limit, which is a typical limit for Ada code. Note that, on devices with a small screen size, some code examples might be difficult to read.

Note

Each code example from this book has an associated "code block metadata", which contains the name of the "project" and an MD5 hash value. This information is used to identify a single code example.

You can find all code examples in a zip file, which you can download from the learn website[325]. The directory structure in the zip file is based on the code block metadata. For example, if you're searching for a code example with this metadata:

- Project: Courses.Intro_To_Ada.Imperative_Language.Greet
- MD5: cba89a34b87c9dfa71533d982d05e6ab

you will find it in this directory:

```
projects/Courses/Intro_To_Ada/Imperative_Language/Greet/
cba89a34b87c9dfa71533d982d05e6ab/
```

In order to use this code example, just follow these steps:

1. Unpack the zip file;
2. Go to target directory;
3. Start GNAT Studio on this directory;
4. Build (or compile) the project;
5. Run the application (if a main procedure is available in the project).

[324] http://creativecommons.org/licenses/by-sa/4.0

[325] https://learn.adacore.com/zip/learning-ada_code.zip

CHAPTER

TWENTYNINE

INTRODUCTION

This course describes how to implement selected programming idioms in the Ada language.

What is an idiom? Some would say that an idiom is a workaround for an expressive deficiency in a programming language. That is not what we mean.

What we have in mind are answers to the question "In this situation, what is the most elegant implementation approach?". Elegant software is comprehensible, efficient, concise, reliable, and, as a result, maintainable, so elegance is an economically and technically desirable characteristic.

Design patterns[332] are intended to answer that question, and indeed some would equate idioms with design patterns. But what we have in mind is more general in scope.

For example, Reference Counting[326] is a well-known approach to tracking and managing the storage for objects and is conceptually independent of the programming language. However, reference counting is not a design pattern.

Likewise, Resource Acquisition Is Allocation (RAII)[327], type punning[328], interface inheritance[329], and implementation inheritance[330] are not design patterns.

Those are the kinds of situations and solutions we focus upon.

That said, we may refer to a design pattern to illustrate an idiom's purpose and/or implementation. For example, in the idiom for controlling object creation and initialization, the implementation approach happens to be the same as for expressing a Singleton[332].

In addition to language-independent situations, we also include solutions for situations specific to the Ada language. These idioms are *best practices* in situations that arise given the extensive capabilities of the language.

For example, Ada directly supports tasks (threads) via a dedicated construct consisting of local objects and a sequence of statements. Tasks can also be defined as types, and then used to define components for other composite types. As a result, there is an idiom showing how to associate a task type with an enclosing composite type so that the task components have visibility to the enclosing object's other components.

In all the idioms we want to apply the fundamental principles of software engineering, especially those of abstraction and information hiding. Therefore, we include an idiom for expressing abstractions as types, with compile-time visibility control over the representation. These are the well-known Abstract Data Types, something the Ada language directly supports but using *building blocks* instead of a single construct. For that same reason we include another idiom for defining abstractions that manage global data (Abstract Data Machines). Most of the idioms' solutions will be defined using these abstraction techniques as their starting point.

[332] E. Gamma, R. Helm, and others. *Design Patterns: Elements of Reusable Object-Oriented Software*. Reading, MA, Addison-Wesley Publishing Company, 1995.
[326] https://en.wikipedia.org/wiki/Reference_counting
[327] https://en.wikipedia.org/wiki/Resource_acquisition_is_initialization
[328] https://en.wikipedia.org/wiki/Type_punning
[329] https://en.wikipedia.org/wiki/Subtyping
[330] https://en.wikipedia.org/wiki/Implementation_inheritance

29.1 Assumptions

We assume the reader knows Ada to some degree, including some advanced topics. For those lacking significant familiarity, we hope these solutions will at least give a sense for how to apply the language. We direct such readers to the *online Learn courses dedicated to the Ada language itself* (page 275).

29.2 Definitions

For the sake of avoiding duplication in the idiom entries, the following terms are defined here. Note that the Ada Language Manual includes a glossary in Section 1.3[331] (located in Annex N prior to Ada 2022). Some of the following expand on the definitions found there.

29.2.1 Suppliers and Clients

Suppliers are software units that provide programming entities to other software units, the users. These users are the *clients* of the supplied units. The concept is simple and intuitive, but by defining these terms we can convey these roles quickly in the idioms' discussions.

For example, a unit that defines a type and associated operations would be a supplier. Client units could use that type to declare objects, and/or apply the operations to such objects. The language-defined package `Ada.Text_IO` is an example of a supplier. Similarly, the unit that defines a library, such as a math library, is a supplier. Callers to the math library routines are the clients. The generic package `Ada.Numerics.Generic_Complex_Elementary_Functions`, once instantiated, would be an example supplier. (Arguably, the generic package itself would be a supplier to the client that instantiates it, but instantiation is the only possibility in that narrow case. Only the routines in the instances can be called.)

Bertrand Meyer's book on OOP[333] limits these terms specifically to the case of a type used in an object declaration. Our definitions cover that case but others as well.

Units can be both suppliers and clients, because a given supplier's facility, i.e., the interface and/or implementation, may be built upon the facilities defined by other suppliers.

29.2.2 Compile-time Visibility

In the definitions of supplier and client above, we gave an example in which a supplier's type was used by clients to declare objects of the type. For the client to legally do so — that is, for the compiler to accept this usage and process the code — the use of the supplier's type has to satisfy the scope and visibility rules of the programming language.

Good implementations harness these visibility rules to adhere to the software engineering principles of information hiding and abstraction, both of which require that nothing of the implementation be made visible to clients unless necessary. Compiler enforcement ensures rigorous adherence to those principles.

Therefore, modern languages provide some way to express this control. For example, in Ada, a package can have both a *public* part and a *private* part. Clients have no compile-time visibility to the private part, nor to the package body, as both parts contain implementation artifacts. In class-oriented languages, parts of the class can be marked as *public, private*, and *protected* (the details depend on the specific language).

The idioms *Abstract Data Types* (page 1149) and *Abstract Data Machines* (page 1155) are prime examples used throughout the other idioms.

[331] http://www.ada-auth.org/standards/22rm/html/RM-1-3.html
[333] B. Meyer. *Object-Oriented Software Construction*. Prentice-Hall, 1997.

The idioms explored in *Fundamental Packages* (page 1145) are largely variations on expressing this control in Ada.

More details on the topic are provided in those idioms.

29.2.3 Views

In Ada, a *view* of an entity defines what the developer can legally do with that entity. For example, the declaration of an object defines a view of that object. The operations allowed by that view are determined by the type used to declare the object: a signed integer type would allow signed integer numeric operations, but not, say, bit-level operations, nor array indexing, and so on. Furthermore, the view includes whether the object is a constant.

An entity can have more than one view, depending on where in the text of the source code a view of that entity is considered. For example, let's say that the integer object introduced above is in fact a variable. Within the scope of that variable, we can refer to it by that name and update the value using assignment statements. However, if we pass that variable as the argument to a procedure call, within that subprogram (for that call) the view specifies a different name for the argument, i.e., the formal parameter name. Moreover, if that formal parameter is a mode-in parameter, within that procedure body the view of the actual parameter is as if it were a constant rather than a variable. No assignments via the formal parameter name are allowed because the view at that point in the text — within that procedure body — doesn't allow them, unlike the view available at the point of the call.

As another example, consider a tagged type named `Parent`, and a type derived from it via type extension, named `Child`. It is common for a derived type to have either additional components, or additional operations, or both. For a given object of the `Child` type, the view via type `Child` allows the developer to refer to the extended components and/or operations. But we can convert the `Child` object to a value of the `Parent` type using what is known as a *view conversion*. With that `Parent` view of the `Child` object, we can only refer to those components and operations defined for the `Parent` type. The compiler enforces this temporary view.

For further details about view conversions, please refer to that *specific section of the Advanced Ada course* (page 326).

Views are a fundamental concept in Ada. Understanding them will greatly facilitate understanding the rules of the language in general.

29.2.4 Partial and Full Views

Like objects, types also can have more than one view, again determined by the place in the program text that a view is considered. These views can be used to apply information hiding and abstraction.

The declaration of a private type defines a *partial view* of a type that reveals only some of its properties: the type name, primarily, but in particular not the type's representation. For example:

```
type Rotary_Encoder is private;
```

Private type declarations must occur in the *public part* of a package declaration. Anything declared there is compile-time visible to clients of the package so the type's name is visible, and potentially some other properties as well. Clients can therefore declare objects of the type name, for example, but must adhere to their partial view's effect on what is compile-time visible.

The private type's full representation must be specified within the *private part* of that same package declaration. For example:

```
type Rotary_Encoder is record ... end record;
```

Therefore, within that package private part and within the package body the *full view* is available because full representation information is compile-time visible in those regions. (Parts of child units have the full view as well.) This view is necessary in those two regions of the package because the representation details are required in order to implement the corresponding operations, among other possibilities.

Because the clients only have the partial view they do not have compile-time visibility to the type's internal representation. Consequently, the compiler will not allow representation-specific references or operations in client code. The resulting benefit is that clients are independent of the type's representation and, therefore, it can be changed without requiring coding changes in the clients. Clients need only be recompiled in that case.

This application of information hiding has real-world cost benefits because changing client code can be prohibitively expensive. That's one reason why the maintenance phase of a project is by far the most expensive phase. Another reason is that *maintenance* is often a euphemism for new development. Either way, change is involved.

As a result, when defining types, developers should use private types by default, only avoiding them when they are not appropriate. Not using them should be an explicit design choice, a line item in code reviews. Not defining a major abstraction as a private type should be suspect, just as using a **`struct`** rather than a `class` in C++ should be suspect in that case. (In C++ anything a **`struct`** contains is compile-time visible to clients by default.)

For further details about type views, please refer to that *specific section of the Advanced Ada course* (page 310).

CHAPTER

THIRTY

ESSENTIAL DESIGN IDIOMS FOR PACKAGES

30.1 Motivation

Packages, especially library packages, are modules, and as such are the fundamental building blocks of Ada programs. There is no language-prescribed way to use packages when designing an application, the language just specifies what is legal. However, some legal approaches are more advisable than others.

Specifically, packages should exhibit high cohesion and loose coupling[334]. Cohesion is the degree to which the declarations within a module are related to one another, in the context of the problem being solved. Unrelated entities should not be declared in the same module. This allows the reader to focus on one primary concept, which should be the subject of the package. Coupling is the degree to which a module depends upon other modules. Loose coupling enhances comprehension and maintenance because it allows readers and future developers to examine and modify the module in relative isolation. Coupling and cohesion are interrelated: higher cohesion tends to result in less coupling.

30.2 Implementation(s)

Three idioms for packages were envisioned when the language was first designed. They were introduced and described in detail in the Rationale document for the initial language design[335] and were further developed in Grady Booch's book *Software Engineering with Ada*[336], a foundational work on design with the (sequential part of the) language. Booch added a fourth idiom, the Abstract Data Machine, to the three described by the Rationale. These four idioms have proven themselves capable of producing packages that exhibit high cohesion and loose coupling, resulting in more comprehensible and maintainable source code.

These idioms pre-date later package facilities, such as private packages and hierarchical packages. We describe idioms for those kinds of packages separately.

Two of the simpler idioms are described here. The other two, that are more commonly used, are described in two separate, dedicated entries within this document.

Generic packages are not actually packages, but their instantiations are, so these design idioms apply to generic packages as well.

Because these are idioms for modules, we differentiate them by what the package declarations will contain. But as you will see, what they can contain is a reflection of the degree of information hiding involved.

[334] E. Yourdon and L. L. Constantine. *Structured Design: Fundamentals of a Discipline of Computer Program and System Design*. Prentice-Hall, 1979.
[335] J. Ichbiah, J. Barnes, and others. *Rationale for the Design of the Ada Programming Language*. 1986.
[336] G. Booch. *Software Engineering with Ada*. Benjamin/Cummings Publishing Company, 1983.

30.2.1 Named Collection of Declarations

In the first idiom, the package declaration can contain other declarations only for the following:

- Objects (constants and variables)
- Types
- Exceptions

The idea is to factor out common content required by multiple clients. Declaring common content in one place and letting clients reference the one unit makes the most sense.

For example, the following package declares several physical constants used in a high-fidelity aircraft simulator. These constants are utilized throughout the simulator code, so they are declared in one place and then referenced as needed:

```
package Physical_Constants is
   Polar_Radius    : constant  := 20_856_010.51; --  feet
   Equatorial_Radius : constant  := 20_926_469.20; --  feet
   Earth_Diameter : constant  :=
     2.0 * ((Polar_Radius + Equatorial_Radius)/2.0);
   Gravity  : constant  := 32.1740_4855_6430_4; --  feet/second**2
   Sea_Level_Air_Density    : constant  := 0.002378; --  slugs/foot**3
   Altitude_Of_Tropopause  : constant  := 36089.0; --  feet
   Tropopause_Temperature  : constant  := -56.5; --  degrees-C
end Physical_Constants;
```

No information hiding is occurring when using this idiom.

Pros

Packages designed with this idiom will have high cohesion and low coupling.

The idiom also enhances maintainability because changes to the values, if necessary, need only be made in one place, although in this particular example, we would hope that no such changes will be made.

Cons

When a library package contains variable declarations, these variables comprise global data. In this sense, *global* means potential visibility to multiple clients. Global data should be avoided by default, because the effects of changes are potentially pervasive, throughout the entire set of clients that have visibility to it. In effect the developer must understand everything before changing anything. The introduction of new bugs is a common result. But if, for some compelling reason, the design really called for global data, this idiom provides the way to declare it. Note also that global *constants* are less problematic than variables because they can't be changed.

30.2.2 Groups of Related Program Units

In this idiom, the package can contain all of the declarations allowed by the first idiom, but also contains declarations for operations. These are usually subprograms but other kinds of declarations are also allowed such as protected types and objects. Hence these packages can contain:

- Objects (constants and variables)
- Types
- Exceptions
- Operations

Our intent is that the types declared in the package are used by the operations declared in the package, typically in their formal parameters and/or function return types. In this idiom, however, the types are not private.

For example:

```
package Linear_Algebra is
   type Vector is array (Positive range <>) of Real;
   type Matrix is array (Positive range <>, Positive range <>) of Real;
   function "+" (Left, Right : Vector) return Vector;
   function "*" (Left, Right : Vector) return Matrix;
   -- ...
end Linear_Algebra;
```

In this example, `Vector` and `Matrix` are the types under consideration. The type `Real` might be declared here too, but it might be better declared in a *Named Collection of Declarations* (page 1146) package referenced in a with_clause. In any case, this package declares types and subprograms that manipulate values of those types.

One might also declare variables in the package, but those should not be the central purpose of the package. For example, perhaps we want to have a variable whose value is used as the default for some formal parameters. Clients can change the default for subsequent calls by first assigning a different value to the variable, unlike a hardcoded literal chosen by the developer. It would look like this:

```
Default_Debounce_Time : Time_Span := Milliseconds (75);
--  The default amount of time used to debounce an input pin.
--  This value is tunable.

procedure Await_Active
  (This : Discrete_Input;
   Debounce_Time : Time_Span := Default_Debounce_Time);
```

With this idiom, information hiding applies to the implementation of the visible subprograms in the package body as well as any internal entities declared in the body and used in implementing the visible subprograms.

As mentioned, these idioms apply to generic packages as well. For example, a more realistic approach would be to make type `Real` be a generic formal type:

```
generic
   type Real is digits <>;
package Linear_Algebra is
   type Vector is array (Positive range <>) of Real;
   type Matrix is array (Positive range <>, Positive range <>) of Real;
   function "+" (Left, Right : Vector) return Vector;
   function "*" (Left, Right : Vector) return Matrix;
   --  ...
end Linear_Algebra;
```

Pros

The types and the associated operations are grouped together and are hence highly cohesive. Such packages usually can be loosely coupled as well.

Clients have all the language-defined operations available that the type representations provide. In the case of `Vector` and `Matrix`, clients have compile-time visibility to the fact they are array types. Therefore, clients can manipulate `Vector` and `Matrix` values as arrays: for example, they can create values via aggregates and use array indexing to access specific components.

Cons

Clients can write code that depends on the type's representation, and can be relied upon to do so. Consequently, a change in the representation will potentially require redeveloping the client code, which could be extensive and expensive. That is a serious disadvantage.

However, compile-time visibility to the type representations may be necessary to meet client expectations. For example, engineers expect to use indexing with vectors and matrices. As of Ada 2012, developers can specify the meaning of array indexing but the approach is fairly heavy.

30.3 Notes

1. The rules for what these idiomatic packages contain are not meant to be iron-clad; hybrids are possible but should be considered initially suspect and reviewed accordingly.

CHAPTER

THIRTYONE

ABSTRACT DATA TYPES

31.1 Motivation

In the *Groups of Related Program Units* (page 1146) idiom, client compile-time visibility to the type's representation is both an advantage and a disadvantage. Visibility to the representation makes available the expressiveness of low-level syntax, such as array indexing and aggregates, but in so doing allows client source code to be dependent on the representation. In many cases, the resulting economic and engineering disadvantages of visibility on the representation will outweigh the expressiveness advantages.

For the sake of illustration, let's create a *stack* type that can contain values of type **Integer**. (We use type **Integer** purely for the sake of convenience.) Let's also say that any given Stack object can contain at most a fixed number of values, and arbitrarily pick 100 for that upper bound. The likely representation for the Stack type will require both an array for the contained values and a *stack pointer* indicating the *top* of the stack. Hence this will be a composite type, probably a record type. If we use the *Groups of Related Program Units* (page 1146) idiom the code might look like this:

```
package Integer_Stacks is
   Capacity : constant := 100;
   type Content is array  (1 .. Capacity) of Integer;
   type Stack is record
      Values : Content;
      Top    : Integer range 0 .. Capacity := 0;
   end record;
   procedure Push  (This : in out Stack; Item : in Integer);
   procedure Pop  (This : in out Stack;  Item : out Integer);
   function Empty (This : Stack) return Boolean;
end Integer_Stacks;
```

With this design the compiler will allow client code to directly read and update the two components within any Stack object. For example, given some Stack variable named X, the client can read the value of X.Top, say to determine if X is empty. But by the same token, the client code could change X.Top to some arbitrary value unrelated to the logical top of the stack, completely violating stack semantics.

As a result, where would one look in the source code to find a bug in the handling of some Stack object? It could be literally anywhere in all the client code that uses package Integer_Stacks.

Similarly, changes to the internal representation of a type may become necessary as new requirements are identified. At best, the client code will now fail to compile, making identification of the problem areas simple. At worst, the client code will remain legal but no longer functional. Perhaps an additional component was added that the original components now rely upon, or the original components are used in new ways. Conceivably every client use of Integer_Stacks might need to be changed. Once we find them all we'll have to rewrite them to address the changes in the representation. That's potentially very expensive, perhaps prohibitively so. Worse, our *fixes* will likely introduce new bugs.

These disadvantages argue for an alternative. That is the purpose of this next idiom, known as the Abstract Data Type (ADT)[337],[338].

31.2 Implementation(s)

Abstraction is one of the central principles of software engineering because it is one of the primary ways that humans manage complexity. The idea is to focus on the essentials, in effect the *what*, while ignoring all the inessential implementation details, i.e., the *how*. For example, when we drive a car and want to stop, we press the brake pedal. We don't also think about how the pedal makes the car stop, just that it does so. That's an example of abstraction. In the same way, we know that pressing the accelerator pedal increases the speed of the car, that rotating the steering wheel changes the direction of travel, and so on. If to control the car we had to think about how each part actually works — the brake cylinder and brake pads, the fuel injectors, the spark plugs, the steering shaft, the tie rods, and everything else — we'd certainly crash.

We use abstraction in programming for the same reason. In higher-level languages, an array is an abstraction for the combination of a base address and offset. A file system is composed of a number of layered abstractions, including files (at the top), then tracks, then sectors, then blocks, and ultimately down to individual bytes. A data structure, such as a stack, a queue, or a linked list, is an example of an abstraction, as is a valve, an air-lock, and an engine when represented in software. Even procedures and functions are abstractions for lower-level operations. Decomposing via abstractions allows us to manage complexity because at any given layer we can focus on *what* is being done, rather than how.

Therefore, an abstract data type is a type that is abstract in the sense that[338]:

- It is a higher level of abstraction than the built-in programming language types.
- It is functionally characterized entirely by the operations defined by the ADT itself, along with the common basic operations such as assignment, object declarations, parameter passing, and so on. In particular, clients are not allowed to perform operations that are determined by the type's internal representation. Ideally, this protection is enforced by tools.

The ADT may also be abstract in the sense of object-oriented programming but that is an unrelated issue.

In Ada we use *private types* to define abstract data types because private types make the type's name, but not its representation, visible to clients. These types are composed using syntactical building blocks: a package declaration, separated into two parts, containing a type declared in two parts, and containing declarations for subprograms to manipulate objects of the type via parameters. The compiler uses the building-blocks' compile-time visibility rules to enforce the protections against representation-based operations. (We assume the reader is familiar with private types, but this is such an important, central facility in Ada that we will explain them in some detail anyway.)

Therefore, an ADT package declaration may contain any of the following:

- Constants (but probably not variables)
- A private type
- Ancillary Types
- Exceptions
- Operations

[337] G. Booch. *Software Engineering with Ada*. Benjamin/Cummings Publishing Company, 1983.
[338] B. Liskov and S. Zilles. *Programming with Abstract Data Types*. ACM SIGPLAN symposium on Very high level languages, 1974.

If possible, you should declare at most one private type per ADT package. This keeps things simple and follows the "cohesive" principle. (Note that the *limited-with* construct directly facilitates declaring mutually-dependent private types that are each declared in their own dedicated packages). However, it's not unreasonable to declare more than one private type in the same package, especially if one of the types is clearly the primary type and the other private type is related to the first. For example, in defining an ADT for a maze, we could declare a private type named `Maze` to be the primary abstraction. But mazes have positions within them, and as clients have no business knowing how positions are represented, both `Maze` and `Position` could reasonably be declared as private types in the same package.

You may use any form of private type with this idiom: basic private types, tagged/abstract/limited private types, private type extensions, and so forth. What's important is that the representation occurs in the private part so that it's not compile-time visible to clients.

The abstraction's operations consist of subprograms that each have one or more formal parameters of the type. Clients will declare objects of the type and pass these objects as formal parameters to manipulate those objects.

The operations are known as *primitive operations* because they have the compile-time visibility to the private type's representation necessary to implement the required behavior.

Clients can create their own operations by calling the type's primitive operations, but client's can't compile any operation that manipulates the internal representation.

Consider the following revision to the package `Integer_Stacks`, now as an ADT:

```
package Integer_Stacks is
   type Stack is private;
   procedure Push (This : in out Stack; Item : in Integer);
   procedure Pop (This : in out Stack;  Item : out Integer);
   function Empty (This : Stack) return Boolean;
   Capacity : constant := 100;
private
   type Content is array  (1 .. Capacity) of Integer;
   type Stack is record
      Values : Content;
      Top    : Integer range 0 .. Capacity := 0;
   end record;
end Integer_Stacks;
```

The package declaration now includes the **`private`** reserved word, about half-way down by itself in the example above, thus dividing the package declaration into the *public part* and the *private part*. The compiler only allows clients compile-time visibility to the package public part. No client code that references anything in the private part will compile successfully.

The declaration for the type `Stack` now has two pieces, one in the package visible part and one in the package private part. The visible piece introduces the type name and ends with the keyword **`private`** to indicate that its representation is not provided to clients.

Client code can use the type name to declare objects because the name is visible. Likewise, clients can declare their own subprograms with parameters of type `Stack`, or use type `Stack` as the component type in a composite type declaration. Clients can use a private type in any way that's consistent with the rest of the visible type declaration, except they can't see anything representation-dependent.

The full type definition is in the package private part. Therefore, for any given object of the type, the representation details — the two record components in this example — can't be referenced in client code. Clients must instead only use the operations defined by the package, passing the client objects as the actual parameters. Only the bodies of these operations have compile-time visibility to the representation of the `Stack` parameters, so only they can implement the functionality for those parameters.

Because package-defined subprograms are the only code that can access the internals of objects of the type, the designer's intended abstract operations are strictly enforced. They are the only manipulations that a client can perform. As we mentioned, basic operations such as assignment are allowed, unless the ADT is *limited* as well as private, but these basic operations do not violate the abstraction.

You may, of course, also require other ancillary type declarations in the package, either for the implementation or as types for additional parameters for the visible operations. The array type `Content` is an example of the former case. When it is strictly an implementation artifact, as in this case, it should be in the private part so that it's hidden from clients.

The ADT idiom extends the information hiding applied by the *Groups of Related Program Units* (page 1146) idiom to include the type's representation.

The compile-time lack of visibility to the representation means that clients no longer have a way to construct ADT values from the constituent parts. For example, record aggregates are no longer possible for clients using the `Stack` ADT. Likewise, clients no longer have a way to read the individual constituent components. (Whether doing so is appropriate will be addressed below.) Therefore, an ADT package may include *constructor* and *selector/accessor* subprograms. (The term *constructor* is only conceptually related to the same term in some other languages, such as C++.)

For an example of an abstraction that includes constructors and selectors, imagine there is no language-defined `Complex` number type. We could use the following ADT approach:

```
package Complex_Numbers is
   type Complex_Number is private;
   --  function operating on Complex_Number, eg "+" ...
   --  constructors and selectors/accessors
   function Make (Real_Part, Imaginary_Part : Float) return Complex_Number;
   function Real_Part (This : Complex_Number) return Float;
   function Imaginary_Part (This : Complex_Number) return Float;
private
   type Complex_Number is record
      Real_Part : Float;
      Imaginary_Part : Float;
   end record;
end Complex_Numbers;
```

In the above, the function `Make` is a constructor that replaces the use of aggregates for constructing `Complex_Number` values. Callers pass two floating-point values to be assigned to the components of the resulting record type. In the `Stack` ADT, a constructor for `Stack` objects wasn't required because any stack has a known initial state, i.e., empty, and the component default initialization is sufficient to achieve that state. Complex numbers don't have any predeterminable state so the constructor is required.

Likewise, functions `Real_Part` and `Imaginary_Part` are selector/accessor functions that return the corresponding individual component values of an argument of type `Complex_Number`. They are needed because the mathematical definition of complex numbers has those two parts, so clients can reasonably expect to be able to get such values from a given object. (The function names need not be distinct from the component names, but can be if desired.)

However, by default, selector/accessor functions are not included in the ADT idiom, and especially not for every component of the representation. There are no *getter* operations if you are familiar with that term.

There may be cases when what looks like an accessor function is provided, when in fact the function computes the return value. Similarly, there may be functions that simply return the value of a component but are part of the abstraction and happen to be implementable by returning the value of a component. For example, a real stack's ADT package would include a function indicating the extent of the object — that is, the number of values currently contained. In our example implementation the `Top` component happens to indicate that

value, in addition to indicating the current top of the stack. The body of the `Extent` function can then be as follows:

```
function Extent (This : Stack) return Natural is (This.Top);
```

But a different representation might not have a `Top` component, in which case the function would be implemented in some other way. (For example, we could have declared a subtype of **`Natural`**, using `Capacity` as the upper bound, for the function result type.)

You should not include true *getter* functions that do not meet an abstraction-defined requirement and exist purely to provide client access to the otherwise hidden representation components included. Their usage makes the client code dependent on the representation, just as if the client had direct access. For the same reason, by default there are no *setter* procedures for the representation components. Both kinds of operations should be considered highly suspect. There's no point in hiding the representation if these operations will make it available to clients, albeit indirectly.

31.3 Pros

The advantages of an ADT are due to the strong interface presented, with guaranteed enforcement by the compiler rather than by reliance on clients' good behavior. The ADT designer can rely on client adherence to the intended abstraction because client code that violates the designer's abstraction by directly manipulating the internals of the type will not compile; clients must call the designer's operations to manipulate the objects.

A package defining a strong interface will exhibit high cohesion, thereby aiding comprehension and consequently easing both development and maintenance.

An ADT enhances maintainability because a bug in the ADT implementation must be in the package that defines the ADT itself. The rest of the application need not be explored because nothing elsewhere that accessed the representation would compile. (We ignore child packages for the time-being.) The maintenance phase is the most expensive of the project phases for correcting errors, so this is a significant benefit.

Although changes to the internal representation of an ADT may become necessary, the scope of those changes is limited to the ADT package declaration and body because legal client code cannot depend on the representation of a private type. Consequently, changes to the type's representation can only require recompilation (and hence relinking) of client code, but not rewriting.

A change in representation may have non-functional considerations that prompt a change in client usage, such as performance changes, but it will not be a matter of the legality of the client code. Illegal client usage of an ADT wouldn't have compiled successfully in the first place.

The private type is the fundamental approach to creating abstractions in Ada, just as the use of the *public*, *private*, and *protected* parts of classes is fundamental to creating abstractions in class-oriented languages. Not every type can be private, as illustrated by the client expectation for array indexing in Ada prior to Ada 2012. Not every type should be private, for example those that are explicitly numeric. But the ADT should be the default design idiom when composing a solution.

31.4 Cons

There is more source code text required in an ADT package compared to the idiom in which the representation is not hidden (the *Groups of Related Program Units* (page 1146)). The bulk of the additional text is due to the functions and procedures required to provide the capabilities that the low-level representation-based syntax might have provided, i.e., the *constructor* and *selector/accessor* functions. We say *might have provided* because these

additional operations are by no means necessarily included. In general, the additional text required for private types is worth the protections afforded.

31.5 Relationship With Other Idioms

The package-oriented idioms described here and *previously* (page 1145) are the foundational program composition idioms because packages are the primary structuring unit in Ada. That is especially true of the *Abstract Data Type* (page 1149) idiom, which is the primary type specification facility in Ada. We will describe additional package-oriented idioms, especially regarding hierarchical packages, but those kinds of packages are optional.

The basic package is not optional in Ada for a program of any significant size or complexity. (One could have a program consisting entirely of the main program, but either that program is relatively simple and small or it is badly structured.) As a consequence, other idioms will exist within packages designed using one of these idioms or some other package idiom.

31.6 Notes

1. With the package idioms that declare one or more types, especially the ADT idiom, the principle of Separation of Concerns dictates that objects of the type used by clients be declared by clients in client units, not in the same package that declares the type or types.
2. The Ada Rationale document did not introduce the concept of Abstract Data Types. The ADT concept had already been introduced and recognized as effective when the first version of Ada was being designed[Page 1150, 338]. The Ada language requirements document, *Steelman*[339], uses the term "Encapsulated Definitions" and describes the information hiding to be provided. Steelman does not specify the implementation syntax because requirements documents do not include such directives. The language designers implemented those requirements via package private parts and private types.
3. The ADT is the conceptual foundation for the *class* construct's visibility control in some class-oriented languages.

[339] HOLWG. *Department of Defense Requirements for High Order Computer Programming Language "STEELMAN"*. Department of Defense, 1978.

CHAPTER

THIRTYTWO

ABSTRACT DATA MACHINES

32.1 Motivation

In some systems, only one logical "instance" of an abstraction should exist in the software. This requirement may stem from the functionality involved. For example, a subsystem-level software logging facility should be unique at that level. Likewise, the function of a hardware device may be such that only one instance should exist in both the system and the software. A security device that validates users would be an example. Another reason can be simple physical reality. There might be only one on-board or on-chip device of some sort. Execution on that board or chip entails there being only one such device present.

How can the software representing the abstraction best implement this requirement?

The Abstract Data Type (ADT) *Abstract Data Type* (page 1149) idiom is the primary abstraction definition facility in Ada. Given an ADT that provides the required facility you could simply declare a single object of the type. But how could you ensure that some other client, perhaps in the future, doesn't declare another object of the type, either accidentally or maliciously?

As a general statement about program design, if there is something that must not be allowed, the ideal approach is to use the language rules to make it impossible. That's far better than debugging. For example, we don't want clients to have compile-time access to internal representation artifacts, so we leverage the language visibility rules to make such access illegal. The compiler will then reject undesired references, rigorously.

The occasional need to control object creation is well-known, so much so that there is a design pattern for creating an ADT in which only one instance can ever exist. Known as the "singleton" pattern, the given programming language's rules are applied such that only the ADT implementation can create objects of the type. Clients cannot do so. The implementation only creates one such object, so multiple object declarations are precluded.

Singletons can be expressed easily in Ada *Controlling Object Initialization and Creation* (page 1173) but there is an alternative in this specific situation.

This idiom entry describes the alternative, known as the Abstract Data Machine (ADM). The Abstract Data Machine was introduced by Grady Booch[340] as the Abstract State Machine, but that name, though appropriate, encompasses more in computer science than we intend to evoke.

32.2 Implementation(s)

The ADM is similar to the ADT idiom in that it presents an abstraction that doesn't already exist in the programming language. Furthermore, like the ADT, operations are provided to clients to manipulate the abstraction state, which is not otherwise compile-time visible to client code.

[340] G. Booch. *Software Engineering with Ada*. Benjamin/Cummings Publishing Company, 1983.

Unlike the ADT, however, the ADM does not define the abstraction as a type. To understand this difference, first recall that type declarations are descriptions for objects that will contain data (the state). For example, our earlier Stack ADT was represented as a record containing two components: an array to hold the values logically contained by the Stack and an integer indicating the logical top of that array (the stack pointer). No data actually exists, i.e., is allocated storage, until objects of the type are declared. Clients can declare as many objects of type Stack as they require and each object has a distinct, independent copy of the data.

Continuing the Stack example, clients could choose to declare only one object of the Stack type, in which case only one instance of the data described by the Stack type will exist:

```
Integer_Stack : Stack;
```

But, other than convenience, there is no *functional* difference from the client declaring individual variables of the representational component types directly, one for the array and one for the stack pointer:

```
Capacity : constant := 100;
type Content is array  (1 .. Capacity) of Integer;
Values : Content;
Top    : Integer range 0 .. Capacity := 0;
```

or even this, using an anonymously-typed array:

```
Capacity : constant := 100;
Values : array  (1 .. Capacity) of Integer;
Top    : Integer range 0 .. Capacity := 0;
```

If there is to be only one logical stack, these two variables will suffice.

That's what the ADM does. The state variables are declared directly within a package, rather than as components of a type. In that way the package, usually a library package, declares the necessary state for a single abstraction instance. But, as an abstraction, those data declarations must not be compile-time visible to clients. Therefore, the state is declared in either the package private part or the package body. Doing so requires that visible operations be made available to clients, as with the ADT. Hence the combination of a package, the encapsulated variables, and the operations is the one instance of the abstraction. That combination is the fundamental concept for the ADM idiom.

Therefore, the package declaration's visible section contains only the following:

- Constants (but almost certainly not variables)
- Ancillary Types
- Exceptions
- Operations

The package declaration's private part and the package body may contain all the above, but one or the other (or both) will contain variable declarations representing the abstraction's state.

Consider the following ADM version of the package Integer_Stacks, now renamed to Integer_Stack for reasons we will discuss shortly. In this version we declare the state in the package body.

```
package Integer_Stack is
   procedure Push (Item : in Integer);
   procedure Pop (Item : out Integer);
   function Empty return Boolean;
   Capacity : constant := 100;
end Integer_Stack;
```

(continues on next page)

(continued from previous page)

```
package body Integer_Stack is
   Values : array  (1 .. Capacity) of Integer;
   Top    : Integer range 0 .. Capacity := 0;
   procedure Push  (Item : in Integer) is
   begin
      --  ...
      Top := Top + 1;
      Values (Top) := Item;
   end Push;
   procedure Pop (Item : out Integer) is ... end Pop;
   function Empty return Boolean is (Top = 0);
end Integer_Stack;
```

Note how the procedure and function bodies directly access the local variables hidden in the package body.

For those readers familiar with programming languages that can declare entities to be "static," the effect is as if the two variables in the package body are static variables.

When using this idiom, there is only one stack (containing values of some type, in this case type Integer). That's why we changed the name of the package from `Integer_Stacks`, i.e., from the plural form to the singular. It may help to note that what is now the package name was the name of the client's variable name when there was a `Stack` type involved.

As with the ADT idiom, clients of an ADM can only manipulate the encapsulated state via the visible operations. The difference is that the state to be manipulated is no longer an object passed as an argument to the operations. For illustration, consider the Push procedure. The ADT version requires the client to pass the `Stack` object intended to contain the new value (i.e., the actual parameter for the formal named `This`):

```
procedure Push (This : in out Stack; Item : in Integer);
```

In contrast, the ADM version has one less formal parameter, the value to be pushed:

```
procedure Push (Item : in Integer);
```

Here is a call to the ADM version of Push:

```
Integer_Stack.Push (42);
```

That call places the value 42 in the (hidden) array `Integer_Stack.Values` located within the package body. Compare that to the ADT approach, in which objects of type `Stack` are manipulated:

```
Answers : Stack;
--  ...
Push (Answers, 42);
```

That call places the value 42 in the (hidden) array `Answers.Values`, i.e., within the `Answers` variable. Clients can declare as many `Stack` objects as they require, each containing a distinct copy of the state defined by the type. In the ADM version, there is only one stack and therefore only one instance of the state variables. Hence the `Stack` formal parameter is not required.

Rather than declare the abstraction state in the package body, we could just as easily declare it in the package's private section:

```
package Integer_Stack is
   procedure Push (Item : in Integer);
   procedure Pop (Item : out Integer);
   function Empty return Boolean;
```

(continues on next page)

(continued from previous page)

```
   Capacity : constant := 100;
private
   Values : array  (1 .. Capacity) of Integer;
   Top    : Integer range 0 .. Capacity := 0;
end Integer_Stack;
```

Doing so doesn't change anything from the client code point of view; just as clients have no compile-time visibility to declarations in the package body, they have no compile-time visibility to the items in the package private part. This placement also doesn't change the fact that there is only one instance of the data. We've only changed where the data are declared. (We will ignore the effect of child packages here.)

Because the two variables are implementation artifacts we don't declare them in the package's visible part.

Note that the private section wasn't otherwise required when we chose to declare the data in the package body.

The ADM idiom applies information hiding to the internal state, like the ADT idiom, except that the state is not in an object declared by the client. Also, like the *Groups of Related Program Units* (page 1146), the implementations of the visible subprograms are hidden in the package body, along with any non-visible entities required for their implementation.

There are no constructor functions returning a value of the abstraction type because the abstraction is not represented as a type. However, there could be one or more initialization procedures, operating directly on the hidden state in the package private part or package body. In the `Stack` ADM there is no need for them because of the abstraction-appropriate default initial value, as is true of the ADT version.

The considerations regarding selectors/accessors are the same for the ADM as for the ADT idiom, so they are not provided by default. Also like the ADT, so-called *getters* and *setters* are highly suspect and not provided by the idiom by default.

As mentioned, the ADM idiom can be applied to hardware abstractions. For example, consider a target that has a single on-board rotary switch for arbitrary use by system designers. The switch value is available to the software via an 8-bit integer located at a dedicated memory address, mapped like so:

```
Switch : Unsigned_8 with
   Volatile,
   Address => System.Storage_Elements.To_Address (16#FFC0_0801#);
```

Reading the value of the memory-mapped `Switch` variable provides the rotary switch's current value.

However, on this target the memory at that address is read-only, and rightly so because the only way to change the value is to physically rotate the switch. Writing to that address has no effect whatsoever. Although doing so is a logical error no indication is provided by the hardware, which is potentially confusing to developers. It certainly looks like a variable, after all. Declaring it as a constant wouldn't suffice because the user could rotate the switch during execution.

Furthermore, although mapped as a byte, the physical switch has only 16 total positions, read as the values zero through fifteen. An unsigned byte has no such constraints.

The compiler will enforce the read-only view and the accessor operation can handle the range constraint. The ADM is a reasonable choice because there is only one such physical switch; a type doesn't bring any advantages in this case. The following illustrates the approach:

```
with Interfaces; use Interfaces;
package Rotary_Switch is
```

(continues on next page)

(continued from previous page)

```
   subtype Values is Unsigned_8 range 0 .. 15;
   function State return Values;
end Rotary_Switch;
```

Clients can then call the function `Rotary_Switch.State` to get the switch's current value, as a constrained subtype. The body will handle all the details.

```
with System.Storage_Elements;  use System.Storage_Elements;
package body Rotary_Switch is
   Switch : Unsigned_8 with Volatile, Address => To_Address (16#FFC0_0801#);
   function State return Values is
   begin
      if Switch in Values then
         return Switch;
      else
         raise Program_Error;
      end if;
   end State;
end Rotary_Switch;
```

The range check in the function body might be considered over-engineering because the switch is a physical device that cannot have more than 16 values, but physical devices have a habit of springing surprises. Note that *attribute Valid* (page 384) would not be useful here because there are no invalid bit patterns for an unsigned integer. If, on the other hand, we were working with an enumeration type, for example, then `'Valid` would be useful.

32.3 Pros

In terms of abstraction and information hiding, the ADM idiom provides the same advantages as the ADT idiom: clients have no visibility to representation details and must use the operations declared in the package to manipulate the state. The compiler enforces this abstract view. The ADM also has the ADT benefit of knowing where any bugs could possibly be located. If there is a bug in the behavior, it must be in the one package defining the abstraction itself. No other code would have the compile-time visibility necessary.

In addition, less source code text is required to express the abstraction.

32.4 Cons

The disadvantage of the ADM is the lack of flexibility.

An ADM defines only one abstraction instance. If more than one becomes necessary, the developer must copy-and-paste the entire package and then change the new package's unit name. This approach doesn't scale well.

Furthermore, the ADM cannot be used to compose other types, e.g., as the component type in an array or record type. The ADM cannot be used to define the formal parameter of a client-defined subprogram, cannot be dynamically allocated, and so on.

But if one can know with certainty that only one thing is ever going to be represented, as in the hardware rotary switch example, the ADM limitations are irrelevant.

CHAPTER

THIRTYTHREE

PROGRAMMING BY EXTENSION

33.1 Motivation

When declaring entities in a package, developers should ensure that the client view — the package visible part — contains no implementation artifacts. Doing so is important conceptually, but also practically, because any declarations visible to clients inevitably will be used by clients and, as a result, will become permanent fixtures because removal would cause expensive changes in the client code.

The intended client API declarations must be in the package visible part, of course. The question, then, is whether to declare implementation artifacts in the package private part or in the package body. Those are the two parts of a package that do not make declarations compile-time visible to client code.

Some of these entities must be declared in the package private part because they are required in the declaration of some other entity appearing in that part. For example, when using the *ADT idiom* (page 1149), an ancillary type might be required for the completion of the private type. That was the case with the *ADT version* (page 1151) of the `Integer_Stacks` package, repeated here for convenience:

```
package Integer_Stacks is
   type Stack is private;
   --  ...
   Capacity : constant := 100;
private
   type Content is array  (1 .. Capacity) of Integer;
   type Stack is record
      Values : Content;
      Top    : Integer range 0 .. Capacity := 0;
   end record;
end Integer_Stacks;
```

The array type `Content` is required for the `Stack` record component because anonymously-typed array components are illegal. Clients have no business using the type `Content` directly so although it would be legal to declare it in the public part, declaration in the private part is more appropriate.

Likewise, a function called to provide the default initial value for a private type's component must be declared prior to the reference. If the function is truly only part of the implementation, we should declare it in the package private part rather than the public part.

In contrast, there may be implementation-oriented entities that are referenced only in the package body. They could be declared in the package body but could alternatively be declared in the package declaration's private part. Those are the entities (declarations) in question for this idiom.

For a concrete example, here is an elided *ADM version of the stack abstraction* (page 1156), with the stack state declared in the package body:

```
package Integer_Stack is
   procedure Push (Item : in Integer);
   procedure Pop (Item : out Integer);
   function Empty return Boolean;
   Capacity : constant := 100;
end Integer_Stack;

package body Integer_Stack is
   Values : array  (1 .. Capacity) of Integer;
   Top    : Integer range 0 .. Capacity := 0;
   procedure Push  (Item : in Integer) is
   begin
      --  ...
      Top := Top + 1;
      Values (Top) := Item;
   end Push;
   procedure Pop (Item : out Integer) is ...
   function Empty return Boolean is ...
end Integer_Stack;
```

We could add the private part to the package declaration and move the state of the *ADM* (page 1155) — the two variables in this case — up there without any other changes. The subprogram bodies have the same visibility to the two variables either way. (There is no requirement for the `Content` type because `Values` is not a record component; anonymously-typed array objects are legal.) From the viewpoint of the language and the abstraction, the location is purely up to the developer.

33.2 Implementation(s)

When you have a choice of placement, putting the state in either the package private part or the package body is reasonable, but only one of the two is amenable to future requirements.

Specifically, placement in the private part of the package allows *programming by extension*[342] via hierarchical *child* packages. Child packages can be written immediately after the *parent* package but can also be written years later, thus accommodating changes due to new requirements.

Programming by extension allows us to extend an existing package's facilities without having to change the existing package at all. Avoiding source code changes to the existing package is important because doing so might be very expensive. In certified systems, the changed package would require re-certification, for example. Changes to the parent package are avoidable because child packages have compile-time visibility to the private part of the ancestor package (actually the entire ancestor package hierarchy, any of which could be useful). Thus, the extension in the child package can depend on declarations in the existing parent package's private part.

Therefore, if the developer can know, with certainty, that no visibility beyond the one package will ever be appropriate, the declaration should go in the package body. Otherwise, it should go in the package private part, just in case an extension becomes necessary later.

Using our ADM stack example, we could move the state from the package body to the private part:

```
package Integer_Stack is
   procedure Push (Item : in Integer);
   procedure Pop (Item : out Integer);
   function Empty return Boolean;
   Capacity : constant := 100;
```

(continues on next page)

[342] J. Barnes. *Programming In Ada 95*. Addison-Wesley, 1998.

(continued from previous page)

```
private
   Values : array  (1 .. Capacity) of Integer;
   Top    : Integer range 0 .. Capacity := 0;
end Integer_Stack;
```

Note that the private part was not otherwise required by the language in this example.

With that change, a new child package could be created with extended functionality:

```
package Integer_Stack.Utils is
   procedure Reset;
end Integer_Stack. Utils;

package body Integer_Stack.Utils is
   procedure Reset is
   begin
      Top := 0;
   end Reset;
end Integer_Stack.Utils;
```

These child packages are not client code, they contain extensions to the existing abstraction. Hence they are part of what may be considered a subsystem consisting of the original package and the new child package. The child package contains an extension of the abstraction defined by the parent package, so the child is directly related. Given that characterization of child packages we can say that the parent package private part is not visible to client code and, therefore, does not represent a *leak* of implementation details to clients.

33.3 Pros

We can extend an abstraction without changing the source code defining that abstraction, thereby meeting new requirements without incurring potentially expensive redevelopment.

33.4 Cons

Clients could abuse the hierarchical package visibility rules by creating a child package that doesn't really extend the existing package abstraction.

Abuse of the visibility rules allows child packages that can break the abstraction. For example, if we only change the name of procedure `Reset` in package `Integer_Stack.Utils` to `Lose_All_Contained_Data` then the routine has a rather different complexion.

Similarly, abuse of the visibility rules allows child packages that can indirectly leak state from the parent package. For example:

```
package Integer_Stack.Leaker is
   function Current_Top return Integer;
end Integer_Stack.Leaker;

package body Integer_Stack.Leaker is
   function Current_Top return Integer is (Top);
end Integer_Stack.Leaker;
```

We could do that without even requiring a package body, using an expression function for the completion:

```
package Integer_Stack.Leaker is
   function Current_Top return Integer;
```

(continues on next page)

(continued from previous page)

```
private
   function Current_Top return Integer is (Top);
end Integer_Stack.Leaker;
```

The function must be completed in the private part because that is where compile-time visibility to the parent begins within a child package.

Code reviews are the only way to detect these abuses, although detection of potential cases could be automated with an analysis tool such as Libadalang[341].

33.5 Relationship With Other Idioms

We assume the use of the *Abstract Data Type* (page 1149) or *Abstract Data Machine* (page 1155) idioms for the existing package abstraction, as well as for the child package.

33.6 Notes

This guideline will already be used when developing a subsystem (a set of related packages in an overall hierarchy) as a structuring approach during initial development. The idiom discussed here is yet another reason to use the private part, but in this case for the sake of the future, rather than initial, development.

The very first version of Ada (Ada 83) did not have hierarchical library units so, typically, anything not required in the private part was declared in the package body. Declaring them in the private part would only clutter the code that had to be there, without any benefit. The author's personal experience and anecdotal information confirms that after Ada 95 introduced hierarchical library units, some declarations in existing package bodies tended to "percolate up" to the package declarations' private parts.

[341] https://github.com/AdaCore/libadalang

CHAPTER

THIRTYFOUR

CONSTRUCTOR FUNCTIONS FOR ABSTRACT DATA TYPES

34.1 Motivation

In languages supporting object-oriented programming (OOP), including Ada, *constructors* are not inherited when one type is derived from another. That's appropriate because, in general, they would be unable to fully construct values for the new type. The purpose of this idiom is to explain how Ada defines constructors, how the language rules prevent constructor inheritance, and how to design the constructor code in light of those rules.

Ada uses tagged types to fully support dynamic OOP. Therefore, in the following, a *derived type* refers to a tagged type that is declared as a so-called *type extension* — a form of inheritance — based on some existing *parent* tagged type. The extension consists of additional components and/or additional or changed operations beyond those inherited from the existing parent type.

This discussion assumes these tagged types are declared in packages designed using the *Abstract Data Type* (page 1149) (ADT) idiom. We strongly recommend the reader be comfortable with that idiom before proceeding.

As abstract data types, the parent type is a private type, and the derived type is a *private extension*. A private extension is a type extension declaration that does not reveal the components added, if any. The parent type could itself be an extended type, but the point is that these types will all be private types one way or another. Declarations as private types and private extensions are not required by the language for inheritance, but as argued in the ADT idiom discussion, doing so is recommended in the strongest terms. OOP doesn't change that, and in fact the encapsulation and information hiding that are characteristic of the ADT idiom are foundational principles for OOP types.

For an example of a private extension, given a tagged type named `Graphics.Shape` one can declare a new type named `Circle` via type extension:

```
type Circle is new Graphics.Shape with private;
```

This declaration will be in the public part of a package, but, as a private type extension, the additional components are not compile-time visible to client code, conforming to ADT requirements. That's what the reserved word **`private`** indicates in the type declaration.

Instead of a distinct constructor syntax, Ada uses regular functions to construct objects. Specifically, so-called *constructor functions* are functions that return an object of the type.

```
type Circle is new Graphics.Shape with private;

function New_Circle (Radius : Float) return Circle;
```

Like any function there may be formal parameters specified, but not necessarily.

Functions and procedures that manipulate objects of the private type are *primitive operations* for the type if they are declared in the same package as the type declaration itself. For procedures, that means they have formal parameters of the type. For functions, that

means they either have formal parameters of the type, or return a value of the type, or both.

Declaration within the same package as the type itself provides the compile-time visibility to the type's representation required to implement the subprograms.

Other operations might be declared in the same package too, but if they do not manipulate or return values of the type they are not primitive operations for the type. (Their location in that package is somewhat suspect and should be reviewed explicitly.)

Primitive operations, and only primitive operations, are inherited during type derivation.

If you think in terms of Abstract Data Types all these rules make sense.

Now, here's the rub.

Constructor functions require that same compile-time visibility so the intuitive approach will be to declare them in the same package declaration as the type. As a result, they will be primitive operations for that type.

However, that means that the constructor functions will be inherited, contrary to the expectation for constructors. Therefore, Ada has rules specific to primitive constructor functions that have the effect of preventing their inheritance.

The explanation and illustration for these rules first requires explanation of the word *abstract*. We mentioned above that the package enclosing the type will be designed with the *Abstract Data Type* (page 1149) idiom. In that idiom *abstract* means that the type represents an abstraction. (See that section for the details.)

The term *abstract* also has a meaning in OOP, one that is unrelated to an ADT. In OOP, an *abstract* type is one that defines an interface but at most a partial implementation. As such, the type can serve as the ancestor type for derived types but cannot be used to declare objects. An abstract type in Ada includes the reserved word **abstract** in the declaration. For example:

```
type Foo is abstract tagged private;
```

Similarly, subprograms can be abstract. These again define an interface, via the subprogram formal parameters and result type, but are not callable units. In Ada these too include the word **abstract** in their declarations, for example:

```
procedure Do_Something (This : in out Foo) is abstract;
```

Now we can explain how Ada prevents constructor inheritance.

Whenever a tagged type is extended, all inherited constructor functions automatically become abstract functions for the extended type, just as if they were explicitly declared abstract.

However, only abstract types can legally have abstract primitive operations. Concrete types may not, so that we can never dynamically dispatch to a subprogram without an actual implementation.

Therefore, unless the extended child type is itself abstract, the type extension will be illegal. The compiler will reject the declaration of the child type, thus preventing this inappropriate constructor inheritance.

For an example, both to illustrate the code and the Ada rules, consider this simple package declaration that presents the tagged private type `Graphics.Shape`:

```
package Graphics is
   type Shape is tagged private;
   function Make (X, Y : Float) return Shape;
   ...
private
```

(continues on next page)

(continued from previous page)

```
   type Shape is tagged record
      X : Float := 0.0;
      Y : Float := 0.0;
   end record;
end Graphics;
```

Note in particular the primitive constructor function named Make that constructs a value of type Shape.

Because type Shape is tagged, other types can extend it:

```
with Graphics;
package Geometry is
   type Circle is new Graphics.Shape with private;  -- a private extension
   --  ...
private
   type Circle is new Graphics.Shape with record
      Radius : Float;
   end record;
end Geometry;
```

Type `Circle` automatically inherits the components and primitive operations defined by type Shape, including the constructor function Make. No additional declarations are required in order to inherit these operations or components. The inherited operations are now primitive operations for the new type.

Inherited primitive operations have an unchanged formal parameter and result-type profile, except for the controlling parameter type name, so although Make now returns a `Circle` object, the function still only has parameters for the X and Y components. Hence this version of Make could not set the `Radius` component in the returned `Circle` value to anything other than some default.

Therefore, to prevent this inherited function from being available, two Ada rules come into play. The first rule specifies that the implicit function is inherited as if declared explicitly abstract:

```
function Make (X, Y : Float) return Circle is abstract;
-- as actually inherited, implicitly
```

Note the reserved word **`abstract`** in the implicit function declaration. This declaration doesn't actually appear in the source code because all the inherited primitive operations are implicitly declared.

Another rule specifies that only abstract types can have abstract primitive subprograms. Type `Circle` is not abstract in this sense, therefore the combination of those two rules makes the `Circle` type extension illegal. Package `Geometry` will not compile successfully.

Failing to compile is safe — it prevents clients from having a callable function that in general cannot suffice — but requires an alternative so that sufficient constructor functions are possible.

Therefore, a general design idiom is required for defining constructor functions for concrete tagged Abstract Data Types.

34.2 Implementation(s)

The general approach uses functions for constructing objects but prevents these functions from being inherited. The problem is thus circumvented entirely.

To prevent their being inherited, the implementation prevents the constructor functions from being primitive operations. However, these functions require compile-time visibility

to the parent type's representation in order to construct values of the type, as this typically involves assigning values to components in the return object. The alternative approach must supply the compile-time visibility that primitive operations have.

Therefore, the specific implementation is to declare constructor functions in a separate package that is a *child* of the package declaring the tagged type. This takes advantage of the *hierarchical library units* capability introduced in Ada 95.

Operations declared in a child package are not primitive operations for the type in the parent package, so they are not inherited when that type is extended. Consequently they do not become abstract.

In addition, the required visibility to the parent type's representation in the private part will be available to the functions' implementations because the private part and body of a child package have compile-time visibility to the parent package's private part.

In this idiom, any package declaring a tagged type, either directly or by type extension, will have a *constructors* child package if constructors are required. For example:

```
package Graphics.Constructors is
   function Make (X, Y : Float) return Shape;
end Graphics.Constructors;
```

and similarly, for `Circle`:

```
package Geometry.Constructors is
   function Make (X, Y, R : Float) return Circle;
end Geometry.Constructors;
```

Each of these two package declarations will have a package body containing the body of the corresponding function. In fact such packages can declare as many constructor functions as required, overloaded or not.

Clients that want to use a constructor function will specify the constructor package in the context clauses for their units, as usual. The constructor package body for an extended type might very well do so itself, as shown below:

```
with Graphics.Constructors; use Graphics.Constructors;
package body Geometry.Constructors is
   function Make (X, Y, R : Float) return Circle is
     (Circle'(Make (X, Y) with Radius => R));
end Geometry.Constructors;
```

Of course, the name "Constructors" is not required for the child packages. It could be "Ctors", for example (a name common in C++), or something else. But whatever the choice, regularity enhances comprehension so the same child package name should be used throughout.

34.3 Pros

The issue is sidestepped entirely, and as an additional benefit, the parent packages are that much simpler because the constructor function declarations and bodies are no longer present there. The *constructors* child packages themselves will be relatively simple since they contain only the constructor functions and any ancillary code required to implement them. Simpler code enhances comprehension and correctness.

Having the constructors declared in separate packages applies the principle of Separation of Concerns, between the code defining the type's semantics and the code for constructing objects of the type. This principle also enhances comprehension.

34.4 Cons

There will be a child package for each tagged type that requires constructors, hence more packages and files (assuming one unit per file, which is desirable in itself, even if not required by the language).

Some developers might argue for having fewer files, presumably containing larger units. In the author's experience larger units make comprehension, and therefore correctness, unjustifiably difficult if smaller units are possible. Some units are unavoidably large and complicated but often we can achieve relative simplicity.

For those developers, however, the constructor package could be declared instead as a nested package located within the package defining the tagged type. Doing so would achieve the same effect as using a child package because the contained functions would not be primitive. Therefore, they would not inherited.

This alternative would reduce the number of files back to the minimum. However, the defining package would be relatively more complicated because of this nested package. Note that the nested package declaration would require a nested package body too.

In short, the alternative reduces the number of files at the cost of additional unit complexity. (If the issue with the larger number of files is difficulty in locating individual entities of interest, any decent IDE will make doing so trivial.)

The alternative also loses the distinction between clients that use objects of the type and clients that create those objects, because, with the child package approach, the latter will be the only clients that have context clauses for the constructor packages.

34.5 Relationship With Other Idioms

N/A

34.6 Notes

For those interested, in this section we provide a discussion of alternatives to the implementation presented, and why they are inadequate.

Changing the behavior of an inherited operation requires an explicit conforming subprogram declaration and therefore a new subprogram body for that operation. This change is known as *overriding* the inherited operation.

Package `Geometry` could declare a function with the additional parameters required to fully construct a value of the new type. In this case the new constructor would include the `Radius` parameter:

```
function Make (X, Y, Radius : Float) return Circle;
```

But such a function would not be overriding for the inherited version because the parameter and result type profile would be different. This function `Make` would overload the inherited function, not override it. The inherited function remains visible, as-is.

In fact, we could even have the compiler confirm that this is not an overriding function by declaring it so:

```
not overriding function Make (X, Y, Radius : Float) return Circle;
```

In general, specifying that a subprogram is not overriding is less convenient than specifying that it is overriding. We only do so in these examples to make everything explicit.

Because that new function is not overriding, the inherited version remains implicitly abstract and the type extension remains illegal. Developers could also override the inherited function, which would make the code legal, but as we have said such a function cannot properly construct values in general, and might be called accidentally. For example:

```
with Graphics;
package Geometry is
   type Circle is new Graphics.Shape with private;

   overriding function Make (X, Y : Float) return Circle;

   not overriding function Make (X, Y, Radius : Float) return Circle;
   -- overloading

   ...
private
   --  ...
end Geometry;
```

Although the overridden Make does not have a Radius parameter and could only assign some default to that component, if that default is reasonable then the overridden function could be called on purpose, i.e., not accidentally. That's not a general approach, however.

Alternatively, developers could use procedures as their constructors, with a mode-out parameter for the result. The procedure would not become implicitly abstract in type extensions, unlike a function.

```
package Graphics is
   type Shape is tagged private;
   procedure Make (Value : out Shape;  X, Y : in Float);
private
   --  ...
end Graphics;
```

And then the client extension would inherit the procedure:

```
with Graphics;
package Geometry is
   type Circle is new Graphics.Shape with private;
   --  procedure Make (Value : out Circle;  X, Y : in Float);  -- inherited
private
   --  ...
end Geometry;
```

However, although now legal, the inherited procedure would not suffice, lacking the required parameter for the Radius component.

Developers might then add an overloaded version with the additional parameter:

```
with Graphics;
package Geometry is
   type Circle is new Graphics.Shape with private;

   --  procedure Make (Value : out Circle;  X, Y : in Float);
   -- inherited

   not overriding procedure Make (Value : out Circle;  X, Y, R : in Float);
   -- not inherited
private
   --  ...
end Geometry;
```

But the same issues arise as with functions. Clients might accidentally call the wrong proce-

dure, i.e., the inherited routine that doesn't have a parameter for the `Radius`. That routine would not even mention the `Radius` component, much less assign a default value, so it would have to be overridden in order to do so. This too is not a general approach.

CHAPTER

THIRTYFIVE

CONTROLLING OBJECT INITIALIZATION AND CREATION

35.1 Motivation

Developers are responsible for ensuring that no uninitialized objects are read in Ada programs. Default initialization is a good way to meet this requirement because it is guaranteed to happen and requires no actions on the part of the client code. But of the many kinds of types provided by Ada, only access types have a language-defined default initial value. Fortunately, Ada supports user-defined default initialization for user-defined types.

Default initialization is conveniently expressed, especially because components of record types can have default initial values. Record types are perhaps the most commonly used non-numeric type in the language. Sometimes a given type was *wrapped* inside a record type purely for the sake of default component initialization, e.g., numeric types. That wrapping approach is less common than in earlier versions of the language, given the comparatively more recent aspect `Default_Value` for scalar types, and `Default_Component_Value` for scalar array components.

These facilities are often sufficient to express an abstraction's initial state. For example, we can expect that container objects will be initially empty. Consider a bounded stack ADT. The representation is likely a record type containing an array component and a `Top` component indicating the index of the last array component used. We can default initialize objects to the empty state simply by setting `Top` to zero in the record component's declaration:

```
type Content is array (Positive range <>) of Element;
type Stack (Capacity : Positive) is record
   Values : Content (1 .. Capacity);
   Top    : Natural := 0;
end record;
```

For an unbounded container such as a simple binary tree, if the representation is an access type, the automatic default value `null` initializes `Tree` objects to the empty state.

```
package Binary_Trees is
   type Tree is limited private;
   ...
private
   type Leaf_and_Branch is record ...
   type Tree is access Leaf_and_Branch;
   ...
end Binary_Trees;
```

In both cases, simply declaring an object in the client code is sufficient to ensure it is initially empty.

However, not all abstractions have a meaningful default initial state. Default initialization will not suffice to fully initialize objects in these cases, so explicit initialization is required.

An explicit procedure call could be used to set the initial state of an object (passed to a mode-out parameter), but there is no guarantee that the call will occur and no way to force

a client to make it.

In contrast, the declaration of the object is guaranteed to occur, and as part of the declaration the object can be given an explicit initial value. The initial value can be specified by a literal for the type, by the value of another object of that type, or by the value of that type returned from a function call.

```
declare
   X : Integer := Some_Existing_Integer_Object;
   Prompt : constant String := "Name? ";
   Reply : constant String := Response (Prompt);
begin
   ...
end;
```

The initial value can also specify constraints, if required. In the code above, the object `Prompt` has a lower bound of `Positive'First` and an upper bound set to the length of the literal. The specific bounds of `Reply` are determined by the function, and need not start at `Positive'First`.

An object cannot be used before it is declared. Since this explicit initial value is part of the declaration, the object cannot be read before it is initialized. That fact is the key to the implementation approaches.

However, although the object declaration is guaranteed to occur, explicit initialization is optional. But unlike a procedure call, we can force the initial value to be given. There are two ways to force it, so there are two implementations presented.

In addition, a specific form of explicit initialization may be required because not all forms of initialization are necessarily appropriate for a given abstraction. Imagine a type representing a thread lock, implemented in such a way that default initialization isn't an option. Unless we prevent it, initialization by some other existing object will be possible:

```
declare
   X : Thread_Lock := Y;    --  Y is some other Thread_Lock object
begin
   --  ...
end;
```

This would amount to a copy, which might not make sense. Imagine the lock type contains a queue of pending callers...

More generally, if a type's representation includes access type components, initialization by another object will create a shallow copy of the designated objects. That is typically inappropriate.

Using an existing object for the initial value amounts to a complete copy of that other object, perhaps more of a copy than required. For example, consider a bounded container type, e.g., another stack, backed by an array and an index component named `Top`. At any time, for any stack, the contained content is in the slice of the array from 1 up to `Top`. Any array component at an index greater than `Top` has a junk value. Those components may never even have been assigned during use. Now consider the declaration of a `Stack` object, `A`, whose initial value is that of another existing `Stack` named `B`.

```
A : Stack := B;
```

The entire value of `B` is copied into `A`, so `B.Top` is copied to `A.Top`, which makes sense. But likewise, the entire array in `B` will be copied to the array in `A`. For a stack with a large backing array that might take a significant amount of time. If `B` is logically full then the time required for the full array copy is unavoidable. But if only a few values are contained by `B`, the hit could be avoided by only copying up to `Top`.

And of course, the initial value might require client-specific information.

Calling a *constructor function* (page 1165) for the initial value would be the right approach in these cases, returning an object of the type. The function might even take an existing object as a parameter, creating a new object with only the necessary parts copied.

Therefore, for some abstractions, not only do we need to guarantee explicit object initialization, we may also need to restrict the form of initial value to a function call.

The other purpose of the idiom is controlling, for some type, whether object creation itself is to be allowed by clients. As you will see, controlling object initialization can be used to control object creation.

Preventing object creation is not typical but is not unknown. The singleton design pattern[343] is an example, in which a type is defined but corresponding object creation by clients is not intended. Instead, the abstraction implementation creates a single object of the type. The abstraction is a type, rather than an *ADM* (page 1155), for the sake of potential extension via inheritance. We will illustrate this design pattern and implementation using a real-world hardware device.

35.2 Implementation(s)

There are two ways to force an explicit initial value as part of an object declaration. One is a matter of legality at compile-time so it is enforced by the compiler. The other is enforced by a run-time check.

Note that both approaches are type-specific, so when we say *objects* we mean objects of a type that has been designed with one of these two idiom implementations. Neither implementation applies to every object of every type used in the client code. (SPARK, a formal language based closely on Ada, statically ensures all objects are initialized before read.)

The *ADT idiom* (page 1149) describes Ada *building blocks* that developers can use to compose types with semantics that we require. We can declare a type to be private, for example, so that the implementation is not compile-time visible to clients.

In addition to private types, we can decorate a type declaration with the reserved word **`limited`** so that assignment is not allowed (among other things) for client objects of the type. We can combine the two building blocks, creating a type that is both private and limited.

Throughout this discussion we will assume that these designs are based on *Abstract Data Types* (page 1149), hence we assume the use of private types. That's a general, initial design assumption but in this case private types are required by the two idiom implementations. The types are not necessarily limited as well, but in one situation they will be limited too. But in both implementations the primary types will be private types.

35.2.1 Compile-Time Legality

We can combine the private type and limited type building blocks with another, known as *unknown discriminants*, to force explicit object initialization by clients, to control the form of explicit initialization, and, when required, to control client object creation itself. Limited and private types are fairly common building blocks, but *unknown discriminants* are less common so we will first explain them, and then show how to utilize the combinations for this idiom.

Discriminants are useful for our purpose because types with discriminants are *indefinite types* (under certain circumstances). Indefinite types do not allow object declarations without also specifying some sort of constraints for those objects. Unconstrained array types, such as **`String`**, are good examples. We cannot simply declare an object of type **`String`** without also specifying the array bounds, one way or another:

[343] https://en.wikipedia.org/wiki/Singleton_pattern

```
with Ada.Text_IO; use Ada.Text_IO;
procedure Initialization_Demo is
   S1 : String (1 .. 11) := (others => ' ');
   S2 : String := "Hello World";
   S3 : String := S1;
begin
   Put_Line ('"' & S1 & '"');
   Put_Line ('"' & S2 & '"');
   Put_Line ('"' & S3 & '"');
end Initialization_Demo;
```

In the code above, `String` objects S1, S2, and S3 all have the same constraints: a lower bound of `Positive'First` and an upper bound of 11. S1 gives the bounds directly, whereas S2 and S3 take their constraints from their initial values. A function that returned a `String` value would suffice for the initial value too and would thus serve to specify the array bounds. There are other ways to specify a constraint as well, but we can ignore them in this idiom because the building blocks we'll use preclude them.

Types with discriminants are indefinite types unless the discriminants have default values. That fact will not apply in this idiom because of the characteristics of the building blocks. You will see why in a moment. The important idea is that we can leverage the object constraint requirements of indefinite types to force explicit initialization on declarations.

Discriminants come in two flavors. So-called *known* discriminants are the most common. These discriminants are known in the sense that they are compile-time visible to client code. Clients then have everything needed for declaring objects of the corresponding type. For example, here is the type declaration for a bounded stack ADT:

```
type Stack (Capacity : Positive) is private;
```

In the above, `Capacity` is the physical number of components in the array backing the bounded implementation. Clients can, therefore, have different objects of the type with different capacities:

```
Trays : Stack (Capacity => 10);
Operands : Stack (100);
```

The existence of `Capacity` is known to clients via the partial view, so the requirement for the constraint is visible and can be expressed.

In contrast, types may have *unknown discriminants* in the client's view. The syntax reflects their confidential nature:

```
type Foo (<>) is private;
```

The parentheses are required as usual, but the *box* symbol appears inside, instead of one or more discriminant declarations. The box symbol always indicates *not specified here* so in this case no discriminants are included in the view. There may or may not be discriminants in the full view, but client's don't have compile-time visibility to that information because the type is private.

Unknown discriminants can be specified for various kinds of types, not only private types. See the *Notes section* (page 1190) for the full list. That said, combining them with private type declarations, or private type extension declarations, is the most common usage when composing abstraction definitions. For example:

```
package P is
   type Q (<>) is private;
private
   type Q is range 0 .. 100;
end P;
```

Clients of package P must use type Q as if Q requires discriminant constraints, even though clients don't have compile-time visibility to whatever constraints are actually required, if any. In the above, Q is just an integer type in the full view. No constraint is required to create objects of type Q, but clients cannot take advantage of that fact because they only have the partial view. Only the package private part, the package body, and child units have the visibility required to treat Q as an integer type.

Q might actually be completed as an indefinite type, but the constraint required need not be a discriminant constraint. In the following, objects of type Q require an array bounds constraint:

```
package P is
   type Q (<>) is private;
private
   type Q is array  (Positive range <>) of Integer;
end P;
```

Code with the full view must respect the index bounds requirement, but the semantics of the partial view remain the same.

As illustrated, the consequence of combining indefinite types with private types is that, when declaring objects, clients must express a constraint but cannot do so directly. The constraints must instead be provided by the initial value. Hence, for these types, the initial value is now a requirement that the compiler enforces on client object declarations.

But because the type is private, the initial value cannot be specified by a literal. Instead, the initial value must be either an existing object of the type, or the result of a call to a function that returns an object of the type.

Consider the following:

```
package P is
   type Q (<>) is private;
   function F return Q;
private
   type Q is range 0 .. 100;
end P;

package body P is
   function F return Q is (42);
   --  since that is the answer to everything...
end P;

with P;
procedure Demo is
   Obj1 : P.Q;  --  not legal, requires initial value for constraint
   Obj2 : P.Q := 42;  --  not legal, per client's partial view
   Obj3 : P.Q := P.F;
   Obj4 : P.Q := Obj3;
begin
   null;
end Demo;
```

The declaration for Obj1 is illegal because no constraint is provided. Because P.Q is also private, the declaration of Obj2 is illegal because clients don't have the full view supporting integer usage. But the initial value can be provided by a function result (Obj3), thereby also specifying the required constraint. And an existing object can be used to give the constraints to other objects during their declarations (Obj4). Explicit client initialization in these two ways is required by the compiler for indefinite private types.

But as illustrated by the spin-lock example, initialization by an existing object is not always appropriate. We can restrict the initial value to a function call result by making the type limited as well as private and indefinite. Then only constructor functions can be used legally

for the initial values, and the compiler will require them to be called during object declarations (e.g., `Obj3` above). That's what we'd do for the spin-lock type. We'd make the type limited in the completion too, to prevent copying in any form, including the function result. (The function result would then be built in place instead of copied.)

To recap, the primary purpose of the idiom, for a given type, is to ensure that clients initialize objects of that type as part of the object declarations. In this first implementation we meet the requirement by composing the type via building blocks that:

1. require a constraint to be given when declaring any object of the type, and
2. require an initial value to give that constraint, and
3. allow only objects and function call results as the initial values, and
4. when necessary, allow only function call results to be used for the initial values.

The compiler will reject declarations that do not adhere to these rules. Explicit initialization in the client code is thus guaranteed.

For a concrete example, consider a closed loop process controller, specifically a proportional–integral–derivative (PID) controller[344]. A PID controller examines the difference between an intended value, such as the desired speed of your automobile, and the current value (the actual speed). In response to that difference the controller increases or decreases the throttle setting. This measurement and resulting control output response happens iteratively at some rate. This is a sophisticated ADT, and explaining how a PID controller actually works is beyond the scope of this document. There are numerous web sites available that describe them in detail. What you should know for our purpose is that they are used to control physical processes, such as your car's cruise control system, that affect our lives directly. Ensuring proper initialization is part of ensuring correct use.

The PID controller must be explicitly initialized because there is no default initial state that would allow subsequent safe use. Only a partial meaningful state can be defined by default. Specifically, a PID controller can be enabled and disabled by the user (the external process control engineer) at arbitrary times. We can define default initialization such that the objects are initially in the disabled state. When disabled, the output computation actually affects nothing, so starting from that state would be safe. However, there is nothing to prevent the user from enabling the controller object without first configuring it. Configuring the various parameters is essential for safe and predictable behavior.

To address that problem, we could add operation preconditions requiring the object to be in some *configured* state, but that isn't always appropriate. Such a precondition would just raise an exception, which isn't in the use-cases. (Statically proving prior configuration in the client code would be a viable alternative, but that's also beyond the scope of this document.)

Therefore, default initialization doesn't really suffice for this ADT. We need to force initialization (configuration) during object creation so that enabling the ADT output will always be safe. This idiom implementation does exactly that.

The following is a cut-down version of the package declaration using this idiom implementation, with some operations and record components elided for the sake of simplicity. In the full version the unit is a generic package for the sake of not hard-coding the floating point types. We use a regular package and type **`Float`** here for convenience. The full version is here:

- AdaCore/Robotics_with_Ada/src/control_systems (GitHub)[345]

```
package Process_Control is

   type PID_Controller (<>) is tagged limited private;
```

(continues on next page)

[344] https://en.wikipedia.org/wiki/Proportional–integral–derivative_controller
[345] https://github.com/AdaCore/Robotics_with_Ada/blob/master/src/control_systems/

(continued from previous page)

```
   type Bounds is record
      Min, Max : Float;
   end record with
     Predicate => Min < Max;

   type Controller_Directions is (Direct, Reversed);

   type Millisecond_Units is mod 2**32;

   subtype Positive_Milliseconds is
     Millisecond_Units range 1 .. Millisecond_Units'Last;

   function Configured_Controller
     (Proportional_Gain : Float;
      Integral_Gain     : Float;
      Derivative_Gain   : Float;
      Invocation_Period : Positive_Milliseconds;
      Output_Limits     : Bounds;
      Direction         : Controller_Directions := Direct)
   return PID_Controller;

   procedure Enable
     (This             : in out PID_Controller;
      Process_Variable : Float;   --  current input value from the process
      Control_Variable : Float);  --  current output value

   procedure Disable (This : in out PID_Controller);

   procedure Compute_Output
     (This             : in out PID_Controller;
      Process_Variable : Float;          --  the input, Measured Value/Variable
      Setpoint         : Float;
      Control_Variable : in out Float);  --  the output, Manipulated Variable

   --  ...

   function Enabled (This : PID_Controller) return Boolean;

private

   type PID_Controller is tagged limited record
      --  ...
      Enabled : Boolean;
   end record;

end Process_Control;
```

As you can see, the PID controller type is indefinite limited private:

```
type PID_Controller (<>) is tagged limited private;
```

It is also tagged, primarily for the sake of the distinguished receiver call syntax. We don't really expect type extensions in this specific ADT, although nothing prevents them.

Therefore, the language requires an initial value when creating objects of the type, and because the type is limited, a function must be used for that initial value. The compiler will not compile the code containing the declaration otherwise. The only constructor function provided is `Configured_Controller` so it is guaranteed to be called. (A later child package could add another *constructor function* (page 1165). For that matter, we probably should have declared this one in a child package. In any case one of them is guaranteed to be called.)

Here is an example declaration taken from the steering control module for an RC car written in Ada[346].

The PID controller, named `Steering_Computer`, is declared within the body of a task `Servo` that controls a motor, `Steering_Motor`, in response to requested directions from the remote control. `Steering_Motor` is an instance of an ADT named `Basic_Motors`, and is declared elsewhere. The `Servo` task is declared within the body of a package that contains various values referenced within the task, such as the various PID gain parameters, that are not shown.

```
task body Servo is
   Next_Release       : Time;
   Target_Angle       : Float;
   Current_Angle      : Float := 0.0;
   --  zero for call to Steering_Computer.Enable
   Steering_Power     : Float := 0.0;
   --  zero for call to Steering_Computer.Enable
   Motor_Power        : NXT.Motors.Power_Level;
   Rotation_Direction : NXT.Motors.Directions;
   Steering_Offset    : Float;
   Steering_Computer  : PID_Controller :=
     Configured_Controller
       (Proportional_Gain => Kp,
        Integral_Gain     => Ki,
        Derivative_Gain   => Kd,
        Invocation_Period => System_Configuration.Steering_Control_Period,
        Output_Limits     => Power_Level_Limits,
        Direction         => Closed_Loop.Direct);
begin
   Global_Initialization.Critical_Instant.Wait (Epoch => Next_Release);
   Initialize_Steering_Mechanism (Steering_Offset);
   Steering_Computer.Enable (Process_Variable => Current_Angle,
                             Control_Variable => Steering_Power);
   loop
      Current_Angle := Current_Motor_Angle (Steering_Motor) -
                       Steering_Offset;
      Target_Angle := Float (Remote_Control.Requested_Steering_Angle);
      Limit (Target_Angle, -Steering_Offset, +Steering_Offset);
      Steering_Computer.Compute_Output
        (Process_Variable => Current_Angle,
         Setpoint         => Target_Angle,
         Control_Variable => Steering_Power);
      Convert_To_Motor_Values (Steering_Power,
                               Motor_Power,
                               Rotation_Direction);
      Steering_Motor.Engage (Rotation_Direction, Motor_Power);

      Next_Release := Next_Release + Period;
      delay until Next_Release;
   end loop;
end Servo;
```

Because `Steering_Computer` must be declared before it can be passed as a parameter, the call to configure the object's state necessarily precedes any other operation (e.g., `Enable`).

35.2.2 Run-Time Checks

Ada 2022 adds another building block, `Default_Initial_Condition` (DIC), that can be used as an alternative to the unknown discriminants used above. We must still have a private type or private type extension, and the type may or may not be limited, but unknown discriminants will not be involved. The compiler would not allow the combination, in fact.

[346] https://blog.adacore.com/making-an-rc-car-with-ada-and-spark

DIC is an aspect applied to a private type or private extension declaration. Developers use it to specify a developer-defined Boolean condition that will be true at run-time after the default initialization of an object of the type. Specifically, if `Default_Initial_Condition` is specified for a type, a run-time check is emitted for each object declaration of that type that uses default initialization. The check consists of the evaluation of the DIC expression. The exception `Assertion_Error` is raised if the check fails. You can think of this aspect as specifying the effects of default initialization for the type, with a verification at run-time when needed. No check is emitted for those declarations that use explicit initialization.

For example, the following is a partial definition of a `Stack` ADT. It is only a partial definition primarily because `Pop` is not provided, but other operations would be included as well. Moreover, a fully realistic version would be a generic package. We have used a subtype named `Element` as a substitute for the generic formal type what would have had that name. Note that there is a `Default_Initial_Condition` aspect specifying that any object of type `Stack` is initially empty as a result of default initialization. The *argument* to the function call is the corresponding type name, representing the current instance object, thus any object of the type.

```
package Bounded_Stacks is

   subtype Element is Integer;
   --  arbitrary substitute for generic formal type

   type Stack (Capacity : Positive) is limited private with
     Default_Initial_Condition => Empty (Stack);

   procedure Push (This : in out Stack; Value : Element) with
     Pre  => not Full (This),
     Post => not Empty (This);

   function Full (This : Stack) return Boolean;

   function Empty (This : Stack) return Boolean;

private

   type Contents is array (Positive range <>) of Element;

   type Stack (Capacity : Positive) is limited record
      Content : Contents (1 .. Capacity);
      Top     : Natural :=0;
   end record;

   function Full (This : Stack) return Boolean is
     (This.Top = This.Capacity);

   function Empty (This : Stack) return Boolean is
     (This.Top = 0);

end Bounded_Stacks;

package body Bounded_Stacks is

   procedure Push (This : in out Stack; Value : Element) is
   begin
      This.Top := This.Top + 1;
      This.Content (This.Top) := Value;
   end Push;

end Bounded_Stacks;

with Ada.Text_IO;   use Ada.Text_IO;
```

(continues on next page)

(continued from previous page)

```
with Bounded_Stacks; use Bounded_Stacks;

procedure Demo is
   S : Stack (Capacity => 10);
begin
   Push (S, 42);
   Put_Line ("Done");
end Demo;
```

The function Empty returns **True** when Top is zero, and zero is assigned to Top during default initialization. Consequently, Assertion_Error is not raised when Demo executes because the object S was indeed default initialized to the empty state.

We said that when DIC is applied to a type, the run-time check is emitted for all object declarations of that type that rely on default initialization. But suppose the type does not define any default initialization. We can detect these uninitialized objects at run-time if we set the DIC Boolean expression to indicate that there is no default initialization defined for this type. The checks will then fail for those objects. That's the second implementation approach to the initialization requirement.

Specifically, we can express the lack of default initialization by a DIC condition that is hard-coded to the literal **False**. The evaluation during the check will then necessarily fail, raising Assertion_Error. Hence, for this type, explicit initialization is guaranteed in a program that does not raise Assertion_Error for this cause.

The following is an example of the DIC set to **False**:

```
package P is

   type Q is limited private with
     Default_Initial_Condition => False;

   function F return Q;

private

   type Q is range -1 .. 100;

end P;

package body P is

   function F return Q is (42);

end P;

with Ada.Text_IO;  use Ada.Text_IO;

with P; use P;

procedure Main is
   Obj1 : constant Q := F;
   Obj2 : Q;  --  triggers Assertion_Error
begin
   Put_Line (Obj1'Image);
   Put_Line (Obj2'Image);
   Put_Line ("Done");
end Main;
```

In the above, Assertion_Error is raised by the elaboration of Obj2 because the DIC check necessarily fails. There is no check on the declaration of Obj1 because it is initialized, explicitly.

To recap, we can ensure initialization for objects of the type by detecting, during elaboration at run-time, any objects not explicitly initialized.

This approach is sufficient because when elaboration of an object declaration raises an exception, no use of that object is possible. That's guaranteed because the frame containing that declarative part is immediately abandoned and the exception is propagated up to the previous level. A local handler never can apply. But even if there is a matching handler in the previous level, there's really nothing much to be done. Re-entering the frame containing the declaration will raise the exception all over again, necessarily. Thus the code will have to be changed and recompiled, meeting the goal of the idiom.

We can illustrate this assurance using `Storage_Error`. Consider the following program, in which the main procedure calls an inner procedure P:

```
with Text_IO; use Text_IO;

procedure Main is

   procedure P (Output : out Float) is
      N : array (Positive) of Float; -- Storage_Error is likely
   begin
      Put_Line ("P's body assigns N's components and uses them");
      -- The following indexes and component values are arbitrary
      -- and used purely for illustration...
      N := (others => 0.0);
      -- other computations and assignments to N ...
      Output := N (5);
   exception
      when Storage_Error =>
         Output := N (1);
   end P;

   X : Float;

begin
   P (X);
   Put_Line (X'Image);
   Put_Line ("Done");
exception
   when Storage_Error =>
      Put_Line ("Main completes abnormally");
end Main;
```

When `Main` calls P, the elaboration of the declarative part of P almost certainly fails because there is insufficient storage to allocate to the object `P.N`, hence `Storage_Error` is raised. (If your machine can handle the above, congratulations.) Even though procedure P has a handler specifically for `Storage_Error`, that handler never applies because the declarative part is immediately abandoned. Instead, the exception is raised in the caller, where it can be caught. This behavior is essential to ensure that problematic objects are not referenced in the local handlers. In the above, the handler in P for `Storage_Error` references the object `P.N` to assign the `P.Output` parameter. If that assignment could happen — again, it cannot — what would it mean, functionally? No one knows.

Handling `Storage_Error` is a little tricky anyway. Does the OS give the program a chance to execute a handler? If so, is there sufficient storage remaining to execute the exception handler's statements? In any case you can see the problem that the declaration failure semantics preclude.

Therefore, although the DIC approach is not enforced at compile-time, it is nevertheless sufficient to ensure no uninitialized object of the type can be used.

35.2.3 Preventing Object Creation by Clients

The other idiom requirement is the ability to control object creation itself. The implementation is trivially achieved using an indefinite limited private type: we can prevent client object creation simply by not providing any constructor functions. Doing so removes any means for initializing objects of the type, and since the type is indefinite there is then no way for clients to declare objects at all. The compiler again enforces this implementation.

For a concrete example, we can apply the Singleton design pattern to represent the *time stamp counter* (TSC[347]) provided by x86 architectures. The TSC is a 64-bit hardware register incremented once per clock cycle, starting from zero at power-up. We can use it to make a timestamp abstraction. As explained by Wikipedia page[348], some care is required when using the register for that purpose on modern hardware, but it will suffice to illustrate the idiom implementation. Note that the Singleton pattern is itself somewhat controversial in the OOP community, but that's beyond the scope of this document.

Why use the Singleton pattern in this case? Ordinarily, clients of some ADT will reasonably expect that the states of distinct objects are independent of each other. When using an ADT to represent a single piece of hardware, however, this presumption of independence will not hold because the device is shared by all the objects, unavoidably. The singleton idiom prevents the resulting problems by precluding the existence of multiple objects in the first place.

In this specific case, the time stamp counter hardware is read-only, so the lack of independence is not an issue. Multiple objects would not be a problem. But many devices are not read-only, so the singleton pattern is worth knowing.

First we'll define a singleton ADT representing the TSC register itself, then we will extend that type to add convenience operations for measuring elapsed times. We'll use the design approach of indefinite limited private types without any constructor functions in order to ensure clients cannot create objects of the type. The type will also be tagged for the sake of allowing type extensions. Adding the tagged characteristic doesn't change anything regarding the idiom implementation.

```
with Interfaces;

package Timestamp is

   type Cycle_Counter (<>) is tagged limited private;

   type Cycle_Counter_Reference is access all Cycle_Counter;

   function Counter return not null Cycle_Counter_Reference;

   type Cycle_Count is new Interfaces.Unsigned_64;

   function Sample (This : not null access Cycle_Counter) return Cycle_Count;

private

   type Cycle_Counter is tagged limited null record;

   function Read_TimeStamp_Counter return Cycle_Count with
     Import,
     Convention    => Intrinsic,
     External_Name => "__rdtsc",
     Inline;
   --  This gcc builtin issues the machine instruction to read the time-stamp
   --  counter, i.e., RDTSC, which returns a 64-bit count of the number of
   --  system clock cycles since power-up.
```

(continues on next page)

[347] https://en.wikipedia.org/wiki/Time_Stamp_Counter
[348] https://en.wikipedia.org/wiki/Time_Stamp_Counter

(continued from previous page)

```
   function Sample (This : not null access Cycle_Counter)
                    return Cycle_Count is
     (Read_TimeStamp_Counter);
     --  The formal parameter This is not referenced

end Timestamp;
```

Note also that the primitive function named `Counter` is not a constructor — it doesn't return an object of the `Cycle_Counter` type. As such, it cannot be used as an initial value for a `Cycle_Counter` object declaration. Clients cannot, therefore, create their own objects of type `Cycle_Counter`.

Instead, function `Counter` returns an access value designating an object of the type. Because clients cannot declare objects themselves the function is the only way to get an object, albeit indirectly. Therefore, the function can control how many objects are created. As you will see, the function only creates a single object of the type.

The type `Cycle_Counter` is completed as a null record because the state is maintained in the hardware register we're reading.

The function `Sample` reads the timestamp counter register by calling the `Read_TimeStamp_Counter` function. That second function accesses the TSC register by executing an assembly language instruction dedicated to that purpose. We could have `Sample` issue that instruction instead, without declaring a separate function, but there is no run-time cost (due to the inlining) and separating them emphasizes that one is a member of the API and the other is an implementation artifact. Note that `Sample` does not actually reference the formal parameter `This`. The parameter exists just to make `Sample` a primitive function. Assuming we don't have a use-clause for `Timestamp`, to call `Sample` we could say:

```
TimeStamp.Counter.Sample
```

for example:

```
with Timestamp;
with Ada.Text_IO; use Ada.Text_IO;

procedure Demo_TimeStamp is
begin
   for K in 1 .. 10 loop
      Put_Line (Timestamp.Counter.Sample'Image);
   end loop;
end Demo_TimeStamp;
```

The above calls the `Timestamp.Counter` function and then implicitly dereferences the resulting access value to call the `Sample` function using the distinguished receiver syntax. The resulting number is then converted to a **`String`** value and output to `Standard_Output`.

We could have instead used positional call notation for the call to `Sample`:

```
Timestamp.Sample (Timestamp.Counter)
```

In that case we need the package name on the references, or we'd add a use-clause.

The package body is shown below. Only the function `Counter` has a body because `Sample` is completed in the package declaration's private part and `Read_TimeStamp_Counter` is an imported intrinsic, i.e., without a body.

```
package body Timestamp is

```

(continues on next page)

(continued from previous page)

```
   The_Instance : Cycle_Counter_Reference;

   -------------
   -- Counter --
   -------------

   function Counter return not null Cycle_Counter_Reference is
   begin
      if The_Instance = null then
         The_Instance := new Cycle_Counter;
      end if;
      return The_Instance;
   end Counter;

end Timestamp;
```

Function `Counter` creates the single object that this singleton implementation creates. It does so by lazily allocating an object dynamically. If `Counter` is never called (because some subclass is used instead) then no object of type `Cycle_Counter` is created. At most one `Cycle_Counter` object is ever created.

We could instead declare `The_Instance` as a `Cycle_Counter` object in the package body, mark it as aliased, and return a corresponding access value designating it. But when objects are large, declaring one that might never be used is wasteful. The indirection avoids that wasted storage at the cost of an access object, which is small. On the other hand, now the heap is involved.

Note that we could have declared `The_Instance` in the private part of the package declaration. Type extensions in child packages could then use it, if needed. Presumably we'd make `The_Instance` be of some access to class-wide type so that extensions could use it to allocate objects of their specific type, otherwise extensions in child packages would have no need for it. But that only saves the storage for an access object in the child packages, so we leave the declaration in the parent package body. See the *Programming by Extension idiom* (page 1161) for a discussion of whether to declare an entity in the package private part or the package body.

Next, we declare a type extension in a child package. The child package body will contain its own object named `The_Instance`, returning an access value designating the specific extension type. The client API in the package declaration follows that of the parent type `Cycle_Counter`, but with additional primitives for working with samples.

```
package Timestamp.Sampling is

   type Timestamp_Sampler is new Cycle_Counter with private;

   type Timestamp_Sampler_Reference is access all Timestamp_Sampler;

   function Counter return not null Timestamp_Sampler_Reference with Inline;
   --  returns an access value designating the single instance

   procedure Take_First_Sample  (This : not null access Timestamp_Sampler)
     with Inline;
   procedure Take_Second_Sample (This : not null access Timestamp_Sampler)
     with Inline;

   function First_Sample  (This : not null access Timestamp_Sampler)
                           return Cycle_Count;
   function Second_Sample (This : not null access Timestamp_Sampler)
                           return Cycle_Count;
   function Elapsed       (This : not null access Timestamp_Sampler)
                           return Cycle_Count;
```

(continues on next page)

(continued from previous page)

```
private

   type Timestamp_Sampler is new Cycle_Counter with record
      First  : Cycle_Count := 0;
      Second : Cycle_Count := 0;
   end record;

end Timestamp.Sampling;

package body Timestamp.Sampling is

   The_Instance : Timestamp_Sampler_Reference;

   -------------
   -- Counter --
   -------------

   function Counter return not null Timestamp_Sampler_Reference is
   begin
      if The_Instance = null then
         The_Instance := new Timestamp_Sampler;
      end if;
      return The_Instance;
   end Counter;

   ------------------------
   -- Take_First_Sample --
   ------------------------

   procedure Take_First_Sample (This : not null access Timestamp_Sampler) is
   begin
      This.First := Sample (This);
   end Take_First_Sample;

   -------------------------
   -- Take_Second_Sample --
   -------------------------

   procedure Take_Second_Sample (This : not null access Timestamp_Sampler) is
   begin
      This.Second := Sample (This);
   end Take_Second_Sample;

   ------------------
   -- First_Sample --
   ------------------

   function First_Sample (This : not null access Timestamp_Sampler)
                          return Cycle_Count is
     (This.First);

   -------------------
   -- Second_Sample --
   -------------------

   function Second_Sample (This : not null access Timestamp_Sampler)
                           return Cycle_Count is
     (This.Second);

   -------------
```

(continues on next page)

(continued from previous page)

```
   -- Elapsed --
   -------------

   function Elapsed (This : not null access Timestamp_Sampler)
                     return Cycle_Count is
     (This.Second - This.First + 1);

end Timestamp.Sampling;
```

The inherited `Sample` function is called in the two procedures that take the two samples of the timestamp register. The formal parameter `This` is passed to the calls, but as mentioned earlier the argument is not referenced within `Sample`. All the formal parameter does is participate in dispatching the calls to `Sample`, in this case meaning that the inherited version of `Sample` is the one called because `This` is of the extended type.

But `Sample` is not overridden in this child package, therefore effectively we are calling the parent version. Is `Sample` ever likely to be overridden? Arguably not, because it is so directly dependent on the underlying hardware. Of course, some future type extension may override `Sample` for some unforeseen reason — that's the point of making it possible, after all. Presumably the overridden version would also call the parent version, otherwise the timestamp counter would not be accessed. Because we can't say for certain that it will never need to be overridden, we have made `Sample` a primitive function, thus overridable.

Suppose we came to the opposite conclusion, that `Timestamp.Sample` would never need to be overridden. In that case we have some options worth exploring.

Clearly function `Sample` must be part of the client API, but that doesn't force it to be a primitive function.

We could have declared `Sample` in `Timestamp` as a visible non-primitive operation, i.e., without a formal parameter or function result of the ADT type:

```
function Sample return Cycle_Count with Inline;
```

As a non-primitive function it would be neither inherited nor overridable. But we'd still be able to call it in client code.

Yet, as a non-primitive, this version looks like an implementation artifact, hence out of place as part of the visible client API. It isn't illegal by any means, it just *looks* wrong.

Furthermore, if we are going to make `Sample` a non-primitive function, why not remove it and replace it with the other non-primitive function `Read_Timestamp_Counter`? Or make the body of `Sample` call the imported intrinsic, and do away with function `Read_Timestamp_Counter`? There is no clear winner here.

An attractive alternative would be to make `Sample` be a class-wide operation. To do so, we make the formal parameter class-wide instead of removing it:

```
function Sample (This : not null access Cycle_Counter'Class)
                 return Cycle_Count
  with Inline;
```

In the version above, the formal parameter type is now (anonymous) access to `Cycle_Counter'Class`, i.e., class-wide, so in this version `Sample` can be passed a value designating an object of type `Cycle_Counter` or any type derived from it. We don't want to have a null access value passed so we add that to the parameter specification.

In this version the function is again not a primitive operation and so is neither inherited nor overridable, but because it mentions type `Cycle_Counter` it looks like a reasonable part of an Abstract Data Type. As it happens this version of `Sample` also doesn't actually reference the formal parameter, so it is somewhat unusual. Ordinarily in the body we'd expect the

class-wide formal to be used in dynamic dispatching calls to primitive operations, but that's not required by the language.

Ultimately whether to make Sample a primitive operation is a judgment call. We don't know that Sample will never need to be overridden so we declare it as a primitive op.

With all that said, here is an example program using the child type. Because the timestamp register is updated once per clock cycle, if we know the system clock frequency we can use the counter to measure elapsed time. In the demo below we measure the accuracy of the delay statement by delaying for a known time, with samples taken before and after the delay statement. We can then compare the known delay time to the measured elapsed time, printing the difference.

Note the constant Machine_Cycles_Per_Second. Before you run the demo you will likely need to change it in the source code to your machine's clock frequency.

```
with Timestamp.Sampling;   use Timestamp.Sampling;
with Ada.Text_IO;          use Ada.Text_IO;

procedure Demo_Sampling_Cycle_Counter is

   Delay_Interval : constant Duration := 1.0;
   --  arbitrary, change if desired
   Elapsed_Time   : Duration;

   GHz : constant := 1_000_000_000;

   Machine_Cycles_Per_Second : constant := 1.9 * GHz;
   --  This is the system clock rate on the machine running this executable.
   --  It corresponds to the rate at which the time stamp counter hardware is
   --  incremented. Change it according to your target.

   use type Timestamp.Cycle_Count;  --  for "<"
begin
   Put_Line ("Using" & Machine_Cycles_Per_Second'Image
             & " Hertz for system clock");

   Put_Line ("Delaying for" & Delay_Interval'Image & " second(s) ...");

   Counter.Take_First_Sample;
   delay Delay_Interval;
   Counter.Take_Second_Sample;

   Put_Line ("First sample            :" & Counter.First_Sample'Image);
   Put_Line ("Second sample           :" & Counter.Second_Sample'Image);

   if Counter.Second_Sample < Counter.First_Sample then
      Put_Line ("RDTSC counter wrapped around!?");
      return;
   end if;

   Elapsed_Time := Duration (Elapsed (Counter)) / Machine_Cycles_Per_Second;

   Put_Line ("Elapsed count           :" & Elapsed (Counter)'Image);
   Put_Line ("Specified delay interval:" & Delay_Interval'Image);
   Put_Line ("Measured delay interval :" & Elapsed_Time'Image);
end Demo_Sampling_Cycle_Counter;
```

In the above, Delay_Interval is set to 1.0 so the program will delay for 1 second, with samples taken from the TSC before and after. Delay statement semantics are such that at least the amount of time requested is delayed, so some value slightly greater than 1 second is expected. There will be overhead too, so an elapsed time slightly larger than requested should be seen. The value of Delay_Interval is arbitrary, change it to whatever you like.

If you have set the `Machine_Cycles_Per_Second` properly but still get elapsed measurement values that are much larger than expected or don't make sense at all, it may be that your machine does not support using the TSC[349] this way reliably.

35.3 Pros

Ensuring explicit initialization is easily achieved. The abstraction should likely be a private type anyway, and the syntax for the required additional building blocks is light: all are just additional decorations on the declaration of the private type or private extension. The compiler does the rest, either at compile-time itself or via a generated check verified at run-time.

Likewise, ensuring that only the implementation can create objects of a type is straightforward. We take the same approach for ensuring initialization via function calls in object declarations, but then don't provide any such functions. Only the implementation will have the required visibility to create objects of the type, and can limit that number of objects to one (or any other number). Client access to this hidden object must be indirect, but that is not a heavy burden.

35.4 Cons

None.

35.5 Relationship With Other Idioms

The *Abstract Data Type* (page 1149) is assumed, in the form of a private type.

35.6 Notes

Only certain types can have unknown discriminants. For completeness here is the list:

- A private type
- A private extension
- An incomplete type
- A generic formal private type
- A generic formal private type extension
- A generic formal derived type
- Descendants of the above

The types above will either have a corresponding completion or a generic actual parameter to either define the discriminants or specify that there are none.

As we mentioned, `Default_Initial_Condition` is new in Ada 2022. The other implementation, based on indefinite private types, is supported by Ada 2022 but also by earlier versions of the language. However, if the type is also limited, Ada 2005 is the earliest version allowing that implementation. Prior to that version an object of a limited type could not be initialized in the object's declaration.

[349] https://en.wikipedia.org/wiki/Time_Stamp_Counter

CHAPTER

THIRTYSIX

TYPE PUNNING

36.1 Motivation

When declaring an object, the type chosen by the developer is presumably one that meets the operational requirements. Sometimes, however, the chosen type is not sufficient for clients of that object. Normally that situation would indicate a design error, but not necessarily.

Consider a device driver that receives external data, such as a network or serial I/O driver. Typically the driver presents incoming data to clients as arrays of raw bytes. That's how the data enter the receiving machine, so that's the most natural representation at the lowest level of the device driver code. However, that representation is not likely sufficient for the higher-level clients. These clients are not necessarily at the application level, they may be lower than that, but they are clients because they use the data presented.

For example, the next level of the network processing code must interpret the byte arrays in order to implement the network protocol. Interpreting the data requires reading headers that are logically contained within slices of those bytes. These headers are naturally represented as record types containing multiple fields. How, then, can the developer apply such record types? An array of bytes contains bytes, not headers.

Stated generally, on occasion a developer needs to manipulate or access the value of a given object in a manner not supported by the object's type. The issue is that the compiler will enforce the type model defined by the language, to some degree of rigor, potentially resulting in the rejection of the alternative access and manipulation code. In such cases the developer must circumvent this enforcement. That's the purpose of this idiom.

A common circumvention technique, across programming languages, is to apply multiple distinct types to a single given object. Doing so makes available additional operations or accesses not provided by the type used to declare the object in the first place. The technique is known as type punning[350] in the programming community because different types are used for the same object in much the same way that a pun in natural languages uses different meanings for words that sound the same when spoken.

Ada is accurately described as "a language with inherently reliable features, only compromised via explicit escape hatches having well-defined and portable semantics when used appropriately."[353] The foundation for this reliability is static named typing with rigorous enforcement by the compiler.

Specifically, the Ada compiler checks that the operations and values applied to an object are consistent with the one type specified when the object is declared. Any usage not consistent with that type is rejected by the compiler. Similarly, the Ada compiler also checks that any type conversions involve only those types that the language defines as meaningfully convertible.

[350] https://en.wikipedia.org/wiki/Type_punning

[353] S. Tucker Taft. *Post in Internet Relay Chat on Comp.Lang.Ada channel*. https://groups.google.com/g/comp.lang.ada/c/9WXgvv8Xjuw/m/JMyo9_P7nxAJ, 1993.

By design, this strong typing model does not lend itself to circumvention (thankfully). That's the point of Ada's *escape hatches* — they provide standard ways to circumvent these and other checks. To maintain the integrity of the type model not many escape hatches exist. The most commonly used of these, *unchecked conversion*, allows type conversion between arbitrary types. Unchecked conversions remain explicit, but the compiler does not limit them to the types defined as reasonable by the language.

36.2 Implementation(s)

There are two common approaches for expressing type punning in Ada. We show both in the following subsections. The purpose in both approaches is to apply a different type, thereby making available a different type-specific view of the storage.

36.2.1 Overlays

The first approach applies an alternative type to an existing object by declaring another object at the same location in memory but with a different type. Given an existing object, the developer:

1. declares (or reuses) an alternative type that provides the required operations and values not provided by the existing object's type, and
2. declares another object of this alternative type, and
3. as part of the new object's declaration, specifies that this new object shares some or all of the storage occupied by the existing object.

The result is a partial or complete storage overlay. Because there are now multiple distinct types involved, there are multiple views of that shared storage, each view providing different operations and values. Thus, the shared storage can be legally manipulated in distinct ways. As usual, the Ada compiler verifies that the usage corresponds to the type view presented by the object name referenced.

For example, let's say that we have an existing object, and that a signed integer is most appropriate for its type. On some occasions let's also say we need to access individual bits within that existing object. Signed integer types don't support bit-level operations, unlike unsigned integers, but we've said that a signed type is the best fit for the bulk of the usage.

One of the ways to enable bit access, then, is to apply another type that does have bit-level operations. We could overlay the existing object with an unsigned integer type of the same size, but let's take a different approach for the sake of illustration. Instead, we'll declare an array type with components that can be represented as a single bit. The length of the array type will reflect the number of bits used by the signed integer type so that the entire object will be overlaid. (A record type would work too, with a component allocated to each bit.)

The type **Boolean** will suffice for the array component type as long as we force the single-bit representation. **Boolean** array components are likely to be represented as individual bytes otherwise. Alternatively, we could just make up an integer type with range `0 .. 1` but that seems unnecessary, unless numeric values would make the code clearer. (Maybe the requirements specify ones and zeros for the bit values.) In any case we'll need to force single bits for the components.

Assuming values of type **Integer** require exactly 32 bits, the following code illustrates the approach:

```
type Bits32 is array (0 .. 31) of Boolean with Component_Size => 1;

X : aliased Integer;
Y : Bits32 with Address => X'Address;
```

In the above, we use X'Address to query the starting address of object X. We use that address to specify the location of the overlay object Y. As a result, X and Y start at the same address.

We marked X as explicitly **aliased** because **Integer** is not a by-reference type. The **Address** attribute is not required to provide a useful result otherwise. (Maybe the compiler would have put X into a register, for example.) The compiler, seeing 'Address applied, would probably do the right thing anyway, but this makes it certain.

Here is a simple main program that illustrates the approach.

Listing 1: main.adb

```
with Ada.Text_IO;  use Ada.Text_IO;

procedure Main is

   X : aliased Integer := 42;

   type Bits32 is array (0 .. 31) of Boolean
     with Component_Size => 1;

   Y : Bits32 with Address => X'Address;

begin
   X := Integer'First;
   Put_Line (X'Image);
   for Bit in Bits32'Range loop
      Put (if Y (Bit) then '1' else '0');
   end loop;
   New_Line;
end Main;
```

Object Y starts at the same address as X and has the same size, so all references to X and Y refer to the same storage. The source code can manipulate that memory as either a signed integer or as an array of bits, including individual bit access, using the two object names. The compiler will ensure that every reference via X is compatible with the integer view, and every reference via Y is compatible with the array view.

In the above example, we've ignored the endianess issue. If you wanted to change the sign bit, for example, or display the bits in the "correct" order, you'd need to handle that detail.

This expression of type-punning does not use an escape hatch but does achieve the effect. (We don't include address clauses as an escape hatch because address clauses aren't dedicated to overlaying multiple objects of different types. On the other hand, even one Ada object with an address specified overlays that object's view with the machine storage view of that address...)

36.2.2 Unchecked Conversions on Address Values

The common implementation of type punning, across multiple languages, involves converting the address of a given object into a pointer designating the alternative type to be applied. Dereferencing the resulting pointer provides a different compile-time view of the object. Thus, the operations defined by the alternative type are made applicable to the object.

Expressing this approach in Ada requires unchecked conversion because, in Ada, address values are semantically distinct from pointer values (*access values*). An access value might be represented by an address value, but because architectures vary, that implementation in not guaranteed. Therefore, the language does not define checked conversions between addresses and access values. We need the escape hatch.

Unchecked conversion requires instantiation of the generic function Ada.Unchecked_Conversion, including a context clause for that unit, making it a relatively heavy mechanism. This heaviness is intentional, and the with_clause at the top of the client unit makes it noticeable. Although ubiquitous use strongly suggests abuse of the type model, in this case unchecked conversion is necessary. Nevertheless, we'd hide its use within the body of some visible unit.

Let's start with a simple example. There is an accelerometer that provides three signed 16-bit acceleration values, one for each axis. Accelerations can be both positive and negative so the signed type is appropriate. These values are read from the device as two unsigned bytes. The two bytes are read individually so two reads are required per acceleration value. (This is an actual, real-world device.) Because the acceleration values are signed 16-bit integers, we need to convert two unsigned bytes into a single signed 16-bit quantity. We can use type punning, based on a pointer designating the 16-bit signed type, to achieve that effect. There are certainly other ways to do this, but we're starting with something simple for the sake of illustrating this idiom.

In the following fragment, type Acceleration is a signed 16-bit integer type already declared elsewhere:

```
type Acceleration_Pointer is access all Acceleration
  with Storage_Size => 0;

function As_Acceleration_Pointer is new Ada.Unchecked_Conversion
  (Source => System.Address, Target => Acceleration_Pointer);
```

The access type is general, not pool-specific, but that is optional. We tell the compiler to reserve no storage for the access type because an allocation would be an error that we want the compiler to catch. Whether or not the compiler actually reserves storage for an individual access type is implementation-dependent, but this way we can be sure. In any case the compiler will reject any allocations.

Given this access type declaration we can then instantiate Ada.Unchecked_Conversion. The resulting function name is a matter of style but is appropriate because the function allows us to treat an address as a pointer to an Acceleration value. We aren't changing the address value, we're only providing another view of that value, which is why the function name is not To_Acceleration_Pointer.

The following is the device driver routine for getting the scaled accelerations from the device. The type Three_Axis_Accelerometer is the device driver *ADT* (page 1149), and type Axes_Accelerations is a record type containing the three axis values. The procedure gets the raw acceleration values from the device and scales them per the current device sensitivity, returning all three in the mode-out record parameter.

```
procedure Get_Accelerations
  (This : Three_Axis_Accelerometer;
   Axes : out Axes_Accelerations)
is

   Buffer : array (0 .. 5) of UInt8 with Alignment => 2, Size => 48;
   Scaled : Float;

   type Acceleration_Pointer is access all Acceleration
     with Storage_Size => 0;

   function As_Acceleration_Pointer is new Ada.Unchecked_Conversion
     (Source => System.Address, Target => Acceleration_Pointer);

begin
   This.Loc_IO_Read (Buffer (0), OUT_X_L);
   This.Loc_IO_Read (Buffer (1), OUT_X_H);
   This.Loc_IO_Read (Buffer (2), OUT_Y_L);
```

(continues on next page)

(continued from previous page)

```
   This.Loc_IO_Read (Buffer (3), OUT_Y_H);
   This.Loc_IO_Read (Buffer (4), OUT_Z_L);
   This.Loc_IO_Read (Buffer (5), OUT_Z_H);

   Get_X : declare
      Raw : Acceleration renames
               As_Acceleration_Pointer (Buffer (0)'Address).all;
   begin
      Scaled := Float (Raw) * This.Sensitivity;
      Axes.X := Acceleration (Scaled);
   end Get_X;

   Get_Y : declare
      Raw : Acceleration renames
               As_Acceleration_Pointer (Buffer (2)'Address).all;
   begin
      Scaled := Float (Raw) * This.Sensitivity;
      Axes.Y := Acceleration (Scaled);
   end Get_Y;

   Get_Z : declare
      Raw : Acceleration renames
               As_Acceleration_Pointer (Buffer (4)'Address).all;
   begin
      Scaled := Float (Raw) * This.Sensitivity;
      Axes.Z := Acceleration (Scaled);
   end Get_Z;
end Get_Accelerations;
```

This procedure first reads the six bytes representing all three acceleration values into the array `Buffer`. Procedure `Loc_IO_Read` is defined by the driver *ADT* (page 1149). The constants `OUT_n_L` and `OUT_n_H`, also defined by the driver, specify the low-order and high-order bytes requested for the given *n* axis. Then the declare blocks do the actual scaling and that's where the type punning is applied to the `Buffer` content.

In each block, the address of one of the bytes in the array is converted into an access value designating a two-byte `Acceleration` value. The X acceleration is first in the buffer, so the address of `Buffer (0)` is converted. Likewise, the address of `Buffer (2)` is converted for the Y axis value, and for the Z value, `Buffer (4)` is converted. (We could have said `Buffer'Address` instead of `Buffer (0)'Address`, they mean the same thing, but an explicit index seemed more clear, given the need for the other indexes.)

But we want the designated axis acceleration value, not the access value, so we also dereference the converted access value via `.all`, and rename the result for convenience. The name is Raw because the value needs to be scaled. Each dereference reads two bytes, i.e., the bytes at indexes 0 and 1, or 2 and 3, or 4 and 5.

That's the way the device driver is written currently, but it could be simpler. Clients always get all three accelerations via this procedure, so we could have used unchecked conversion to directly convert the entire array of six bytes into a value of the record type `Axes_Accelerations` containing the three 16-bit components. Type punning would not be required in that case. (The components would still need scaling, of course.)

Note that to get individual values we can't just convert a slice of the array because that's illegal: array slices cannot be converted. We'd need some other way to refer to a two-byte pair within the array. Type punning would be an appropriate approach.

For that matter we could use type punning but have the record type be the designated type returned from the address conversion, rather than a single axis value. Then we'd just convert `Buffer'Address` and not need to specify array indexes as all. This would be the same as converting the array to the record type, but with a level of indirection added.

For the network packet example, we want to apply record type views to arbitrary sequences within an array of raw bytes, so indexing will be required. Just as we indexed into the accelerometer `Buffer` for the addresses of the individual 16-bit acceleration values, we can index into the network packet array to get the starting addresses of the individual headers. Regular record component access syntax can then be used. Reading the record components reads the corresponding raw bytes in the array.

For a specific example, we can read the IP header in a packet's array of bytes using the header's record type and an access type designating that record type:

```
Min_IP_Header_Length : constant := 20;

--  IP packet header RFC 791.
type IP_Header is record
   Version         : UInt4;
   Word_Count      : UInt4;
   Type_of_Service : UInt8;
   Total_Length    : UInt16;
   Identifier      : UInt16;
   Flags_Offset    : UInt16;
   Time_To_Live    : UInt8;
   Protocol        : Transport_Protocol;
   Checksum        : UInt16;
   Source          : IP_Address;
   Destination     : IP_Address;
end record with
  Alignment => 2,
  Size      => Min_IP_Header_Length * 8;

for IP_Header use record
   Version         at 0  range 4 .. 7;
   Word_Count      at 0  range 0 .. 3;
   Type_of_Service at 1  range 0 .. 7;
   Total_Length    at 2  range 0 .. 15;
   Identifier      at 4  range 0 .. 15;
   Flags_Offset    at 6  range 0 .. 15;
   Time_To_Live    at 8  range 0 .. 7;
   Protocol        at 9  range 0 .. 7;
   Checksum        at 10 range 0 .. 15;
   Source          at 12 range 0 .. 31;
   Destination     at 16 range 0 .. 31;
end record;
for IP_Header'Bit_Order use System.Low_Order_First;
for IP_Header'Scalar_Storage_Order use System.Low_Order_First;

type IP_Header_Access is access all IP_Header;
pragma No_Strict_Aliasing (IP_Header_Access);

--  and so on, for the other kinds of headers...
```

Note that **pragma** *No_Strict_Aliasing* stops the compiler from doing some optimizations, based on the assumption of a lack of aliasing, that could cause unexpected results in this approach.

```
function As_IP_Header_Access is new Ada.Unchecked_Conversion
  (Source => System.Address, Target => IP_Header_Access);

function As_ARP_Header_Access is new Ada.Unchecked_Conversion
  (Source => System.Address, Target => ARP_Packet_Access);

--  and so on, for the other kinds of headers...
```

We can then implement a function, visible to clients, for acquiring the access value from a

given memory buffer's data:

```
function IP_Hdr (This : Memory_Buffer) return IP_Header_Access is
  (As_IP_Header_Access (This.Packet.Data (IP_Pos)'Address));
```

In the function, `Data` is the packet's array of raw bytes, and `IP_Pos` is a constant specifying the index into the array corresponding to the first byte of the IP header. As you can see, this is the same approach as shown earlier for working with an array of bytes containing acceleration values.

Similar functions support ARP[351] headers, TCP[352] headers, and so on.

36.3 Pros

Both approaches work and are fairly simple, although the first is simplest. The second approach, based on converting addresses to access values, is more flexible. That's because the address to be converted can be changed at run-time, whereas the object overlay specifies the address exactly once during elaboration.

36.4 Cons

We're assuming access values are represented as addresses. There's no guarantee of that. But on typical architectures it will likely work.

That said, not all types can support the address conversion approach. In particular, unconstrained array types may not work correctly because of the existence of the additional in-memory representation of the bounds. An access value designating such an object might point at the bounds of the array whereas the address of the object would point to the first element.

In either approach, the developer is responsible for the correctness of the address values applied, either for the second object's declaration or for the pointer conversion. For example, this includes the alternative type's alignment. Otherwise, all bets are off.

36.5 Relationship With Other Idioms

None.

36.6 Notes

Generic package `System.Address_To_Access_Conversions` is an obvious alternative to our use of unchecked conversions between addresses and access values. The generic is convenient: it provides the access type as well as functions for converting in both directions. But it will require an instantiation for each designated type, so it offers no reduction in the number of instantiations required over that of `Ada.Unchecked_Conversion`. (For more details on this generic package, please refer to the section on *access and address* (page 955).)

Moreover, because that generic package is defined by the language, the naïve user might think it will work for all types. It might not. Unconstrained array types remain a potential problem. For that reason, the GNAT implementation issues a warning in such cases.

[351] https://en.wikipedia.org/wiki/Address_Resolution_Protocol
[352] https://en.wikipedia.org/wiki/Transmission_Control_Protocol

CHAPTER

THIRTYSEVEN

USING BUILDING BLOCKS TO EXPRESS INHERITANCE IDIOMS

37.1 Motivation

Betrand Meyer's magisterial book on OOP[356] includes a taxonomy of inheritance idioms. Two especially well-known entries in that taxonomy are Subtype Inheritance[354] and Implementation Inheritance[355]. The name of the first idiom is perhaps confusing from an Ada point of view because Ada subtypes have a different meaning. In Ada terms we are talking about *derived types*. A derived type is a new, distinct type based on (i.e., derived from) some existing type. We will informally refer to the existing ancestor type as the *parent* type, and the new type as the *child* type. The term *Subtype* in the idiom name refers to the child type.

Subtype Inheritance is the most well-known idiom for inheritance because it's based on the notion of a taxonomy, in which categories and disjoint subcategories are identified. For example, we can say that dogs, cats, and dolphins are mammals, and that all mammals are animals:

[356] B. Meyer. *Object-Oriented Software Construction*. Prentice-Hall, 1997.
[354] https://en.wikipedia.org/wiki/Subtyping
[355] https://en.wikipedia.org/wiki/Inheritance_(object-oriented_programming)

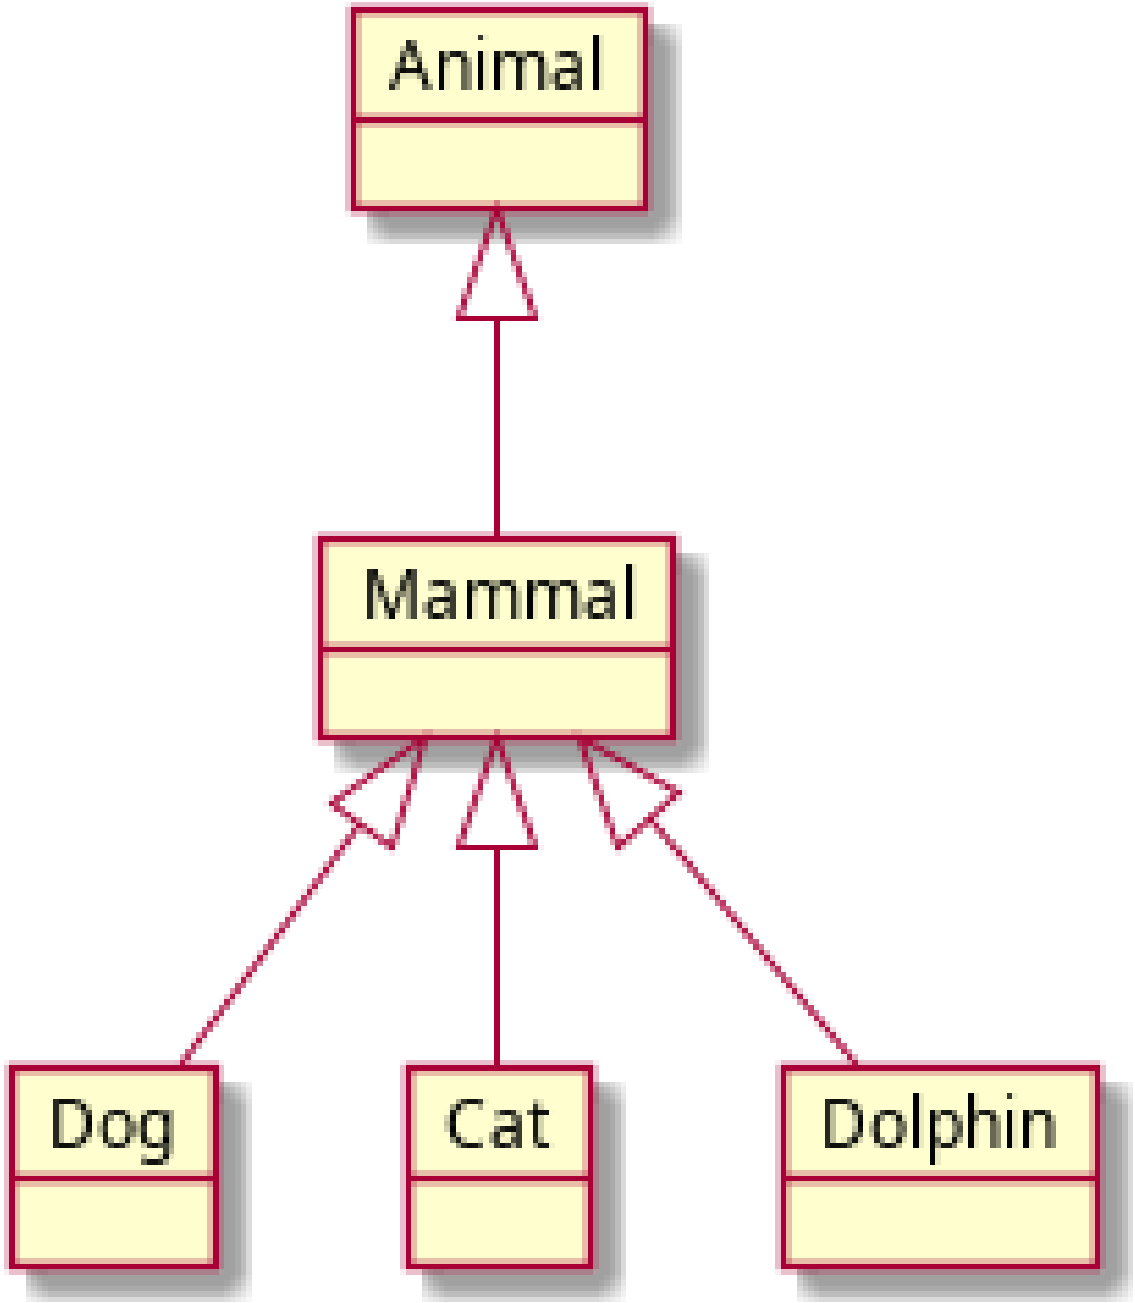

By saying that the subcategories are disjoint we mean that, for example, dogs are neither cats nor dolphins and cannot be treated as if they are.

In software, we use various constructs to represent the categories and subcategories and use inheritance to organize them. As mentioned above, in Ada, we express that inheritance via derived types representing the categories and subcategories. Ada's strong typing ensures they are treated as disjoint entities.

Although the derived child type is distinct from the parent type, the child is the same *kind* as the parent type. Some authors use *kind of* as the name for the relationship between the child and parent. Meyer uses the term *is-a*[Page 1199, 356], a popular term that we will use too. For example, a cat *is a* mammal, and also is an animal.

The fundamental difference between *Subtype Inheritance* (page 1203) and *Implementation Inheritance* (page 1206) is whether clients have compile-time visibility to the *is-a* relationship between the parent and child types. The relationship exists in both idioms but is only

visible to clients in one. In Subtype Inheritance, clients do have compile-time visibility to the relationship, while in Implementation Inheritance, clients don't have that visibility.

Consequently, with Subtype Inheritance, all of the inherited operations become part of the child type's visible interface. In contrast, with Implementation Inheritance, none of those parent capabilities are part of the visible interface: the inherited parent capabilities are only available internally, to implement the child type's representation and its primitive operations.

37.1.1 Building Blocks

Ada uses distinct *building block* constructs to compose types that have specific characteristics and capabilities. In particular, Ada packages, with their control over compile-time visibility, are modules. Private types are combined with packages to define *abstract data types* (page 1149) having hidden representations. Sets of related types are presented explicitly by class-wide types.

In addition, simple reserved words may be attached to a type declaration to refine or expand the capabilities of the type. These type declarations include declarations for derived types, providing considerable flexibility and expressive power for controlling the client's view of the child and parent types.

For example, in Ada, full dynamic OOP capabilities require type declarations to be decorated with the reserved word **tagged**. However, from its earliest days, Ada has also supported a static form of inheritance, using types that are not tagged. The implementation we describe below works with both forms of inheritance.

The developer also has a choice of whether the parent type and/or the child type is a private type. Using private types is the default design choice, for the sake of designing in terms of abstract data types, but is nevertheless optional.

In addition, a type can be both private and tagged. This possibility raises the question of whether the type is *visibly tagged*, i.e., whether the client view of the type includes the tagged characteristic, and hence the corresponding capabilities. Recall that a private type is declared in two steps: the first part occurs in the visible part of the package and introduces the type name to clients. The second part — the type completion — appears in the package private part and specifies the type's actual representation. The question arises because the first step, i.e., the declaration in the package's visible part, need not be tagged, yet can be tagged in the completion in the package private part. For example:

```
package P is
   type Foo is private;  --  not visibly tagged for clients
   -- operations on type Foo
private
   type Foo is tagged record  -- tagged completion
      ...
   end record;
end P;
```

In the above, Foo is not visibly tagged except in the package private part and the package body. As a consequence, the capabilities of tagged types are not available to clients using type Foo. Clients cannot refer to Foo'Class, for example. (The opposite arrangement — tagged in the visible client view but not actually tagged in the private view — is not legal, because clients would be promised capabilities that are not actually available.)

When the parent type is tagged, the type derivation syntax for the child is a *type extension* declaration that introduces the child type's name, specifies the parent type, and then extends the parent representation with child-specific record components, if any. For example:

```
type Child is new Parent with record ... end record;
```

Even though the child type declaration does not include the reserved word **tagged** the child will be a tagged type because the parent type is tagged. The compiler would not allow the extension construct for a non-tagged parent type.

Just as a private type can be visibly tagged or not, a private type can be *visibly derived* or not. When it is visibly derived, clients have a view of the private type that includes the fact of the derivation from the parent type. Otherwise, clients have no view of the parent type. Whether or not the child is visibly derived, the representation is not compile-time visible to clients, as for any private type. For example, type Foo is not visibly derived in the following:

```
package P is
   type Foo is tagged private;  --  visibly tagged but not visibly derived
   -- ...
end P;
```

To be visibly derived, we declare the child type as a private type using a *private extension*. A private extension is like a type extension, in that it introduces the child type name and the parent type. But like any private type declaration, it does not specify the type's representation. This is the first of the two steps for declaring a private type; hence it appears in the package visible part. For example:

```
with ...
package P is
   type Child is new Parent with private;  -- visibly derived from Parent
private
   type Child is new Parent with record ... end record;
end P;
```

The representation additions are not expressed until the private type's completion in the package private part, using a type extension. The steps are the same two for any private type: a declaration in the package visible part, with a completion in the package private part. The difference is the client visibility to the parent type.

37.2 Implementation(s)

There are two implementations presented, one for each of the two inheritance idioms under discussion. First, we will specify our building block choices, then show the two idiom expressions in separate subsections.

- We use tagged types for the sake of providing full OOP capabilities. That is the most common choice when inheritance is involved. The static form of inheritance has cases in which it is useful, but those cases are very narrow in applicability.
- We assume that the parent type and the child type are both private types, i.e., abstract data types, because that is the best practice. See the *Abstract Data Type idiom* (page 1149) for justification and details.
- To provide the most general capabilities, we assume the parent type is visibly tagged.
- We're going to declare the child type in a distinct, dedicated package, following the *ADT idiom* (page 1149). This package may or may not be a child of the parent package. This implementation's approach does not require a child package's special compile-time visibility, although a child package is often necessary for the sake of that visibility.
- Whether the child type is visibly derived will vary with the *inheritance idiom* (page 1206) implementation.

To avoid unnecessary code duplication, we use the same parent type, declared as a simple tagged private type, in the examples for the two idiom implementations. The parent type could itself be derived from some other tagged type, but that changes nothing conceptually significant. We declare parent type in package P as follows:

```
package P is
   type Parent is tagged private;  -- visibly tagged
   --  primitive operations with type Parent as the
   --  controlling formal parameter
private
   type Parent is tagged record ... end record;
end P;
```

37.2.1 Subtype Inheritance

Recall that Subtype Inheritance requires clients to have compile-time visibility to the *is-a* relationship between the child and parent types. We can satisfy that requirement if we make the child visibly derived from the parent. Hence we declare the private type as a private extension in the visible part of the package:

```
with P; use P;
package Q is
  type Child is new Parent with private;
  --  implicit, inherited primitive Parent operations declared here,
  --  now for type Child
  --  additional primitives for Child explicitly declared, if any
private
  type Child is new Parent with record ... end record;
end Q;
```

The primitive operations from the parent type are implicitly declared immediately after the private extension declaration. That means those operations are in the visible part of the package, hence clients can invoke them. Any additional operations for the client interface will be explicitly declared in the visible part as well, as will any overriding declarations for those inherited operations that are to be changed.

For example, here is a basic bank account *ADT* (page 1149) that we will use as the parent type in a derivation:

Listing 1: bank.ads

```
1  with Ada.Strings.Unbounded;  use Ada.Strings.Unbounded;
2  with Ada.Containers.Doubly_Linked_Lists;
3
4  package Bank is
5
6     type Basic_Account is tagged private
7       with Type_Invariant'Class => Consistent_Balance (Basic_Account);
8
9     function Consistent_Balance (This : Basic_Account) return Boolean;
10
11    type Currency is delta 0.01 digits 12;
12
13    procedure Deposit (This   : in out Basic_Account;
14                       Amount : Currency) with
15      Pre'Class  => Open (This) and Amount > 0.0,
16      Post'Class => Balance (This) = Balance (This)'Old + Amount;
17
18    procedure Withdraw (This   : in out Basic_Account;
19                        Amount : Currency) with
20      Pre'Class  => Open (This) and Funds_Available (This, Amount),
21      Post'Class => Balance (This) = Balance (This)'Old - Amount;
22
23    function Balance (This : Basic_Account) return Currency
24      with Pre'Class => Open (This);
```

(continues on next page)

(continued from previous page)

```
25
26    procedure Report_Transactions (This : Basic_Account)
27      with Pre'Class => Open (This);
28
29    procedure Report (This : Basic_Account)
30      with Pre'Class => Open (This);
31
32    function Open (This : Basic_Account) return Boolean;
33
34    procedure Open
35      (This            : in out Basic_Account;
36       Name            : String;
37       Initial_Deposit : Currency)
38    with Pre'Class => not Open (This),
39         Post'Class => Open (This);
40
41    function Funds_Available (This : Basic_Account;
42                              Amount : Currency) return Boolean is
43      (Amount > 0.0 and then Balance (This) >= Amount)
44    with Pre'Class => Open (This);
45
46 private
47
48    package Transactions is new
49      Ada.Containers.Doubly_Linked_Lists (Element_Type => Currency);
50
51    type Basic_Account is tagged record
52       Owner           : Unbounded_String;
53       Current_Balance : Currency := 0.0;
54       Withdrawals     : Transactions.List;
55       Deposits        : Transactions.List;
56    end record;
57
58    function Total (This : Transactions.List) return Currency is
59      (This'Reduce ("+", 0.0));
60
61 end Bank;
```

We could then declare an interest-bearing bank account using Subtype Inheritance:

Listing 2: bank-interest_bearing.ads

```
1  package Bank.Interest_Bearing is
2
3     type Account is new Basic_Account with private;
4
5     overriding
6     function Consistent_Balance (This : Account) return Boolean;
7
8     function Minimum_Balance (This : Account) return Currency;
9
10    overriding
11    procedure Open
12      (This            : in out Account;
13       Name            : String;
14       Initial_Deposit : Currency)
15    with Pre => Initial_Deposit >= Minimum_Balance (This);
16
17    overriding
18    procedure Withdraw (This : in out Account;  Amount : Currency);
19
```

(continues on next page)

(continued from previous page)

```
20    function Penalties_Accrued (This : Account) return Currency;
21    function Interest_Accrued (This : Account) return Currency;
22
23 private
24
25    type Account is new Basic_Account with record
26       Penalties          : Transactions.List;
27       Interest_Earned    : Transactions.List;
28       Days_Under_Minimum : Natural := 0;
29    end record;
30
31 end Bank.Interest_Bearing;
```

The new type `Bank.Interest_Bearing.Account` inherits all the `Basic_Account` operations in the package visible part. They are, therefore, available to clients. Some of those inherited operations are overridden so that their behavior can be changed. Additional operations specific to the new type are also declared in the visible part so they are added to the client API.

The package private part and the body of package `Bank.Interest_Bearing` have visibility to the private part of package Bank because the new package is a child of package Bank. That makes the private function `Bank.Total` visible in the child package, along with the components of the record type `Basic_Account`.

Note that there is no language requirement that the actual parent type in the private type's completion be the one named in the private extension declaration presented to clients. The parent type in the completion must only be in the same derivation class — be the same kind of type — so that it satisfies the *is-a* relationship stated to clients.

For example, we could start with a basic graphics shape:

```
package Graphics is
   type Shape is tagged private;
   --  operations for type Shape ...
   ...
end Graphics;
```

We could then declare a subcategory of Shape that allows translation in some 2-D space:

```
package Graphics.Translatable is
   type Translatable_Shape is new Graphics.Shape with private;
   procedure Translate (This : in out Translatable_Shape;  X, Y : in Float);
...
end Graphics.Translatable;
```

Given that, we could now declare another type visibly derived from Shape, but using `Translatable_Shape` as the actual parent type:

```
with Graphics;
private with Graphics.Translatable;
package Geometry is
   type Circle is new Graphics.Shape with private;
   --  operations for type Circle, inherited from Shape,
   --   and any new ops added ...
private
   use Graphics.Translatable;
   type Circle is new Translatable_Shape with record ... end record;
end Geometry;
```

In the type extension that completes type `Circle` in the package private part above, the extended parent type is not the one presented to clients, i.e., `Graphics.Shape`. Instead, the parent type is another type that is derived from type Shape. That substitution is legal

and reasonable because Translatable_Shape necessarily can do anything that Shape can do. To understand why that is legal, it is helpful to imagine that there is a *contract* between the package public part and the private part regarding type Circle. As long as Circle can do everything promised to clients — i.e., inherited Shape operations — the contract is fulfilled. Circle inherits Shape operations because Translatable_Shape inherits those operations. The fact that Circle can do more than is contractually required by the client view is perfectly fine.

37.2.2 Implementation Inheritance

Recall that with Implementation Inheritance clients do not have compile-time visibility to the *is-a* relationship between the parent and child types. We meet that requirement by not making the child visibly derived from the parent. Therefore, we declare the child type as a simple tagged private type and only mention the parent in the child type's completion in the package private part:

```
with P; use P;
package Q is
  type Child is tagged private;
   --  explicitly declared primitives for Child
private
  type Child is new Parent with record ...
   --  implicit, inherited primitive operations with type Child
   --  as the controlling formal parameter
end Q;
```

The primitive operations from the parent type are implicitly declared immediately after the type extension, but these declarations are now located in the package private part. Therefore, the inherited primitive operations are not compile-time visible to clients. Hence clients cannot invoke them. These operations are only visible (after the type completion) in the package private part and the package body, for use with the implementation of the explicitly declared primitive operations.

For example, we might use a *controlled type* in the implementation of a tagged private type. These types have procedures Initialize and Finalize defined as primitive operations. Both are called automatically by the compiler. Clients generally don't have any business directly calling them so we usually use implementation inheritance with controlled types. But if clients did have the need to call them we would use Subtype Inheritance instead, to make them visible to clients.

For example, the following is a generic package providing an abstract data type for unbounded queues. As such, the Queue type uses dynamic allocation internally. This specific version automatically reclaims the allocated storage when objects of the Queue type cease to exist:

Listing 3: unbounded_sequential_queues.ads

```
1  with Ada.Finalization;
2  generic
3     type Element is private;
4  package Unbounded_Sequential_Queues is
5
6     type Queue is tagged limited private;
7
8     procedure Insert (Into : in out Queue;  Item : Element) with
9       Post => not Empty (Into) and
10                Extent (Into) = Extent (Into)'Old + 1;
11      --  may propagate Storage_Error
12
13    procedure Remove (From : in out Queue;  Item : out Element) with
```

(continues on next page)

(continued from previous page)

```
14       Pre  => not Empty (From),
15       Post => Extent (From) = Natural'Max (0, Extent (From)'Old - 1);
16
17    procedure Reset (This : in out Queue) with
18       Post => Empty (This) and Extent (This) = 0;
19
20    function Extent (This : Queue) return Natural;
21
22    function Empty (This : Queue) return Boolean;
23
24 private
25
26    type Node;
27
28    type Link is access Node;
29
30    type Node is record
31       Data : Element;
32       Next : Link;
33    end record;
34
35    type Queue is new Ada.Finalization.Limited_Controlled with
36       record
37          Count : Natural := 0;
38          Rear  : Link;
39          Front : Link;
40       end record;
41
42    overriding procedure Finalize (This : in out Queue) renames Reset;
43
44 end Unbounded_Sequential_Queues;
```

The basic operation of assignment usually does not make sense for an abstraction represented as a linked list, so we declare the private type as *limited*, in addition to tagged and private, and then use the language-defined limited controlled type for the type extension completion in the private part.

Procedures `Initialize` and `Finalize` are inherited immediately after the type extension. Both are null procedures that do nothing. We can leave `Initialize` as-is because initialization is already accomplished via the default values for the `Queue` components. On the other hand, we want finalization to reclaim all allocated storage so we cannot leave `Finalize` as a null procedure. By overriding the procedure, we can change the implementation. That change is usually accomplished by placing the corresponding procedure body in the package body. However, in this case we have an existing procedure named `Reset` that is part of the visible (client) API. `Reset` does exactly what we want `Finalize` to do, so we implement the overridden `Finalize` by saying that it is just another name for `Reset`. No completion body for `Finalize` is then required or allowed. This approach has the same semantics as if we explicitly wrote a body for `Finalize` that simply called `Reset`, but this is more succinct. Clients can call `Reset` whenever they want, but the procedure will also be called automatically, via `Finalize`, when any `Queue` object ceases to exist.

37.3 Pros

The two idioms are easily composed simply by controlling where in the enclosing package the parent type is mentioned: either in the declaration of the private child type in the package visible part or in the child type's completion in the package private type.

37.4 Cons

Although the inheritance expressions are simple by themselves, the many ancillary design choices can make the design effort seem more complicated than it really is.

37.5 Relationship With Other Idioms

We assume the *Abstract Data Type idiom* (page 1149), so we are using private types throughout. That includes the child type, and, as we saw, allows us to control the compile-time visibility to the parent type.

CHAPTER

THIRTYEIGHT

PROVIDING COMPONENT ACCESS TO ENCLOSING RECORD OBJECTS

38.1 Motivation

In some design situations we want to have a record component that is of a task or protected type. That in itself is trivially accomplished because task types and protected types can be used to declare record components. But there's more to this idiom.

We would want a task type or protected type record component when:

a) a task or protected object (PO) is required to implement part — but not all — of the record type's functionality, and

b) each such task or PO is intended to implement its functionality only for the object logically containing that specific task object or protected object. The record object and contained task/PO object pair is a functional unit, independent of all other such units.

This idiom applies to both enclosed task types and protected types, but for simplicity let's assume the record component will be of a protected type.

As part of a functional unit, the PO component will almost certainly be required to reference the other record components in the enclosing record object. That reference will allow the PO to read and/or update those other components. Note that these record components include discriminants, if any.

To be a functional unit, the record object referenced by a given PO in this relationship must be the same record object at run-time that contains that specific PO instance. That will allow the PO instance to implement the functionality for the specific record object containing that PO instance.

Unless we arrange it, that back-reference from the protected object to the record object isn't provided. Consider the following:

```
package Q is
   protected type P is ... end P;
   type R is record
     ...
     Y : P;
   end record;
end Q;
```

During execution, whenever an object of type `Q.R` is declared or allocated, at run-time we will have two objects, instances of two distinct types — the record object and the protected object. Let's say that a client declares an object `Obj` of type R. There is only one reference direction defined, from the record denoted by `Obj` to the component protected object denoted by `Obj.Y`. This idiom, however, requires a reference in the opposite direction, from `Oby.Y` to `Obj`.

This may seem like an unrealistic situation, but it is not. An IO device type that involves interrupt handling is just one real-world example, one that we will show in detail.

The idiom context is a type because there will often be multiple real-world entities being represented in software. Representing these entities as multiple objects declared of a single type is by far the most reasonable approach.

We assume the functional unit will be implemented as an *Abstract Data Type (ADT)* (page 1149). Strictly speaking, the ADT idiom is not required here, but that is the best approach for defining major types, for the good reasons given in that idiom entry. There's no reason not to use an ADT in this case so we will.

38.2 Implementation(s)

As mentioned, the implementation approach applies to enclosed components of both task types and protected types. We will continue the discussion in terms of protected types.

The implementation has two parts:

1. An access discriminant on the PO type, designating the enclosing record's type. That part is straightforward.
2. A value given to that discriminant that designates the object of the enclosing record type, i.e., the record object that contains that PO. That part requires a relatively obscure language construct.

Given those two parts, the PO can then dereference its access discriminant to read or update the other components in the same enclosing record object.

Consider the following (very artificial) package declaration illustrating these two parts:

```
package P is
   type Device is tagged limited private;
private

   protected type Controller (Encloser : not null access Device) is
      -- Part 1

      procedure Increment_X;
   end Controller;

   type Device is tagged limited record
      X : Integer;  -- arbitrary type

      C : Controller (Encloser => ...);
      -- Part 2, not fully shown yet
   end record;

end P;
```

The record type named `Device` contains a component named `X`, arbitrarily of type **`Integer`**, and another component `C` that is of protected type `Controller`. Part #1 of the implementation is the access discriminant on the declaration of the protected type `Controller`:

```
protected type Controller (Encloser : not null access Device) is
```

Given a value for the discriminant `Encloser`, the code within the spec and body of type `Controller` can then reference some `Device` object via that discriminant.

But not just any object of type `Device` will suffice. For Part #2, we must give the `Encloser` discriminant a value that refers to the current instance of the record object containing this same PO object. In the package declaration above, the value passed to `Encloser` is elided.

The following is that code again, now showing just the declaration for Device, but also including the construct that is actually passed. This is where the subtlety comes into play:

```
type Device is tagged limited record
      ...
      C : Controller (Encloser => Device'Access);
end record;
```

The subtlety is the expression Device'Access. Within a type declaration, usage of the type name denotes the current instance of that type. The current instance of a type is the object of the type that is associated with the execution that evaluates the type name. For example, during execution, when an object of type Device is elaborated, the name Device refers to that object.

It isn't compiler-defined magic, the semantics are defined by the Ada standard so it is completely portable. (There are other cases for expressing the current instance of task types, protected types, and generics.)

Therefore, within the declaration of type Device, the expression Device'Access provides an access value designating the current instance of that type. This is exactly what we want and is the crux of the idiom expression. With that discriminant value, the enclosed PO spec and body can reference the other record components of the same object that contains the PO.

To illustrate that, here is the package body for this trivial example. Note the value referenced in the body of procedure Increment_X:

```
package body P is

   protected body Controller is

      procedure Increment_X is
      begin
         Encloser.X := Encloser.X + 1;
      end Increment_X;

   end Controller;

end P;
```

Specifically, the body of procedure Increment_X can use the access discriminant Encloser to get to the current instance's X component. (We could express it as Encloser.**all**.X but why bother. Implicit dereferencing is a wonderful thing.)

That's the implementation. Now for some necessary details.

Note that we declared type Device as a limited type, first in the visible part of the package:

```
type Device is tagged limited private;
```

and again in the type completion in the package private part:

```
type Device is tagged limited record ... end record;
```

We declare Device as a limited type because we want to preclude assignment statements for client objects of the type. Assignment of the enclosing record object would leave the PO Encloser discriminant designating the prior (right-hand side) enclosing object. If the PO is written with the assumption that the enclosing object is always the one identified during creation of the PO, that assumption will no longer hold. We didn't state it up-front, but that is the assumption underlying the idiom as described, and in fact, only limited types may have a component that uses the **Access** attribute in this way. Also note that any type that includes a protected or task object is limited, so a type like Device will necessarily be limited in any case.

The type need not be tagged for this approach, but it must be limited in both its partial view and its full view. More generally, a tagged type must be limited in both views if it is limited in either view.

For the idiom implementation to be legal, the type's completion in the private part must not merely be limited, but actually *immutably limited*, meaning that it is always truly limited. There are various ways to make that happen (see AARM22 7.5 (8.1/3)[357]) but the easiest way to is to include the reserved word **limited** in the type definition within the full view, as we did above. That is known as making the type *explicitly limited*. It turns out having a task or protected component also makes it immutably limited, so this requirement is naturally satisfied in this use case.

Why does the compiler require the type to be immutably limited?

Recall that a (non-tagged) private type need not be limited in both views. It can be limited in the partial client view but non-limited in its full view:

```
package Q is
   type T is limited private;
   -- the partial view for clients in package visible part
   ...
private
   type T is record -- the full view in the package private part
      ...
   end record;
end Q;
```

Clients must treat type `Q.T` as if it is limited, but `Q.T` isn't really limited because the full view defines reality. Clients simply have a more restricted view of the type than is really the case.

Types that are immutably limited are necessarily limited in all views. That's important because the current instance of the type given in `type_name'Access` must be aliased for `'Access` to be legal. But if the type's view could change between limited and not limited, its current instance would be aliased in some contexts and not aliased in others. To prevent that complexity, the language requires the type to be immutably limited so that the current instance of the type will be aliased in every view. In practice, we're working with record types and type extensions, so just make the full type definition explicitly limited and all will be well:

```
package Q is
   type T is limited private;
   ...
private
   type T is limited record
      ...
   end record;
end Q;
```

Then, as mentioned, you can choose whether the type will also be tagged.

38.3 Real-World Example

For a concrete, real-world example, suppose we have a serial IO device on an embedded target board. The device can be either a UART or USART[358]. For the sake of brevity let's assume we have USARTs available.

Many boards have more than one USART resident, so it makes sense to represent them in software as instances of an ADT. This example uses the USART ADT supported in the

[357] http://www.ada-auth.org/standards/22aarm/html/AA-7-5.html
[358] https://en.wikipedia.org/wiki/Universal_synchronous_and_asynchronous_receiver-transmitter

Ada Drivers Library (ADL)[359] that is named, imaginatively, USART. (We don't show package STM32.USARTs, but you will see it referenced in the example's context clauses.) Each of these USART devices can support either a polling implementation or an interrupt-driven implementation. We will first define a basic USART ADT, and then extend that to a new one that works with interrupts.

At the most basic level, to work with a given USART device we must combine it with some other hardware, specifically the IO pins that connect it to the outside world. That combination will be represented by a new ADT, the type Device defined in package Serial_IO.

Any given Serial_IO.Device object will be associated permanently with one USART. Therefore, type Device will have a discriminant named Transceiver designating that USART object.

There are some low-level operations that a Serial_IO.Device will implement, such as initializing the hardware and setting the baud rate and so forth. We can also implement the hardware-oriented input and output routines in this package because both are independent of the polling or interrupt-driven designs.

Here's the resulting package declaration for the serial IO device ADT. Parts of the package are elided for simplicity (the full code is *at the end of this idiom entry* (page 1217)):

```
with STM32;          use STM32;
with STM32.GPIO;     use STM32.GPIO;
with STM32.USARTs;   use STM32.USARTs;
with HAL;   -- the ADL's Hardware Abstraction Layer

package Serial_IO is

   type Device (Transceiver : not null access USART) is tagged limited private;

   procedure Initialize
     (This           : in out Device;
      Tx_Pin         : GPIO_Point;
      Rx_Pin         : GPIO_Point;
      ...);

   procedure Configure (This : in out Device;  Baud_Rate : Baud_Rates;  ...);
   ...
   procedure Put (This : in out Device;  Data : HAL.UInt8) with Inline;
   procedure Get (This : in out Device;  Data : out HAL.UInt8) with Inline;

private

   type Device (Transceiver : not null access USART) is tagged limited record
      Tx_Pin : GPIO_Point;
      Rx_Pin : GPIO_Point;
      ...
   end record;

end Serial_IO;
```

When called, procedure Initialize does the hardware setup required, such as enabling power for the USART and pins. We can ignore those details for this discussion.

Given this basic Device type we can then use inheritance (type extension) to define distinct types that support the polling and interrupt-driven facilities. These types will themselves be ADTs. Let's focus on the new interrupt-driven ADT, named Serial_Port. This type will be declared in the child package Serial_IO.Interrupt_Driven.

When interrupts are used, each USART raises a USART-specific interrupt for sending and receiving. Each interrupt occurrence is specific to one device. Therefore, the interrupt

[359] https://github.com/AdaCore/Ada_Drivers_Library

handler code is specific to each Serial_Port object instance. We use protected objects as interrupt handlers in (canonical) Ada, hence each Serial_Port object will contain a dedicated interrupt handling PO as a record component.

As a controller and handler for a USART's interrupts, the PO will require a way to access the USART and pins being driven. Our idiom design provides that access.

Here is the client view of the ADT for the interrupt-driven implementation:

```
with Ada.Interrupts;      use Ada.Interrupts;
with HAL;
with System; use System;

package Serial_IO.Interrupt_Driven is

   type Serial_Port
     (Transceiver  : not null access USART;
      IRQ          : Interrupt_ID;
      IRQ_Priority : Interrupt_Priority)
   is new Serial_IO.Device with private;

   --  The procedures Initialize and Configure, among others, are
   --  implicitly declared here as operations inherited from
   --  Serial_IO.Device.

   overriding
   procedure Put (This : in out Serial_Port;  Data : HAL.UInt8)
     with Inline;

   overriding
   procedure Get (This : in out Serial_Port;  Data : out HAL.UInt8)
     with Inline;

private
   ...
end Serial_IO.Interrupt_Driven;
```

The declaration of type Serial_Port uses *Interface Inheritance* (page 1199) to extend Serial_IO.Device with both visible and hidden components. The three visible extension components are the discriminants Transceiver, IRQ, and IRQ_Priority. Transceiver will designate the USART to drive (discussed in a moment). IRQ is the Interrupt_ID indicating the interrupt that the associated USART raises. IRQ_Priority is the priority for that interrupt. (*IRQ* in a common abbreviation for *Interrupt ReQuest*.) These two interrupt-oriented discriminants are used within the PO declaration to configure it for interrupt handling.

Clients will know which USART they are working with so they will be able to determine which interrupt ID and priority to specify, presumably by consulting the board documentation.

Now let's examine the Serial_Port type completion in the package's private part.

We've said we will use a PO interrupt handler as a component of the Serial_Port record type. This PO type, named IO_Manager, will include discriminants for the two interrupt-specific values it requires as an interrupt handler. It will also have a discriminant providing access to the enclosing Serial_Port record type.

```
protected type IO_Manager
  (IRQ          : Interrupt_ID;
   IRQ_Priority : Interrupt_Priority;
   Port         : not null access Serial_Port)
with
   Interrupt_Priority => IRQ_Priority
is
   entry Put (Datum : HAL.UInt8);
```

(continues on next page)

(continued from previous page)

```
   entry Get (Datum : out HAL.UInt8);
private
   ...
   procedure IRQ_Handler with Attach_Handler => IRQ;
end IO_Manager;
```

Note how the first two discriminants are used within the type declaration to give the priority of the PO and to attach the interrupt handler procedure `IRQ_Handler` to the interrupt indicated by `IRQ`. The `Port` discriminant will be the back-reference to the enclosing record object.

We can then, finally, provide the `Serial_Port` type completion, in which the record object and protected object are connected whenever a `Serial_Port` object is declared:

```
type Serial_Port
  (Transceiver  : not null access USART;
   IRQ          : Interrupt_ID;
   IRQ_Priority : Interrupt_Priority)
is new Serial_IO.Device (Transceiver) with record
   Controller : IO_Manager (IRQ, IRQ_Priority, Serial_Port'Access);
end record;
```

The type completion repeats the declaration in the public part, up to the point where the `Serial_Port.Transceiver` discriminant is passed to the `Serial_IO.Device.Transceiver` discriminant. Type `Device` must be constrained with a discriminant value here, so we just pass the discriminant defined for `Serial_Port`.

Why does `Serial_Port` also have a `Transceiver` discriminant? Just as `Serial_IO.Device` is a complete wrapper for the combination of a USART and IO pins, `Serial_Port` is a standalone wrapper for `Serial_IO.Device`. Hence `Serial_Port` also needs a discriminant designating a USART to be complete.

The full definition of type `Serial_Port` contains the declaration of the component named `Controller`, of the protected type `IO_Manager`. The two interrupt-oriented discriminants from `Serial_Port` are passed to the discriminants defined for this PO component. The third `IO_Manager` discriminant value, `Serial_Port'Access`, denotes the current instance of the `Serial_Port` type. Thus the idiom requirements are achieved.

Let's see that back-reference in use within the protected body.

As mentioned, there is one interrupt used for both sending and receiving, per USART. Strictly speaking, the device itself does use two dedicated interrupts, one indicating that a 9-bit value has been received, and one indicating that transmission for a single 9-bit value has completed. But these two are signaled to the software on one interrupt line, and that is the value indicated by `IRQ`.

Therefore, there is one interrupt handling protected procedure, named `IRQ_Handler`. In response to this interrupt, `IRQ_Handler` determines which event has occurred by checking one of the `Transceiver` status registers. The back-reference through `Port` makes that possible. Other `Transceiver` routines are also called via `Port`, and `Port.all` is passed to the `Put` and `Get` calls:

```
procedure IRQ_Handler is
begin
   --  check for data arrival
   if Port.Transceiver.Status (Read_Data_Register_Not_Empty) and then
       Port.Transceiver.Interrupt_Enabled (Received_Data_Not_Empty)
   then  -- handle reception
      -- call the Serial_IO.Device version:
      Get (Serial_IO.Device (Port.all), Incoming);
```

(continues on next page)

(continued from previous page)

```
      Await_Reception_Complete : loop
         exit when not Port.Transceiver.Status (Read_Data_Register_Not_Empty);
      end loop Await_Reception_Complete;
      Port.Transceiver.Disable_Interrupts (Received_Data_Not_Empty);
      Port.Transceiver.Clear_Status (Read_Data_Register_Not_Empty);
      Incoming_Data_Available := True;
   end if;

   --  check for transmission ready
   if Port.Transceiver.Status (Transmission_Complete_Indicated) and then
      Port.Transceiver.Interrupt_Enabled (Transmission_Complete)
   then  -- handle transmission
      -- call the Serial_IO.Device version:
      Put (Serial_IO.Device (Port.all), Outgoing);

      Port.Transceiver.Disable_Interrupts (Transmission_Complete);
      Port.Transceiver.Clear_Status (Transmission_Complete_Indicated);
      Transmission_Pending := False;
   end if;
end IRQ_Handler;
```

In this example, although the PO only accesses the `Transceiver` component in the enclosing record object, additional functionality might need to access more components, for this example perhaps using some of the inherited IO pin components.

38.4 Pros

The implementation is directly expressed, requiring only an access discriminant and the current instance semantics of `type_name'Access`.

Although the real-word example is complex — multiple discriminants are involved, and a type extension — the implementation itself requires little text. Interrupt handling is relatively complex in any language.

38.5 Cons

The record type must be truly a limited type, but that is not the severe limitation it was in earlier versions of Ada. Note that although access discriminants are required, there is no dynamic allocation involved.

38.6 Relationship With Other Idioms

This idiom is useful when we have a record type enclosing a PO or task object. If the *Abstract Data Machine (ADM)* (page 1155) would instead be appropriate, the necessary visibility can be achieved without requiring this implementation approach because there would be no enclosing record type. But as described in the ADM discussion, the *ADT approach* (page 1149) is usually superior.

38.7 Notes

As a wrapper abstraction for a USART, package `Serial_IO` is still more hardware-specific than absolutely necessary, as reflected in the parameters' types for procedure `Initialize` and the corresponding record component types. We could use the Hardware Abstraction

Layer (HAL) to further isolate the hardware dependencies, but that doesn't affect the idiom expression itself.

38.8 Full Source Code for Selected Units

We did not show some significant parts of the code discussed above, for the sake of not obscuring the points being made. Doing so, however, means that the interested reader cannot see how everything fits together and works, such as the actual IO using interrupts. The code below shows the relevant packages in their entirety. Note that the ADL STM32 hierarchy packages and the HAL (Hardware Abstraction Layer) package are in the Ada Drivers Library on GitHub[360].

First, the basic `Serial_IO` abstraction:

```
with STM32;         use STM32;
with STM32.GPIO;    use STM32.GPIO;
with STM32.USARTs;  use STM32.USARTs;
with HAL;

package Serial_IO is

   type Device (Transceiver : not null access USART) is tagged limited private;

   procedure Initialize
     (This           : in out Device;
      Transceiver_AF : GPIO_Alternate_Function;
      Tx_Pin         : GPIO_Point;
      Rx_Pin         : GPIO_Point;
      CTS_Pin        : GPIO_Point;
      RTS_Pin        : GPIO_Point);
   --  must be called before Configure

   procedure Configure
     (This      : in out Device;
      Baud_Rate : Baud_Rates;
      Parity    : Parities     := No_Parity;
      Data_Bits : Word_Lengths := Word_Length_8;
      End_Bits  : Stop_Bits    := Stopbits_1;
      Control   : Flow_Control := No_Flow_Control);

   procedure Set_CTS (This : in out Device; Value : Boolean) with Inline;
   procedure Set_RTS (This : in out Device; Value : Boolean) with Inline;

   procedure Put (This : in out Device;  Data : HAL.UInt8)     with Inline;
   procedure Get (This : in out Device;  Data : out HAL.UInt8) with Inline;

private

   type Device (Transceiver : not null access USART) is tagged limited record
      Tx_Pin  : GPIO_Point;
      Rx_Pin  : GPIO_Point;
      CTS_Pin : GPIO_Point;
      RTS_Pin : GPIO_Point;
   end record;

end Serial_IO;
```

And the package body:

[360] https://github.com/AdaCore/Ada_Drivers_Library

```
with STM32.Device; use STM32.Device;

package body Serial_IO is

   ----------------
   -- Initialize --
   ----------------

   procedure Initialize
     (This           : in out Device;
      Transceiver_AF : GPIO_Alternate_Function;
      Tx_Pin         : GPIO_Point;
      Rx_Pin         : GPIO_Point;
      CTS_Pin        : GPIO_Point;
      RTS_Pin        : GPIO_Point)
   is
      IO_Pins : constant GPIO_Points := Rx_Pin & Tx_Pin;
   begin
      This.Tx_Pin := Tx_Pin;
      This.Rx_Pin := Rx_Pin;
      This.CTS_Pin := CTS_Pin;
      This.RTS_Pin := RTS_Pin;

      Enable_Clock (This.Transceiver.all);

      Enable_Clock (IO_Pins);

      Configure_IO
        (IO_Pins,
         Config => (Mode_AF,
                    AF             => Transceiver_AF,
                    AF_Speed       => Speed_50MHz,
                    AF_Output_Type => Push_Pull,
                    Resistors      => Pull_Up));

      Enable_Clock (RTS_Pin & CTS_Pin);

      Configure_IO (RTS_Pin, Config => (Mode_In, Resistors => Pull_Up));

      Configure_IO
        (CTS_Pin,
         Config => (Mode_Out,
                    Speed       => Speed_50MHz,
                    Output_Type => Push_Pull,
                    Resistors   => Pull_Up));
   end Initialize;

   ---------------
   -- Configure --
   ---------------

   procedure Configure
     (This      : in out Device;
      Baud_Rate : Baud_Rates;
      Parity    : Parities     := No_Parity;
      Data_Bits : Word_Lengths := Word_Length_8;
      End_Bits  : Stop_Bits    := Stopbits_1;
      Control   : Flow_Control := No_Flow_Control)
   is
   begin
      This.Transceiver.Disable;
```

(continues on next page)

(continued from previous page)

```
      This.Transceiver.Set_Baud_Rate    (Baud_Rate);
      This.Transceiver.Set_Mode         (Tx_Rx_Mode);
      This.Transceiver.Set_Stop_Bits    (End_Bits);
      This.Transceiver.Set_Word_Length  (Data_Bits);
      This.Transceiver.Set_Parity       (Parity);
      This.Transceiver.Set_Flow_Control (Control);

      This.Transceiver.Enable;
   end Configure;

   -------------
   -- Set_CTS --
   -------------

   procedure Set_CTS (This : in out Device; Value : Boolean) is
   begin
      This.CTS_Pin.Drive (Value);
   end Set_CTS;

   -------------
   -- Set_RTS --
   -------------

   procedure Set_RTS (This : in out Device; Value : Boolean) is
   begin
      This.RTS_Pin.Drive (Value);
   end Set_RTS;

   ---------
   -- Put --
   ---------

   procedure Put (This : in out Device;  Data : HAL.UInt8) is
   begin
      This.Transceiver.Transmit (HAL.UInt9 (Data));
   end Put;

   ---------
   -- Get --
   ---------

   procedure Get (This : in out Device;  Data : out HAL.UInt8) is
      Received : HAL.UInt9;
   begin
      This.Transceiver.Receive (Received);
      Data := HAL.UInt8 (Received);
   end Get;

end Serial_IO;
```

Next, the interrupt-driven extension.

```
with Ada.Interrupts;      use Ada.Interrupts;
with HAL;
with System; use System;

package Serial_IO.Interrupt_Driven is
   pragma Elaborate_Body;

   type Serial_Port
     (Transceiver  : not null access USART;
```

(continues on next page)

(continued from previous page)

```
      IRQ          : Interrupt_ID;
      IRQ_Priority : Interrupt_Priority)
   is new Serial_IO.Device with private;
   --  A serial port that uses interrupts for I/O. Extends the Device
   --  abstraction that is itself a wrapper for the USARTs hardware.

   --  The procedures Initialize and Configure, among others, are implicitly
   --  declared here, as operations inherited from Serial_IO.Device

   overriding
   procedure Put (This : in out Serial_Port;  Data : HAL.UInt8)
     with Inline;
   --  Non-blocking, ie the caller can return before the Data goes out,
   --  but does block until the underlying UART is not doing any other
   --  transmitting. Does no polling. Will not interfere with any other I/O
   --  on the same device.

   overriding
   procedure Get (This : in out Serial_Port;  Data : out HAL.UInt8)
     with Inline;
   --  Blocks the caller until a character is available! Does no polling.
   --  Will not interfere with any other I/O on the same device.

private

   --  The protected type defining the interrupt-based I/O for sending and
   --  receiving via the USART attached to the serial port designated by
   --  Port. Each serial port object of the type defined by this package has
   --  a component of this protected type.
   protected type IO_Manager
     (IRQ          : Interrupt_ID;
      IRQ_Priority : Interrupt_Priority;
      Port         : not null access Serial_Port)
   --  with
      --  Interrupt_Priority => IRQ_Priority   -- compiler bug :-(
   is
      pragma Interrupt_Priority (IRQ_Priority);

      entry Put (Datum : HAL.UInt8);

      entry Get (Datum : out HAL.UInt8);

   private

      Outgoing : HAL.UInt8;
      Incoming : HAL.UInt8;

      Incoming_Data_Available : Boolean := False;
      Transmission_Pending    : Boolean := False;

      procedure IRQ_Handler with Attach_Handler => IRQ;

    end IO_Manager;

   type Serial_Port
     (Transceiver  : not null access USART;
      IRQ          : Interrupt_ID;
      IRQ_Priority : Interrupt_Priority)
   is
      new Serial_IO.Device (Transceiver) with
   record
```

(continues on next page)

(continued from previous page)

```
      Controller : IO_Manager (IRQ, IRQ_Priority, Serial_Port'Access);
      --  Note that Serial_Port'Access provides the Controller with a view
      --  to the current instance's components, including the discriminant
      --  components
   end record;

end Serial_IO.Interrupt_Driven;
```

And the package body:

```
with STM32.Device; use STM32.Device;

package body Serial_IO.Interrupt_Driven is

   ---------
   -- Put --
   ---------

   overriding
   procedure Put (This : in out Serial_Port;  Data : HAL.UInt8) is
   begin
      This.Controller.Put (Data);
   end Put;

   ---------
   -- Get --
   ---------

   overriding
   procedure Get (This : in out Serial_Port;  Data : out HAL.UInt8) is
   begin
      This.Transceiver.Enable_Interrupts (Received_Data_Not_Empty);
      This.Controller.Get (Data);
   end Get;

   ----------------
   -- IO_Manager --
   ----------------

   protected body IO_Manager is

      -----------------
      -- IRQ_Handler --
      -----------------

      procedure IRQ_Handler is
      begin
         --  check for data arrival
         if Port.Transceiver.Status (Read_Data_Register_Not_Empty) and then
            Port.Transceiver.Interrupt_Enabled (Received_Data_Not_Empty)
         then  -- handle reception
            -- call the Serial_IO.Device version:
            Get (Serial_IO.Device (Port.all), Incoming);

            Await_Reception_Complete : loop
               exit when not
                 Port.Transceiver.Status (Read_Data_Register_Not_Empty);
            end loop Await_Reception_Complete;
            Port.Transceiver.Disable_Interrupts (Received_Data_Not_Empty);
            Port.Transceiver.Clear_Status (Read_Data_Register_Not_Empty);
            Incoming_Data_Available := True;
```

(continues on next page)

(continued from previous page)

```
         end if;

         --  check for transmission ready
         if Port.Transceiver.Status (Transmission_Complete_Indicated) and then
            Port.Transceiver.Interrupt_Enabled (Transmission_Complete)
         then  -- handle transmission
            -- call the Serial_IO.Device version:
            Put (Serial_IO.Device (Port.all), Outgoing);

            Port.Transceiver.Disable_Interrupts (Transmission_Complete);
            Port.Transceiver.Clear_Status (Transmission_Complete_Indicated);
            Transmission_Pending := False;
         end if;
      end IRQ_Handler;
      ---------
      -- Put --
      ---------

      entry Put (Datum : HAL.UInt8) when not Transmission_Pending is
      begin
         Transmission_Pending := True;
         Outgoing := Datum;
         Port.Transceiver.Enable_Interrupts (Transmission_Complete);
      end Put;

      ---------
      -- Get --
      ---------

      entry Get (Datum : out HAL.UInt8) when Incoming_Data_Available is
      begin
         Datum := Incoming;
         Incoming_Data_Available := False;
      end Get;

   end IO_Manager;

end Serial_IO.Interrupt_Driven;
```

CHAPTER

THIRTYNINE

INTERRUPT HANDLING

39.1 Motivation

Recall that, in Ada, protected procedures are the standard interrupt-handling mechanism. The canonical interrupt handling and management model is defined in the Systems Programming Annex, section C.3 of the Reference Manual[361]. We assume that this optional annex is supported, and indeed effectively all compilers do support it. Likewise, we assume that the Real-Time Annex, annex D[362], is supported (which would require Annex C[363] to be supported anyway). Finally, we assume that either the Ravenscar or the Jorvik usage profile is applied. These two profiles define configurations of the two annexes that are appropriate for typical embedded systems that handle interrupts.

The definition of a canonical model mitigates differences imposed by the target, but some remain. For example, the number of different priority values, including interrupt priorities, differs with the targets involved. The model supports blocking of those interrupts at a lower priority than the currently executing interrupt handler, but the hardware might not support that behavior, although many do. None of these variations affect the expression of the idioms themselves.

The response to interrupts is often arranged in logical levels. The first level is the protected procedure handler itself. In some cases, everything required to handle the interrupt is performed there. However, some applications require more extensive, asynchronous processing of the data produced by the first level interrupt handler. In this case a second-level response can be defined, consisting of a task triggered by the first level. For example, the interrupt handler could respond to the first arrival of a character on a USART[364], poll for the remainder (or not), and then notify a task to perform analysis of the entire string received.

But even if no second-level interrupt processing is required, the interrupt handler may be required to notify the application that the event has occurred. Because interrupts are asynchronous, and logically concurrent with the application code, the association of an application task to a given interrupt-driven event is convenient and common.

Hence a task is often involved. How the handler procedure notifies the task leads to a couple of different idiom implementations. In both cases notification amounts to releasing the previously suspended task for further execution.

In the following section we show how to express these three idioms: one for using protected procedures alone, and two in which a protected procedure handler notifies a task.

[361] http://www.ada-auth.org/standards/12rm/html/RM-C-3.html
[362] http://www.ada-auth.org/standards/12rm/html/RM-D.html
[363] http://www.ada-auth.org/standards/12rm/html/RM-C.html
[364] https://en.wikipedia.org/wiki/Universal_synchronous_and_asynchronous_receiver-transmitter

39.2 Implementation(s)

39.2.1 First Level Handler Alone

In this approach the interrupt handler protected procedure does everything necessary and does not require a second-level handler.

An interrupt handler that simply copies data from one location to another is a good example of a necessary and sufficient first-level handler. The enclosing application assumes the copying is occurring as required and needs no explicit notification. If the copying isn't happening the failure will be obvious.

So, given that, why discuss such a scenario? Two reasons: to show how it is done in general, and especially, to show how double-buffering can be implemented very elegantly with interrupts.

For a concrete example, consider an audio streaming device that takes PCM samples from Ethernet via incoming UDP packets and transfers them to an audio CODEC device[365] on the target board. The CODEC output is physically connected to a high-quality amplifier and speakers. No upper-level application thread requires notification of the copying: if the transfer is working the audio output occurs, otherwise it does not.

In our implementation the CODEC device is *fed* from a buffer named `Outgoing_PCM_Samples`. The buffer must always have new samples available when the CODEC is ready for them, because delays or breaks would introduce audible artifacts. The timing is determined by the sampling rate used by the audio source, prior to transmission. To match that rate and to provide it efficiently, we use DMA to transfer the data from the buffer to the CODEC. In addition, `Outgoing_PCM_Samples` is double-buffered to help ensure the samples are always available upon demand.

However, the incoming UDP packets don't arrive at exact intervals. Because of this *jitter* in the arrival times, we cannot directly insert the PCM samples from these incoming packets into the `Outgoing_PCM_Samples` buffer. The delays would be audible. Therefore, we use a *jitter buffer* to deal with the arrival time variations. This jitter buffer holds the PCM samples as they arrive in the UDP packets, in sufficient amounts to de-couple the arrival time jitter from the outgoing data. A jitter buffer can do much more than this, such as correcting the order of arriving packets, but in this specific case the additional functionality is not required.

We use two DMA interrupts to copy data from the jitter buffer to the `Outgoing_PCM_Samples` buffer. The rationale for using two interrupts, rather than one, is given momentarily. The figure below illustrates the overall approach, with the jitter buffer on the left, the two interrupt handlers in the middle, and the `Outgoing_PCM_Samples` buffer on the right.

[365] https://en.wikipedia.org/wiki/Audio_codec

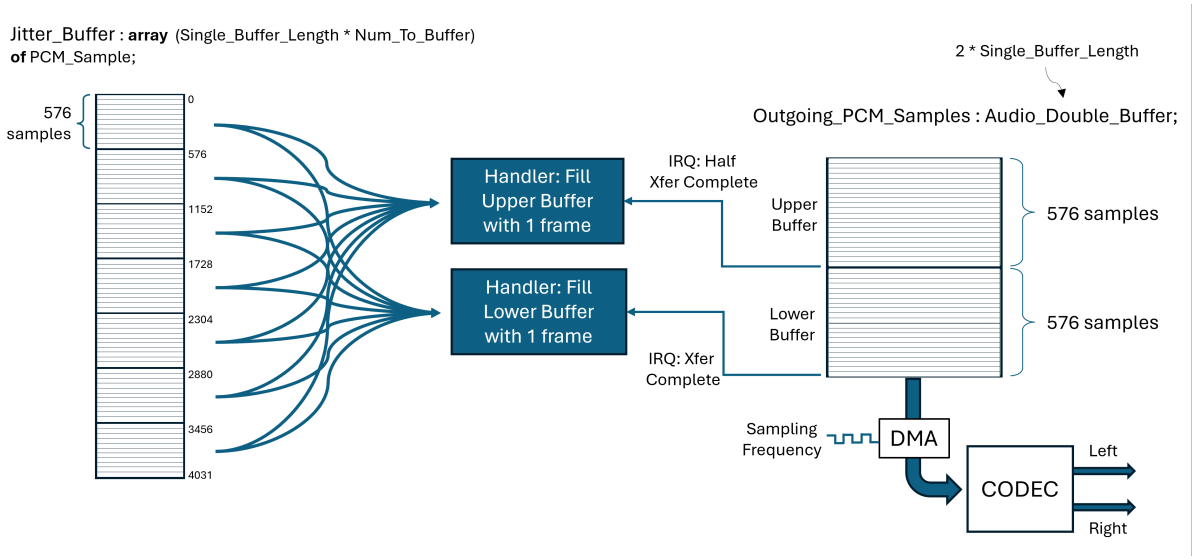

Each UDP packet contains 576 PCM samples, used as the *single buffer length* for the double-buffered `Outgoing_PCM_Samples` and the `Jitter_Buffer`.

The advantage of double-buffering is that the producer can be filling one buffer while the consumer is removing data from the other. These directions switch when the current output buffer becomes empty. The result is a fast, continuous output stream. Many audio and video devices use double-buffering for that reason.

To express double-buffering you could use two physically distinct array objects, switching between them when the DMA controller signals that the current outgoing buffer is empty. That would require keeping track of which buffer is being filled and which is being emptied. There is an elegant, simpler alternative that uses two different DMA interrupts instead of one. (The DMA device must support this approach directly.)

In this alternative, there is one physical array (`Outgoing_PCM_Samples`), containing twice the number of components as a single physical buffer would contain. We can then use the two interrupts to treat the one physical array as two logical buffers.

The two DMA interrupts are triggered as the DMA transfer consumes the content within this single array. One interrupt is triggered when the transfer reaches the physical half-way point in the array. The other interrupt is triggered when the transfer reaches the physical end of the array. Therefore, because the array is twice the size of a single buffer, each interrupt corresponds to one of the two logical buffers becoming empty.

Furthermore, the DMA device generating these interrupts is configured so that it does not stop. After triggering the *half transfer complete* interrupt the DMA continues reading, now from the second logical buffer. After triggering the *transfer complete* interrupt the DMA device starts over at the beginning of the array, reading from the first logical buffer again.

Therefore, we have two distinct interrupt handlers, one for each of the two interrupts. When the *half transfer complete* handler is invoked, the upper logical buffer is now empty, so the handler for that half fills it. Likewise, the *transfer complete* interrupt handler fills the lower logical buffer at the bottom half of the array. There's no need to keep track of which buffer is being filled or emptied. It's all being emptied, and the handlers always fill the same upper or lower halves of the array. As long as each handler completes filling their half before the DMA transfer begins reading it, all is well.

Here's the declaration of the protected object containing the DMA interrupt handling code.

```
protected DMA_Interrupt_Controller with
  Interrupt_Priority => DMA_Interrupt_Priority
is
private
```

(continues on next page)

(continued from previous page)

```
   procedure DMA_IRQ_Handler with
      Attach_Handler => STM32.Board.Audio_Out_DMA_Interrupt;
end DMA_Interrupt_Controller;
```

A few points are worth highlighting.

First, `DMA_Interrupt_Priority` is an application-defined constant. The actual value isn't important to this discussion. The handler procedure is attached to an interrupt that is specific to the target board, so it is defined in the package `STM32.Board` in the Ada Drivers Library. Each target board supported by the library has such a package, always with the same package name. This particular STM32 board has dedicated audio DMA support, along with the CODEC.

Second, there's nothing declared in the visible part of the PO. More to the point, everything is declared in the optional private part. That placement is a matter of style, but it's good style. No software client should ever call the protected procedure — only the hardware should call it, via the runtime library — so we make it impossible for any client to call it accidentally. That placement also informs the reader of our intent.

Third, we said there are two interrupts, but only one interrupt handler procedure is declared and attached. There's nothing inherently wrong with one routine handling multiple interrupts, although conceptually it is not ideal. In this case it is necessary because on this target both device interrupts arrive at the MCU on one external interrupt line. Therefore, the one protected procedure handler handles both device interrupts, querying the DMA status flags to see which interrupt is active. This approach is shown below. Note that there must be an enclosing package, with multiple context clauses, but we do not show them so that we can focus on the interrupt handler itself.

```
protected body DMA_Interrupt_Controller is

   procedure DMA_IRQ_Handler is
      use STM32.Board; -- for the audio DMA
   begin
      if Status (Audio_DMA,
                 Audio_DMA_Out_Stream,
                 DMA.Half_Transfer_Complete_Indicated)
      then
         --  The middle of the double-buffer array has been reached by the
         --  DMA transfer, therefore the "upper half buffer" is empty.
         Fill_Logical_Buffer (Outgoing_PCM_Samples,
                              Starting_Index => Upper_Buffer_Start);
         Clear_Status (Audio_DMA,
                       Audio_DMA_Out_Stream,
                       DMA.Half_Transfer_Complete_Indicated);
      end if;

      if Status (Audio_DMA,
                 Audio_DMA_Out_Stream,
                 DMA.Transfer_Complete_Indicated)
      then
         --  The bottom of the double-buffer array has been reached by the
         --  DMA transfer, therefore the "lower half buffer" is empty.
         Fill_Logical_Buffer (Outgoing_PCM_Samples,
                              Starting_Index => Lower_Buffer_Start);
         Clear_Status (Audio_DMA,
                       Audio_DMA_Out_Stream,
                       DMA.Transfer_Complete_Indicated);
      end if;
   end DMA_IRQ_Handler;

end DMA_Interrupt_Controller;
```

In both cases `Fill_Logical_Buffer` is called to insert samples from the jitter buffer into one of the logical buffers. The difference is the value passed to the formal parameter `Starting_Index`. This is the array index at which filling should begin within `Outgoing_PCM_Samples`. `Upper_Buffer_Start` corresponds to `Outgoing_PCM_Samples'First`, and `Lower_Buffer_Start` is `Outgoing_PCM_Samples'First + Single_Buffer_Length`.

That's all the software has to do. Offloading work to the hardware, in this case the DMA controller, is always a good idea, but that's especially true for less powerful targets, e.g., microcontrollers. Note that the availability of the *half transfer complete* interrupt varies across different DMA devices.

The implementation of `Fill_Logical_Buffer` is straightforward and need not be shown. However, the procedure declares a local variable named `Incoming_PCM_Samples` that has ramifications worth noting. In particular, the representation may require altering and rebuilding the underlying Ada run-time library.

The object `Incoming_PCM_Samples` is declared within `Fill_Logical_Buffer` like so:

```
Incoming_PCM_Samples : Jitter_Buffer.Sample_Buffer_Slice;
```

The alteration might be required because `Fill_Logical_Buffer` executes entirely in the interrupt handler procedure's context. Hence the storage used by the procedure's execution comes from the interrupt handler stack. Interrupt handlers typically do relatively little, and, as a result, a relatively small stack allocation is typically defined for them. The storage for `Incoming_PCM_Samples` might exceed that allocation.

Specifically, we said that `Fill_Logical_Buffer` fills an entire half of the double-buffer, i.e., it works in terms of `Single_Buffer_Length`. If `Sample_Buffer_Slice` is an actual array, the required storage might be considerable.

The interrupt stack allocation is set by the run-time library source code in GNAT, as is common. You could increase the allocation and rebuild the run-time.

On the other hand, `Sample_Buffer_Slice` need not be an actual array. It could be a record type containing a (read-only) pointer to the jitter buffer array and an index indicating where in that array the *slice* to be transferred begins. That representation would obviously require much less stack space, obviating the run-time library change and rebuild. Moreover, that representation would allow `Fill_Logical_Buffer` to copy directly from the jitter buffer into the final destination, i.e., `Outgoing_PCM_Samples`. If `Incoming_PCM_Samples` is an array, we'd have to copy from the jitter buffer into `Incoming_PCM_Samples`, and then again from there to `Outgoing_PCM_Samples`. That's an extra copy operation we can avoid.

A related issue, perhaps requiring a run-time change, is the *secondary stack* allocation for interrupt handlers. The secondary stack is a common approach to implementing calls to functions that return values of unconstrained subtypes (usually, unconstrained array types, such as **`String`**). Because the result size is not known at the point of the call, using the primary call stack for holding the returned value is messy. The function's returned value would follow the stack space used for the call itself. But on return, only the call space is popped, leaving a *hole* in the stack because the value returned from the function remains on the stack. Therefore, another separate stack is commonly used for these functions. (GNAT does so.) The interrupt handler code could exhaust this allocation as well. The allocation amount is also specified in the run-time library source code. But, as with the situation above, the source code can be changed, in this case to avoid calling functions with unconstrained result types. The trade-off is whether that change is more costly than changing and rebuilding the run-time, as well as maintaining the change.

39.2.2 Task Notification Introduction

The first idiom implementation did not require notifying a task, but these next idiom implementations will do so. As we mentioned earlier, how the interrupt handler achieves this notification leads to two distinct idioms. Ultimately the difference between them is whether

or not the interrupt handler must communicate with the task. In both cases the handler synchronizes with the task because of the notification required.

39.2.3 Task Notification With Communication

In this implementation the interrupt handler releases a task but also communicates with it when doing so. Therefore, a protected entry is used, and the entry parameters are the communication medium. The approach is depicted in the figure below:

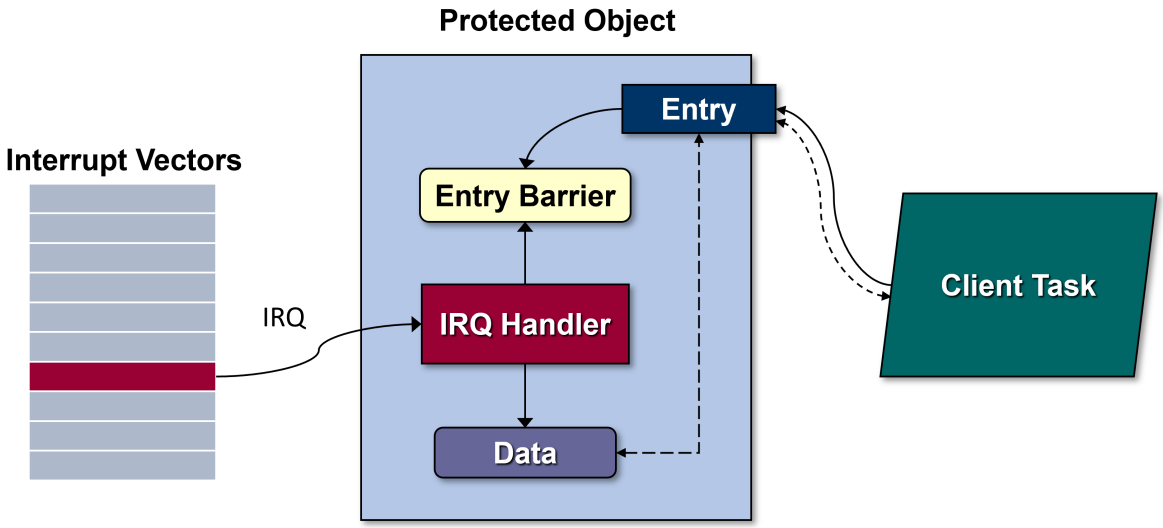

The interrupt handler stores data within the PO and only enables the entry barrier when ready to either produce it or consume it via the entry parameters. The dashed lines in the figure represent this data flow.

By coincidence, this is the notification approach used in the idiom entry *Providing Component Access to Enclosing Record Objects* (page 1209). In that implementation, client tasks call two entries to Put and Get single characters, so the data stored in the PO consists of those characters. We did not mention it there because we were focused on that other idiom, i.e., how to give visibility within a PO/task component to an enclosing record object.

Be sure to understand the code for the other idiom before exploring this one. We will repeat elided parts of the code and only discuss the parts relevant for this current idiom. Because we are focused now on the interrupt handling task notification, here is the full interrupt handler PO type declaration — `IO_Manager` — within the elided package declaration:

```
package Serial_IO.Interrupt_Driven is

   type Serial_Port ... is new Serial_IO.Device with private;

   overriding
   procedure Put (This : in out Serial_Port;  Data : HAL.UInt8)
     with Inline;

   overriding
   procedure Get (This : in out Serial_Port;  Data : out HAL.UInt8)
     with Inline;

private

   protected type IO_Manager
     (IRQ          : Interrupt_ID;
      IRQ_Priority : Interrupt_Priority;
      Port         : not null access Serial_Port)
```

(continues on next page)

(continued from previous page)

```
   with
      Interrupt_Priority => IRQ_Priority
   is

      entry Put (Datum : HAL.UInt8);

      entry Get (Datum : out HAL.UInt8);

   private

      Outgoing : HAL.UInt8;
      Incoming : HAL.UInt8;

      Incoming_Data_Available : Boolean := False;
      Transmission_Pending    : Boolean := False;

      procedure IRQ_Handler with Attach_Handler => IRQ;

    end IO_Manager;

   ...

end Serial_IO.Interrupt_Driven;
```

A protected object of type `IO_Manager` is given a discriminant value that designates the enclosing `Serial_Port` object because that `Serial_Port` has the USART device required to do the actual I/O. The other two discriminants are required for configuring the interrupt handler and attaching it to the interrupt hardware.

The two octets `Outgoing` and `Incoming` are the values sent and received via the interrupt handler's manipulation of the USART. (A USART doesn't receive characters, as such, and we're ignoring the fact that it may work with a 9-bit value instead.)

The two Boolean components `Incoming_Data_Available` and `Transmission_Pending` are used for the two barrier expressions. Their purpose is explained below.

The bodies of visible procedures `Put` and `Get` (shown below) call through to the interrupt manager's protected entries, also named `Put` and `Get`. Those entries block the callers until the interrupt manager is ready for them, via the entry barriers controlled by the interrupt handler.

```
with STM32.Device; use STM32.Device;

package body Serial_IO.Interrupt_Driven is

   ---------
   -- Put --
   ---------

   overriding
   procedure Put (This : in out Serial_Port;  Data : HAL.UInt8) is
   begin
      This.Controller.Put (Data);
   end Put;

   ---------
   -- Get --
   ---------

   overriding
   procedure Get (This : in out Serial_Port;  Data : out HAL.UInt8) is
```

(continues on next page)

(continued from previous page)

```
   begin
      This.Transceiver.Enable_Interrupts (Received_Data_Not_Empty);
      This.Controller.Get (Data);
   end Get;

   ----------------
   -- IO_Manager --
   ----------------

   protected body IO_Manager is

      -----------------
      -- IRQ_Handler --
      -----------------

      procedure IRQ_Handler is
      begin
         --  check for data arrival
         if Port.Transceiver.Status (Read_Data_Register_Not_Empty) and then
            Port.Transceiver.Interrupt_Enabled (Received_Data_Not_Empty)
         then  -- handle reception
            Get (Serial_IO.Device (Port.all), Incoming);
            -- call the Serial_IO.Device version!
            Await_Reception_Complete : loop
               exit when not
                 Port.Transceiver.Status (Read_Data_Register_Not_Empty);
            end loop Await_Reception_Complete;
            Port.Transceiver.Disable_Interrupts (Received_Data_Not_Empty);
            Port.Transceiver.Clear_Status (Read_Data_Register_Not_Empty);
            Incoming_Data_Available := True;
         end if;

         --  check for transmission ready
         if Port.Transceiver.Status (Transmission_Complete_Indicated) and then
            Port.Transceiver.Interrupt_Enabled (Transmission_Complete)
         then  -- handle transmission
            Put (Serial_IO.Device (Port.all), Outgoing);
            -- call the Serial_IO.Device version!
            Port.Transceiver.Disable_Interrupts (Transmission_Complete);
            Port.Transceiver.Clear_Status (Transmission_Complete_Indicated);
            Transmission_Pending := False;
         end if;
      end IRQ_Handler;

      ---------
      -- Put --
      ---------

      entry Put (Datum : HAL.UInt8) when not Transmission_Pending is
      begin
         Transmission_Pending := True;
         Outgoing := Datum;
         Port.Transceiver.Enable_Interrupts (Transmission_Complete);
      end Put;

      ---------
      -- Get --
      ---------

      entry Get (Datum : out HAL.UInt8) when Incoming_Data_Available is
      begin
```

(continues on next page)

(continued from previous page)

```
         Datum := Incoming;
         Incoming_Data_Available := False;
      end Get;

   end IO_Manager;

end Serial_IO.Interrupt_Driven;
```

Note how `IRQ_Handler` checks for which interrupt is active, possibly both, does whatever is necessary for that to be handled, and then sets the entry barriers accordingly. The barrier expression `Transmission_Pending` blocks `Put` callers until the current transmission, if any, completes. The barrier `Incoming_Data_Available` blocks `Get` callers until a character has been received and can be provided to the caller. The entry bodies copy the entry formal parameters to/from the internally stored characters and likewise set the entry barriers.

Note too how the body of procedure `Get` first enables the *received data available* interrupt before calling the entry. The body of the entry `Put` does something similar. They both work in concert with the handler procedure to manage the interrupts as required.

Using protected entries is ideal for this case because, after all, that is exactly what they are designed to do. Note that declaring multiple protected entries in a single protected type/object requires the Jorvik usage profile to be applied.

39.2.4 Task Notification Without Communication

In this implementation, the interrupt handler procedure is not required to communicate with the task. It only needs to synchronize with it, to release it.

Therefore, we can use a `Suspension_Object`: a language-defined, thread-safe *binary flag* type defined in package `Ada.Synchronous_Task_Control`. Objects of this type have two values: **`True`** and **`False`**, with **`False`** as the default initial value. There are two primary primitive operations: procedures `Suspend_Until_True` and `Set_True`. Procedure `Set_True` does just what you think it does. Procedure `Suspend_Until_True` suspends the caller (task) until the value of the specified argument becomes **`True`**, at which point the suspended task is allowed to continue execution. (Of course, if it was already **`True`** when `Suspend_Until_True` was called, the caller returns without suspending.) Critically, procedure `Suspend_Until_True` also sets the argument back to **`False`** before returning. As a result, those are the only two routines you're likely to need, although there are others.

The interrupt handler procedure in this approach simply calls `Set_True` for a `Suspension_Object` (an object of that type) visible to both the handler and the task. This arrangement is illustrated by the following figure:

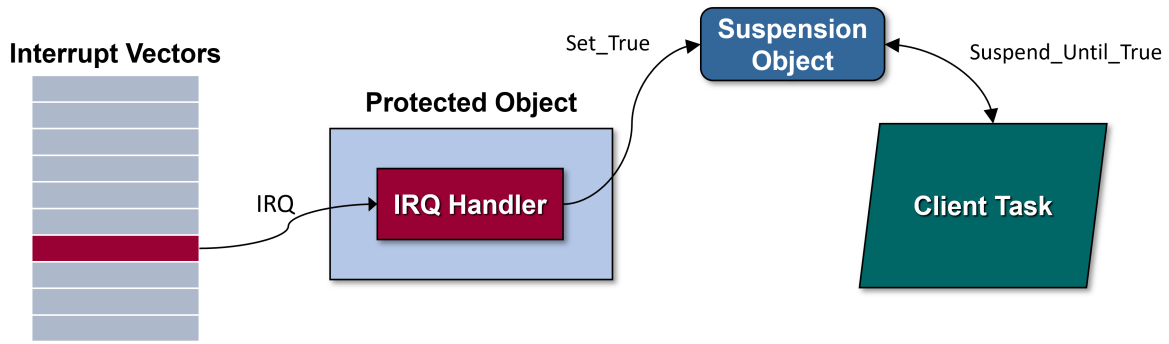

The language requires the run-time library implementation to allow calls to `Set_False` and `Set_True` during any protected action, even one that has its ceiling priority in the `Interrupt_Priority` range, so this approach will work for interrupt handlers as well as tasks.

For our example we implement a facility for sending and receiving *messages* over a serial port, using interrupts. The design is similar to the implementation we just explored, and thus to the *Providing Component Access to Enclosing Record Objects* (page 1209) idiom. In that implementation, however, only single characters were sent and received, whereas messages will consist of one or more characters. Although there are differences, we assume that you are familiar enough with that idiom's approach that we don't need to go into all the details of the serial I/O, the USART, or the interrupt handler within a PO. We'll focus instead of the differences due to this idiom.

In this version we want to notify a task when an entire message has been sent or received, not just a single character. We'll define a message as a **String** that has a message-specified logical terminator character, e.g., the *nul* character. Transmission will cease when the terminator character is encountered when sending a message object. Similarly, a message is considered complete when the terminator character is received. (The terminator is not stored in message content.)

In a sense the interrupt handler is again communicating with tasks, but not directly, so entry parameters aren't applicable. Therefore, a `Suspension_Object` component is appropriate. But instead of one `Suspension_Object` variable, each `Message` object will contain two: one for notification of new content receipt, and one for notification of successful content transmission.

For the sake of the Separation of Concerns principle, the type `Message` should be an ADT of its own, in a dedicated package:

```
with Serial_IO;                      use Serial_IO;
with Ada.Synchronous_Task_Control;   use Ada.Synchronous_Task_Control;

package Message_Buffers is

   type Message (Physical_Size : Positive) is tagged limited private;

   function Content (This : Message) return String;
   function Length (This : Message) return Natural;
   procedure Set (This : in out Message;  To : String) with
     Pre  => To'Length <= This.Physical_Size,
     Post => Length (This) = To'Length and Content (This) = To;
   ...
   function Terminator (This : Message) return Character;
   procedure Await_Transmission_Complete (This : in out Message);
   procedure Await_Reception_Complete (This : in out Message);
   procedure Signal_Transmission_Complete (This : in out Message);
   procedure Signal_Reception_Complete (This : in out Message);

private

   type Message (Physical_Size : Positive) is tagged limited record
      Content               : String (1 .. Physical_Size);
      Length                : Natural := 0;
      Reception_Complete    : Suspension_Object;
      Transmission_Complete : Suspension_Object;
      Terminator            : Character := ASCII.NUL;
   end record;

end Message_Buffers;
```

In essence, a `Message` object is just the usual *variable length string* abstraction with a known terminator and ways to suspend and resume clients using them. Note the two `Suspension_Object` components.

In this example the tasks to be notified are application tasks rather than second-level interrupt handlers. Client tasks can suspend themselves to await either transmission completion or reception completion. The `Message` procedures simply call the appropriate routines for

the parameter's Suspension_Object components:

```
procedure Await_Transmission_Complete (This : in out Message) is
begin
   Suspend_Until_True (This.Transmission_Complete);
end Await_Transmission_Complete;
```

and likewise:

```
procedure Await_Reception_Complete (This : in out Message) is
begin
   Suspend_Until_True (This.Reception_Complete);
end Await_Reception_Complete;
```

The client task could look like the following, in this case the main program's environment task:

```
procedure Demo_Serial_Port_Nonblocking is

   Incoming : aliased Message (Physical_Size => 1024);  -- arbitrary size
   Outgoing : aliased Message (Physical_Size => 1024);  -- arbitrary size

   procedure Send (This : String) is
   begin
      Set (Outgoing, To => This);
      Start_Sending (COM, Outgoing'Unchecked_Access);
      Outgoing.Await_Transmission_Complete;
   end Send;

begin
   Initialize_Hardware (COM);
   Configure (COM, Baud_Rate => 115_200);

   Incoming.Set_Terminator (ASCII.CR);
   Send ("Enter text, terminated by CR.");
   loop
      Start_Receiving (COM, Incoming'Unchecked_Access);
      Incoming.Await_Reception_Complete;
      Send ("Received : " & Incoming.Content);
   end loop;
end Demo_Serial_Port_Nonblocking;
```

We don't show all the context clauses, for brevity, but one of the packages declares COM as the serial port. This demo doesn't exploit the nonblocking aspect because it does not perform any other actions before suspending itself after initiating sending and receiving. But it could do so, while the I/O is happening, only later suspending to await completion of the requested operation.

The interrupt handler procedure can signal both transmission and reception completion using the two other procedures:

```
procedure Signal_Transmission_Complete (This : in out Message) is
begin
   Set_True (This.Transmission_Complete);
end Signal_Transmission_Complete;

procedure Signal_Reception_Complete (This : in out Message) is
begin
   Set_True (This.Reception_Complete);
end Signal_Reception_Complete;
```

In this version of the Serial IO facility, the interrupt handler's enclosing protected type is the type Serial_Port itself, rather than a PO enclosed by a record type:

```
protected type Serial_Port
  (Device       : not null access Peripheral_Descriptor;
   IRQ          : Interrupt_ID;
   IRQ_Priority : Interrupt_Priority)
with
    Interrupt_Priority => IRQ_Priority
is

   procedure Start_Sending (Msg : not null access Message);
   procedure Start_Receiving (Msg : not null access Message);

private

   Next_Out     : Positive;
   Outgoing_Msg : access Message;
   Incoming_Msg : access Message;

   procedure Handle_Transmission with Inline;
   procedure Handle_Reception    with Inline;
   procedure ISR with Attach_Handler => IRQ;

end Serial_Port;
```

Procedure ISR (*Interrupt Service Routine*) is the handler.

The two visible protected procedures, `Start_Sending` and `Start_Receiving`, are given non-null arguments when called (indirectly) by client tasks. Each argument is an access value designating a `Message` object declared by clients. The pointers are copied into the internal components, i.e., `Outgoing_Msg` and `Incoming_Msg`, for use by the interrupt handler procedure.

As with the earlier idiom above, there are multiple device interrupts, but they are all delivered on one external interrupt line. The handler procedure checks the status flags to see which interrupts are active and calls dedicated internal procedures accordingly. We don't need to see this infrastructure code again, so we can focus instead on one, the internal `Handle_Reception` procedure. The routine for transmitting is similar.

```
procedure Handle_Reception is
   Received_Char : constant Character :=
     Character'Val (Current_Input (Device.Transceiver.all));
begin
   if Received_Char /= Incoming_Msg.Terminator then
      Incoming_Msg.Append (Received_Char);
   end if;
   if Received_Char = Incoming_Msg.Terminator or else
      Incoming_Msg.Length = Incoming_Msg.Physical_Size
   then -- reception complete
      loop
         --  wait for device to clear the status
         exit when not Status (Device.Transceiver.all,
                               Read_Data_Register_Not_Empty);
      end loop;
      Disable_Interrupts (Device.Transceiver.all,
                          Source => Received_Data_Not_Empty);
      Incoming_Msg.Signal_Reception_Complete;
      Incoming_Msg := null;
   end if;
end Handle_Reception;
```

Note the call to `Signal_Reception_Complete` for the current Message object being received, designated by `Incoming_Msg`.

The alternative to a `Suspension_Object` is a parameterless protected entry that a task calls

to suspend itself. That certainly works in general, but we would need two entries, hence Jorvik. But also, the `Suspension_Object` approach can have a little better performance because it does not have the functionality that a protected entry has.

Note that type `Suspension_Object` might very well be implemented as a protected type. On a uniprocessor target, protected object mutual exclusion can be implemented via priorities, so it won't make much difference. (GNAT's bare-board run-times use that mutual exclusion implementation approach, as well as the PO implementation of type `Suspension_Object`.)

39.3 Pros

In all three idioms, the approach is directly expressed, meets the requirements, and hides the implementation details. The implementations are efficient relative to their requirements, the only reasonable metric. In particular, `Suspension_Objects` are expected to be faster than protected entries, but only support synchronization, and only with one caller at a time — there's no queue. Nor do they support communication. Protected entries have no such restrictions and are reasonably efficient given their considerable additional capabilities.

39.4 Cons

None.

39.5 Relationship With Other Idioms

The idiom showing how to connect a PO or task to an enclosing record object was illustrated by an interrupt handler PO, but that idiom is not necessary. Indeed, we used a protected type directly in the last implementation.

39.6 What About Priorities?

The idiom expressions do not determine the actual priorities assigned to the protected objects containing the handler procedures, nor those of the notified tasks.

The language standard requires the priorities for interrupt handler POs to be in the range defined by the subtype `System.Interrupt_Priority`. Under the Ravenscar and Jorvik profiles they must also satisfy the Ceiling Priority Protocol requirements.

The target's interrupt hardware may dictate the specific handler priorities, or at least their floor values. You may be able to control those hardware priorities via the target board startup code.

But usually we have some freedom to choose, so what priorities should be assigned?

Often the values are arbitrary. However, a more rigorous approach may be required. A good guideline is that if you need to do a timing (schedulability) analysis for the application tasks' deadlines, you need to do it for the interrupt handlers' deadlines too. The same analyses can be used, i.e., response-time analysis, and the same priority assignment schemes, i.e., a shorter period gets a higher priority. (The interrupt *period* is the minimum interval between the interrupt occurrences.)

In addition, ensuring interrupt handler deadlines are met is part of ensuring the tasks meet their deadlines. That's because the interrupt handlers release the associated sporadic (event-driven) tasks for execution. A sporadic task triggered by a device (say) usually

will have a deadline no greater than the next occurrence of the sensor-generated interrupt, that is, the interrupt period. The priority of the task will be set according to that period.

39.7 Notes

1. The *traditional* expression for an interrupt handler, i.e., a procedure, is allowed by the language as a vendor-defined extension. However, there will likely be language-oriented restrictions applied to those procedures, due to the context. That's true of other languages as well.
2. You shouldn't assign interrupt handler (PO) priorities by semantic importance, just as you shouldn't do so for task priorities. More *important* interrupt handlers shouldn't necessarily be assigned more urgent priorities.

CHAPTER

FORTY

REDUCING OBJECT CODE FROM GENERIC PACKAGE INSTANTIATIONS

40.1 Motivation

Generic unit instantiations are often, but not always, implemented by an Ada compiler as a form of *macro expansion*. In this approach, the compiler produces separate, dedicated object code for every instantiation. The macro expansion approach can produce better run-time performance but can result in large total object code size for the executable when there are many instances, especially when the generic packages instantiated contain a lot of unit declarations. For example, the generic I/O packages contained within package `Ada.Text_IO` are themselves relatively large.

The alternative compiler implementation approach is *code-sharing*, in which distinct instantiations of a given generic unit are implemented with shared object code in a single module.

Clearly, sharing the object code can reduce the total size, but code-sharing can be very complicated to implement, depending on the generic unit itself. For a trivial example, consider the following package:

```
generic
package P is
   Error : exception;
end P;
```

The semantics of the language require that every instantiation of generic package P be a distinct package, as if each instance was instead written explicitly as a non-generic package (at the point of instantiation) with the instance name. As a result, each package instance declares an exception, and these exceptions must be treated as distinct from each other. A code-sharing implementation must maintain that distinction with one object code module.

In the example above, there are no generic formal parameters, nor other declarations within the package declarative part besides the exception, because they are not necessary for that example. However, generic formal parameters can be a problem for code-sharing too. For example, consider this generic package:

```
generic
   Formal_Object : in out Integer;
package P is
   --  ...
end P;
```

This generic package has a generic formal object parameter with mode `in out`. (We chose type `Integer` purely for convenience.) That specific mode can cause a similar problem as seen in the exception example, because the mode allows the generic package to update the generic actual object passed to it. The shared object code must keep track of which object is updated during execution.

Therefore, when writing the application source code that instantiates generic packages, developers should do so in a manner that minimizes the amount of object code that might result.

40.2 Implementation(s)

The application source code should be written in a manner that shares the instantiations themselves, when possible, thereby reducing the number of instantiations that exist.

For example, let's say that several units in the application code require the ability to do I/O on some floating-point type. For simplicity, let's say that this is a type named `Real`, declared in a package named `Common`. Here is a declaration for an example package body that requires the I/O capability:

```
with Ada.Text_IO, Common;
package body User1 is
    package Real_IO is new Ada.Text_IO.Float_IO (Common.Real);
    -- ...
end User1;
```

That's certainly legal, and works, but we've said that several units require I/O for type `Real`. Let's say there are in fact twenty such units. They all do something similar:

```
with Ada.Text_IO, Common;
package body User20 is
    package Real_IO is new Ada.Text_IO.Float_IO (Common.Real);
    -- ...
end User20;
```

As a result, the application has twenty instantiations (at least) of `Ada.Text_IO.Float_IO`. There will be instances named `User1.Real_IO`, `User2.Real_IO`, and so on, up to `User20.Real_IO`. The fact that the local names are all `Real_IO` is irrelevant.

If the compiler happens to use the macro-expansion implementation, that means the application executable will have twenty copies of the object code defined by the generic `Float_IO`. For example, GNAT performs some internal restructuring to avoid this problem for these specific language-defined generic units, but not for application-defined generics.

Instead, we can simply instantiate the generic at the library level:

```
with Ada.Text_IO, Common;
package Real_IO is new Ada.Text_IO.Float_IO (Common.Real);
```

Because the instantiation occurred at the library level, the resulting instance is declared at the library level, and can therefore be named in a "with_clause" like any other library package.

```
with Real_IO;
package body User1 is
    -- ...
end User1;
```

Each client package can use the same instance via the with_clause, and there's only one instance so there's only one copy of the object code.

40.3 Pros

The total object code size is reduced, compared to the alternative of many local instantiations.

40.4 Cons

What would otherwise be an implementation detail hidden from clients can now become visible to them because a (public) library unit can be named in with_clause by any other unit. As a result, this approach should not be used in all cases, not even as a default design approach. Restricting the visibility of the instance may be more important than the amount of object code it contributes. Hiding implementation artifacts allows more freedom to change the implementation without requiring changes to client code.

40.5 Relationship With Other Idioms

None.

40.6 Notes

1. The reader should understand that this issue is not about the number of subprograms within any given package, whether or not the package is a generic package. In the past, some linkers included the entire object code for a given package (instance or not), regardless of the number of subprograms actually used from that package in the application code. That was an issue with reusable library code, for example packages providing mathematical functions. Modern linkers can be told not to include those subprograms not called by the application. For example, with gcc, the compiler can be told to put each subprogram in a separate section, and then the linker can be told to only include in the executable those sections actually referenced. (Data declarations can be reduced that way as well.)

Part IV

Introduction To SPARK

Copyright © 2018 – 2024, AdaCore

This book is published under a CC BY-SA license, which means that you can copy, redistribute, remix, transform, and build upon the content for any purpose, even commercially, as long as you give appropriate credit, provide a link to the license, and indicate if changes were made. If you remix, transform, or build upon the material, you must distribute your contributions under the same license as the original. You can find license details on this page[366]



This tutorial is an interactive introduction to the SPARK programming language and its formal verification tools. You will learn the difference between Ada and SPARK and how to use the various analysis tools that come with SPARK.

This document was prepared by Claire Dross and Yannick Moy.

Note

The code examples in this course use an 80-column limit, which is a typical limit for Ada code. Note that, on devices with a small screen size, some code examples might be difficult to read.

Note

Each code example from this book has an associated "code block metadata", which contains the name of the "project" and an MD5 hash value. This information is used to identify a single code example.

You can find all code examples in a zip file, which you can download from the learn website[367]. The directory structure in the zip file is based on the code block metadata. For example, if you're searching for a code example with this metadata:

- Project: Courses.Intro_To_Ada.Imperative_Language.Greet
- MD5: cba89a34b87c9dfa71533d982d05e6ab

you will find it in this directory:

```
projects/Courses/Intro_To_Ada/Imperative_Language/Greet/
cba89a34b87c9dfa71533d982d05e6ab/
```

In order to use this code example, just follow these steps:

1. Unpack the zip file;
2. Go to target directory;
3. Start GNAT Studio on this directory;
4. Build (or compile) the project;
5. Run the application (if a main procedure is available in the project).

[366] http://creativecommons.org/licenses/by-sa/4.0
[367] https://learn.adacore.com/zip/learning-ada_code.zip

CHAPTER

FORTYONE

SPARK OVERVIEW

This tutorial is an introduction to the SPARK programming language and its formal verification tools. You need not know any specific programming language (although going over the *Introduction to Ada course* (page 5) first may help) or have experience in formal verification.

41.1 What is it?

SPARK refers to two different things:

- a programming language targeted at functional specification and static verification, and
- a set of development and verification tools for that language.

The SPARK language is based on a subset of the Ada language. Ada is particularly well suited to formal verification since it was designed for critical software development. SPARK builds on that foundation.

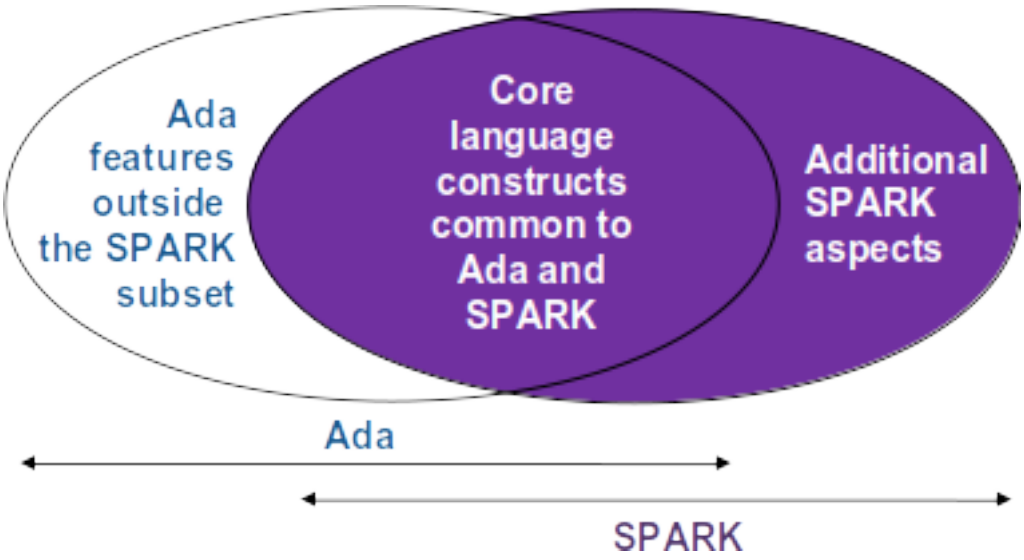

Version 2012 of Ada introduced the use of *aspects*, which can be used for subprogram contracts, and version 2014 of SPARK added its own aspects to further aid static analysis.

41.2 What do the tools do?

We start by reviewing static verification of programs, which is verification of the source code performed without compiling or executing it. Verification uses tools that perform static analysis. These can take various forms. They include tools that check types and enforce visibility rules, such as the compiler, in addition to those that perform more complex reasoning,

such as abstract interpretation, as done by a tool like the GNAT Static Analysis Suite[368] from AdaCore. The tools that come with SPARK perform two different forms of static analysis:

- *flow analysis* is the fastest form of analysis. It checks initializations of variables and looks at data dependencies between inputs and outputs of subprograms. It can also find unused assignments and unmodified variables.
- *proof* checks for the absence of runtime errors as well as the conformance of the program with its specifications.

41.3 Key Tools

The tool for formal verification of the SPARK language is called *GNATprove*. It checks for conformance with the SPARK subset and performs flow analysis and proof of the source code. Several other tools support the SPARK language, including both the GNAT compiler[369] and the GNAT Studio integrated development environment[370].

41.4 A trivial example

We start with a simple example of a subprogram in Ada that uses SPARK aspects to specify verifiable subprogram contracts. The subprogram, called `Increment`, adds 1 to the value of its parameter X:

Listing 1: increment.ads

```
procedure Increment
  (X : in out Integer)
with
  Global  => null,
  Depends => (X => X),
  Pre     => X < Integer'Last,
  Post    => X = X'Old + 1;
```

Listing 2: increment.adb

```
procedure Increment
  (X : in out Integer)
is
begin
  X := X + 1;
end Increment;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Overview.Trivial_Example
MD5: ce28b1facb44917b6cc208639c187064
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
increment.adb:5:10: info: overflow check proved
increment.ads:4:03: info: data dependencies proved
increment.ads:5:03: info: flow dependencies proved
```

(continues on next page)

[368] https://www.adacore.com/static-analysis-suite
[369] https://www.adacore.com/gnatpro
[370] https://www.adacore.com/gnatpro/toolsuite/gps

(continued from previous page)

```
increment.ads:7:14: info: postcondition proved
increment.ads:7:24: info: overflow check proved
```

The contracts are written using the Ada *aspect* feature and those shown specify several properties of this subprogram:

- The SPARK Global aspect says that `Increment` does not read or write any global variables.
- The SPARK Depend aspect is especially interesting for security: it says that the value of the parameter X after the call depends only on the (previous) value of X.
- The `Pre` and `Post` aspects of Ada specify functional properties of `Increment`:
  - `Increment` is only allowed to be called if the value of X prior to the call is less than `Integer'Last`. This ensures that the addition operation performed in the subprogram body doesn't overflow.
  - `Increment` does indeed perform an increment of X: the value of X after a call is one greater than its value before the call.

GNATprove can verify all of these contracts. In addition, it verifies that no error can be raised at runtime when executing `Increment`'s body.

41.5 The Programming Language

It's important to understand why there are differences between the SPARK and Ada languages. The aim when designing the SPARK subset of Ada was to create the largest possible subset of Ada that was still amenable to simple specification and sound verification.

The most notable restrictions from Ada are related to exceptions and access types, both of which are known to considerably increase the amount of user-written annotations required for full support. Backwards goto statements and controlled types are also not supported since they introduce non-trivial control flow. The two remaining restrictions relate to side-effects in expressions and aliasing of names, which we now cover in more detail.

41.6 Limitations

41.6.1 No side-effects in expressions

The SPARK language doesn't allow side-effects in expressions. In other words, evaluating a SPARK expression must not update any object. This limitation is necessary to avoid unpredictable behavior that depends on order of evaluation, parameter passing mechanisms, or compiler optimizations. The expression for `Dummy` below is non-deterministic due to the order in which the two calls to F are evaluated. It's therefore not legal SPARK.

Listing 3: show_illegal_ada_code.adb

```
1  procedure Show_Illegal_Ada_Code is
2
3     function F (X : in out Integer) return Integer is
4        Tmp : constant Integer := X;
5     begin
6        X := X + 1;
7        return Tmp;
8     end F;
9
10    Dummy : Integer := 0;
```

(continues on next page)

(continued from previous page)

```
11
12 begin
13    Dummy := F (Dummy) - F (Dummy); -- ??
14 end Show_Illegal_Ada_Code;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Overview.Illegal_Ada_Code
MD5: a5cbf1824526857da94791ac1790200c
```

Build output

```
show_illegal_ada_code.adb:13:28: error: value may be affected by call to "F"␣
 ↪because order of evaluation is arbitrary
gprbuild: *** compilation phase failed
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
show_illegal_ada_code.adb:13:28: error: value may be affected by call to "F"␣
 ↪because order of evaluation is arbitrary
gnatprove: error during generation of Global contracts
```

In fact, the code above is not even legal Ada, so the same error is generated by the GNAT compiler. But SPARK goes further and GNATprove also produces an error for the following equivalent code that is accepted by the Ada compiler:

Listing 4: show_illegal_spark_code.adb

```
1  procedure Show_Illegal_SPARK_Code is
2
3     Dummy : Integer := 0;
4
5     function F return Integer is
6        Tmp : constant Integer := Dummy;
7     begin
8        Dummy := Dummy + 1;
9        return Tmp;
10    end F;
11
12 begin
13    Dummy := F - F; -- ??
14 end Show_Illegal_SPARK_Code;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Overview.Illegal_SPARK_Code
MD5: e747edb6ee147adb7fba97c9e7c8d5ef
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
show_illegal_spark_code.adb:5:13: error: function "F" with output global "Dummy"␣
 ↪is not allowed in SPARK [E0005]
show_illegal_spark_code.adb:5:13: error: violation of pragma SPARK_Mode at /
 ↪vagrant/frontend/dist/test_output/projects/Courses/Intro_To_Spark/Overview/
 ↪Illegal_SPARK_Code/e747edb6ee147adb7fba97c9e7c8d5ef/main_spark.adc:12
show_illegal_spark_code.adb:5:13: error: launch "gnatprove --explain=E0005" for␣
```

(continues on next page)

(continued from previous page)

```
 ↪more information
gnatprove: error during analysis of data and information flow
```

The SPARK languages enforces the lack of side-effects in expressions by forbidding side-effects in functions, which include modifications to either parameters or global variables. As a consequence, SPARK forbids functions with **out** or **in out** parameters in addition to functions modifying a global variable. Function F below is illegal in SPARK, while Function `Incr` might be legal if it doesn't modify any global variables and function `Incr_And_Log` might be illegal if it modifies global variables to perform logging.

```
function F (X : in out Integer) return Integer;     -- Illegal

function Incr (X : Integer) return Integer;         -- OK?

function Incr_And_Log (X : Integer) return Integer; -- OK?
```

In most cases, you can easily replace these functions by procedures with an **out** parameter that returns the computed value.

When it has access to function bodies, GNATprove verifies that those functions are indeed free from side-effects. Here for example, the two functions `Incr` and `Incr_And_Log` have the same signature, but only `Incr` is legal in SPARK. `Incr_And_Log` isn't: it attempts to update the global variable `Call_Count`.

Listing 5: side_effects.ads

```
1  package Side_Effects is
2
3     function Incr (X : Integer) return Integer;         -- OK?
4
5     function Incr_And_Log (X : Integer) return Integer; -- OK?
6
7  end Side_Effects;
```

Listing 6: side_effects.adb

```
1  package body Side_Effects is
2
3     function Incr (X : Integer) return Integer
4     is (X + 1); -- OK
5
6     Call_Count : Natural := 0;
7
8     function Incr_And_Log (X : Integer) return Integer is
9     begin
10       Call_Count := Call_Count + 1; -- Illegal
11       return X + 1;
12    end Incr_And_Log;
13
14 end Side_Effects;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Overview.Side_Effects
MD5: 1b555e4b7bb519eea4df718a9356a2ed
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
```

(continues on next page)

(continued from previous page)

```
Phase 3 of 3: analysis of data and information flow ...
side_effects.ads:5:13: error: function "Incr_And_Log" with output global "Call_
 ↪Count" is not allowed in SPARK [E0005]
side_effects.ads:5:13: error: violation of pragma SPARK_Mode at /vagrant/frontend/
 ↪dist/test_output/projects/Courses/Intro_To_Spark/Overview/Side_Effects/
 ↪1b555e4b7bb519eea4df718a9356a2ed/main_spark.adc:12
side_effects.ads:5:13: error: launch "gnatprove --explain=E0005" for more␣
 ↪information
gnatprove: error during analysis of data and information flow
```

41.6.2 No aliasing of names

Another restriction imposed by the SPARK subset concerns aliasing[371]. We say that two names are *aliased* if they refer to the same object. There are two reasons why aliasing is forbidden in SPARK:

- It makes verification more difficult because it requires taking into account the fact that modifications to variables with different names may actually update the same object.
- Results may seem unexpected from a user point of view. The results of a subprogram call may depend on compiler-specific attributes, such as parameter passing mechanisms, when its parameters are aliased.

Aliasing can occur as part of the parameter passing that occurs in a subprogram call. Functions have no side-effects in SPARK, so aliasing of parameters in function calls isn't problematic; we need only consider procedure calls. When a procedure is called, SPARK verifies that no **out** or **in out** parameter is aliased with either another parameter of the procedure or a global variable modified in the procedure's body.

Procedure `Move_To_Total` is an example where the possibility of aliasing wasn't taken into account by the programmer:

Listing 7: no_aliasing.adb

```
procedure No_Aliasing is

   Total : Natural := 0;

   procedure Move_To_Total (Source : in out Natural)
     with Post => Total = Total'Old + Source'Old and Source = 0
   is
   begin
      Total  := Total + Source;
      Source := 0;
   end Move_To_Total;

   X : Natural := 3;

begin
   Move_To_Total (X);          -- OK
   pragma Assert (Total = 3); -- OK
   Move_To_Total (Total);      -- flow analysis error
   pragma Assert (Total = 6); -- runtime error
end No_Aliasing;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Overview.Aliasing
MD5: 91038ef030fe27e3b000ab3db9c134ad
```

[371] https://en.wikipedia.org/wiki/Aliasing_(computing)

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
no_aliasing.adb:18:19: high: formal parameter "Source" and global "Total" are␣
 ↪aliased (SPARK RM 6.4.2)
gnatprove: unproved check messages considered as errors
```

Runtime output

```
raised ADA.ASSERTIONS.ASSERTION_ERROR : no_aliasing.adb:19
```

`Move_To_Total` adds the value of its input parameter `Source` to the global variable `Total` and then resets `Source` to 0. The programmer has clearly not taken into account the possibility of an aliasing between `Total` and `Source`. (This sort of error is quite common.)

This procedure itself is valid SPARK. When doing verification, GNATprove assumes, like the programmer did, that there's no aliasing between `Total` and `Source`. To ensure this assumption is valid, GNATprove checks for possible aliasing on every call to `Move_To_Total`. Its final call in procedure `No_Aliasing` violates this assumption, which produces both a message from GNATprove and a runtime error (an assertion violation corresponding to the expected change in `Total` from calling `Move_To_Total`). Note that the postcondition of `Move_To_Total` is not violated on this second call since integer parameters are passed by copy and the postcondition is checked before the copy-back from the formal parameters to the actual arguments.

Aliasing can also occur as a result of using access types (pointers[372] in Ada). These are restricted in SPARK so that only benign aliasing is allowed, when both names are only used to read the data. In particular, assignment between access objects operates a transfer of ownership, where the source object loses its permission to read or write the underlying allocated memory.

Procedure `Ownership_Transfer` is an example of code that is legal in Ada but rejected in SPARK due to aliasing:

Listing 8: ownership_transfer.adb

```
1  procedure Ownership_Transfer is
2     type Int_Ptr is access Integer;
3     X     : Int_Ptr;
4     Y     : Int_Ptr;
5     Dummy : Integer;
6  begin
7     X     := new Integer'(1);
8     X.all := X.all + 1;
9     Y     := X;
10    Y.all := Y.all + 1;
11    X.all := X.all + 1;  --  illegal
12    X.all := 1;          --  illegal
13    Dummy := X.all;      --  illegal
14 end Ownership_Transfer;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Overview.Ownership_Transfer
MD5: 951fe1c930d43a5009e607994ae0dd03
```

Prover output

[372] https://en.wikipedia.org/wiki/Pointer_(computer_programming)

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
ownership_transfer.adb:11:06: error: dereference from "X" is not writable
ownership_transfer.adb:11:06: error: object was moved at line 9 [E0010]
ownership_transfer.adb:11:06: error: launch "gnatprove --explain=E0010" for more␣
 ↪information
ownership_transfer.adb:11:15: error: dereference from "X" is not readable
ownership_transfer.adb:11:15: error: object was moved at line 9 [E0010]
ownership_transfer.adb:11:15: error: launch "gnatprove --explain=E0010" for more␣
 ↪information
ownership_transfer.adb:12:06: error: dereference from "X" is not writable
ownership_transfer.adb:12:06: error: object was moved at line 9 [E0010]
ownership_transfer.adb:12:06: error: launch "gnatprove --explain=E0010" for more␣
 ↪information
ownership_transfer.adb:13:15: error: dereference from "X" is not readable
ownership_transfer.adb:13:15: error: object was moved at line 9 [E0010]
ownership_transfer.adb:13:15: error: launch "gnatprove --explain=E0010" for more␣
 ↪information
gnatprove: error during analysis of data and information flow
```

After the assignment of X to Y, variable X cannot be used anymore to read or write the underlying allocated memory.

Note

For more details on these limitations, see the SPARK User's Guide[373].

41.7 Designating SPARK Code

Since the SPARK language is restricted to only allow easily specifiable and verifiable constructs, there are times when you can't or don't want to abide by these limitations over your entire code base. Therefore, the SPARK tools only check conformance to the SPARK subset on code which you identify as being in SPARK.

You do this by using an aspect named SPARK_Mode. If you don't explicitly specify otherwise, SPARK_Mode is *Off*, meaning you can use the complete set of Ada features in that code and that it should not be analyzed by GNATprove. You can change this default either selectively (on some units or subprograms or packages inside units) or globally (using a configuration pragma, which is what we're doing in this tutorial). To allow simple reuse of existing Ada libraries, entities declared in imported units with no explicit SPARK_Mode can still be used from SPARK code. The tool only checks for SPARK conformance on the declaration of those entities which are actually used within the SPARK code.

Here's a common case of using the SPARK_Mode aspect:

```
package P
  with SPARK_Mode => On
is
   -- package spec is IN SPARK, so can be used by SPARK clients
end P;

package body P
  with SPARK_Mode => Off
is
```

(continues on next page)

[373] https://docs.adacore.com/live/wave/spark2014/html/spark2014_ug/en/source/language_restrictions.html#language-restrictions

(continued from previous page)

```
   -- body is NOT IN SPARK, so is ignored by GNATprove
end P;
```

The package P only defines entities whose specifications are in the SPARK subset. However, it wants to use all Ada features in its body. Therefore the body should not be analyzed and has its SPARK_Mode aspect set to *Off*.

You can specify SPARK_Mode in a fine-grained manner on a per-unit basis. An Ada package has four different components: the visible and private parts of its specification and the declarative and statement parts of its body. You can specify SPARK_Mode as being either *On* or *Off* on any of those parts. Likewise, a subprogram has two parts: its specification and its body.

A general rule in SPARK is that once SPARK_Mode has been set to *Off*, it can never be switched *On* again in the same part of a package or subprogram. This prevents setting SPARK_Mode to *On* for local units of a unit with SPARK_Mode *Off* and switching back to SPARK_Mode *On* for a part of a given unit where it was set fo *Off* in a previous part.

Note

For more details on the use of SPARK_Mode, see the SPARK User's Guide[374].

41.8 Code Examples / Pitfalls

41.8.1 Example #1

Here's a package defining an abstract stack type (defined as a private type in SPARK) of Element objects along with some subprograms providing the usual functionalities of stacks. It's marked as being in the SPARK subset.

Listing 9: stack_package.ads

```
1  package Stack_Package
2    with SPARK_Mode => On
3  is
4     type Element is new Natural;
5     type Stack is private;
6
7     function Empty return Stack;
8     procedure Push (S : in out Stack; E : Element);
9     function Pop (S : in out Stack) return Element;
10
11 private
12    type Stack is record
13       Top : Integer;
14       --  ...
15    end record;
16
17 end Stack_Package;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Overview.Example_01
MD5: 2b15e13e850435fb93406054d70b51c6
```

Prover output

[374] https://docs.adacore.com/live/wave/spark2014/html/spark2014_ug/en/spark_mode.html

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
stack_package.ads:9:18: error: function cannot have parameter of mode "out" or "in␣
 ↪out" in SPARK [E0015]
stack_package.ads:9:18: error: launch "gnatprove --explain=E0015" for more␣
 ↪information
gnatprove: error during generation of Global contracts
```

Side-effects in expressions are not allowed in SPARK. Therefore, Pop is not allowed to modify its parameter S.

41.8.2 Example #2

Let's turn to an abstract state machine version of a stack, where the unit provides a single instance of a stack. The content of the stack (global variables Content and Top) is not directly visible to clients. In this stripped-down version, only the function Pop is available to clients. The package spec and body are marked as being in the SPARK subset.

Listing 10: global_stack.ads

```
1  package Global_Stack
2    with SPARK_Mode => On
3  is
4     type Element is new Integer;
5
6     function Pop return Element;
7
8  end Global_Stack;
```

Listing 11: global_stack.adb

```
1  package body Global_Stack
2    with SPARK_Mode => On
3  is
4     Max : constant Natural := 100;
5     type Element_Array is array (1 .. Max) of Element;
6
7     Content : Element_Array;
8     Top     : Natural;
9
10    function Pop return Element is
11       E : constant Element := Content (Top);
12    begin
13       Top := Top - 1;
14       return E;
15    end Pop;
16
17 end Global_Stack;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Overview.Example_02
MD5: 8c4eb564643eef48264b5e43a6f580b9
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
global_stack.ads:6:13: error: function "Pop" with output global "Top" is not␣
```

(continues on next page)

(continued from previous page)

```
 ↪allowed in SPARK [E0005]
global_stack.ads:6:13: error: violation of aspect SPARK_Mode at line 2
global_stack.ads:6:13: error: launch "gnatprove --explain=E0005" for more␣
 ↪information
gnatprove: error during analysis of data and information flow
```

As above, functions should be free from side-effects. Here, Pop updates the global variable Top, which is not allowed in SPARK.

41.8.3 Example #3

We now consider two procedures: Permute and Swap. Permute applies a circular permutation to the value of its three parameters. Swap then uses Permute to swap the value of X and Y.

Listing 12: p.ads

```
package P
  with SPARK_Mode => On
is
   procedure Permute (X, Y, Z : in out Positive);
   procedure Swap (X, Y : in out Positive);
end P;
```

Listing 13: p.adb

```
package body P
  with SPARK_Mode => On
is
   procedure Permute (X, Y, Z : in out Positive) is
      Tmp : constant Positive := X;
   begin
      X := Y;
      Y := Z;
      Z := Tmp;
   end Permute;

   procedure Swap (X, Y : in out Positive) is
   begin
      Permute (X, Y, Y);
   end Swap;
end P;
```

Listing 14: test_swap.adb

```
with P; use P;

procedure Test_Swap
  with SPARK_Mode => On
is
   A : Integer := 1;
   B : Integer := 2;
begin
   Swap (A, B);
end Test_Swap;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Overview.Example_03
MD5: 0868a806061d86af4d2a03b1e7dc83c2
```

Build output

```
p.adb:14:19: error: writable actual for "Y" overlaps with actual for "Z"
gprbuild: *** compilation phase failed
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
p.adb:14:19: error: writable actual for "Y" overlaps with actual for "Z"
gnatprove: error during generation of Global contracts
```

Here, the values for parameters Y and Z are aliased in the call to Permute, which is not allowed in SPARK. In fact, in this particular case, this is even a violation of Ada rules so the same error is issued by the Ada compiler.

In this example, we see the reason why aliasing is not allowed in SPARK: since Y and Z are **Positive**, they are passed by copy and the result of the call to Permute depends on the order in which they're copied back after the call.

41.8.4 Example #4

Here, the Swap procedure is used to swap the value of the two record components of R.

Listing 15: p.ads

```
package P
  with SPARK_Mode => On
is
   type Rec is record
      F1 : Positive;
      F2 : Positive;
   end record;

   procedure Swap_Fields (R : in out Rec);
   procedure Swap (X, Y : in out Positive);
end P;
```

Listing 16: p.adb

```
package body P
  with SPARK_Mode => On
is
   procedure Swap (X, Y : in out Positive) is
      Tmp : constant Positive := X;
   begin
      X := Y;
      Y := Tmp;
   end Swap;

   procedure Swap_Fields (R : in out Rec) is
   begin
      Swap (R.F1, R.F2);
   end Swap_Fields;

end P;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Overview.Example_04
MD5: ae4d3ebe8dd1a8f67f35cedffdea2ac9
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
```

This code is correct. The call to Swap is safe: two different components of the same record can't refer to the same object.

41.8.5 Example #5

Here's a slight modification of the previous example using an array instead of a record: Swap_Indexes calls Swap on values stored in the array A.

Listing 17: p.ads

```
1  package P
2    with SPARK_Mode => On
3  is
4     type P_Array is array (Natural range <>) of Positive;
5
6     procedure Swap_Indexes (A : in out P_Array; I, J : Natural);
7     procedure Swap (X, Y : in out Positive);
8  end P;
```

Listing 18: p.adb

```
1  package body P
2    with SPARK_Mode => On
3  is
4     procedure Swap (X, Y : in out Positive) is
5        Tmp : constant Positive := X;
6     begin
7        X := Y;
8        Y := Tmp;
9     end Swap;
10
11    procedure Swap_Indexes (A : in out P_Array; I, J : Natural) is
12    begin
13       Swap (A (I), A (J));
14    end Swap_Indexes;
15
16 end P;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Overview.Example_05
MD5: 62a95179572e36443995ff54a2d5ef08
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
p.adb:13:13: medium: formal parameters "X" and "Y" might be aliased (SPARK RM 6.4.
 ↪2)
gnatprove: unproved check messages considered as errors
```

GNATprove detects a possible case of aliasing. Unlike the previous example, it has no way of knowing that the two elements `A (I)` and `A (J)` are actually distinct when we call Swap. GNATprove issues a check message here instead of an error, giving you the possibility of

justifying the message after review (meaning that you've verified manually that this can't, in fact, occur).

41.8.6 Example #6

We now consider a package declaring a type `Dictionary`, an array containing a word per letter. The procedure `Store` allows us to insert a word at the correct index in a dictionary.

Listing 19: p.ads

```
with Ada.Finalization;

package P
  with SPARK_Mode => On
is
   subtype Letter is Character range 'a' .. 'z';
   type String_Access is new Ada.Finalization.Controlled with record
      Ptr : access String;
   end record;
   type Dictionary is array (Letter) of String_Access;

   procedure Store (D : in out Dictionary; W : String);
end P;
```

Listing 20: p.adb

```
package body P
  with SPARK_Mode => On
is
   procedure Store (D : in out Dictionary; W : String) is
      First_Letter : constant Letter := W (W'First);
   begin
      D (First_Letter).Ptr := new String'(W);
   end Store;
end P;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Overview.Example_06
MD5: 9175bcd1474e2143462b860c01d8602e
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
p.adb:7:07: error: "String_Access" is not allowed in SPARK (due to controlled␣
 ↪types)
p.adb:7:07: error: violation of aspect SPARK_Mode at line 2
p.adb:7:31: error: borrow or observe of an expression which is not part of stand-
 ↪alone object or parameter is not allowed in SPARK (SPARK RM 3.10(4))
p.adb:7:31: error: violation of aspect SPARK_Mode at line 2
p.ads:7:09: error: "Controlled" is not allowed in SPARK (due to controlled types)
p.ads:7:09: error: violation of aspect SPARK_Mode at line 4
p.ads:10:04: error: "String_Access" is not allowed in SPARK (due to controlled␣
 ↪types)
p.ads:10:04: error: violation of aspect SPARK_Mode at line 4
gnatprove: error during analysis of data and information flow
```

This code is not correct: controlled types are not part of the SPARK subset. The solution here is to use SPARK_Mode to separate the definition of `String_Access` from the rest of the code in a fine grained manner.

41.8.7 Example #7

Here's a new version of the previous example, which we've modified to hide the controlled type inside the private part of package P, using `pragma SPARK_Mode (Off)` at the start of the private part.

Listing 21: p.ads

```
with Ada.Finalization;

package P
  with SPARK_Mode => On
is
   subtype Letter is Character range 'a' .. 'z';
   type String_Access is private;
   type Dictionary is array (Letter) of String_Access;

   function New_String_Access (W : String) return String_Access;

   procedure Store (D : in out Dictionary; W : String);

private
   pragma SPARK_Mode (Off);

   type String_Access is new Ada.Finalization.Controlled with record
      Ptr : access String;
   end record;

   function New_String_Access (W : String) return String_Access is
     (Ada.Finalization.Controlled with Ptr => new String'(W));
end P;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Overview.Example_07
MD5: cb04206c9734eb95f6444757d005dae2
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
```

Since the controlled type is defined and used inside of a part of the code ignored by GNATprove, this code is correct.

41.8.8 Example #8

Let's put together the new spec for package P with the body of P seen previously.

Listing 22: p.ads

```
with Ada.Finalization;

package P
  with SPARK_Mode => On
is
   subtype Letter is Character range 'a' .. 'z';
   type String_Access is private;
   type Dictionary is array (Letter) of String_Access;

   function New_String_Access (W : String) return String_Access;
```

(continues on next page)

(continued from previous page)

```
11
12    procedure Store (D : in out Dictionary; W : String);
13
14 private
15    pragma SPARK_Mode (Off);
16
17    type String_Access is new Ada.Finalization.Controlled with record
18       Ptr : access String;
19    end record;
20
21    function New_String_Access (W : String) return String_Access is
22      (Ada.Finalization.Controlled with Ptr => new String'(W));
23 end P;
```

Listing 23: p.adb

```
1  package body P
2    with SPARK_Mode => On
3  is
4     procedure Store (D : in out Dictionary; W : String) is
5        First_Letter : constant Letter := W (W'First);
6     begin
7        D (First_Letter) := New_String_Access (W);
8     end Store;
9  end P;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Overview.Example_08
MD5: dacb2d50d0ddc6c620ee9945cb819369
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
p.adb:1:01: error: incorrect application of SPARK_Mode at /vagrant/frontend/dist/
 ↪test_output/projects/Courses/Intro_To_Spark/Overview/Example_08/
 ↪dacb2d50d0ddc6c620ee9945cb819369/main_spark.adc:12
p.adb:1:01: error: value Off was set for SPARK_Mode on "P" at p.ads:15
p.adb:2:08: error: incorrect use of SPARK_Mode
p.adb:2:08: error: value Off was set for SPARK_Mode on "P" at p.ads:15
gnatprove: error during generation of Global contracts
```

The body of `Store` doesn't actually use any construct that's not in the SPARK subset, but we nevertheless can't set SPARK_Mode to On for P's body because it has visibility to P's private part, which is not in SPARK, even if we don't use it.

41.8.9 Example #9

Next, we moved the declaration and the body of the procedure `Store` to another package named Q.

Listing 24: p.ads

```
1  with Ada.Finalization;
2
3  package P
4    with SPARK_Mode => On
5  is
6     subtype Letter is Character range 'a' .. 'z';
```

(continues on next page)

(continued from previous page)

```
   type String_Access is private;
   type Dictionary is array (Letter) of String_Access;

   function New_String_Access (W : String) return String_Access;

private
   pragma SPARK_Mode (Off);

   type String_Access is new Ada.Finalization.Controlled with record
      Ptr : access String;
   end record;

   function New_String_Access (W : String) return String_Access is
     (Ada.Finalization.Controlled with Ptr => new String'(W));
end P;
```

Listing 25: q.ads

```
with P; use P;
package Q
  with SPARK_Mode => On
is
   procedure Store (D : in out Dictionary; W : String);
end Q;
```

Listing 26: q.adb

```
package body Q
  with SPARK_Mode => On
is
   procedure Store (D : in out Dictionary; W : String)  is
      First_Letter : constant Letter := W (W'First);
   begin
      D (First_Letter) := New_String_Access (W);
   end Store;
end Q;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Overview.Example_09
MD5: b397e82987c100de5a53ede16fbef37f
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
```

And now everything is fine: we've managed to retain the use of the controlled type while having most of our code in the SPARK subset so GNATprove is able to analyze it.

41.8.10 Example #10

Our final example is a package with two functions to search for the value 0 inside an array A. The first raises an exception if 0 isn't found in A while the other simply returns 0 in that case.

Listing 27: p.ads

```
package P
  with SPARK_Mode => On
is
   type N_Array is array (Positive range <>) of Natural;
   Not_Found : exception;

   function Search_Zero_P (A : N_Array) return Positive;

   function Search_Zero_N (A : N_Array) return Natural;
end P;
```

Listing 28: p.adb

```
package body P
  with SPARK_Mode => On
is
   function Search_Zero_P (A : N_Array) return Positive is
   begin
      for I in A'Range loop
         if A (I) = 0 then
            return I;
         end if;
      end loop;
      raise Not_Found;
   end Search_Zero_P;

   function Search_Zero_N (A : N_Array) return Natural
     with SPARK_Mode => Off is
   begin
      return Search_Zero_P (A);
   exception
      when Not_Found => return 0;
   end Search_Zero_N;
end P;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Overview.Example_10
MD5: 4b9656698ab1d42cebc72817f8a00637
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
p.adb:11:07: medium: unexpected exception might be raised
gnatprove: unproved check messages considered as errors
```

This code is perfectly correct, despite the use of exception handling, because we've carefully isolated this non-SPARK feature in a function body marked with a SPARK_Mode of `Off` so it's ignored by GNATprove. However, GNATprove tries to show that `Not_Found` is never raised in `Search_Zero_P`, producing a message about a possible exception being raised. Looking at `Search_Zero_N`, it's indeed likely that an exception is meant to be raised in some cases, which means you need to verify that `Not_Found` is only raised when appropriate using other methods such as peer review or testing.

CHAPTER

FORTYTWO

FLOW ANALYSIS

In this section we present the flow analysis capability provided by the GNATprove tool, a critical tool for using SPARK.

42.1 What does flow analysis do?

Flow analysis concentrates primarily on variables. It models how information flows through them during a subprogram's execution, connecting the final values of variables to their initial values. It analyzes global variables declared at library level, local variables, and formal parameters of subprograms.

Nesting of subprograms creates what we call *scope variables*: variables declared locally to an enclosing unit. From the perspective of a nested subprogram, scope variables look very much like global variables

Flow analysis is usually fast, roughly as fast as compilation. It detects various types of errors and finds violations of some SPARK legality rules, such as the absence of aliasing and freedom of expressions from side-effects. We discussed these rules in the *SPARK Overview* (page 1245).

Flow analysis is *sound*: if it doesn't detect any errors of a type it's supposed to detect, we know for sure there are no such errors.

42.2 Errors Detected

42.2.1 Uninitialized Variables

We now present each class of errors detected by flow analysis. The first is the reading of an uninitialized variable. This is nearly always an error: it introduces non-determinism and breaks the type system because the value of an uninitialized variable may be outside the range of its subtype. For these reasons, SPARK requires every variable to be initialized before being read.

Flow analysis is responsible for ensuring that SPARK code always fulfills this requirement. For example, in the function `Max_Array` shown below, we've neglected to initialize the value of `Max` prior to entering the loop. As a consequence, the value read by the condition of the if statement may be uninitialized. Flow analysis detects and reports this error.

Listing 1: show_uninitialized.ads

```
1 package Show_Uninitialized is
2
3    type Array_Of_Naturals is array (Integer range <>) of Natural;
4
5    function Max_Array (A : Array_Of_Naturals) return Natural;
```

(continues on next page)

(continued from previous page)

```
6
7  end Show_Uninitialized;
```

Listing 2: show_uninitialized.adb

```
1  package body Show_Uninitialized is
2
3     function Max_Array (A : Array_Of_Naturals) return Natural is
4        Max : Natural;
5     begin
6        for I in A'Range loop
7           if A (I) > Max then -- Here Max may not be initialized
8              Max := A (I);
9           end if;
10       end loop;
11       return Max;
12    end Max_Array;
13
14 end Show_Uninitialized;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Flow_Analysis.Uninitialized
MD5: 82fe32cbe33e25bac5466f86ee2e03c4
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
show_uninitialized.adb:7:21: medium: "Max" might not be initialized
show_uninitialized.adb:11:14: medium: "Max" might not be initialized
gnatprove: unproved check messages considered as errors
```

Note

For more details on how flow analysis verifies data initialization, see the SPARK User's Guide[375].

42.2.2 Ineffective Statements

Ineffective statements are different than dead code: they're executed, and often even modify the value of variables, but have no effect on any of the subprogram's visible outputs: parameters, global variables or the function result. Ineffective statements should be avoided because they make the code less readable and more difficult to maintain.

More importantly, they're often caused by errors in the program: the statement may have been written for some purpose, but isn't accomplishing that purpose. These kinds of errors can be difficult to detect in other ways.

For example, the subprograms Swap1 and Swap2 shown below don't properly swap their two parameters X and Y. This error caused a statement to be ineffective. That ineffective statement is not an error in itself, but flow analysis produces a warning since it can be indicative of an error, as it is here.

[375] https://docs.adacore.com/live/wave/spark2014/html/spark2014_ug/en/source/language_restrictions.html#data-initialization-policy

Listing 3: show_ineffective_statements.ads

```
package Show_Ineffective_Statements is

   type T is new Integer;

   procedure Swap1 (X, Y : in out T);
   procedure Swap2 (X, Y : in out T);

end Show_Ineffective_Statements;
```

Listing 4: show_ineffective_statements.adb

```
package body Show_Ineffective_Statements is

   procedure Swap1 (X, Y : in out T) is
      Tmp : T;
   begin
      Tmp := X; -- This statement is ineffective
      X   := Y;
      Y   := X;
   end Swap1;

   Tmp : T := 0;

   procedure Swap2 (X, Y : in out T) is
      Temp : T := X; -- This variable is unused
   begin
      X := Y;
      Y := Tmp;
   end Swap2;

end Show_Ineffective_Statements;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Flow_Analysis.Ineffective_Statements
MD5: 473a9215e9e98bd25147998d43847a12
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
show_ineffective_statements.ads:5:21: warning: unused initial value of "X"
show_ineffective_statements.ads:6:21: warning: unused initial value of "X"
```

So far, we've seen examples where flow analysis warns about ineffective statements and unused variables.

42.2.3 Incorrect Parameter Mode

Parameter modes are an important part of documenting the usage of a subprogram and affect the code generated for that subprogram. Flow analysis checks that each specified parameter mode corresponds to the usage of that parameter in the subprogram's body. It checks that an **in** parameter is never modified, either directly or through a subprogram call, checks that the initial value of an **out** parameter is never read in the subprogram (since it may not be defined on subprogram entry), and warns when an **in out** parameter isn't modified or when its initial value isn't used. All of these may be signs of an error.

We see an example below. The subprogram Swap is incorrect and GNATprove warns about an input which isn't read:

Listing 5: show_incorrect_param_mode.ads

```
package Show_Incorrect_Param_Mode is

   type T is new Integer;

   procedure Swap (X, Y : in out T);

end Show_Incorrect_Param_Mode;
```

Listing 6: show_incorrect_param_mode.adb

```
package body Show_Incorrect_Param_Mode is

   procedure Swap (X, Y : in out T) is
      Tmp : T := X;
   begin
      Y := X;   -- The initial value of Y is not used
      X := Tmp; -- Y is computed to be an out parameter
   end Swap;

end Show_Incorrect_Param_Mode;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Flow_Analysis.Incorrect_Param_Mode
MD5: 1e33dbf461daab0daed01c83025232fc
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
show_incorrect_param_mode.ads:5:23: warning: unused initial value of "Y"
```

In SPARK, unlike Ada, you should declare an **out** parameter to be **in out** if it's not modified on every path, in which case its value may depend on its initial value. SPARK is stricter than Ada to allow more static detection of errors. This table summarizes SPARK's valid parameter modes as a function of whether reads and writes are done to the parameter.

Initial value read	Written on some path	Written on every path	Parameter mode
X			**in**
X	X		**in out**
X		X	**in out**
	X		**in out**
		X	**out**

42.3 Additional Verifications

42.3.1 Global Contracts

So far, none of the verifications we've seen require you to write any additional annotations. However, flow analysis also checks flow annotations that you write. In SPARK, you can specify the set of global and scoped variables accessed or modified by a subprogram. You do this using a contract named `Global`.

When you specify a `Global` contract for a subprogram, flow analysis checks that it's both correct and complete, meaning that no variables other than those stated in the contract are accessed or modified, either directly or through a subprogram call, and that all those listed are accessed or modified. For example, we may want to specify that the function `Get_Value_Of_X` reads the value of the global variable `X` and doesn't access any other global variable. If we do this through a comment, as is usually done in other languages, GNATprove can't verify that the code complies with this specification:

```
package Show_Global_Contracts is

   X : Natural := 0;

   function Get_Value_Of_X return Natural;
   --  Get_Value_Of_X reads the value of the global variable X

end Show_Global_Contracts;
```

You write global contracts as part of the subprogram specification. In addition to their value in flow analysis, they also provide useful information to users of a subprogram. The value you specify for the `Global` aspect is an aggregate-like list of global variable names, grouped together according to their mode.

In the example below, the procedure `Set_X_To_Y_Plus_Z` reads both `Y` and `Z`. We indicate this by specifying them as the value for `Input`. It also writes `X`, which we specify using `Output`. Since `Set_X_To_X_Plus_Y` both writes `X` and reads its initial value, `X`'s mode is `In_Out`. Like parameters, if no mode is specified in a `Global` aspect, the default is `Input`. We see this in the case of the declaration of `Get_Value_Of_X`. Finally, if a subprogram, such as `Incr_Parameter_X`, doesn't reference any global variables, you set the value of the global contract to **`null`**.

Listing 7: show_global_contracts.ads

```
1  package Show_Global_Contracts is
2
3     X, Y, Z : Natural := 0;
4
5     procedure Set_X_To_Y_Plus_Z with
6       Global => (Input  => (Y, Z), --  reads values of Y and Z
7                  Output => X);     --  modifies value of X
8
9     procedure Set_X_To_X_Plus_Y with
10      Global => (Input  => Y,  --  reads value of Y
11                 In_Out => X); --  modifies value of X and
12                               --  also reads its initial value
13
14    function Get_Value_Of_X return Natural with
15      Global => X;  -- reads the value of the global variable X
16
17    procedure Incr_Parameter_X (X : in out Natural) with
18      Global => null; -- do not reference any global variable
19
20 end Show_Global_Contracts;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Flow_Analysis.Global_Contracts
MD5: 2cbf90f2d27b6b0043a2e29449e79df9
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
```

(continues on next page)

(continued from previous page)

```
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
```

Note

For more details on global contracts, see the SPARK User's Guide[376].

42.3.2 Depends Contracts

You may also supply a Depends contract for a subprogram to specify dependencies between its inputs and outputs. These dependencies include not only global variables but also parameters and the function's result. When you supply a Depends contract for a subprogram, flow analysis checks that it's correct and complete, that is, for each dependency you list, the variable depends on those listed and on no others.

For example, you may want to say that the new value of each parameter of Swap, shown below, depends only on the initial value of the other parameter and that the value of X after the return of Set_X_To_Zero doesn't depend on any global variables. If you indicate this through a comment, as you often do in other languages, GNATprove can't verify that this is actually the case.

```
package Show_Depends_Contracts is

   type T is new Integer;

   procedure Swap (X, Y : in out T);
   --  The value of X (resp. Y) after the call depends only
   --  on the value of Y (resp. X) before the call

   X : Natural;
   procedure Set_X_To_Zero;
   --  The value of X after the call depends on no input

end Show_Depends_Contracts;
```

Like Global contracts, you specify a Depends contract in subprogram declarations using an aspect. Its value is a list of one or more dependency relations between the outputs and inputs of the subprogram. Each relation is represented as two lists of variable names separated by an arrow. On the left of each arrow are variables whose final value depends on the initial value of the variables you list on the right.

For example, here we indicate that the final value of each parameter of Swap depends only on the initial value of the other parameter. If the subprogram is a function, we list its result as an output, using the Result attribute, as we do for Get_Value_Of_X below.

Listing 8: show_depends_contracts.ads

```
1  package Show_Depends_Contracts is
2
3     type T is new Integer;
4
5     X, Y, Z : T := 0;
6
7     procedure Swap (X, Y : in out T) with
8       Depends => (X => Y,
```

(continues on next page)

[376] https://docs.adacore.com/live/wave/spark2014/html/spark2014_ug/en/source/subprogram_contracts.html#data-dependencies

(continued from previous page)

```
9                  --  X depends on the initial value of Y
10                 Y => X);
11                 --  Y depends on the initial value of X
12
13    function Get_Value_Of_X return T with
14      Depends => (Get_Value_Of_X'Result => X);
15                 --  result depends on the initial value of X
16
17    procedure Set_X_To_Y_Plus_Z with
18      Depends => (X => (Y, Z));
19                 --  X depends on the initial values of Y and Z
20
21    procedure Set_X_To_X_Plus_Y with
22      Depends => (X =>+ Y);
23              --  X depends on Y and X's initial value
24
25    procedure Do_Nothing (X : T) with
26      Depends => (null => X);
27                 --  no output is affected by X
28
29    procedure Set_X_To_Zero with
30      Depends => (X => null);
31                 --  X depends on no input
32
33 end Show_Depends_Contracts;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Flow_Analysis.Depends_Contracts
MD5: 290866c4208b6deff717a402bc2aef34
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
```

Often, the final value of a variable depends on its own initial value. You can specify this in a concise way using the `+` character, as we did in the specification of `Set_X_To_X_Plus_Y` above. If there's more than one variable on the left of the arrow, a `+` means each variables depends on itself, not that they all depend on each other. You can write the corresponding dependency with `(=> +)` or without `(=>+)` whitespace.

If you have a program where an input isn't used to compute the final value of any output, you express that by writting **`null`** on the left of the dependency relation, as we did for the `Do_Nothing` subprogram above. You can only write one such dependency relation, which lists all unused inputs of the subprogram, and it must be written last. Such an annotation also silences flow analysis' warning about unused parameters. You can also write **`null`** on the right of a dependency relation to indicate that an output doesn't depend on any input. We do that above for the procedure `Set_X_To_Zero`.

Note

For more details on depends contracts, see the SPARK User's Guide[377].

[377] https://docs.adacore.com/live/wave/spark2014/html/spark2014_ug/en/source/subprogram_contracts.html#flow-dependencies

42.4 Shortcomings

42.4.1 Modularity

Flow analysis is sound, meaning that if it doesn't output a message on some analyzed SPARK code, you can be assured that none of the errors it tests for can occur in that code. On the other hand, flow analysis often issues messages when there are, in fact, no errors. The first, and probably most common reason for this relates to modularity.

To scale flow analysis to large projects, verifications are usually done on a per-subprogram basis, including detection of uninitialized variables. To analyze this modularly, flow analysis needs to assume the initialization of inputs on subprogram entry and modification of outputs during subprogram execution. Therefore, each time a subprogram is called, flow analysis checks that global and parameter inputs are initialized and each time a subprogram returns, it checks that global and parameter outputs were modified.

This can produce error messages on perfectly correct subprograms. An example is `Set_X_To_Y_Plus_Z` below, which only sets its **`out`** parameter `X` when `Overflow` is **`False`**.

Listing 9: set_x_to_y_plus_z.adb

```
procedure Set_X_To_Y_Plus_Z
  (Y, Z     :     Natural;
   X        : out Natural;
   Overflow : out Boolean)
is
begin
   if Natural'Last - Z < Y then
      Overflow := True; -- X should be initialized on every path
   else
      Overflow := False;
      X := Y + Z;
   end if;
end Set_X_To_Y_Plus_Z;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Flow_Analysis.Set_X_To_Y_Plus_Z
MD5: be47cd769d2a7267c0bd1bb2ef0d6328
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
set_x_to_y_plus_z.adb:3:04: medium: "X" might not be initialized in "Set_X_To_Y_
 ↪Plus_Z" [reason for check: OUT parameter should be initialized on return]␣
 ↪[possible fix: initialize "X" on all paths or make "X" an IN OUT parameter]
gnatprove: unproved check messages considered as errors
```

The message means that flow analysis wasn't able to verify that the program didn't read an uninitialized variable. To solve this problem, you can either set `X` to a dummy value when there's an overflow or manually verify that `X` is never used after a call to `Set_X_To_Y_Plus_Z` that returned **`True`** as the value of `Overflow`.

42.4.2 Composite Types

Another common cause of false alarms is caused by the way flow analysis handles composite types. Let's start with arrays.

Flow analysis treats an entire array as single object instead of one object per element, so it considers modifying a single element to be a modification of the array as a whole.

Obviously, this makes reasoning about which global variables are accessed less precise and hence the dependencies of those variables are also less precise. This also affects the ability to accurately detect reads of uninitialized data.

It's sometimes impossible for flow analysis to determine if an entire array object has been initialized. For example, after we write code to initialize every element of an unconstrained array A in chunks, we may still receive a message from flow analysis claiming that the array isn't initialized. To resolve this issue, you can either use a simpler loop over the full range of the array, or (even better) an aggregate assignment, or, if that's not possible, verify initialization of the object manually.

Listing 10: show_composite_types_shortcoming.ads

```
package Show_Composite_Types_Shortcoming is

   type T is array (Natural range <>) of Integer;

   procedure Init_Chunks (A : out T);
   procedure Init_Loop (A : out T);
   procedure Init_Aggregate (A : out T);

end Show_Composite_Types_Shortcoming;
```

Listing 11: show_composite_types_shortcoming.adb

```
package body Show_Composite_Types_Shortcoming is

   procedure Init_Chunks (A : out T) is
   begin
      A (A'First) := 0;
      for I in A'First + 1 .. A'Last loop
         A (I) := 0;
      end loop;
      --  flow analysis doesn't know that A is initialized
   end Init_Chunks;

   procedure Init_Loop (A : out T) is
   begin
      for I in A'Range loop
         A (I) := 0;
      end loop;
      --  flow analysis knows that A is initialized
   end Init_Loop;

   procedure Init_Aggregate (A : out T) is
   begin
      A := (others => 0);
      --  flow analysis knows that A is initialized
   end Init_Aggregate;

end Show_Composite_Types_Shortcoming;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Flow_Analysis.Composite_Types_Shortcoming
MD5: a366dcdd141191466027b2b928560c5e
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
```

(continues on next page)

(continued from previous page)

```
show_composite_types_shortcoming.ads:5:27: medium: "A" might not be initialized in
 ↪"Init_Chunks" [reason for check: OUT parameter should be fully initialized on␣
 ↪return] [possible fix: initialize "A" on all paths, make "A" an IN OUT parameter␣
 ↪or annotate it with aspect Relaxed_Initialization]
gnatprove: unproved check messages considered as errors
```

Flow analysis is more precise on record objects because it tracks the value of each component of a record separately within a single subprogram. So when a record object is initialized by successive assignments of its components, flow analysis knows that the entire object is initialized. However, record objects are still treated as single objects when analyzed as an input or output of a subprogram.

Listing 12: show_record_flow_analysis.ads

```
package Show_Record_Flow_Analysis is

   type Rec is record
      F1 : Natural;
      F2 : Natural;
   end record;

   procedure Init (R : out Rec);

end Show_Record_Flow_Analysis;
```

Listing 13: show_record_flow_analysis.adb

```
package body Show_Record_Flow_Analysis is

   procedure Init (R : out Rec) is
   begin
      R.F1 := 0;
      R.F2 := 0;
      --  R is initialized
   end Init;

end Show_Record_Flow_Analysis;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Flow_Analysis.Record_Flow_Analysis_1
MD5: 24cd553b87b737536912b1bb780f6402
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
show_record_flow_analysis.ads:8:20: info: initialization of "R" proved
```

Flow analysis complains when a procedure call initializes only some components of a record object. It'll notify you of uninitialized components, as we see in subprogram `Init_F2` below.

Listing 14: show_record_flow_analysis.ads

```
package Show_Record_Flow_Analysis is

   type Rec is record
      F1 : Natural;
      F2 : Natural;
```

(continues on next page)

(continued from previous page)

```
   end record;

   procedure Init (R : out Rec);
   procedure Init_F2 (R : in out Rec);

end Show_Record_Flow_Analysis;
```

Listing 15: show_record_flow_analysis.adb

```
package body Show_Record_Flow_Analysis is

   procedure Init_F2
     (R : in out Rec) is
   begin
      R.F2 := 0;
   end Init_F2;

   procedure Init (R : out Rec) is
   begin
      R.F1 := 0;
      Init_F2 (R); -- R should be initialized before this call
   end Init;

end Show_Record_Flow_Analysis;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Flow_Analysis.Record_Flow_Analysis_2
MD5: efeecb787bf9d68977ed9701689cd6c4
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
show_record_flow_analysis.adb:12:16: high: "R.F2" is not initialized
gnatprove: unproved check messages considered as errors
```

42.4.3 Value Dependency

Flow analysis is not value-dependent: it never reasons about the values of expressions, only whether they have been set to some value or not. As a consequence, if some execution path in a subprogram is impossible, but the impossibility can only be determined by looking at the values of expressions, flow analysis still considers that path feasible and may emit messages based on it believing that execution along such a path is possible.

For example, in the version of `Absolute_Value` below, flow analysis computes that `R` is uninitialized on a path that enters neither of the two conditional statements. Because it doesn't consider values of expressions, it can't know that such a path is impossible.

Listing 16: absolute_value.adb

```
procedure Absolute_Value
  (X :     Integer;
   R : out Natural)
is
begin
   if X < 0 then
      R := -X;
```

(continues on next page)

(continued from previous page)

```
   end if;
   if X >= 0 then
      R := X;
   end if;
   --  flow analysis doesn't know that R is initialized
end Absolute_Value;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Flow_Analysis.Absolute_Value_1
MD5: 69c233d22afdfdac679bf379b353a8d4
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
absolute_value.adb:3:04: medium: "R" might not be initialized in "Absolute_Value"␣
 ↪[reason for check: OUT parameter should be initialized on return] [possible fix:␣
 ↪initialize "R" on all paths or make "R" an IN OUT parameter]
gnatprove: unproved check messages considered as errors
```

To avoid this problem, you should make the control flow explicit, as in this second version of `Absolute_Value`:

Listing 17: absolute_value.adb

```
procedure Absolute_Value
  (X :     Integer;
   R : out Natural)
is
begin
   if X < 0 then
      R := -X;
   else
      R := X;
   end if;
   --  flow analysis knows that R is initialized
end Absolute_Value;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Flow_Analysis.Absolute_Value_2
MD5: 9c773547f81e82a7aa1b45132b105937
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
```

42.4.4 Contract Computation

The final cause of unexpected flow messages that we'll discuss also comes from inaccuracy in computations of contracts. As we explained earlier, both `Global` and `Depends` contracts are optional, but GNATprove uses their data for some of its analysis.

For example, flow analysis can't detect reads from uninitialized variables without knowing the set of variables accessed. It needs to analyze and check both the `Depends` contracts you wrote for a subprogram and those you wrote for callers of that subprogram. Since

each flow contract on a subprogram depends on the flow contracts of all the subprograms called inside its body, this computation can often be quite time-consuming. Therefore, flow analysis sometimes trades-off the precision of this computation against the time a more precise computation would take.

This is the case for Depends contracts, where flow analysis simply assumes the worst, that each subprogram's output depends on all of that subprogram's inputs. To avoid this assumption, all you have to do is supply contracts when default ones are not precise enough. You may also want to supply `Global` contracts to further speed up flow analysis on larger programs.

42.5 Code Examples / Pitfalls

42.5.1 Example #1

The procedure `Search_Array` searches for an occurrence of element `E` in an array `A`. If it finds one, it stores the index of the element in `Result`. Otherwise, it sets `Found` to **`False`**.

Listing 18: show_search_array.ads

```
package Show_Search_Array is

   type Array_Of_Positives is array (Natural range <>) of Positive;

   procedure Search_Array
     (A      :     Array_Of_Positives;
      E      :     Positive;
      Result : out Integer;
      Found  : out Boolean);

end Show_Search_Array;
```

Listing 19: show_search_array.adb

```
package body Show_Search_Array is

   procedure Search_Array
     (A      :     Array_Of_Positives;
      E      :     Positive;
      Result : out Integer;
      Found  : out Boolean) is
   begin
      for I in A'Range loop
         if A (I) = E then
            Result := I;
            Found  := True;
            return;
         end if;
      end loop;
      Found := False;
   end Search_Array;

end Show_Search_Array;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Flow_Analysis.Example_01
MD5: d2a27a5bde247767e2f6cd2d42a2d629
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
show_search_array.ads:8:07: medium: "Result" might not be initialized in "Search_
 ↪Array" [reason for check: OUT parameter should be initialized on return]␣
 ↪[possible fix: initialize "Result" on all paths or make "Result" an IN OUT␣
 ↪parameter]
gnatprove: unproved check messages considered as errors
```

GNATprove produces a message saying that `Result` is possibly uninitialized on return. There are perfectly legal uses of the function `Search_Array`, but flow analysis detects that `Result` is not initialized on the path that falls through from the loop. Even though this program is correct, you shouldn't ignore the message: it means flow analysis cannot guarantee that `Result` is always initialized at the call site and so assumes any read of `Result` at the call site will read initialized data. Therefore, you should either initialize `Result` when Found is false, which silences flow analysis, or verify this assumption at each call site by other means.

42.5.2 Example #2

To avoid the message previously issued by GNATprove, we modify `Search_Array` to raise an exception when E isn't found in A:

Listing 20: show_search_array.ads

```
package Show_Search_Array is

   type Array_Of_Positives is array (Natural range <>) of Positive;

   Not_Found : exception;

   procedure Search_Array
     (A      :     Array_Of_Positives;
      E      :     Positive;
      Result : out Integer);
end Show_Search_Array;
```

Listing 21: show_search_array.adb

```
package body Show_Search_Array is

   procedure Search_Array
     (A      :     Array_Of_Positives;
      E      :     Positive;
      Result : out Integer) is
   begin
      for I in A'Range loop
         if A (I) = E then
            Result := I;
            return;
         end if;
      end loop;
      raise Not_Found;
   end Search_Array;

end Show_Search_Array;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Flow_Analysis.Example_02
MD5: fa159faeb68974b1af3de2112e086b16
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
show_search_array.adb:14:07: medium: unexpected exception might be raised
gnatprove: unproved check messages considered as errors
```

Flow analysis doesn't emit any messages in this case, meaning it can verify that `Result` can't be read in SPARK code while uninitialized. But why is that, since `Result` is still not initialized when E is not in A? This is because the exception, `Not_Found`, can never be caught within SPARK code (SPAK doesn't allow exception handlers). However, the GNATprove tool also tries to ensure the absence of runtime errors in SPARK code, so tries to prove that `Not_Found` is never raised. When it can't do that here, it produces a different message.

42.5.3 Example #3

In this example, we're using a discriminated record for the result of `Search_Array` instead of conditionally raising an exception. By using such a structure, the place to store the index at which E was found exists only when E was indeed found. So if it wasn't found, there's nothing to be initialized.

Listing 22: show_search_array.ads

```
1  package Show_Search_Array is
2
3     type Array_Of_Positives is array (Natural range <>) of Positive;
4
5     type Search_Result (Found : Boolean := False) is record
6        case Found is
7           when True =>
8              Content : Integer;
9           when False => null;
10       end case;
11    end record;
12
13    procedure Search_Array
14      (A      :     Array_Of_Positives;
15       E      :     Positive;
16       Result : out Search_Result)
17    with Pre => not Result'Constrained;
18
19 end Show_Search_Array;
```

Listing 23: show_search_array.adb

```
1  package body Show_Search_Array is
2
3     procedure Search_Array
4       (A      :     Array_Of_Positives;
5        E      :     Positive;
6        Result : out Search_Result) is
7     begin
8        for I in A'Range loop
9           if A (I) = E then
10             Result := (Found   => True,
11                        Content => I);
```

(continues on next page)

(continued from previous page)

```
            return;
         end if;
      end loop;
      Result := (Found => False);
   end Search_Array;

end Show_Search_Array;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Flow_Analysis.Example_03
MD5: 1d5ec5d78185fd75499b90b3d21f8ae2
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
show_search_array.adb:10:20: info: discriminant check proved
show_search_array.adb:15:14: info: discriminant check proved
show_search_array.ads:16:07: info: initialization of "Result" proved
```

This example is correct and flow analysis doesn't issue any message: it can verify both that no uninitialized variables are read in `Search_Array`'s body, and that all its outputs are set on return. We've used the attribute `Constrained` in the precondition of `Search_Array` to indicate that the value of the `Result` in argument can be set to any variant of the record type `Search_Result`, specifically to either the variant where `E` was found and where it wasn't.

42.5.4 Example #4

The function `Size_Of_Biggest_Increasing_Sequence` is supposed to find all sequences within its parameter `A` that contain elements with increasing values and returns the length of the longest one. To do this, it calls a nested procedure `Test_Index` iteratively on all the elements of `A`. `Test_Index` checks if the sequence is still increasing. If so, it updates the largest value seen so far in this sequence. If not, it means it's found the end of a sequence, so it computes the size of that sequence and stores it in `Size_Of_Seq`.

Listing 24: show_biggest_increasing_sequence.ads

```
package Show_Biggest_Increasing_Sequence is

   type Array_Of_Positives is array (Integer range <>) of Positive;

   function Size_Of_Biggest_Increasing_Sequence (A : Array_Of_Positives)
      return Natural;

end Show_Biggest_Increasing_Sequence;
```

Listing 25: show_biggest_increasing_sequence.adb

```
package body Show_Biggest_Increasing_Sequence is

   function Size_Of_Biggest_Increasing_Sequence (A : Array_Of_Positives)
      return Natural
   is
      Max         : Natural;
      End_Of_Seq  : Boolean;
      Size_Of_Seq : Natural;
```

(continues on next page)

(continued from previous page)

```
9        Beginning   : Integer;
10
11       procedure Test_Index (Current_Index : Integer) is
12       begin
13          if A (Current_Index) >= Max then
14             Max := A (Current_Index);
15             End_Of_Seq := False;
16          else
17             Max         := 0;
18             End_Of_Seq  := True;
19             Size_Of_Seq := Current_Index - Beginning;
20             Beginning   := Current_Index;
21          end if;
22       end Test_Index;
23
24       Biggest_Seq : Natural := 0;
25
26    begin
27       for I in A'Range loop
28          Test_Index (I);
29          if End_Of_Seq then
30             Biggest_Seq := Natural'Max (Size_Of_Seq, Biggest_Seq);
31          end if;
32       end loop;
33       return Biggest_Seq;
34    end Size_Of_Biggest_Increasing_Sequence;
35
36 end Show_Biggest_Increasing_Sequence;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Flow_Analysis.Example_04
MD5: e6083665827d9dee4e00bdce4c1e962f
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
show_biggest_increasing_sequence.adb:13:34: medium: "Max" might not be initialized,
 ↪ in call inlined at show_biggest_increasing_sequence.adb:28
show_biggest_increasing_sequence.adb:19:44: medium: "Beginning" might not be␣
 ↪initialized, in call inlined at show_biggest_increasing_sequence.adb:28
show_biggest_increasing_sequence.adb:30:41: medium: "Size_Of_Seq" might not be␣
 ↪initialized
gnatprove: unproved check messages considered as errors
```

However, this example is not correct. Flow analysis emits messages for `Test_Index` stating that `Max`, `Beginning`, and `Size_Of_Seq` should be initialized before being read. Indeed, when you look carefully, you see that both `Max` and `Beginning` are missing initializations because they are read in `Test_Index` before being written. As for `Size_Of_Seq`, we only read its value when `End_Of_Seq` is true, so it actually can't be read before being written, but flow analysis isn't able to verify its initialization by using just flow information.

The call to `Test_Index` is automatically inlined by GNATprove, which leads to another messages above. If GNATprove couldn't inline the call to `Test_Index`, for example if it was defined in another unit, the same messages would be issued on the call to `Test_Index`.

42.5.5 Example #5

In the following example, we model permutations as arrays where the element at index I is the position of the I'th element in the permutation. The procedure `Init` initializes a permutation to the identity, where the I'th elements is at the I'th position. `Cyclic_Permutation` calls `Init` and then swaps elements to construct a cyclic permutation.

Listing 26: show_permutation.ads

```
package Show_Permutation is

   type Permutation is array (Positive range <>) of Positive;

   procedure Swap (A    : in out Permutation;
                   I, J : Positive);

   procedure Init (A : out Permutation);

   function Cyclic_Permutation (N : Natural) return Permutation;

end Show_Permutation;
```

Listing 27: show_permutation.adb

```
package body Show_Permutation is

   procedure Swap (A    : in out Permutation;
                   I, J : Positive)
   is
      Tmp : Positive := A (I);
   begin
      A (I) := A (J);
      A (J) := Tmp;
   end Swap;

   procedure Init (A : out Permutation) is
   begin
      A (A'First) := A'First;
      for I in A'First + 1 .. A'Last loop
         A (I) := I;
      end loop;
   end Init;

   function Cyclic_Permutation (N : Natural) return Permutation is
      A : Permutation (1 .. N);
   begin
      Init (A);
      for I in A'First .. A'Last - 1 loop
         Swap (A, I, I + 1);
      end loop;
      return A;
   end Cyclic_Permutation;

end Show_Permutation;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Flow_Analysis.Example_05
MD5: 219b06617c636c18543128d77f90fcee
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
show_permutation.ads:8:20: medium: "A" might not be initialized in "Init" [reason␣
↪for check: OUT parameter should be fully initialized on return] [possible fix:␣
↪initialize "A" on all paths, make "A" an IN OUT parameter or annotate it with␣
↪aspect Relaxed_Initialization]
gnatprove: unproved check messages considered as errors
```

This program is correct. However, flow analysis will nevertheless still emit messages because it can't verify that every element of A is initialized by the loop in `Init`. This message is a false alarm. You can either ignore it or justify it safely.

42.5.6 Example #6

This program is the same as the previous one except that we've changed the mode of A in the specification of `Init` to **`in out`** to avoid the message from flow analysis on array assignment.

Listing 28: show_permutation.ads

```
1  package Show_Permutation is
2
3     type Permutation is array (Positive range <>) of Positive;
4
5     procedure Swap (A    : in out Permutation;
6                     I, J : Positive);
7
8     procedure Init (A : in out Permutation);
9
10    function Cyclic_Permutation (N : Natural) return Permutation;
11
12 end Show_Permutation;
```

Listing 29: show_permutation.adb

```
1  package body Show_Permutation is
2
3     procedure Swap (A    : in out Permutation;
4                     I, J : Positive)
5     is
6        Tmp : Positive := A (I);
7     begin
8        A (I) := A (J);
9        A (J) := Tmp;
10    end Swap;
11
12    procedure Init (A : in out Permutation) is
13    begin
14       A (A'First) := A'First;
15       for I in A'First + 1 .. A'Last loop
16          A (I) := I;
17       end loop;
18    end Init;
19
20    function Cyclic_Permutation (N : Natural) return Permutation is
21       A : Permutation (1 .. N);
22    begin
23       Init (A);
24       for I in A'First .. A'Last - 1 loop
```

(continues on next page)

(continued from previous page)

```
25          Swap (A, I, I + 1);
26       end loop;
27       return A;
28    end Cyclic_Permutation;
29
30 end Show_Permutation;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Flow_Analysis.Example_06
MD5: 61406d9a66dda71630c74c12f3d67936
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
show_permutation.adb:23:13: high: "A" is not initialized
gnatprove: unproved check messages considered as errors
```

This program is not correct. Changing the mode of a parameter that should really be `out` to `in out` to silence a false alarm is not a good idea. Not only does this obfuscate the specification of `Init`, but flow analysis emits a message on the procedure where `A` is not initialized, as shown by the message in `Cyclic_Permutation`.

42.5.7 Example #7

`Incr_Step_Function` takes an array `A` as an argument and iterates through `A` to increment every element by the value of `Increment`, saturating at a specified threshold value. We specified a `Global` contract for `Incr_Until_Threshold`.

Listing 30: show_increments.ads

```
1  package Show_Increments is
2
3     type Array_Of_Positives is array (Natural range <>) of Positive;
4
5     Increment : constant Natural := 10;
6
7     procedure Incr_Step_Function (A : in out Array_Of_Positives);
8
9  end Show_Increments;
```

Listing 31: show_increments.adb

```
1  package body Show_Increments is
2
3     procedure Incr_Step_Function (A : in out Array_Of_Positives) is
4
5        Threshold : Positive := Positive'Last;
6
7        procedure Incr_Until_Threshold (I : Integer) with
8          Global => (Input  => Threshold,
9                     In_Out => A);
10
11       procedure Incr_Until_Threshold (I : Integer) is
12       begin
13          if Threshold - Increment <= A (I) then
14             A (I) := Threshold;
```

(continues on next page)

(continued from previous page)

```
         else
            A (I) := A (I) + Increment;
         end if;
      end Incr_Until_Threshold;

   begin
      for I in A'Range loop
         if I > A'First then
            Threshold := A (I - 1);
         end if;
         Incr_Until_Threshold (I);
      end loop;
   end Incr_Step_Function;

end Show_Increments;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Flow_Analysis.Example_07
MD5: 8e28a005cd9d78947e4bfc60db708bf5
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
show_increments.adb:8:09: info: data dependencies proved
```

Everything is fine here. Specifically, the `Global` contract is correct. It mentions both `Threshold`, which is read but not written in the procedure, and `A`, which is both read and written. The fact that `A` is a parameter of an enclosing unit doesn't prevent us from using it inside the `Global` contract; it really is global to `Incr_Until_Threshold`. We didn't mention `Increment` since it's a static constant.

42.5.8 Example #8

We now go back to the procedure `Test_Index` from *Example #4* (page 1278) and correct the missing initializations. We want to know if the `Global` contract of `Test_Index` is correct.

Listing 32: show_biggest_increasing_sequence.ads

```
package Show_Biggest_Increasing_Sequence is

   type Array_Of_Positives is array (Integer range <>) of Positive;

   function Size_Of_Biggest_Increasing_Sequence (A : Array_Of_Positives)
      return Natural;

end Show_Biggest_Increasing_Sequence;
```

Listing 33: show_biggest_increasing_sequence.adb

```
package body Show_Biggest_Increasing_Sequence is

   function Size_Of_Biggest_Increasing_Sequence (A : Array_Of_Positives)
      return Natural
   is
      Max         : Natural := 0;
      End_Of_Seq  : Boolean;
```

(continues on next page)

(continued from previous page)

```
      Size_Of_Seq : Natural := 0;
      Beginning   : Integer := A'First - 1;

      procedure Test_Index (Current_Index : Integer) with
        Global => (In_Out => (Beginning, Max, Size_Of_Seq),
                   Output => End_Of_Seq,
                   Input  => Current_Index)
      is
      begin
         if A (Current_Index) >= Max then
            Max := A (Current_Index);
            End_Of_Seq := False;
         else
            Max         := 0;
            End_Of_Seq  := True;
            Size_Of_Seq := Current_Index - Beginning;
            Beginning   := Current_Index;
         end if;
      end Test_Index;

      Biggest_Seq : Natural := 0;

   begin
      for I in A'Range loop
         Test_Index (I);
         if End_Of_Seq then
            Biggest_Seq := Natural'Max (Size_Of_Seq, Biggest_Seq);
         end if;
      end loop;
      return Biggest_Seq;
   end Size_Of_Biggest_Increasing_Sequence;

end Show_Biggest_Increasing_Sequence;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Flow_Analysis.Example_08
MD5: 86fb934c32a38f6841ef736780b2e3b2
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
show_biggest_increasing_sequence.adb:14:30: error: global item cannot reference␣
 ↪parameter of subprogram "Test_Index"
gnatprove: error during generation of Global contracts
```

The contract in this example is not correct: `Current_Index` is a parameter of `Test_Index`, so we shouldn't reference it as a global variable. Also, we should have listed variable `A` from the outer scope as an `Input` in the `Global` contract.

42.5.9 Example #9

Next, we change the `Global` contract of `Test_Index` into a `Depends` contract. In general, we don't need both contracts because the set of global variables accessed can be deduced from the `Depends` contract.

Listing 34: show_biggest_increasing_sequence.ads

```
package Show_Biggest_Increasing_Sequence is

   type Array_Of_Positives is array (Integer range <>) of Positive;

   function Size_Of_Biggest_Increasing_Sequence (A : Array_Of_Positives)
      return Natural;

end Show_Biggest_Increasing_Sequence;
```

Listing 35: show_biggest_increasing_sequence.adb

```
package body Show_Biggest_Increasing_Sequence is

   function Size_Of_Biggest_Increasing_Sequence (A : Array_Of_Positives)
      return Natural
   is
      Max         : Natural := 0;
      End_Of_Seq  : Boolean;
      Size_Of_Seq : Natural := 0;
      Beginning   : Integer := A'First - 1;

      procedure Test_Index (Current_Index : Integer) with
        Depends => ((Max, End_Of_Seq)        => (A, Current_Index, Max),
                    (Size_Of_Seq, Beginning) =>
                       + (A, Current_Index, Max, Beginning))
      is
      begin
         if A (Current_Index) >= Max then
            Max := A (Current_Index);
            End_Of_Seq := False;
         else
            Max         := 0;
            End_Of_Seq  := True;
            Size_Of_Seq := Current_Index - Beginning;
            Beginning   := Current_Index;
         end if;
      end Test_Index;

      Biggest_Seq : Natural := 0;

   begin
      for I in A'Range loop
         Test_Index (I);
         if End_Of_Seq then
            Biggest_Seq := Natural'Max (Size_Of_Seq, Biggest_Seq);
         end if;
      end loop;
      return Biggest_Seq;
   end Size_Of_Biggest_Increasing_Sequence;

end Show_Biggest_Increasing_Sequence;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Flow_Analysis.Example_09
MD5: d54ac5d4266738b1bf64869131644b33
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
show_biggest_increasing_sequence.adb:7:07: info: initialization of "End_Of_Seq"␣
 ↪proved
show_biggest_increasing_sequence.adb:11:17: info: initialization of "End_Of_Seq"␣
 ↪proved
show_biggest_increasing_sequence.adb:12:09: info: flow dependencies proved
show_biggest_increasing_sequence.ads:5:13: info: implicit aspect Always_Terminates␣
 ↪on "Size_Of_Biggest_Increasing_Sequence" has been proved, subprogram will␣
 ↪terminate
```

This example is correct. Some of the dependencies, such as `Size_Of_Seq` depending on `Beginning`, come directly from the assignments in the subprogram. Since the control flow influences the final value of all of the outputs, the variables that are being read, `A`, `Current_Index`, and `Max`, are present in every dependency relation. Finally, the dependencies of `Size_Of_Eq` and `Beginning` on themselves are because they may not be modified by the subprogram execution.

42.5.10 Example #10

The subprogram `Identity` swaps the value of its parameter two times. Its `Depends` contract says that the final value of `X` only depends on its initial value and likewise for `Y`.

Listing 36: show_swap.ads

```
1  package Show_Swap is
2
3     procedure Swap (X, Y : in out Positive);
4
5     procedure Identity (X, Y : in out Positive) with
6       Depends => (X => X,
7                   Y => Y);
8
9  end Show_Swap;
```

Listing 37: show_swap.adb

```
1  package body Show_Swap is
2
3     procedure Swap (X, Y : in out Positive) is
4        Tmp : constant Positive := X;
5     begin
6        X := Y;
7        Y := Tmp;
8     end Swap;
9
10    procedure Identity (X, Y : in out Positive) is
11    begin
12       Swap (X, Y);
13       Swap (Y, X);
14    end Identity;
15
16 end Show_Swap;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Flow_Analysis.Example_10
MD5: 8567ece1e5bbc190f62dd483785d078a
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
show_swap.ads:6:18: medium: missing dependency "X => Y"
show_swap.ads:7:18: medium: missing dependency "Y => X"
gnatprove: unproved check messages considered as errors
```

This code is correct, but flow analysis can't verify the `Depends` contract of `Identity` because we didn't supply a `Depends` contract for `Swap`. Therefore, flow analysis assumes that all outputs of `Swap`, `X` and `Y`, depend on all its inputs, both `X` and `Y`'s initial values. To prevent this, we should manually specify a `Depends` contract for `Swap`.

CHAPTER

FORTYTHREE

PROOF OF PROGRAM INTEGRITY

This section presents the proof capability of GNATprove, a major tool for the SPARK language. We focus here on the simpler proofs that you'll need to write to verify your program's integrity. The primary objective of performing proof of your program's integrity is to ensure the absence of runtime errors during its execution.

The analysis steps discussed here are only sound if you've previously performed *Flow Analysis* (page 1263). You shouldn't proceed further if you still have unjustified flow analysis messages for your program.

43.1 Runtime Errors

There's always the potential for errors that aren't detected during compilation to occur during a program's execution. These errors, called runtime errors, are those targeted by GNATprove.

There are various kinds of runtime errors, the most common being references that are out of the range of an array (buffer overflow[378] in Ada), subtype range violations, overflows in computations, and divisions by zero. The code below illustrates many examples of possible runtime errors, all within a single statement. Look at the assignment statement setting the `I + J`'th cell of an array `A` to the value `P /Q`.

Listing 1: show_runtime_errors.ads

```
package Show_Runtime_Errors is

   type Nat_Array is array (Integer range <>) of Natural;

   procedure Update (A : in out Nat_Array; I, J, P, Q : Integer);

end Show_Runtime_Errors;
```

Listing 2: show_runtime_errors.adb

```
package body Show_Runtime_Errors is

   procedure Update (A : in out Nat_Array; I, J, P, Q : Integer) is
   begin
      A (I + J) := P / Q;
   end Update;

end Show_Runtime_Errors;
```

Code block metadata

[378] https://en.wikipedia.org/wiki/Buffer_overflow

```
Project: Courses.Intro_To_Spark.Proof_of_Program_Integrity.Runtime_Errors
MD5: c0718b8cb6138b84a99e0040e2a9164e
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
show_runtime_errors.adb:5:12: medium: overflow check might fail, cannot prove␣
 ↪lower bound for I + J [reason for check: result of addition must fit in a 32-
 ↪bits machine integer] [possible fix: add precondition (if J >= 0 then I <=␣
 ↪Integer'Last - J else I >= Integer'First - J) to subprogram at show_runtime_
 ↪errors.ads:5]
show_runtime_errors.adb:5:12: medium: array index check might fail [reason for␣
 ↪check: result of addition must be a valid index into the array] [possible fix:␣
 ↪add precondition (if J >= 0 then I <= A'Last - J else I >= A'First - J) to␣
 ↪subprogram at show_runtime_errors.ads:5]
show_runtime_errors.adb:5:22: medium: divide by zero might fail [possible fix: add␣
 ↪precondition (Q /= 0) to subprogram at show_runtime_errors.ads:5]
show_runtime_errors.adb:5:22: medium: overflow check might fail, cannot prove␣
 ↪lower bound for P / Q [reason for check: result of division must fit in a 32-
 ↪bits machine integer] [possible fix: add precondition (P / Q >= Integer'First)␣
 ↪to subprogram at show_runtime_errors.ads:5]
show_runtime_errors.adb:5:22: medium: range check might fail, cannot prove lower␣
 ↪bound for P / Q [reason for check: result of division must fit in the target␣
 ↪type of the assignment] [possible fix: add precondition (P / Q >= Natural'First)␣
 ↪to subprogram at show_runtime_errors.ads:5]
gnatprove: unproved check messages considered as errors
```

There are quite a number of errors that may occur when executing this code. If we don't know anything about the values of `I`, `J`, `P`, and `Q`, we can't rule out any of those errors.

First, the computation of `I + J` can overflow, for example if `I` is `Integer'Last` and `J` is positive.

```
A (Integer'Last + 1) := P / Q;
```

Next, the sum, which is used as an array index, may not be in the range of the index of the array.

```
A (A'Last + 1) := P / Q;
```

On the other side of the assignment, the division may also overflow, though only in the very special case where `P` is `Integer'First` and `Q` is -1 because of the asymmetric range of signed integer types.

```
A (I + J) := Integer'First / -1;
```

The division is also not allowed if `Q` is 0.

```
A (I + J) := P / 0;
```

Finally, since the array contains natural numbers, it's also an error to store a negative value in it.

```
A (I + J) := 1 / -1;
```

The compiler generates checks in the executable code corresponding to each of those run-time errors. Each check raises an exception if it fails. For the above assignment statement, we can see examples of exceptions raised due to failed checks for each of the different cases above.

```
A (Integer'Last + 1) := P / Q;
-- raised CONSTRAINT_ERROR : overflow check failed

A (A'Last + 1) := P / Q;
-- raised CONSTRAINT_ERROR : index check failed

A (I + J) := Integer'First / (-1);
-- raised CONSTRAINT_ERROR : overflow check failed

A (I + J) := 1 / (-1);
-- raised CONSTRAINT_ERROR : range check failed

A (I + J) := P / 0;
-- raised CONSTRAINT_ERROR : divide by zero
```

These runtime checks are costly, both in terms of program size and execution time. It may be appropriate to remove them if we can statically ensure they aren't needed at runtime, in other words if we can prove that the condition tested for can never occur.

This is where the analysis done by GNATprove comes in. It can be used to demonstrate statically that none of these errors can ever occur at runtime. Specifically, GNATprove logically interprets the meaning of every instruction in the program. Using this interpretation, GNATprove generates a logical formula called a *verification condition* for each check that would otherwise be required by the Ada (and hence SPARK) language.

```
A (Integer'Last + 1) := P / Q;
-- medium: overflow check might fail

A (A'Last + 1) := P / Q;
-- medium: array index check might fail

A (I + J) := Integer'First / (-1);
-- medium: overflow check might fail

A (I + J) := 1 / (-1);
-- medium: range check might fail

A (I + J) := P / 0;
-- medium: divide by zero might fail
```

GNATprove then passes these verification conditions to an automatic prover, stated as conditions that must be true to avoid the error. If every such condition can be validated by a prover (meaning that it can be mathematically shown to always be true), we've been able to prove that no error can ever be raised at runtime when executing that program.

43.2 Modularity

To scale to large programs, GNATprove performs proofs on a per-subprogram basis by relying on preconditions and postconditions to properly summarize the input and output state of each subprogram. More precisely, when verifying the body of a subprogram, GNATprove assumes it knows nothing about the possible initial values of its parameters and of the global variables it accesses except what you state in the subprogram's precondition. If you don't specify a precondition, it can't make any assumptions.

For example, the following code shows that the body of `Increment` can be successfully verified: its precondition constrains the value of its parameter `X` to be less than `Integer'Last` so we know the overflow check is always false.

In the same way, when a subprogram is called, GNATprove assumes its **`out`** and **`in out`** parameters and the global variables it writes can be modified in any way compatible with their

postconditions. For example, since `Increment` has no postcondition, GNATprove doesn't know that the value of X after the call is always less than `Integer'Last`. Therefore, it can't prove that the addition following the call to `Increment` can't overflow.

Listing 3: show_modularity.adb

```
procedure Show_Modularity is

   procedure Increment (X : in out Integer) with
     Pre => X < Integer'Last is
   begin
      X := X + 1;
      --  info: overflow check proved
   end Increment;

   X : Integer;
begin
   X := Integer'Last - 2;
   Increment (X);
   --  After the call, GNATprove no longer knows the value of X

   X := X + 1;
   --  medium: overflow check might fail
end Show_Modularity;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Program_Integrity.Modularity_1
MD5: ca8ff8d29792fd5a06f7cb0158e13689
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
show_modularity.adb:6:14: info: overflow check proved
show_modularity.adb:10:04: info: initialization of "X" proved
show_modularity.adb:13:04: info: precondition proved
show_modularity.adb:16:11: medium: overflow check might fail, cannot prove upper␣
↪bound for X + 1 [reason for check: result of addition must fit in a 32-bits␣
↪machine integer] [possible fix: call at line 13 should mention X (for argument␣
↪X) in a postcondition]
gnatprove: unproved check messages considered as errors
```

43.2.1 Exceptions

There are two cases where GNATprove doesn't require modularity and hence doesn't make the above assumptions. First, local subprograms without contracts can be inlined if they're simple enough and are neither recursive nor have multiple return points. If we remove the contract from `Increment`, it fits the criteria for inlining.

Listing 4: show_modularity.adb

```
procedure Show_Modularity is

   procedure Increment (X : in out Integer) is
   begin
      X := X + 1;
      --  info: overflow check proved, in call inlined at...
   end Increment;

```

(continues on next page)

(continued from previous page)

```
   X : Integer;
begin
   X := Integer'Last - 2;
   Increment (X);
   X := X + 1;
   --  info: overflow check proved
end Show_Modularity;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Program_Integrity.Modularity_2
MD5: 448d576897c3e4606cd4b90621aad63a
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
show_modularity.adb:5:14: info: overflow check proved, in call inlined at show_
↪modularity.adb:12
show_modularity.adb:9:04: info: initialization of "X" proved
show_modularity.adb:13:11: info: overflow check proved
```

GNATprove now sees the call to `Increment` exactly as if the increment on X was done outside that call, so it can successfully verify that neither addition can overflow.

Note

For more details on contextual analysis of subprograms, see the SPARK User's Guide[379].

The other case involves functions. If we define a function as an expression function, with or without contracts, GNATprove uses the expression itself as the postcondition on the result of the function.

In our example, replacing `Increment` with an expression function allows GNATprove to successfully verify the overflow check in the addition.

Listing 5: show_modularity.adb

```
procedure Show_Modularity is

   function Increment (X : Integer) return Integer is
     (X + 1)
     --  info: overflow check proved
     with Pre => X < Integer'Last;

   X : Integer;
begin
   X := Integer'Last - 2;
   X := Increment (X);
   X := X + 1;
   --  info: overflow check proved
end Show_Modularity;
```

Code block metadata

[379] https://docs.adacore.com/live/wave/spark2014/html/spark2014_ug/en/source/how_to_write_subprogram_contracts.html#contextual-analysis-of-subprograms-without-contracts

```
Project: Courses.Intro_To_Spark.Proof_of_Program_Integrity.Modularity_3
MD5: b2b67845362929472e4e23867fcbd5e7
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
show_modularity.adb:3:13: info: implicit aspect Always_Terminates on "Increment"␣
 ↪has been proved, subprogram will terminate
show_modularity.adb:4:09: info: overflow check proved
show_modularity.adb:8:04: info: initialization of "X" proved
show_modularity.adb:11:09: info: precondition proved
show_modularity.adb:12:11: info: overflow check proved
```

Note

For more details on expression functions, see the SPARK User's Guide[380].

43.3 Contracts

Ada contracts are perfectly suited for formal verification, but are primarily designed to be checked at runtime. When you specify the `-gnata` switch, the compiler generates code that verifies the contracts at runtime. If an Ada contract isn't satisfied for a given subprogram call, the program raises the `Assert_Failure` exception. This switch is particularly useful during development and testing, but you may also retain run-time execution of assertions, and specifically preconditions, during the program's deployment to avoid an inconsistent state.

Consider the incorrect call to `Increment` below, which violates its precondition. One way to detect this error is by compiling the function with assertions enabled and testing it with inputs that trigger the violation. Another way, one that doesn't require guessing the needed inputs, is to run GNATprove.

Listing 6: show_precondition_violation.adb

```
1  procedure Show_Precondition_Violation is
2
3     procedure Increment (X : in out Integer) with
4       Pre => X < Integer'Last  is
5     begin
6        X := X + 1;
7     end Increment;
8
9     X : Integer;
10
11 begin
12    X := Integer'Last;
13    Increment (X);
14 end Show_Precondition_Violation;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Program_Integrity.Precondition_Violation
MD5: 60cb889128fc6bca10e21b1baf041258
```

[380] https://docs.adacore.com/live/wave/spark2014/html/spark2014_ug/en/source/specification_features.html#expression-functions

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
show_precondition_violation.adb:13:04: medium: precondition might fail
gnatprove: unproved check messages considered as errors
```

Runtime output

```
raised ADA.ASSERTIONS.ASSERTION_ERROR : failed precondition from show_precondition_
↪violation.adb:4
```

Similarly, consider the incorrect implementation of function `Absolute` below, which violates its postcondition. Likewise, one way to detect this error is by compiling the function with assertions enabled and testing with inputs that trigger the violation. Another way, one which again doesn't require finding the inputs needed to demonstrate the error, is to run GNATprove.

Listing 7: show_postcondition_violation.adb

```
1  procedure Show_Postcondition_Violation is
2
3     procedure Absolute (X : in out Integer) with
4       Post => X >= 0 is
5     begin
6        if X > 0 then
7           X := -X;
8        end if;
9     end Absolute;
10
11    X : Integer;
12
13 begin
14    X := 1;
15    Absolute (X);
16 end Show_Postcondition_Violation;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Program_Integrity.Postcondition_Violation
MD5: fb1340de7e082d801f177bd8a0cf90a6
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
show_postcondition_violation.adb:4:14: medium: postcondition might fail
gnatprove: unproved check messages considered as errors
```

Runtime output

```
raised ADA.ASSERTIONS.ASSERTION_ERROR : failed postcondition from show_
↪postcondition_violation.adb:4
```

The benefits of dynamically checking contracts extends beyond making testing easier. Early failure detection also allows an easier recovery and facilitates debugging, so you may want to enable these checks at runtime to terminate execution before some damaging or hard-to-debug action occurs.

GNATprove statically analyses preconditions and postconditions. It verifies preconditions every time a subprogram is called, which is the runtime semantics of contracts. Postconditions, on the other hand, are verified once as part of the verification of the subprogram's body. For example, GNATprove must wait until `Increment` is improperly called to detect the precondition violation, since a precondition is really a contract for the caller. On the other hand, it doesn't need `Absolute` to be called to detect that its postcondition doesn't hold for all its possible inputs.

Note

For more details on pre and postconditions, see the SPARK User's Guide[381].

43.3.1 Executable Semantics

Expressions in Ada contracts have the same semantics as Boolean expressions elsewhere, so runtime errors can occur during their computation. To simplify both debugging of assertions and combining testing and static verification, the same semantics are used by GNATprove.

While proving programs, GNATprove verifies that no error can ever be raised during the execution of the contracts. However, you may sometimes find those semantics too heavy, in particular with respect to overflow checks, because they can make it harder to specify an appropriate precondition. We see this in the function Add below.

Listing 8: show_executable_semantics.adb

```
procedure Show_Executable_Semantics
  with SPARK_Mode => On
is
   function Add (X, Y : Integer) return Integer is (X + Y)
     with Pre => X + Y in Integer;

   X : Integer;
begin
   X := Add (Integer'Last, 1);
end Show_Executable_Semantics;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Program_Integrity.Executable_Semantics
MD5: d85fa0507d7c35fb98ade7815020117e
```

Build output

```
show_executable_semantics.adb:5:24: warning: explicit membership test may be␣
 ↪optimized away [enabled by default]
show_executable_semantics.adb:5:24: warning: use 'Valid attribute instead [enabled␣
 ↪by default]
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
show_executable_semantics.adb:5:20: medium: overflow check might fail, cannot␣
 ↪prove lower bound for X + Y [reason for check: result of addition must fit in a␣
 ↪32-bits machine integer] [possible fix: use pragma Overflow_Mode or switch -
```

(continues on next page)

[381] https://docs.adacore.com/live/wave/spark2014/html/spark2014_ug/en/source/subprogram_contracts.html#preconditions

(continued from previous page)

```
 ↪gnato13 or unit SPARK.Big_Integers]
show_executable_semantics.adb:9:09: medium: precondition might fail, cannot prove␣
 ↪upper bound for Add (Integer'Last, 1)
gnatprove: unproved check messages considered as errors
```

Runtime output

```
raised CONSTRAINT_ERROR : show_executable_semantics.adb:5 overflow check failed
```

GNATprove issues a message on this code warning about a possible overflow when computing the sum of X and Y in the precondition. Indeed, since expressions in assertions have normal Ada semantics, this addition can overflow, as you can easily see by compiling and running the code that calls Add with arguments `Integer'Last` and 1.

On the other hand, you sometimes may prefer GNATprove to use the mathematical semantics of addition in contracts while the generated code still properly verifies that no error is ever raised at runtime in the body of the program. You can get this behavior by using the compiler switch `-gnato??` (for example `-gnato13`), which allows you to independently set the overflow mode in code (the first digit) and assertions (the second digit). For both, you can either reduce the number of overflow checks (the value 2), completely eliminate them (the value 3), or preserve the default Ada semantics (the value 1).

Note

For more details on overflow modes, see the SPARK User's Guide[382].

43.3.2 Additional Assertions and Contracts

As we've seen, a key feature of SPARK is that it allows us to state properties to check using assertions and contracts. SPARK supports preconditions and postconditions as well as assertions introduced by the `Assert` pragma.

The SPARK language also includes new contract types used to assist formal verification. The new pragma `Assume` is treated as an assertion during execution but introduces an assumption when proving programs. Its value is a Boolean expression which GNATprove assumes to be true without any attempt to verify that it's true. You'll find this feature useful, but you must use it with great care. Here's an example of using it.

Listing 9: incr.adb

```
1 procedure Incr (X : in out Integer) is
2 begin
3    pragma Assume (X < Integer'Last);
4    X := X + 1;
5 end Incr;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Program_Integrity.Pragma_Assume
MD5: bfbc4b8aca259d7516b6acaee571f8c2
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
```

(continues on next page)

[382] https://docs.adacore.com/live/wave/spark2014/html/spark2014_ug/en/source/overflow_modes.html

(continued from previous page)

```
Phase 3 of 3: flow analysis and proof ...
incr.adb:4:11: info: overflow check proved
```

Note

For more details on pragma Assume, see the SPARK User's Guide[383].

The Contract_Cases aspect is another construct introduced for GNATprove, but which also acts as an assertion during execution. It allows you to specify the behavior of a subprogram using a disjunction of cases. Each element of a Contract_Cases aspect is a *guard*, which is evaluated before the call and may only reference the subprogram's inputs, and a *consequence*. At each call of the subprogram, one and only one guard is permitted to evaluate to **True**. The consequence of that case is a contract that's required to be satisfied when the subprogram returns.

Listing 10: absolute.adb

```
1  procedure Absolute (X : in out Integer) with
2    Pre            =>  X > Integer'First,
3    Contract_Cases => (X <  0 => X = -X'Old,
4                       X >= 0 => X =  X'Old)
5  is
6  begin
7     if X < 0 then
8        X := -X;
9     end if;
10 end Absolute;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Program_Integrity.Absolute
MD5: 5ac868f35be18bb6fffe2444ecbea28d
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
absolute.adb:3:03: info: disjoint contract or exit cases proved
absolute.adb:3:03: info: complete contract cases proved
absolute.adb:3:22: info: contract case proved
absolute.adb:3:36: info: overflow check proved
absolute.adb:4:22: info: contract case proved
absolute.adb:8:12: info: overflow check proved
```

Similarly to how it analyzes a subprogram's precondition, GNATprove verifies the Contract_Cases only once. It verifies the validity of each consequence (given the truth of its guard) and the disjointness and completeness of the guard conditions (meaning that exactly one guard must be true for each possible set of input values).

Note

For more details on Contract_Cases, see the SPARK User's Guide[384].

[383] https://docs.adacore.com/live/wave/spark2014/html/spark2014_ug/en/source/assertion_pragmas.html#pragma-assume

[384] https://docs.adacore.com/live/wave/spark2014/html/spark2014_ug/en/source/subprogram_contracts.html#contract-cases

43.4 Debugging Failed Proof Attempts

GNATprove may report an error while verifying a program for any of the following reasons:

- there might be an error in the program; or
- the property may not be provable as written because more information is required; or
- the prover used by GNATprove may be unable to prove a perfectly valid property.

We spend the remainder of this section discussing the sometimes tricky task of debugging failed proof attempts.

43.4.1 Debugging Errors in Code or Specification

First, let's discuss the case where there's indeed an error in the program. There are two possibilities: the code may be incorrect or, equally likely, the specification may be incorrect. As an example, there's an error in our procedure `Incr_Until` below which makes its `Contract_Cases` unprovable.

Listing 11: show_failed_proof_attempt.ads

```
package Show_Failed_Proof_Attempt is

   Incremented : Boolean := False;

   procedure Incr_Until (X : in out Natural) with
     Contract_Cases =>
       (Incremented => X > X'Old,
        others      => X = X'Old);

end Show_Failed_Proof_Attempt;
```

Listing 12: show_failed_proof_attempt.adb

```
package body Show_Failed_Proof_Attempt is

   procedure Incr_Until (X : in out Natural) is
   begin
      if X < 1000 then
         X := X + 1;
         Incremented := True;
      else
         Incremented := False;
      end if;
   end Incr_Until;

end Show_Failed_Proof_Attempt;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Program_Integrity.Failed_Proof_Attempt_1
MD5: 814636ae9df6f4f66ad69f5099a5729b
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
show_failed_proof_attempt.ads:7:09: medium: contract case might fail
show_failed_proof_attempt.ads:8:09: medium: contract case might fail
gnatprove: unproved check messages considered as errors
```

Since this is an assertion that can be executed, it may help you find the problem if you run the program with assertions enabled on representative sets of inputs. This allows you to find bugs in both the code and its contracts. In this case, testing `Incr_Until` with an input greater than 1000 raises an exception at runtime.

Listing 13: show_failed_proof_attempt.ads

```
package Show_Failed_Proof_Attempt is

   Incremented : Boolean := False;

   procedure Incr_Until (X : in out Natural) with
     Contract_Cases =>
       (Incremented => X > X'Old,
        others      => X = X'Old);

end Show_Failed_Proof_Attempt;
```

Listing 14: show_failed_proof_attempt.adb

```
package body Show_Failed_Proof_Attempt is

   procedure Incr_Until (X : in out Natural) is
   begin
      if X < 1000 then
         X := X + 1;
         Incremented := True;
      else
         Incremented := False;
      end if;
   end Incr_Until;

end Show_Failed_Proof_Attempt;
```

Listing 15: main.adb

```
with Show_Failed_Proof_Attempt; use Show_Failed_Proof_Attempt;

procedure Main is
   Dummy : Integer;
begin
   Dummy := 0;
   Incr_Until (Dummy);

   Dummy := 1000;
   Incr_Until (Dummy);
end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Program_Integrity.Failed_Proof_Attempt_2
MD5: bd87cb0f64a6468eaab3cad1678271db
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
show_failed_proof_attempt.ads:7:09: medium: contract case might fail
show_failed_proof_attempt.ads:8:09: medium: contract case might fail
gnatprove: unproved check messages considered as errors
```

Runtime output

```
raised ADA.ASSERTIONS.ASSERTION_ERROR : failed contract case at show_failed_proof_
↪attempt.ads:8
```

The error message shows that the first contract case is failing, which means that `Incremented` is **`True`**. However, if we print the value of `Incremented` before returning, we see that it's **`False`**, as expected for the input we provided. The error here is that guards of contract cases are evaluated before the call, so our specification is wrong! To correct this, we should either write `X < 1000` as the guard of the first case or use a standard postcondition with an if-expression.

43.4.2 Debugging Cases where more Information is Required

Even if both the code and the assertions are correct, GNATprove may still report that it can't prove a verification condition for a property. This can happen for two reasons:

- The property may be unprovable because the code is missing some assertion. One category of these cases is due to the modularity of the analysis which, as we discussed above, means that GNATprove only knows about the properties of your subprograms that you have explicitly written.
- There may be some information missing in the logical model of the program used by GNATprove.

Let's look at the case where the code and the specification are correct but there's some information missing. As an example, GNATprove finds the postcondition of `Increase` to be unprovable.

Listing 16: show_failed_proof_attempt.ads

```
1  package Show_Failed_Proof_Attempt is
2
3     C : Natural := 100;
4
5     procedure Increase (X : in out Natural) with
6        Post => (if X'Old < C then X > X'Old else X = C);
7
8  end Show_Failed_Proof_Attempt;
```

Listing 17: show_failed_proof_attempt.adb

```
1  package body Show_Failed_Proof_Attempt is
2
3     procedure Increase (X : in out Natural) is
4     begin
5        if X < 90 then
6           X := X + 10;
7        elsif X >= C then
8           X := C;
9        else
10          X := X + 1;
11       end if;
12    end Increase;
13
14 end Show_Failed_Proof_Attempt;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Program_Integrity.Failed_Proof_Attempt_3
MD5: e01fc27a981bcb80757f30c94768237e
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
show_failed_proof_attempt.ads:6:49: medium: postcondition might fail, cannot prove␣
 ↪X = C
gnatprove: unproved check messages considered as errors
```

This postcondition is a conditional. It says that if the parameter (X) is less than a certain value (C), its value will be increased by the procedure while if it's greater, its value will be set to C (saturated). When C has the value 100, the code of `Increases` adds 10 to the value of X if it was initially less than 90, increments X by 1 if it was between 90 and 99, and sets X to 100 if it was greater or equal to 100. This behavior does satisfy the postcondition, so why is the postcondition not provable?

The values in the counterexample returned by GNATprove in its message gives us a clue: `C = 0 and X = 10 and X'Old = 0`. Indeed, if C is not equal to 100, our reasoning above is incorrect: the values of 0 for C and X on entry indeed result in X being 10 on exit, which violates the postcondition!

We probably didn't expect the value of C to change, or at least not to go below 90. But, in that case, we should have stated so by either declaring C to be constant or by adding a precondition to the `Increase` subprogram. If we do either of those, GNATprove is able to prove the postcondition.

43.4.3 Debugging Prover Limitations

Finally, there are cases where GNATprove provides a perfectly valid verification condition for a property, but it's nevertheless not proved by the automatic prover that runs in the later stages of the tool's execution. This is quite common. Indeed, GNATprove produces its verification conditions in first-order logic, which is not decidable, especially in combination with the rules of arithmetic. Sometimes, the automatic prover just needs more time. Other times, the prover will abandon the search almost immediately or loop forever without reaching a conclusive answer (either a proof or a counterexample).

For example, the postcondition of our GCD function below — which calculates the value of the GCD of two positive numbers using Euclide's algorithm — can't be verified with GNATprove's default settings.

Listing 18: show_failed_proof_attempt.ads

```
1  package Show_Failed_Proof_Attempt is
2
3     function GCD (A, B : Positive) return Positive with
4       Post =>
5         A mod GCD'Result = 0
6         and B mod GCD'Result = 0;
7
8  end Show_Failed_Proof_Attempt;
```

Listing 19: show_failed_proof_attempt.adb

```
1  package body Show_Failed_Proof_Attempt is
2
3     function GCD (A, B : Positive) return Positive is
4     begin
5        if A > B then
6           return GCD (A - B, B);
7        elsif B > A then
8           return GCD (A, B - A);
```

(continues on next page)

(continued from previous page)

```
      else
         return A;
      end if;
   end GCD;

end Show_Failed_Proof_Attempt;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Program_Integrity.Failed_Proof_Attempt_4
MD5: a6f1a39ceb0793df8a00691d59a5d9ce
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
show_failed_proof_attempt.adb:6:10: medium: implicit aspect Always_Terminates on
 ↪"GCD" could be incorrect, subprogram is recursive [possible fix: annotate "GCD"␣
 ↪with a Subprogram_Variant aspect]
show_failed_proof_attempt.adb:8:10: medium: implicit aspect Always_Terminates on
 ↪"GCD" could be incorrect, subprogram is recursive [possible fix: annotate "GCD"␣
 ↪with a Subprogram_Variant aspect]
show_failed_proof_attempt.ads:5:08: medium: postcondition might fail, cannot prove␣
 ↪A mod GCD'Result = 0
gnatprove: unproved check messages considered as errors
```

The first thing we try is increasing the amount of time the prover is allowed to spend on each verification condition using the `--timeout` option of GNATprove (e.g., by using the dialog box in GNAT Studio). In this example, increasing it to one minute, which is relatively high, doesn't help. We can also specify an alternative automatic prover — if we have one — using the option `--prover` of GNATprove (or the dialog box). For our postcondition, we tried Alt-Ergo, cvc5, and Z3 without any luck.

Listing 20: show_failed_proof_attempt.ads

```
package Show_Failed_Proof_Attempt is

   function GCD (A, B : Positive) return Positive with
     Post =>
       A mod GCD'Result = 0
       and B mod GCD'Result = 0;

end Show_Failed_Proof_Attempt;
```

Listing 21: show_failed_proof_attempt.adb

```
package body Show_Failed_Proof_Attempt is

   function GCD (A, B : Positive) return Positive
   is
      Result : Positive;
   begin
      if A > B then
         Result := GCD (A - B, B);
         pragma Assert ((A - B) mod Result = 0);
         --  info: assertion proved
         pragma Assert (B mod Result = 0);
         --  info: assertion proved
         pragma Assert (A mod Result = 0);
```

(continues on next page)

(continued from previous page)

```
14          --  medium: assertion might fail
15       elsif B > A then
16          Result := GCD (A, B - A);
17          pragma Assert ((B - A) mod Result = 0);
18          --  info: assertion proved
19       else
20          Result := A;
21       end if;
22       return Result;
23    end GCD;
24
25 end Show_Failed_Proof_Attempt;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Program_Integrity.Failed_Proof_Attempt_5
MD5: 954ecbf2177705770c3a44a477c1de17
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
show_failed_proof_attempt.adb:5:07: info: initialization of "Result" proved
show_failed_proof_attempt.adb:8:17: medium: implicit aspect Always_Terminates on
 ↪"GCD" could be incorrect, subprogram is recursive [possible fix: annotate "GCD"␣
 ↪with a Subprogram_Variant aspect]
show_failed_proof_attempt.adb:8:27: info: range check proved
show_failed_proof_attempt.adb:9:25: info: assertion proved
show_failed_proof_attempt.adb:9:33: info: division check proved
show_failed_proof_attempt.adb:11:25: info: assertion proved
show_failed_proof_attempt.adb:11:27: info: division check proved
show_failed_proof_attempt.adb:13:25: medium: assertion might fail [possible fix:␣
 ↪subprogram at show_failed_proof_attempt.ads:3 should mention A in a precondition]
show_failed_proof_attempt.adb:13:27: info: division check proved
show_failed_proof_attempt.adb:16:17: medium: implicit aspect Always_Terminates on
 ↪"GCD" could be incorrect, subprogram is recursive [possible fix: annotate "GCD"␣
 ↪with a Subprogram_Variant aspect]
show_failed_proof_attempt.adb:16:30: info: range check proved
show_failed_proof_attempt.adb:17:25: info: assertion proved
show_failed_proof_attempt.adb:17:33: info: division check proved
show_failed_proof_attempt.ads:5:08: medium: postcondition might fail, cannot prove␣
 ↪A mod GCD'Result = 0
show_failed_proof_attempt.ads:5:10: info: division check proved
show_failed_proof_attempt.ads:6:14: info: division check proved
gnatprove: unproved check messages considered as errors
```

To better understand the reason for the failure, we added intermediate assertions to simplify the proof and pin down the part that's causing the problem. Adding such assertions is often a good idea when trying to understand why a property is not proved. Here, provers can't verify that if both A - B and B can be divided by Result so can A. This may seem surprising, but non-linear arithmetic, involving, for example, multiplication, modulo, or exponentiation, is a difficult topic for provers and is not handled very well in practice by any of the general-purpose ones like Alt-Ergo, cvc5, or Z3.

Note

For more details on how to investigate unproved checks, see the SPARK User's Guide[385].

[385] https://docs.adacore.com/live/wave/spark2014/html/spark2014_ug/en/source/how_to_investigate_unproved_

43.5 Code Examples / Pitfalls

We end with some code examples and pitfalls.

43.5.1 Example #1

The package `Lists` defines a linked-list data structure. We call `Link(I,J)` to make a link from index `I` to index `J` and call `Goes_To(I,J)` to determine if we've created a link from index `I` to index `J`. The postcondition of `Link` uses `Goes_To` to state that there must be a link between its arguments once `Link` completes.

Listing 22: lists.ads

```
package Lists with SPARK_Mode is

   type Index is new Integer;

   function Goes_To (I, J : Index) return Boolean;

   procedure Link (I, J : Index) with Post => Goes_To (I, J);

private

   type Cell (Is_Set : Boolean := True) is record
      case Is_Set is
         when True =>
            Next : Index;
         when False =>
            null;
      end case;
   end record;

   type Cell_Array is array (Index) of Cell;

   Memory : Cell_Array;

end Lists;
```

Listing 23: lists.adb

```
package body Lists with SPARK_Mode is

   function Goes_To (I, J : Index) return Boolean is
   begin
      if Memory (I).Is_Set then
         return Memory (I).Next = J;
      end if;
      return False;
   end Goes_To;

   procedure Link (I, J : Index) is
   begin
      Memory (I) := (Is_Set => True, Next => J);
   end Link;

end Lists;
```

Code block metadata

checks.html

```
Project: Courses.Intro_To_Spark.Proof_of_Program_Integrity.Example_01
MD5: c2246948c584304d5694b49b4d1fd0fc
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
lists.ads:7:47: medium: postcondition might fail [possible fix: you should␣
 ↪consider adding a postcondition to function Goes_To or turning it into an␣
 ↪expression function]
gnatprove: unproved check messages considered as errors
```

This example is correct, but can't be verified by GNATprove. This is because Goes_To itself has no postcondition, so nothing is known about its result.

43.5.2 Example #2

We now redefine Goes_To as an expression function.

Listing 24: lists.ads

```
1  package Lists with SPARK_Mode is
2
3     type Index is new Integer;
4
5     function Goes_To (I, J : Index) return Boolean;
6
7     procedure Link (I, J : Index) with Post => Goes_To (I, J);
8
9  private
10
11    type Cell (Is_Set : Boolean := True) is record
12       case Is_Set is
13       when True =>
14          Next : Index;
15       when False =>
16          null;
17       end case;
18    end record;
19
20    type Cell_Array is array (Index) of Cell;
21
22    Memory : Cell_Array;
23
24    function Goes_To (I, J : Index) return Boolean is
25      (Memory (I).Is_Set and then Memory (I).Next = J);
26
27 end Lists;
```

Listing 25: lists.adb

```
1  package body Lists with SPARK_Mode is
2
3     procedure Link (I, J : Index) is
4     begin
5        Memory (I) := (Is_Set => True, Next => J);
6     end Link;
7
8  end Lists;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Program_Integrity.Example_02
MD5: c65953bbe8a5f9fb77a4d94e2dd875f9
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
lists.adb:5:18: info: discriminant check proved
lists.ads:5:13: info: implicit aspect Always_Terminates on "Goes_To" has been␣
 ↪proved, subprogram will terminate
lists.ads:7:47: info: postcondition proved
lists.ads:25:44: info: discriminant check proved
```

GNATprove can fully prove this version: Goes_To is an expression function, so its body is available for proof (specifically, for creating the postcondition needed for the proof).

43.5.3 Example #3

The package Stacks defines an abstract stack type with a Push procedure that adds an element at the top of the stack and a function Peek that returns the content of the element at the top of the stack (without removing it).

Listing 26: stacks.ads

```
1  package Stacks with SPARK_Mode is
2
3     type Stack is private;
4
5     function  Peek (S : Stack) return Natural;
6     procedure Push (S : in out Stack; E : Natural) with
7       Post => Peek (S) = E;
8
9  private
10
11    Max : constant := 10;
12
13    type Stack_Array is array (1 .. Max) of Natural;
14
15    type Stack is record
16       Top     : Positive;
17       Content : Stack_Array;
18    end record;
19
20    function Peek (S : Stack) return Natural is
21      (if S.Top in S.Content'Range then S.Content (S.Top) else 0);
22
23 end Stacks;
```

Listing 27: stacks.adb

```
1  package body Stacks with SPARK_Mode is
2
3     procedure Push (S : in out Stack; E : Natural) is
4     begin
5        if S.Top >= Max then
6           return;
7        end if;
8
```

(continues on next page)

(continued from previous page)

```
      S.Top := S.Top + 1;
      S.Content (S.Top) := E;
   end Push;

end Stacks;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Program_Integrity.Example_03
MD5: 917d624916c5ef14c4e454d6c56414fd
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
stacks.ads:7:14: medium: postcondition might fail
gnatprove: unproved check messages considered as errors
```

This example isn't correct. The postcondition of Push is only satisfied if the stack isn't full when we call Push.

43.5.4 Example #4

We now change the behavior of Push so it raises an exception when the stack is full instead of returning.

Listing 28: stacks.ads

```
package Stacks with SPARK_Mode is

   type Stack is private;

   Is_Full_E : exception;

   function  Peek (S : Stack) return Natural;
   procedure Push (S : in out Stack; E : Natural) with
     Post => Peek (S) = E;

private

   Max : constant := 10;

   type Stack_Array is array (1 .. Max) of Natural;

   type Stack is record
      Top     : Positive;
      Content : Stack_Array;
   end record;

   function Peek (S : Stack) return Natural is
     (if S.Top in S.Content'Range then S.Content (S.Top) else 0);

end Stacks;
```

Listing 29: stacks.adb

```
package body Stacks with SPARK_Mode is

   procedure Push (S : in out Stack; E : Natural) is
```

(continues on next page)

(continued from previous page)

```
   begin
      if S.Top >= Max then
         raise Is_Full_E;
      end if;

      S.Top := S.Top + 1;
      S.Content (S.Top) := E;
   end Push;

end Stacks;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Program_Integrity.Example_04
MD5: b573ebe93f85ea171166b6953cbb8956
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
stacks.adb:6:10: medium: unexpected exception might be raised
gnatprove: unproved check messages considered as errors
```

The postcondition of Push is now proved because GNATprove only considers execution paths leading to normal termination. But it issues a message warning that exception `Is_Full_E` may be raised at runtime.

43.5.5 Example #5

Let's add a precondition to Push stating that the stack shouldn't be full.

Listing 30: stacks.ads

```
package Stacks with SPARK_Mode is

   type Stack is private;

   Is_Full_E : exception;

   function  Peek (S : Stack) return Natural;
   function  Is_Full (S : Stack) return Boolean;
   procedure Push (S : in out Stack; E : Natural) with
     Pre  => not Is_Full (S),
     Post => Peek (S) = E;

private

   Max : constant := 10;

   type Stack_Array is array (1 .. Max) of Natural;

   type Stack is record
      Top     : Positive;
      Content : Stack_Array;
   end record;

   function Peek (S : Stack) return Natural is
     (if S.Top in S.Content'Range then S.Content (S.Top) else 0);
   function Is_Full (S : Stack) return Boolean is (S.Top >= Max);
```

(continues on next page)

(continued from previous page)

```
27
28 end Stacks;
```

Listing 31: stacks.adb

```
1  package body Stacks with SPARK_Mode is
2
3     procedure Push (S : in out Stack; E : Natural) is
4     begin
5        if S.Top >= Max then
6           raise Is_Full_E;
7        end if;
8        S.Top := S.Top + 1;
9        S.Content (S.Top) := E;
10    end Push;
11
12 end Stacks;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Program_Integrity.Example_05
MD5: 63c2dfd68dd5acd91d8d497206e7423e
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
stacks.adb:6:10: info: only expected exception raised
stacks.adb:8:22: info: overflow check proved
stacks.adb:9:19: info: index check proved
stacks.ads:7:14: info: implicit aspect Always_Terminates on "Peek" has been proved,
 ↪ subprogram will terminate
stacks.ads:8:14: info: implicit aspect Always_Terminates on "Is_Full" has been␣
 ↪proved, subprogram will terminate
stacks.ads:11:14: info: postcondition proved
stacks.ads:25:52: info: index check proved
```

This example is correct. With the addition of the precondition, GNATprove can now verify that `Is_Full_E` can never be raised at runtime.

43.5.6 Example #6

The package `Memories` defines a type `Chunk` that models chunks of memory. Each element of the array, represented by its index, corresponds to one data element. The procedure `Read_Record` reads two pieces of data starting at index `From` out of the chunk represented by the value of `Memory`.

Listing 32: memories.ads

```
1  package Memories is
2
3     type Chunk is array (Integer range <>) of Integer
4       with Predicate => Chunk'Length >= 10;
5
6     function Is_Too_Coarse (V : Integer) return Boolean;
7
8     procedure Treat_Value (V : out Integer);
9
10 end Memories;
```

Listing 33: read_record.adb

```
with Memories; use Memories;

procedure Read_Record (Memory : Chunk; From : Integer)
  with SPARK_Mode => On,
       Pre => From in Memory'First .. Memory'Last - 2
is
   function Read_One (First : Integer; Offset : Integer) return Integer
     with Pre => First + Offset in Memory'Range
   is
      Value : Integer := Memory (First + Offset);
   begin
      if Is_Too_Coarse (Value) then
         Treat_Value (Value);
      end if;
      return Value;
   end Read_One;

   Data1, Data2 : Integer;

begin
   Data1 := Read_One (From, 1);
   Data2 := Read_One (From, 2);
end Read_Record;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Program_Integrity.Example_06
MD5: aec8014dc291708999092fa123ee7416
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
generation of data representation information failed
continuing analysis with partial data representation
for details, see log file gnatprove/data_representation_generation.log
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
read_record.adb:8:24: medium: overflow check might fail, cannot prove lower bound␣
 ↪for First + Offset [reason for check: result of addition must fit in a 32-bits␣
 ↪machine integer] [possible fix: use pragma Overflow_Mode or switch -gnato13 or␣
 ↪unit SPARK.Big_Integers]
read_record.adb:13:10: warning: no Always_Terminates aspect available for "Treat_
 ↪Value" [assumed-always-terminates]
read_record.adb:13:10: warning: assuming "Treat_Value" always terminates
gnatprove: unproved check messages considered as errors
```

This example is correct, but it can't be verified by GNATprove, which analyses Read_One on its own and notices that an overflow may occur in its precondition in certain contexts.

43.5.7 Example #7

Let's rewrite the precondition of Read_One to avoid any possible overflow.

Listing 34: memories.ads

```
package Memories is

   type Chunk is array (Integer range <>) of Integer
     with Predicate => Chunk'Length >= 10;
```

(continues on next page)

(continued from previous page)

```
5
6     function Is_Too_Coarse (V : Integer) return Boolean;
7
8     procedure Treat_Value (V : out Integer);
9
10 end Memories;
```

Listing 35: read_record.adb

```
1  with Memories; use Memories;
2
3  procedure Read_Record (Memory : Chunk; From : Integer)
4    with SPARK_Mode => On,
5         Pre => From in Memory'First .. Memory'Last - 2
6  is
7     function Read_One (First : Integer; Offset : Integer) return Integer
8       with Pre => First >= Memory'First
9              and then Offset in 0 .. Memory'Last - First
10    is
11       Value : Integer := Memory (First + Offset);
12    begin
13       if Is_Too_Coarse (Value) then
14          Treat_Value (Value);
15       end if;
16       return Value;
17    end Read_One;
18
19    Data1, Data2 : Integer;
20
21 begin
22    Data1 := Read_One (From, 1);
23    Data2 := Read_One (From, 2);
24 end Read_Record;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Program_Integrity.Example_07
MD5: 6b4c6a41b652ad76bc7ef8934dcd9bfc
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
generation of data representation information failed
continuing analysis with partial data representation
for details, see log file gnatprove/data_representation_generation.log
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
read_record.adb:9:49: medium: overflow check might fail, cannot prove lower bound␣
 ↪for Memory'Last - First [reason for check: result of subtraction must fit in a␣
 ↪32-bits machine integer] [possible fix: use pragma Overflow_Mode or switch -
 ↪gnato13 or unit SPARK.Big_Integers]
read_record.adb:14:10: warning: no Always_Terminates aspect available for "Treat_
 ↪Value" [assumed-always-terminates]
read_record.adb:14:10: warning: assuming "Treat_Value" always terminates
gnatprove: unproved check messages considered as errors
```

This example is also not correct: unfortunately, our attempt to correct Read_One's precondition failed. For example, an overflow will occur at runtime if `First` is **`Integer`**`'Last` and Memory`'Last` is negative. This is possible here because type Chunk uses **`Integer`** as base index type instead of **`Natural`** or **`Positive`**.

43.5.8 Example #8

Let's completely remove the precondition of Read_One.

Listing 36: memories.ads

```
package Memories is

   type Chunk is array (Integer range <>) of Integer
     with Predicate => Chunk'Length >= 10;

   function Is_Too_Coarse (V : Integer) return Boolean;

   procedure Treat_Value (V : out Integer);

end Memories;
```

Listing 37: read_record.adb

```
with Memories; use Memories;

procedure Read_Record (Memory : Chunk; From : Integer)
  with SPARK_Mode => On,
       Pre => From in Memory'First .. Memory'Last - 2
is
   function Read_One (First : Integer; Offset : Integer) return Integer is
      Value : Integer := Memory (First + Offset);
   begin
      if Is_Too_Coarse (Value) then
         Treat_Value (Value);
      end if;
      return Value;
   end Read_One;

   Data1, Data2 : Integer;

begin
   Data1 := Read_One (From, 1);
   Data2 := Read_One (From, 2);
end Read_Record;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Program_Integrity.Example_08
MD5: 5a806fb84b50d2dc1f2af428b1bc8d0a
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
generation of data representation information failed
continuing analysis with partial data representation
for details, see log file gnatprove/data_representation_generation.log
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
read_record.adb:5:51: info: overflow check proved
read_record.adb:7:13: info: implicit aspect Always_Terminates on "Read_One" has␣
 ↪been proved, subprogram will terminate
read_record.adb:8:40: info: overflow check proved, in call inlined at read_record.
 ↪adb:19
read_record.adb:8:40: info: index check proved, in call inlined at read_record.
 ↪adb:19
read_record.adb:8:40: info: overflow check proved, in call inlined at read_record.
```

(continues on next page)

(continued from previous page)

```
 ↪adb:20
read_record.adb:8:40: info: index check proved, in call inlined at read_record.
 ↪adb:20
read_record.adb:11:10: warning: no Always_Terminates aspect available for "Treat_
 ↪Value" [assumed-always-terminates]
read_record.adb:11:10: warning: assuming "Treat_Value" always terminates
```

This example is correct and fully proved. We could have fixed the contract of Read_One to correctly handle both positive and negative values of `Memory'Last`, but we found it simpler to let the function be inlined for proof by removing its precondition.

43.5.9 Example #9

The procedure `Compute` performs various computations on its argument. The computation performed depends on its input range and is reflected in its contract, which we express using a `Contract_Cases` aspect.

Listing 38: compute.adb

```
procedure Compute (X : in out Integer) with
  Contract_Cases => ((X in -100 .. 100) => X = X'Old * 2,
                     (X in    0 .. 199) => X = X'Old + 1,
                     (X in -199 .. 0)   => X = X'Old - 1,
                      X >=  200          => X =  200,
                      others             => X = -200)
is
begin
   if X in -100 .. 100 then
      X := X * 2;
   elsif X in 0 .. 199 then
      X := X + 1;
   elsif X in -199 .. 0 then
      X := X - 1;
   elsif X >= 200 then
      X := 200;
   else
      X := -200;
   end if;
end Compute;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Program_Integrity.Example_09
MD5: 51962d1bb6dd1b081ed498dd11559685
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
compute.adb:2:03: medium: contract or exit cases might not be disjoint
compute.adb:3:22: medium: contract case might fail
compute.adb:4:22: medium: contract case might fail
gnatprove: unproved check messages considered as errors
```

This example isn't correct. We duplicated the content of `Compute`'s body in its contract. This is incorrect because the semantics of `Contract_Cases` require disjoint cases, just like a case statement. The counterexample returned by GNATprove shows that `X = 0` is covered by two different case-guards (the first and the second).

43.5.10 Example #10

Let's rewrite the contract of `Compute` to avoid overlapping cases.

Listing 39: compute.adb

```
procedure Compute (X : in out Integer) with
  Contract_Cases => ((X in    0 ..  199) => X >= X'Old,
                     (X in -199 ..   -1) => X <= X'Old,
                      X >=  200          => X =  200,
                      X <  -200          => X = -200)
is
begin
   if X in -100 .. 100 then
      X := X * 2;
   elsif X in 0 .. 199 then
      X := X + 1;
   elsif X in -199 .. 0 then
      X := X - 1;
   elsif X >= 200 then
      X := 200;
   else
      X := -200;
   end if;
end Compute;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Program_Integrity.Example_10
MD5: 01d33b10fd60f384ffa4ae8fea1e7d87
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
compute.adb:2:03: medium: contract cases might not be complete
gnatprove: unproved check messages considered as errors
```

This example is still not correct. GNATprove can successfully prove the different cases are disjoint and also successfully verify each case individually. This isn't enough, though: a `Contract_Cases` must cover all cases. Here, we forgot the value -200, which is what GNATprove reports in its counterexample.

CHAPTER

FORTYFOUR

STATE ABSTRACTION

Abstraction is a key concept in programming that can drastically simplify both the implementation and maintenance of code. It's particularly well suited to SPARK and its modular analysis. This section explains what state abstraction is and how you use it in SPARK. We explain how it impacts GNATprove's analysis both in terms of information flow and proof of program properties.

State abstraction allows us to:

- express dependencies that wouldn't otherwise be expressible because some data that's read or written isn't visible at the point where a subprogram is declared — examples are dependencies on data, for which we use the `Global` contract, and on flow, for which we use the `Depends` contract.
- reduce the number of variables that need to be considered in flow analysis and proof, a reduction which may be critical in order to scale the analysis to programs with thousands of global variables.

44.1 What's an Abstraction?

Abstraction is an important part of programming language design. It provides two views of the same object: an abstract one and a refined one. The abstract one — usually called *specification* — describes what the object does in a coarse way. A subprogram's specification usually describes how it should be called (e.g., parameter information such as how many and of what types) as well as what it does (e.g., returns a result or modifies one or more of its parameters).

Contract-based programming, as supported in Ada, allows contracts to be added to a subprogram's specification. You use contracts to describe the subprogram's behavior in a more fine-grained manner, but all the details of how the subprogram actually works are left to its refined view, its implementation.

Take a look at the example code shown below.

Listing 1: increase.ads

```
procedure Increase (X : in out Integer) with
  Global => null,
  Pre    => X <= 100,
  Post   => X'Old < X;
```

Listing 2: increase.adb

```
procedure Increase (X : in out Integer) is
begin
   X := X + 1;
end Increase;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.State_Abstraction.No_Abstraction
MD5: c4c8f229aeb1b5c12744d26369a8603f
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
increase.adb:3:11: info: overflow check proved
increase.ads:2:03: info: data dependencies proved
increase.ads:4:13: info: postcondition proved
```

We've written a specification of the subprogram `Increase` to say that it's called with a single argument, a variable of type **`Integer`** whose initial value is less than 100. Our contract says that the only effect of the subprogram is to increase the value of its argument.

44.2 Why is Abstraction Useful?

A good abstraction of a subprogram's implementation is one whose specification precisely and completely summarizes what its callers can rely on. In other words, a caller of that subprogram shouldn't rely on any behavior of its implementation if that behavior isn't documented in its specification.

For example, callers of the subprogram `Increase` can assume that it always strictly increases the value of its argument. In the code snippet shown below, this means the loop must terminate.

Listing 3: increase.ads

```
1 procedure Increase (X : in out Integer) with
2   Global => null,
3   Pre    => X <= 100,
4   Post   => X'Old < X;
```

Listing 4: client.adb

```
1 with Increase;
2 procedure Client is
3    X : Integer := 0;
4 begin
5    while X <= 100 loop      --  The loop will terminate
6       Increase (X);         --  Increase can be called safely
7    end loop;
8    pragma Assert (X = 101); --  Will this hold?
9 end Client;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.State_Abstraction.Using_Abstraction
MD5: 9cd07cb04ae2194343931f0561693be4
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
generation of data representation information failed
continuing analysis with partial data representation
for details, see log file gnatprove/data_representation_generation.log
Phase 2 of 3: generation of Global contracts ...
```

(continues on next page)

(continued from previous page)

```
Phase 3 of 3: flow analysis and proof ...
client.adb:6:07: warning: no Always_Terminates aspect available for "Increase"␣
 ↪[assumed-always-terminates]
client.adb:6:07: warning: assuming "Increase" always terminates
client.adb:8:19: medium: assertion might fail
gnatprove: unproved check messages considered as errors
```

Callers can also assume that the implementation of `Increase` won't cause any runtime errors when called in the loop. On the other hand, nothing in the specification guarantees that the assertion show above is correct: it may fail if `Increase`'s implementation is changed.

If you follow this basic principle, abstraction can bring you significant benefits. It simplifies both your program's implementation and verification. It also makes maintenance and code reuse much easier since changes to the implementation of an object shouldn't affect the code using this object. Your goal in using it is that it should be enough to understand the specification of an object in order to use that object, since understanding the specification is usually much simpler than understanding the implementation.

GNATprove relies on the abstraction defined by subprogram contracts and therefore doesn't prove the assertion after the loop in `Client` above.

44.3 Abstraction of a Package's State

Subprograms aren't the only objects that benefit from abstraction. The state of a package — the set of persistent variables defined in it — can also be hidden from external users. You achieve this form of abstraction — called *state abstraction* — by defining variables in the body or private part of a package so they can only be accessed through subprogram calls. For example, our `Stack` package shown below provides an abstraction for a `Stack` object which can only be modified using the `Pop` and `Push` procedures.

```
package Stack is
   procedure Pop  (E : out Element);
   procedure Push (E : in  Element);
end Stack;

package body Stack is
   Content : Element_Array (1 .. Max);
   Top     : Natural;
   ...
end Stack;
```

The fact that we implemented it using an array is irrelevant to the caller. We could change that without impacting our callers' code.

44.4 Declaring a State Abstraction

Hidden state influences a program's behavior, so SPARK allows that state to be declared. You can use the `Abstract_State` aspect, an abstraction that names a state, to do this, but you aren't required to use it even for a package with hidden state. You can use several state abstractions to declare the hidden state of a single package or you can use it for a package with no hidden state at all. However, since SPARK doesn't allow aliasing, different state abstractions must always refer to disjoint sets of variables. A state abstraction isn't a variable: it doesn't have a type and can't be used inside expressions, either those in bodies or contracts.

As an example of the use of this aspect, we can optionally define a state abstraction for the entire hidden state of the `Stack` package like this:

```
package Stack with
  Abstract_State => The_Stack
is
  ...
```

Alternatively, we can define a state abstraction for each hidden variable:

```
package Stack with
  Abstract_State => (Top_State, Content_State)
is
  ...
```

Remember: a state abstraction isn't a variable (it has no type) and can't be used inside expressions. For example:

```
pragma Assert (Stack.Top_State = ...);
-- compilation error: Top_State is not a variable
```

44.5 Refining an Abstract State

Once you've declared an abstract state in a package, you must refine it into its constituents using a `Refined_State` aspect. You must place the `Refined_State` aspect on the package body even if the package wouldn't otherwise have required a body. For each state abstraction you've declared for the package, you list the set of variables represented by that state abstraction in its refined state.

If you specify an abstract state for a package, it must be complete, meaning you must have listed every hidden variable as part of some state abstraction. For example, we must add a `Refined_State` aspect on our `Stack` package's body linking the state abstraction (`The_Stack`) to the entire hidden state of the package, which consists of both `Content` and `Top`.

Listing 5: stack.ads

```
1  package Stack with
2    Abstract_State => The_Stack
3  is
4     type Element is new Integer;
5
6     procedure Pop  (E : out Element);
7     procedure Push (E : Element);
8
9  end Stack;
```

Listing 6: stack.adb

```
1  package body Stack with
2    Refined_State => (The_Stack => (Content, Top))
3  is
4     Max : constant := 100;
5
6     type Element_Array is array (1 .. Max) of Element;
7
8     Content : Element_Array := (others => 0);
9     Top     : Natural range 0 .. Max := 0;
10    --  Both Content and Top must be listed in the list of
11    --  constituents of The_Stack
12
13    procedure Pop (E : out Element) is
```

(continues on next page)

(continued from previous page)

```
   begin
      E   := Content (Top);
      Top := Top - 1;
   end Pop;

   procedure Push (E : Element) is
   begin
      Top           := Top + 1;
      Content (Top) := E;
   end Push;

end Stack;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.State_Abstraction.Refined_State
MD5: 3a794c7a4e4920dab7d01248e50901ab
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
stack.ads:6:20: info: initialization of "E" proved
```

44.6 Representing Private Variables

You can refine state abstractions in the package body, where all the variables are visible. When only the package's specification is available, you need a way to specify which state abstraction each private variable belongs to. You do this by adding the `Part_Of` aspect to the variable's declaration.

`Part_Of` annotations are mandatory: if you gave a package an abstract state annotation, you must link all the hidden variables defined in its private part to a state abstraction. For example:

Listing 7: stack.ads

```
package Stack with
  Abstract_State => The_Stack
is
   type Element is new Integer;

   procedure Pop  (E : out Element);
   procedure Push (E : Element);

private

   Max : constant := 100;

   type Element_Array is array (1 .. Max) of Element;

   Content : Element_Array          with Part_Of => The_Stack;
   Top     : Natural range 0 .. Max with Part_Of => The_Stack;

end Stack;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.State_Abstraction.Private_Variables
MD5: 3b5f7edca8a4511071d2397197b01fda
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
```

Since we chose to define `Content` and `Top` in `Stack`'s private part instead of its body, we had to add a `Part_Of` aspect to both of their declarations, associating them with the state abstraction `The_Stack`, even though it's the only state abstraction. However, we still need to list them in the `Refined_State` aspect in `Stack`'s body.

```
package body Stack with
  Refined_State => (The_Stack => (Content, Top))
```

44.7 Additional State

44.7.1 Nested Packages

So far, we've only discussed hidden variables. But variables aren't the only component of a package's state. If a package P contains a nested package, the nested package's state is also part of P's state. If the nested package is hidden, its state is part of P's hidden state and must be listed in P's state refinement.

We see this in the example below, where the package `Hidden_Nested`'s hidden state is part of P's hidden state.

Listing 8: p.ads

```
1  package P with
2     Abstract_State => State
3  is
4     package Visible_Nested with
5        Abstract_State => Visible_State
6     is
7        procedure Get (E : out Integer);
8     end Visible_Nested;
9  end P;
```

Listing 9: p.adb

```
1  package body P with
2     Refined_State => (State => Hidden_Nested.Hidden_State)
3  is
4     package Hidden_Nested with
5        Abstract_State => Hidden_State,
6        Initializes    => Hidden_State
7     is
8        function Get return Integer;
9     end Hidden_Nested;
10
11    package body Hidden_Nested with
12       Refined_State => (Hidden_State => Cnt)
13    is
14       Cnt : Integer := 0;
15
16       function Get return Integer is (Cnt);
```

(continues on next page)

(continued from previous page)

```
   end Hidden_Nested;

   package body Visible_Nested with
      Refined_State => (Visible_State => Checked)
   is
      Checked : Boolean := False;

      procedure Get (E : out Integer) is
      begin
         Checked := True;
         E := Hidden_Nested.Get;
      end Get;
   end Visible_Nested;
end P;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.State_Abstraction.Nested_Packages
MD5: 8260089cbd651de296dd790506c76fd8
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
p.adb:6:07: info: flow dependencies proved
p.adb:8:16: info: implicit aspect Always_Terminates on "Get" has been proved,␣
 ↪subprogram will terminate
p.ads:7:22: info: initialization of "E" proved
```

Any visible state of `Hidden_Nested` would also have been part of P's hidden state. However, if P contains a visible nested package, that nested package's state isn't part of P's hidden state. Instead, you should declare that package's hidden state in a separate state abstraction on its own declaration, like we did above for `Visible_Nested`.

44.7.2 Constants that Depend on Variables

Some constants are also possible components of a state abstraction. These are constants whose value depends either on a variable or a subprogram parameter. They're handled as variables during flow analysis because they participate in the flow of information between variables throughout the program. Therefore, GNATprove considers these constants to be part of a package's state just like it does for variables.

If you've specified a state abstraction for a package, you must list such hidden constants declared in that package in the state abstraction refinement. However, constants that don't depend on variables don't participate in the flow of information and must not appear in a state refinement.

Let's look at this example.

Listing 10: stack.ads

```
package Stack with
  Abstract_State => The_Stack
is
   type Element is new Integer;

   procedure Pop  (E : out Element);
   procedure Push (E : Element);
end Stack;
```

Listing 11: configuration.ads

```
package Configuration with
  Initializes => External_Variable
is
   External_Variable : Positive with Volatile;
end Configuration;
```

Listing 12: stack.adb

```
with Configuration;
pragma Elaborate (Configuration);

package body Stack with
  Refined_State => (The_Stack => (Content, Top, Max))
  --  Max has variable inputs. It must appear as a
  --  constituent of The_Stack
is
   Max : constant Positive := Configuration.External_Variable;

   type Element_Array is array (1 .. Max) of Element;

   Content : Element_Array := (others => 0);
   Top     : Natural range 0 .. Max := 0;

   procedure Pop (E : out Element) is
   begin
      E   := Content (Top);
      Top := Top - 1;
   end Pop;

   procedure Push (E : Element) is
   begin
      Top           := Top + 1;
      Content (Top) := E;
   end Push;

end Stack;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.State_Abstraction.Constants_And_Variables
MD5: 109a6340ef0f3b0dc88e0fe5888b9a53
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
configuration.ads:2:03: info: flow dependencies proved
stack.ads:6:20: info: initialization of "E" proved
```

Here, Max — the maximum number of elements that can be stored in the stack — is initialized from a variable in an external package. Because of this, we must include Max as part of the state abstraction The_Stack.

Note

For more details on state abstractions, see the SPARK User's Guide[386].

[386] https://docs.adacore.com/live/wave/spark2014/html/spark2014_ug/en/source/package_contracts.html#

44.8 Subprogram Contracts

44.8.1 Global and Depends

Hidden variables can only be accessed through subprogram calls, so you document how state abstractions are modified during the program's execution via the contracts of those subprograms. You use `Global` and `Depends` contracts to specify which of the state abstractions are used by a subprogram and how values flow through the different variables. The `Global` and `Depends` contracts that you write when referring to state abstractions are often less precise than contracts referring to visible variables since the possibly different dependencies of the hidden variables contained within a state abstraction are collapsed into a single dependency.

Let's add `Global` and `Depends` contracts to the `Pop` procedure in our stack.

Listing 13: stack.ads

```
package Stack with
   Abstract_State => (Top_State, Content_State)
is
   type Element is new Integer;

   procedure Pop (E : out Element) with
     Global  => (Input  => Content_State,
                 In_Out => Top_State),
     Depends => (Top_State => Top_State,
                 E         => (Content_State, Top_State));

end Stack;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.State_Abstraction.Global_Depends
MD5: a7b383c35508d6a8294bf7cf0fe332ac
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
```

In this example, the `Pop` procedure only modifies the value of the hidden variable `Top`, while `Content` is unchanged. By using distinct state abstractions for the two variables, we're able to preserve this semantic in the contract.

Let's contrast this example with a different representation of `Global` and `Depends` contracts, this time using a single abstract state.

Listing 14: stack.ads

```
package Stack with
  Abstract_State => The_Stack
is
   type Element is new Integer;

   procedure Pop  (E : out Element) with
     Global  => (In_Out => The_Stack),
     Depends => ((The_Stack, E) => The_Stack);

end Stack;
```

state-abstraction

Code block metadata

```
Project: Courses.Intro_To_Spark.State_Abstraction.Global_Single_Abstract_State
MD5: f89f6026fa5ee3c18baf0af9d7c3dbca
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
```

Here, Top_State and Content_State are merged into a single state abstraction, The_Stack. By doing so, we've hidden the fact that Content isn't modified (though we're still showing that Top may be modified). This loss in precision is reasonable here, since it's the whole point of the abstraction. However, you must be careful not to aggregate unrelated hidden state because this risks their annotations becoming meaningless.

Even though imprecise contracts that consider state abstractions as a whole are perfectly reasonable for users of a package, you should write Global and Depends contracts that are as precise as possible within the package body. To allow this, SPARK introduces the notion of *refined contracts*, which are precise contracts specified on the bodies of subprograms where state refinements are visible. These contracts are the same as normal Global and Depends contracts except they refer directly to the hidden state of the package.

When a subprogram is called inside the package body, you should write refined contracts instead of the general ones so that the verification can be as precise as possible. However, refined Global and Depends are optional: if you don't specify them, GNATprove will compute them to check the package's implementation.

For our Stack example, we could add refined contracts as shown below.

Listing 15: stack.ads

```
1  package Stack with
2    Abstract_State => The_Stack
3  is
4     type Element is new Integer;
5
6     procedure Pop  (E : out Element) with
7       Global  => (In_Out => The_Stack),
8       Depends => ((The_Stack, E) => The_Stack);
9
10    procedure Push (E : Element) with
11      Global  => (In_Out    => The_Stack),
12      Depends => (The_Stack => (The_Stack, E));
13
14 end Stack;
```

Listing 16: stack.adb

```
1  package body Stack with
2    Refined_State => (The_Stack => (Content, Top))
3  is
4     Max : constant := 100;
5
6     type Element_Array is array (1 .. Max) of Element;
7
8     Content : Element_Array := (others => 0);
9     Top     : Natural range 0 .. Max := 0;
10
11    procedure Pop (E : out Element) with
12      Refined_Global  => (Input  => Content,
```

(continues on next page)

(continued from previous page)

```
                          In_Out => Top),
      Refined_Depends => (Top => Top,
                          E   => (Content, Top))
   is
   begin
      E   := Content (Top);
      Top := Top - 1;
   end Pop;

   procedure Push (E : Element) with
     Refined_Global  => (In_Out => (Content, Top)),
     Refined_Depends => (Content =>+ (Content, Top, E),
                         Top     => Top) is
   begin
     Top := Top + 1;
     Content (Top) := E;
   end Push;

end Stack;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.State_Abstraction.Global_Refined
MD5: b7e700645885155ea7faf2f4170f0462
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
```

44.8.2 Preconditions and Postconditions

We mostly express functional properties of subprograms using preconditions and postconditions. These are standard Boolean expressions, so they can't directly refer to state abstractions. To work around this restriction, we can define functions to query the value of hidden variables. We then use these functions in place of the state abstraction in the contract of other subprograms.

For example, we can query the state of the stack with functions `Is_Empty` and `Is_Full` and call these in the contracts of procedures Pop and Push:

Listing 17: stack.ads

```
package Stack is
   type Element is new Integer;

   function Is_Empty return Boolean;
   function Is_Full  return Boolean;

   procedure Pop (E : out Element) with
     Pre  => not Is_Empty,
     Post => not Is_Full;

   procedure Push (E : Element) with
     Pre  => not Is_Full,
     Post => not Is_Empty;

end Stack;
```

Listing 18: stack.adb

```
package body Stack is

   Max : constant := 100;

   type Element_Array is array (1 .. Max) of Element;

   Content : Element_Array := (others => 0);
   Top     : Natural range 0 .. Max := 0;

   function Is_Empty return Boolean is (Top = 0);
   function Is_Full  return Boolean is (Top = Max);

   procedure Pop (E : out Element) is
   begin
      E   := Content (Top);
      Top := Top - 1;
   end Pop;

   procedure Push (E : Element) is
   begin
      Top           := Top + 1;
      Content (Top) := E;
   end Push;

end Stack;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.State_Abstraction.Pre_Postconditions_1
MD5: fe9d4b65ba1beeabc7cf0feda29b8b3c
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
stack.adb:15:23: info: index check proved
stack.adb:16:18: info: range check proved
stack.adb:21:28: info: range check proved
stack.adb:22:16: info: index check proved
stack.ads:4:13: info: implicit aspect Always_Terminates on "Is_Empty" has been␣
 ↪proved, subprogram will terminate
stack.ads:5:13: info: implicit aspect Always_Terminates on "Is_Full" has been␣
 ↪proved, subprogram will terminate
stack.ads:7:19: info: initialization of "E" proved
stack.ads:9:14: info: postcondition proved
stack.ads:13:14: info: postcondition proved
```

Just like we saw for `Global` and `Depends` contracts, you may often find it useful to have a more precise view of functional contracts in the context where the hidden variables are visible. You do this using expression functions in the same way we did for the functions `Is_Empty` and `Is_Full` above. As expression function, bodies act as contracts for GNATprove, so they automatically give a more precise version of the contracts when their implementation is visible.

You may often need a more constraining contract to verify the package's implementation but want to be less strict outside the abstraction. You do this using the `Refined_Post` aspect. This aspect, when placed on a subprogram's body, provides stronger guarantees to internal callers of a subprogram. If you provide one, the refined postcondition must imply the subprogram's postcondition. This is checked by GNATprove, which reports a failing

postcondition if the refined postcondition is too weak, even if it's actually implied by the subprogram's body. SPARK doesn't peform a similar verification for normal preconditions.

For example, we can refine the postconditions in the bodies of Pop and Push to be more detailed than what we wrote for them in their specification.

Listing 19: stack.ads

```
package Stack is
   type Element is new Integer;

   function Is_Empty return Boolean;
   function Is_Full  return Boolean;

   procedure Pop (E : out Element) with
     Pre  => not Is_Empty,
     Post => not Is_Full;

   procedure Push (E : Element) with
     Pre  => not Is_Full,
     Post => not Is_Empty;

end Stack;
```

Listing 20: stack.adb

```
package body Stack is

   Max : constant := 100;

   type Element_Array is array (1 .. Max) of Element;

   Content : Element_Array := (others => 0);
   Top     : Natural range 0 .. Max := 0;

   function Is_Empty return Boolean is (Top = 0);
   function Is_Full  return Boolean is (Top = Max);

   procedure Pop (E : out Element) with
     Refined_Post => not Is_Full and E = Content (Top)'Old
   is
   begin
      E   := Content (Top);
      Top := Top - 1;
   end Pop;

   procedure Push (E : Element) with
     Refined_Post => not Is_Empty and E = Content (Top)
   is
   begin
      Top           := Top + 1;
      Content (Top) := E;
   end Push;

end Stack;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.State_Abstraction.Pre_Postconditions_2
MD5: 4691565d58ba039b3cbd06e65cecfa88
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
stack.adb:14:22: info: refined post proved
stack.adb:14:51: info: index check proved
stack.adb:17:23: info: index check proved
stack.adb:18:18: info: range check proved
stack.adb:22:22: info: refined post proved
stack.adb:22:52: info: index check proved
stack.adb:25:28: info: range check proved
stack.adb:26:16: info: index check proved
stack.ads:4:13: info: implicit aspect Always_Terminates on "Is_Empty" has been␣
 ↪proved, subprogram will terminate
stack.ads:5:13: info: implicit aspect Always_Terminates on "Is_Full" has been␣
 ↪proved, subprogram will terminate
stack.ads:7:19: info: initialization of "E" proved
stack.ads:9:14: info: postcondition proved
stack.ads:13:14: info: postcondition proved
```

Note

For more details on refinement in contracts, see the SPARK User's Guide[387].

44.9 Initialization of Local Variables

As part of flow analysis, GNATprove checks for the proper initialization of variables. Therefore, flow analysis needs to know which variables are initialized during the package's elaboration.

You can use the `Initializes` aspect to specify the set of visible variables and state abstractions that are initialized during the elaboration of a package. An `Initializes` aspect can't refer to a variable that isn't defined in the unit since, in SPARK, a package can only initialize variables declared immediately within the package.

`Initializes` aspects are optional. If you don't supply any, they'll be derived by GNATprove.

For our `Stack` example, we could add an `Initializes` aspect.

Listing 21: stack.ads

```
1  package Stack with
2    Abstract_State => The_Stack,
3    Initializes    => The_Stack
4  is
5     type Element is new Integer;
6
7     procedure Pop  (E : out Element);
8
9  end Stack;
```

Listing 22: stack.adb

```
1  package body Stack with
2    Refined_State => (The_Stack => (Content, Top))
3  is
4     Max : constant := 100;
```

(continues on next page)

[387] https://docs.adacore.com/live/wave/spark2014/html/spark2014_ug/en/source/subprogram_contracts.html#state-abstraction-and-contracts

(continued from previous page)

```
5
6     type Element_Array is array (1 .. Max) of Element;
7
8     Content : Element_Array := (others => 0);
9     Top     : Natural range 0 .. Max := 0;
10
11    procedure Pop (E : out Element) is
12    begin
13       E   := Content (Top);
14       Top := Top - 1;
15    end Pop;
16
17 end Stack;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.State_Abstraction.Local_Init
MD5: 710e74959fd2ef8f5089c4636d7ec13b
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
stack.ads:3:03: info: flow dependencies proved
stack.ads:7:20: info: initialization of "E" proved
```

Flow analysis also checks for dependencies between variables, so it must be aware of how information flows through the code that performs the initialization of states. We discussed one use of the `Initializes` aspect above. But you also can use it to provide flow information. If the initial value of a variable or state abstraction is dependent on the value of another visible variable or state abstraction from another package, you must list this dependency in the `Initializes` contract. You specify the list of entities on which a variable's initial value depends using an arrow following that variable's name.

Let's look at this example:

Listing 23: q.ads

```
1 package Q is
2    External_Variable : Integer := 2;
3 end Q;
```

Listing 24: p.ads

```
1 with Q;
2 package P with
3   Initializes => (V1, V2 => Q.External_Variable)
4 is
5    V1 : Integer := 0;
6    V2 : Integer := Q.External_Variable;
7 end P;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.State_Abstraction.Initializes
MD5: c8aa7f21729f3b926bf3d25a826cccb2
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
p.ads:3:03: info: flow dependencies proved
```

Here we indicated that V2's initial value depends on the value of `Q.External_Variable` by including that dependency in the `Initializes` aspect of P. We didn't list any dependency for V1 because its initial value doesn't depend on any external variable. We could also have stated that lack of dependency explicitly by writing `V1 => null`.

GNATprove computes dependencies of initial values if you don't supply an `Initializes` aspect. However, if you do provide an `Initializes` aspect for a package, it must be complete: you must list every initialized state of the package, along with all its external dependencies.

Note

For more details on `Initializes`, see the SPARK User's Guide[388].

44.10 Code Examples / Pitfalls

This section contains some code examples to illustrate potential pitfalls.

44.10.1 Example #1

Package `Communication` defines a hidden local package, `Ring_Buffer`, whose capacity is initialized from an external configuration during elaboration.

Listing 25: configuration.ads

```
1  package Configuration is
2
3     External_Variable : Natural := 1;
4
5  end Configuration;
```

Listing 26: communication.ads

```
1  with Configuration;
2
3  package Communication with
4    Abstract_State => State,
5    Initializes    => (State => Configuration.External_Variable)
6  is
7     function Get_Capacity return Natural;
8
9  private
10
11    package Ring_Buffer with
12      Initializes => (Capacity => Configuration.External_Variable)
13    is
14       Capacity : constant Natural := Configuration.External_Variable;
15    end Ring_Buffer;
16
17 end Communication;
```

[388] https://docs.adacore.com/live/wave/spark2014/html/spark2014_ug/en/source/package_contracts.html#package-initialization

Listing 27: communication.adb

```
package body Communication with
  Refined_State => (State => Ring_Buffer.Capacity)
is

   function Get_Capacity return Natural is
   begin
      return Ring_Buffer.Capacity;
   end Get_Capacity;

end Communication;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.State_Abstraction.Example_01
MD5: 207e999f85a5b39fa2b9aebbc836b479
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
communication.adb:2:41: error: "Capacity" cannot act as constituent of state "State
 ↪"
communication.adb:2:41: error: missing Part_Of indicator at communication.ads:14␣
 ↪should specify encapsulator "State"
gnatprove: error during generation of Global contracts
```

This example isn't correct. `Capacity` is declared in the private part of `Communication`. Therefore, we should have linked it to `State` by using the `Part_Of` aspect in its declaration.

44.10.2 Example #2

Let's add `Part_Of` to the state of hidden local package `Ring_Buffer`, but this time we hide variable `Capacity` inside the private part of `Ring_Buffer`.

Listing 28: configuration.ads

```
package Configuration is

   External_Variable : Natural := 1;

end Configuration;
```

Listing 29: communication.ads

```
with Configuration;

package Communication with
  Abstract_State => State
is
private

   package Ring_Buffer with
     Abstract_State => (B_State with Part_Of => State),
     Initializes    => (B_State => Configuration.External_Variable)
   is
      function Get_Capacity return Natural;
   private
      Capacity : constant Natural := Configuration.External_Variable
```

(continues on next page)

(continued from previous page)

```
15          with Part_Of => B_State;
16    end Ring_Buffer;
17
18 end Communication;
```

Listing 30: communication.adb

```
1  package body Communication with
2    Refined_State => (State => Ring_Buffer.B_State)
3  is
4
5     package body Ring_Buffer with
6        Refined_State => (B_State => Capacity)
7     is
8        function Get_Capacity return Natural is (Capacity);
9     end Ring_Buffer;
10
11 end Communication;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.State_Abstraction.Example_02
MD5: b8d31fcfbd11bf305646efe07baeb91b
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
communication.ads:10:06: info: flow dependencies proved
communication.ads:12:16: info: implicit aspect Always_Terminates on "Get_Capacity"␣
 ↪has been proved, subprogram will terminate
```

This program is correct and GNATprove is able to verify it.

44.10.3 Example #3

Package `Counting` defines two counters: `Black_Counter` and `Red_Counter`. It provides separate initialization procedures for each, both called from the main procedure.

Listing 31: counting.ads

```
1  package Counting with
2    Abstract_State => State
3  is
4     procedure Reset_Black_Count;
5     procedure Reset_Red_Count;
6  end Counting;
```

Listing 32: counting.adb

```
1  package body Counting with
2    Refined_State => (State => (Black_Counter, Red_Counter))
3  is
4     Black_Counter, Red_Counter : Natural;
5
6     procedure Reset_Black_Count is
7     begin
8        Black_Counter := 0;
```

(continues on next page)

(continued from previous page)

```
   end Reset_Black_Count;

   procedure Reset_Red_Count is
   begin
      Red_Counter := 0;
   end Reset_Red_Count;
end Counting;
```

Listing 33: main.adb

```
with Counting; use Counting;

procedure Main is
begin
   Reset_Black_Count;
   Reset_Red_Count;
end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.State_Abstraction.Example_03
MD5: bc2d7ccd7419d34f7156a16dfc484229
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
counting.ads:2:21: warning: no subprogram exists that can initialize abstract␣
 ↪state "Counting.State"
main.adb:5:04: medium: "Counting.State" might not be initialized after elaboration␣
 ↪of main program "Main"
gnatprove: unproved check messages considered as errors
```

This program doesn't read any uninitialized data, but GNATprove fails to verify that. This is because we provided a state abstraction for package `Counting`, so flow analysis computes the effects of subprograms in terms of this state abstraction and thus considers `State` to be an in-out global consisting of both `Black_Counter` and `Red_Counter`. So it issues the message requiring that `State` be initialized after elaboration as well as the warning that no procedure in package `Counting` can initialize its state.

44.10.4 Example #4

Let's remove the abstract state on package `Counting`.

Listing 34: counting.ads

```
package Counting is
   procedure Reset_Black_Count;
   procedure Reset_Red_Count;
end Counting;
```

Listing 35: counting.adb

```
package body Counting is
   Black_Counter, Red_Counter : Natural;

   procedure Reset_Black_Count is
   begin
```

(continues on next page)

(continued from previous page)

```
      Black_Counter := 0;
   end Reset_Black_Count;

   procedure Reset_Red_Count is
   begin
      Red_Counter := 0;
   end Reset_Red_Count;
end Counting;
```

Listing 36: main.adb

```
with Counting; use Counting;

procedure Main is
begin
   Reset_Black_Count;
   Reset_Red_Count;
end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.State_Abstraction.Example_04
MD5: 3ddd934b6ede6df7b823e46828694d12
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
```

This example is correct. Because we didn't provide a state abstraction, GNATprove reasons in terms of variables, instead of states, and proves data initialization without any problem.

44.10.5 Example #5

Let's restore the abstract state to package `Counting`, but this time provide a procedure `Reset_All` that calls the initialization procedures `Reset_Black_Counter` and `Reset_Red_Counter`.

Listing 37: counting.ads

```
package Counting with
  Abstract_State => State
is
   procedure Reset_Black_Count with Global => (In_Out => State);
   procedure Reset_Red_Count   with Global => (In_Out => State);
   procedure Reset_All         with Global => (Output => State);
end Counting;
```

Listing 38: counting.adb

```
package body Counting with
  Refined_State => (State => (Black_Counter, Red_Counter))
is
   Black_Counter, Red_Counter : Natural;

   procedure Reset_Black_Count is
   begin
      Black_Counter := 0;
```

(continues on next page)

(continued from previous page)

```
9     end Reset_Black_Count;
10
11    procedure Reset_Red_Count is
12    begin
13       Red_Counter := 0;
14    end Reset_Red_Count;
15
16    procedure Reset_All is
17    begin
18       Reset_Black_Count;
19       Reset_Red_Count;
20    end Reset_All;
21 end Counting;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.State_Abstraction.Example_05
MD5: d123ccc644fe6999699388708f2ecf89
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
counting.ads:4:37: info: data dependencies proved
counting.ads:5:37: info: data dependencies proved
counting.ads:6:14: info: initialization of "Black_Counter" constituent of "State"␣
↪proved
counting.ads:6:14: info: initialization of "Red_Counter" constituent of "State"␣
↪proved
counting.ads:6:37: info: data dependencies proved
```

This example is correct. Flow analysis computes refined versions of `Global` contracts for internal calls and uses these to verify that `Reset_All` indeed properly initializes `State`. The `Refined_Global` and `Global` annotations are not mandatory and can be computed by GNATprove.

44.10.6 Example #6

Let's consider yet another version of our abstract stack unit.

Listing 39: stack.ads

```
1  package Stack with
2    Abstract_State => The_Stack
3  is
4     pragma Unevaluated_Use_Of_Old (Allow);
5
6     type Element is new Integer;
7
8     type Element_Array is array (Positive range <>) of Element;
9     Max : constant Natural := 100;
10    subtype Length_Type is Natural range 0 .. Max;
11
12    procedure Push (E : Element) with
13      Post =>
14        not Is_Empty and
15        (if Is_Full'Old then The_Stack = The_Stack'Old else Peek = E);
16
17    function Peek     return Element with Pre => not Is_Empty;
```

(continues on next page)

(continued from previous page)

```
   function Is_Full  return Boolean;
   function Is_Empty return Boolean;
end Stack;
```

Listing 40: stack.adb

```
package body Stack with
  Refined_State => (The_Stack => (Top, Content))
is
   Top     : Length_Type := 0;
   Content : Element_Array (1 .. Max) := (others => 0);

   procedure Push (E : Element) is
   begin
      Top           := Top + 1;
      Content (Top) := E;
   end Push;

   function  Peek     return Element is (Content (Top));
   function  Is_Full  return Boolean is (Top >= Max);
   function  Is_Empty return Boolean is (Top = 0);
end Stack;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.State_Abstraction.Example_06
MD5: 9da2b74da203a639dc66b2d33cbd500d
```

Build output

```
stack.ads:15:39: error: there is no applicable operator "=" for package or␣
 ↪procedure name
gprbuild: *** compilation phase failed
```

Prover output

```
Phase 1 of 2: generation of Global contracts ...
stack.ads:15:39: error: there is no applicable operator "=" for package or␣
 ↪procedure name
gnatprove: error during generation of Global contracts
```

This example isn't correct. There's a compilation error in Push's postcondition: The_Stack is a state abstraction, not a variable, and therefore can't be used in an expression.

44.10.7 Example #7

In this version of our abstract stack unit, a copy of the stack is returned by function Get_Stack, which we call in the postcondition of Push to specify that the stack shouldn't be modified if it's full. We also assert that after we push an element on the stack, either the stack is unchanged (if it was already full) or its top element is equal to the element just pushed.

Listing 41: stack.ads

```
package Stack with
  Abstract_State => The_Stack
is
   pragma Unevaluated_Use_Of_Old (Allow);

```

(continues on next page)

(continued from previous page)

```
   type Stack_Model is private;

   type Element is new Integer;
   type Element_Array is array (Positive range <>) of Element;
   Max : constant Natural := 100;
   subtype Length_Type is Natural range 0 .. Max;

   function Peek      return Element with Pre => not Is_Empty;
   function Is_Full   return Boolean;
   function Is_Empty  return Boolean;
   function Get_Stack return Stack_Model;

   procedure Push (E : Element) with
     Post => not Is_Empty and
       (if Is_Full'Old then Get_Stack = Get_Stack'Old else Peek = E);

private

   type Stack_Model is record
      Top     : Length_Type := 0;
      Content : Element_Array (1 .. Max) := (others => 0);
   end record;

end Stack;
```

Listing 42: stack.adb

```
package body Stack with
  Refined_State => (The_Stack => (Top, Content))
is
   Top     : Length_Type := 0;
   Content : Element_Array (1 .. Max) := (others => 0);

   procedure Push (E : Element) is
   begin
      if Top >= Max then
         return;
      end if;
      Top             := Top + 1;
      Content (Top) := E;
   end Push;

   function Peek     return Element is (Content (Top));
   function Is_Full  return Boolean is (Top >= Max);
   function Is_Empty return Boolean is (Top = 0);

   function Get_Stack return Stack_Model is (Stack_Model'(Top, Content));

end Stack;
```

Listing 43: use_stack.adb

```
with Stack; use Stack;

procedure Use_Stack (E : Element) with
  Pre => not Is_Empty
is
   F : Element := Peek;
begin
   Push (E);
```

(continues on next page)

(continued from previous page)

```
   pragma Assert (Peek = E or Peek = F);
end Use_Stack;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.State_Abstraction.Example_07
MD5: 4831aa7f018f2e2d4e6d102095f8f631
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
use_stack.adb:9:19: medium: assertion might fail [possible fix: precondition of␣
 ↪subprogram at line 3 should mention E]
gnatprove: unproved check messages considered as errors
```

This program is correct, but GNATprove can't prove the assertion in Use_Stack. Indeed, even if Get_Stack is an expression function, its body isn't visible outside of Stack's body, where it's defined.

44.10.8 Example #8

Let's move the definition of Get_Stack and other expression functions inside the private part of the spec of Stack.

Listing 44: stack.ads

```
package Stack with
  Abstract_State => The_Stack
is
   pragma Unevaluated_Use_Of_Old (Allow);

   type Stack_Model is private;

   type Element is new Integer;
   type Element_Array is array (Positive range <>) of Element;
   Max : constant Natural := 100;
   subtype Length_Type is Natural range 0 .. Max;

   function Peek      return Element with Pre => not Is_Empty;
   function Is_Full   return Boolean;
   function Is_Empty  return Boolean;
   function Get_Stack return Stack_Model;

   procedure Push (E : Element) with
     Post => not Is_Empty and
       (if Is_Full'Old then Get_Stack = Get_Stack'Old else Peek = E);

private

   Top     : Length_Type              := 0 with Part_Of => The_Stack;
   Content : Element_Array (1 .. Max) := (others => 0) with
     Part_Of => The_Stack;

   type Stack_Model is record
      Top     : Length_Type := 0;
      Content : Element_Array (1 .. Max) := (others => 0);
   end record;

```

(continues on next page)

(continued from previous page)

```
   function Peek      return Element     is (Content (Top));
   function Is_Full   return Boolean     is (Top >= Max);
   function Is_Empty  return Boolean     is (Top = 0);

   function Get_Stack return Stack_Model is (Stack_Model'(Top, Content));

end Stack;
```

Listing 45: stack.adb

```
package body Stack with
  Refined_State => (The_Stack => (Top, Content))
is

   procedure Push (E : Element) is
   begin
      if Top >= Max then
         return;
      end if;
      Top             := Top + 1;
      Content (Top) := E;
   end Push;

end Stack;
```

Listing 46: use_stack.adb

```
with Stack; use Stack;

procedure Use_Stack (E : Element) with
  Pre => not Is_Empty
is
   F : Element := Peek;
begin
   Push (E);
   pragma Assert (Peek = E or Peek = F);
end Use_Stack;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.State_Abstraction.Example_08
MD5: 7e5204d3f69e71c212e7263906a89da4
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
stack.adb:10:30: info: range check proved
stack.adb:11:16: info: index check proved
stack.ads:13:13: info: implicit aspect Always_Terminates on "Peek" has been proved,
 ↪ subprogram will terminate
stack.ads:14:13: info: implicit aspect Always_Terminates on "Is_Full" has been␣
 ↪proved, subprogram will terminate
stack.ads:15:13: info: implicit aspect Always_Terminates on "Is_Empty" has been␣
 ↪proved, subprogram will terminate
stack.ads:16:13: info: implicit aspect Always_Terminates on "Get_Stack" has been␣
 ↪proved, subprogram will terminate
stack.ads:19:14: info: postcondition proved
stack.ads:20:60: info: precondition proved
```

(continues on next page)

(continued from previous page)

```
stack.ads:33:55: info: index check proved
use_stack.adb:6:19: info: precondition proved
use_stack.adb:9:19: info: precondition proved
use_stack.adb:9:19: info: assertion proved
use_stack.adb:9:31: info: precondition proved
```

This example is correct. GNATprove can verify the assertion in Use_Stack because it has visibility to Get_Stack's body.

44.10.9 Example #9

Package Data defines three variables, Data_1, Data_2 and Data_3, that are initialized at elaboration (in Data's package body) from an external interface that reads the file system.

Listing 47: external_interface.ads

```
package External_Interface with
  Abstract_State => File_System,
  Initializes    => File_System
is
   type Data_Type_1 is new Integer;
   type Data_Type_2 is new Integer;
   type Data_Type_3 is new Integer;

   type Data_Record is record
      Field_1 : Data_Type_1;
      Field_2 : Data_Type_2;
      Field_3 : Data_Type_3;
   end record;

   procedure Read_Data (File_Name : String; Data : out Data_Record)
     with Global => File_System;
end External_Interface;
```

Listing 48: data.ads

```
with External_Interface; use External_Interface;

package Data with
  Initializes => (Data_1, Data_2, Data_3)
is
   pragma Elaborate_Body;

   Data_1 : Data_Type_1;
   Data_2 : Data_Type_2;
   Data_3 : Data_Type_3;

end Data;
```

Listing 49: data.adb

```
with External_Interface;
pragma Elaborate_All (External_Interface);

package body Data is
begin
   declare
      Data_Read : Data_Record;
   begin
```

(continues on next page)

(continued from previous page)

```
      Read_Data ("data_file_name", Data_Read);
      Data_1 := Data_Read.Field_1;
      Data_2 := Data_Read.Field_2;
      Data_3 := Data_Read.Field_3;
   end;
end Data;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.State_Abstraction.Example_09
MD5: 0ca44501f0c991865ea50d2ef663d992
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
data.adb:9:07: warning: no Always_Terminates aspect available for "Read_Data"␣
 ↪[assumed-always-terminates]
data.adb:9:07: warning: assuming "Read_Data" always terminates
data.adb:9:07: high: "External_Interface.File_System" must be mentioned as an␣
 ↪input of the Initializes aspect of "Data" (SPARK RM 7.1.5(11))
gnatprove: unproved check messages considered as errors
```

This example isn't correct. The dependency between Data_1's, Data_2's, and Data_3's initial values and File_System must be listed in Data's Initializes aspect.

44.10.10 Example #10

Let's remove the Initializes contract on package Data.

Listing 50: external_interface.ads

```
package External_Interface with
  Abstract_State => File_System,
  Initializes    => File_System
is
   type Data_Type_1 is new Integer;
   type Data_Type_2 is new Integer;
   type Data_Type_3 is new Integer;

   type Data_Record is record
      Field_1 : Data_Type_1;
      Field_2 : Data_Type_2;
      Field_3 : Data_Type_3;
   end record;

   procedure Read_Data (File_Name : String; Data : out Data_Record)
     with Global => File_System;
end External_Interface;
```

Listing 51: data.ads

```
with External_Interface; use External_Interface;

package Data is
   pragma Elaborate_Body;

   Data_1 : Data_Type_1;
   Data_2 : Data_Type_2;
```

(continues on next page)

(continued from previous page)

```
   Data_3 : Data_Type_3;

end Data;
```

Listing 52: data.adb

```
with External_Interface;
pragma Elaborate_All (External_Interface);

package body Data is
begin
   declare
      Data_Read : Data_Record;
   begin
      Read_Data ("data_file_name", Data_Read);
      Data_1 := Data_Read.Field_1;
      Data_2 := Data_Read.Field_2;
      Data_3 := Data_Read.Field_3;
   end;
end Data;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.State_Abstraction.Example_10
MD5: 60cba2c920c7b1031d13c82a982ed0e9
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
data.adb:7:07: info: initialization of "Data_Read" proved
data.adb:9:07: warning: no Always_Terminates aspect available for "Read_Data"␣
 ↪[assumed-always-terminates]
data.adb:9:07: warning: assuming "Read_Data" always terminates
external_interface.ads:3:03: info: flow dependencies proved
```

This example is correct. Since `Data` has no `Initializes` aspect, GNATprove computes the set of variables initialized during its elaboration as well as their dependencies.

CHAPTER

FORTYFIVE

PROOF OF FUNCTIONAL CORRECTNESS

This section is dedicated to the functional correctness of programs. It presents advanced proof features that you may need to use for the specification and verification of your program's complex properties.

45.1 Beyond Program Integrity

When we speak about the *correctness* of a program or subprogram, we mean the extent to which it complies with its specification. Functional correctness is specifically concerned with properties that involve the relations between the subprogram's inputs and outputs, as opposed to other properties such as running time or memory consumption.

For functional correctness, we usually specify stronger properties than those required to just prove program integrity. When we're involved in a certification processes, we should derive these properties from the requirements of the system, but, especially in non-certification contexts, they can also come from more informal sources, such as the program's documentation, comments in its code, or test oracles.

For example, if one of our goals is to ensure that no runtime error is raised when using the result of the function `Find` below, it may be enough to know that the result is either 0 or in the range of A. We can express this as a postcondition of `Find`.

Listing 1: show_find.ads

```
package Show_Find is

   type Nat_Array is array (Positive range <>) of Natural;

   function Find (A : Nat_Array; E : Natural) return Natural with
     Post => Find'Result in 0 | A'Range;

end Show_Find;
```

Listing 2: show_find.adb

```
package body Show_Find is

   function Find (A : Nat_Array; E : Natural) return Natural is
   begin
      for I in A'Range loop
         if A (I) = E then
            return I;
         end if;
      end loop;
      return 0;
   end Find;
```

(continues on next page)

(continued from previous page)

```
12
13 end Show_Find;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Functional_Correctness.Find_1
MD5: d8f4ace6620fd46af170977c29947289
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
show_find.adb:7:20: info: range check proved
show_find.ads:5:13: info: implicit aspect Always_Terminates on "Find" has been␣
 ↪proved, subprogram will terminate
show_find.ads:6:14: info: postcondition proved
```

In this case, it's automatically proved by GNATprove.

However, to be sure that Find performs the task we expect, we may want to verify more complex properties of that function. For example, we want to ensure it returns an index of A where E is stored and returns 0 only if E is nowhere in A. Again, we can express this as a postcondition of Find.

Listing 3: show_find.ads

```
1  package Show_Find is
2
3     type Nat_Array is array (Positive range <>) of Natural;
4
5     function Find (A : Nat_Array; E : Natural) return Natural with
6       Post =>
7         (if (for all I in A'Range => A (I) /= E)
8            then Find'Result = 0
9          else Find'Result in A'Range and then A (Find'Result) = E);
10
11 end Show_Find;
```

Listing 4: show_find.adb

```
1  package body Show_Find is
2
3     function Find (A : Nat_Array; E : Natural) return Natural is
4     begin
5        for I in A'Range loop
6           if A (I) = E then
7              return I;
8           end if;
9        end loop;
10       return 0;
11    end Find;
12
13 end Show_Find;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Functional_Correctness.Find_2
MD5: 8c12b9768228a3ea45ca02199f65057b
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
show_find.ads:9:14: medium: postcondition might fail, cannot prove Find'Result in A
 ↪'Range
gnatprove: unproved check messages considered as errors
```

This time, GNATprove can't prove this postcondition automatically, but we'll see later that we can help GNATprove by providing a loop invariant, which is checked by GNATprove and allows it to automatically prove the postcondition for `Find`.

Writing at least part of your program's specification in the form of contracts has many advantages. You can execute those contracts during testing, which improves the maintainability of the code by detecting discrepancies between the program and its specification in earlier stages of development. If the contracts are precise enough, you can use them as oracles to decide whether a given test passed or failed. In that case, they can allow you to verify the outputs of specific subprograms while running a larger block of code. This may, in certain contexts, replace the need for you to perform unit testing, instead allowing you to run integration tests with assertions enabled. Finally, if the code is in SPARK, you can also use GNATprove to formally prove these contracts.

The advantage of a formal proof is that it verifies all possible execution paths, something which isn't always possible by running test cases. For example, during testing, the postcondition of the subprogram `Find` shown below is checked dynamically for the set of inputs for which `Find` is called in that test, but just for that set.

Listing 5: show_find.ads

```
1  package Show_Find is
2
3     type Nat_Array is array (Positive range <>) of Natural;
4
5     function Find (A : Nat_Array; E : Natural) return Natural with
6       Post =>
7         (if (for all I in A'Range => A (I) /= E)
8            then Find'Result = 0
9          else Find'Result in A'Range and then A (Find'Result) = E);
10
11 end Show_Find;
```

Listing 6: show_find.adb

```
1  package body Show_Find is
2
3     function Find (A : Nat_Array; E : Natural) return Natural is
4     begin
5        for I in A'Range loop
6           if A (I) = E then
7              return I;
8           end if;
9        end loop;
10       return 0;
11    end Find;
12
13 end Show_Find;
```

Listing 7: use_find.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2  with Show_Find; use Show_Find;
3
```

(continues on next page)

(continued from previous page)

```
procedure Use_Find with
  SPARK_Mode => Off
is
   Seq : constant Nat_Array (1 .. 3) := (1, 5, 3);
   Res : Natural;
begin
   Res := Find (Seq, 3);
   Put_Line ("Found 3 in index #" & Natural'Image (Res) & " of array");
end Use_Find;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Functional_Correctness.Find_3
MD5: 05283ef7808ee5d8254cfa4b883e639d
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
show_find.ads:9:14: medium: postcondition might fail, cannot prove Find'Result in A
 ↪'Range
gnatprove: unproved check messages considered as errors
```

Runtime output

```
Found 3 in index # 3 of array
```

However, if `Find` is formally verified, that verification checks its postcondition for all possible inputs. During development, you can attempt such verification earlier than testing since it's performed modularly on a per-subprogram basis. For example, in the code shown above, you can formally verify `Use_Find` even before you write the body for subprogram `Find`.

45.2 Advanced Contracts

Contracts for functional correctness are usually more complex than contracts for program integrity, so they more often require you to use the new forms of expressions introduced by the Ada 2012 standard. In particular, quantified expressions, which allow you to specify properties that must hold for all or for at least one element of a range, come in handy when specifying properties of arrays.

As contracts become more complex, you may find it useful to introduce new abstractions to improve the readability of your contracts. Expression functions are a good means to this end because you can retain their bodies in your package's specification.

Finally, some properties, especially those better described as invariants over data than as properties of subprograms, may be cumbersome to express as subprogram contracts. Type predicates, which must hold for every object of a given type, are usually a better match for this purpose. Here's an example.

Listing 8: show_sort.ads

```
package Show_Sort is

   type Nat_Array is array (Positive range <>) of Natural;

   function Is_Sorted (A : Nat_Array) return Boolean is
     (for all I in A'Range =>
        (if I < A'Last then A (I) <= A (I + 1)));
```

(continues on next page)

(continued from previous page)

```
8     --  Returns True if A is sorted in increasing order.
9
10    subtype Sorted_Nat_Array is Nat_Array with
11      Dynamic_Predicate => Is_Sorted (Sorted_Nat_Array);
12    --  Elements of type Sorted_Nat_Array are all sorted.
13
14    Good_Array : Sorted_Nat_Array := (1, 2, 4, 8, 42);
15 end Show_Sort;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Functional_Correctness.Sort
MD5: d3b3d26d62074d11b19d9282cc548c1b
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
show_sort.ads:5:13: info: implicit aspect Always_Terminates on "Is_Sorted" has␣
 ↪been proved, subprogram will terminate
show_sort.ads:7:32: info: index check proved
show_sort.ads:7:43: info: overflow check proved
show_sort.ads:7:43: info: index check proved
show_sort.ads:14:37: info: range check proved
show_sort.ads:14:37: info: predicate check proved
```

We can use the subtype `Sorted_Nat_Array` as the type of a variable that must remain sorted throughout the program's execution. Specifying that an array is sorted requires a rather complex expression involving quantifiers, so we abstract away this property as an expression function to improve readability. `Is_Sorted`'s body remains in the package's specification and allows users of the package to retain a precise knowledge of its meaning when necessary. (You must use `Nat_Array` as the type of the operand of `Is_Sorted`. If you use `Sorted_Nat_Array`, you'll get infinite recursion at runtime when assertion checks are enabled since that function is called to check all operands of type `Sorted_Nat_Array`.)

45.2.1 Ghost Code

As the properties you need to specify grow more complex, you may have entities that are only needed because they are used in specifications (contracts). You may find it important to ensure that these entities can't affect the behavior of the program or that they're completely removed from production code. This concept, having entities that are only used for specifications, is usually called having *ghost* code and is supported in SPARK by the `Ghost` aspect.

You can use `Ghost` aspects to annotate any entity including variables, types, subprograms, and packages. If you mark an entity as `Ghost`, GNATprove ensures it can't affect the program's behavior. When the program is compiled with assertions enabled, ghost code is executed like normal code so it can execute the contracts using it. You can also instruct the compiler to not generate code for ghost entities.

Consider the procedure `Do_Something` below, which calls a complex function on its input, X, and wants to check that the initial and modified values of X are related in that complex way.

Listing 9: show_ghost.ads

```
1 package Show_Ghost is
2
```

(continues on next page)

(continued from previous page)

```
   type T is record
      A, B, C, D, E : Boolean;
   end record;

   function Formula (X : T) return Boolean is
     ((X.A and X.B) or (X.C and (X.D or X.E)));

   function Is_Correct (X, Y : T) return Boolean is
     (Formula (X) = Formula (Y));

   procedure Do_Something (X : in out T);

end Show_Ghost;
```

Listing 10: show_ghost.adb

```
package body Show_Ghost is

   procedure Do_Some_Complex_Stuff (X : in out T) is
   begin
      X := T'(X.B, X.A, X.C, X.E, X.D);
   end Do_Some_Complex_Stuff;

   procedure Do_Something (X : in out T) is
      X_Init : constant T := X with Ghost;
   begin
      Do_Some_Complex_Stuff (X);
      pragma Assert (Is_Correct (X_Init, X));
      --  It is OK to use X_Init inside an assertion.
   end Do_Something;

end Show_Ghost;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Functional_Correctness.Ghost_1
MD5: 0a6caaec950b3b043a53c18bab3cb39b
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
show_ghost.adb:12:22: info: assertion proved
show_ghost.ads:7:13: info: implicit aspect Always_Terminates on "Formula" has been␣
 ↪proved, subprogram will terminate
show_ghost.ads:10:13: info: implicit aspect Always_Terminates on "Is_Correct" has␣
 ↪been proved, subprogram will terminate
```

`Do_Something` stores the initial value of `X` in a ghost constant, `X_Init`. We reference it in an assertion to check that the computation performed by the call to `Do_Some_Complex_Stuff` modified the value of `X` in the expected manner.

However, `X_Init` can't be used in normal code, for example to restore the initial value of `X`.

Listing 11: show_ghost.ads

```
package Show_Ghost is

   type T is record
```

(continues on next page)

(continued from previous page)

```
      A, B, C, D, E : Boolean;
   end record;

   function Formula (X : T) return Boolean is
     ((X.A and X.B) or (X.C and (X.D or X.E)));

   function Is_Correct (X, Y : T) return Boolean is
     (Formula (X) = Formula (Y));

   procedure Do_Something (X : in out T);

end Show_Ghost;
```

Listing 12: show_ghost.adb

```
package body Show_Ghost is

   procedure Do_Some_Complex_Stuff (X : in out T) is
   begin
      X := T'(X.B, X.A, X.C, X.E, X.D);
   end Do_Some_Complex_Stuff;

   procedure Do_Something (X : in out T) is
      X_Init : constant T := X with Ghost;
   begin
      Do_Some_Complex_Stuff (X);
      pragma Assert (Is_Correct (X_Init, X));

      X := X_Init; -- ERROR

   end Do_Something;

end Show_Ghost;
```

Listing 13: use_ghost.adb

```
with Show_Ghost; use Show_Ghost;

procedure Use_Ghost is
   X : T := (True, True, False, False, True);
begin
   Do_Something (X);
end Use_Ghost;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Functional_Correctness.Ghost_2
MD5: 464bb4bc355a648e2b92940ec80b4717
```

Build output

```
show_ghost.adb:14:12: error: ghost entity cannot appear in this context
gprbuild: *** compilation phase failed
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
generation of data representation information failed
continuing analysis with partial data representation
for details, see log file gnatprove/data_representation_generation.log
```

(continues on next page)

(continued from previous page)

```
Phase 2 of 3: generation of Global contracts ...
show_ghost.adb:14:12: error: ghost entity cannot appear in this context
gnatprove: error during generation of Global contracts
```

When compiling this example, the compiler flags the use of `X_Init` as illegal, but more complex cases of interference between ghost and normal code may sometimes only be detected when you run GNATprove.

45.2.2 Ghost Functions

Functions used only in specifications are a common occurrence when writing contracts for functional correctness. For example, expression functions used to simplify or factor out common patterns in contracts can usually be marked as ghost.

But ghost functions can do more than improve readability. In real-world programs, it's often the case that some information necessary for functional specification isn't accessible in the package's specification because of abstraction.

Making this information available to users of the packages is generally out of the question because that breaks the abstraction. Ghost functions come in handy in that case since they provide a way to give access to that information without making it available to normal client code.

Let's look at the following example.

Listing 14: stacks.ads

```
1  package Stacks is
2
3     pragma Unevaluated_Use_Of_Old (Allow);
4
5     type Stack is private;
6
7     type Element is new Natural;
8     type Element_Array is array (Positive range <>) of Element;
9     Max : constant Natural := 100;
10
11    function Get_Model (S : Stack) return Element_Array with Ghost;
12    --  Returns an array as a model of a stack.
13
14    procedure Push (S : in out Stack; E : Element) with
15      Pre  => Get_Model (S)'Length < Max,
16      Post => Get_Model (S) = Get_Model (S)'Old & E;
17
18 private
19
20    subtype Length_Type is Natural range 0 .. Max;
21
22    type Stack is record
23       Top     : Length_Type := 0;
24       Content : Element_Array (1 .. Max) := (others => 0);
25    end record;
26
27 end Stacks;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Functional_Correctness.Ghost_Functions
MD5: e287612bd66753f07ac3eecb36c693de
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
generation of data representation information failed
continuing analysis with partial data representation
for details, see log file gnatprove/data_representation_generation.log
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
```

Here, the type Stack is private. To specify the expected behavior of the Push procedure, we need to go inside this abstraction and access the values of the elements stored in S. For this, we introduce a function Get_Model that returns an array as a representation of the stack. However, we don't want code that uses the Stack package to use Get_Model in normal code since this breaks our stack's abstraction.

Here's an example of trying to break that abstraction in the subprogram Peek below.

Listing 15: stacks.ads

```
package Stacks is

   pragma Unevaluated_Use_Of_Old (Allow);

   type Stack is private;

   type Element is new Natural;
   type Element_Array is array (Positive range <>) of Element;
   Max : constant Natural := 100;

   function Get_Model (S : Stack) return Element_Array with Ghost;
   --  Returns an array as a model of a stack.

   procedure Push (S : in out Stack; E : Element) with
     Pre  => Get_Model (S)'Length < Max,
     Post => Get_Model (S) = Get_Model (S)'Old & E;

   function Peek (S : Stack; I : Positive) return Element is
     (Get_Model (S) (I)); -- ERROR

private

   subtype Length_Type is Natural range 0 .. Max;

   type Stack is record
      Top     : Length_Type := 0;
      Content : Element_Array (1 .. Max) := (others => 0);
   end record;

end Stacks;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Functional_Correctness.Ghost_Model
MD5: c00b5d86c9d0b665ccdda7f68f16f07a
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
generation of data representation information failed
continuing analysis with partial data representation
for details, see log file gnatprove/data_representation_generation.log
Phase 2 of 3: generation of Global contracts ...
stacks.ads:19:07: error: ghost entity cannot appear in this context
gnatprove: error during generation of Global contracts
```

We see that marking the function as `Ghost` achieves this goal: it ensures that the subprogram `Get_Model` is never used in production code.

45.2.3 Global Ghost Variables

Though it happens less frequently, you may have specifications requiring you to store additional information in global variables that isn't needed in normal code. You should mark these global variables as ghost, allowing the compiler to remove them when assertions aren't enabled. You can use these variables for any purpose within the contracts that make up your specifications. A common scenario is writing specifications for subprograms that modify a complex or private global data structure: you can use these variables to provide a model for that structure that's updated by the ghost code as the program modifies the data structure itself.

You can also use ghost variables to store information about previous runs of subprograms to specify temporal properties. In the following example, we have two procedures, one that accesses a state A and the other that accesses a state B. We use the ghost variable `Last_Accessed_Is_A` to specify that B can't be accessed twice in a row without accessing A in between.

Listing 16: call_sequence.ads

```
package Call_Sequence is

   type T is new Integer;

   Last_Accessed_Is_A : Boolean := False with Ghost;

   procedure Access_A with
     Post => Last_Accessed_Is_A;

   procedure Access_B with
     Pre  => Last_Accessed_Is_A,
     Post => not Last_Accessed_Is_A;
   --  B can only be accessed after A

end Call_Sequence;
```

Listing 17: call_sequence.adb

```
package body Call_Sequence is

   procedure Access_A is
   begin
      --  ...
      Last_Accessed_Is_A := True;
   end Access_A;

   procedure Access_B is
   begin
      --  ...
      Last_Accessed_Is_A := False;
   end Access_B;

end Call_Sequence;
```

Listing 18: main.adb

```
with Call_Sequence; use Call_Sequence;

```

(continues on next page)

(continued from previous page)

```
procedure Main is
begin
   Access_A;
   Access_B;
   Access_B; -- ERROR
end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Functional_Correctness.Global_Ghost_Vars
MD5: f33fa2ad2bd31eb03d4400c78f22eb71
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
main.adb:7:04: medium: precondition might fail
gnatprove: unproved check messages considered as errors
```

Runtime output

```
raised ADA.ASSERTIONS.ASSERTION_ERROR : failed precondition from call_sequence.
↪ads:11
```

Let's look at another example. The specification of a subprogram's expected behavior is sometimes best expressed as a sequence of actions it must perform. You can use global ghost variables that store intermediate values of normal variables to write this sort of specification more easily.

For example, we specify the subprogram `Do_Two_Things` below in two steps, using the ghost variable `V_Interm` to store the intermediate value of `V` between those steps. We could also express this using an existential quantification on the variable `V_Interm`, but it would be impractical to iterate over all integers at runtime and this can't always be written in SPARK because quantification is restricted to **`for ... loop`** patterns.

Finally, supplying the value of the variable may help the prover verify the contracts.

Listing 19: action_sequence.ads

```
package Action_Sequence is

   type T is new Integer;

   V_Interm : T with Ghost;

   function First_Thing_Done (X, Y : T) return Boolean with Ghost;
   function Second_Thing_Done (X, Y : T) return Boolean with Ghost;

   procedure Do_Two_Things (V : in out T) with
     Post => First_Thing_Done (V'Old, V_Interm)
       and then Second_Thing_Done (V_Interm, V);

end Action_Sequence;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Functional_Correctness.Intermediate_Values
MD5: 2ffbd2cb187c0a81423c78e0989d62f0
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
generation of data representation information failed
continuing analysis with partial data representation
for details, see log file gnatprove/data_representation_generation.log
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
```

Note

For more details on ghost code, see the SPARK User's Guide[389].

45.3 Guide Proof

Since properties of interest for functional correctness are more complex than those involved in proofs of program integrity, we expect GNATprove to initially be unable to verify them even though they're valid. You'll find the techniques we discussed in *Debugging Failed Proof Attempts* (page 1299) to come in handy here. We now go beyond those techniques and focus on more ways of improving results in the cases where the property is valid but GNATprove can't prove it in a reasonable amount of time.

In those cases, you may want to try and guide GNATprove to either complete the proof or strip it down to a small number of easily-reviewable assumptions. For this purpose, you can add assertions to break complex proofs into smaller steps.

```
pragma Assert (Assertion_Checked_By_The_Tool);
--  info: assertion proved

pragma Assert (Assumption_Validated_By_Other_Means);
--  medium: assertion might fail

pragma Assume (Assumption_Validated_By_Other_Means);
--  The tool does not attempt to check this expression.
--  It is recorded as an assumption.
```

One such intermediate step you may find useful is to try to prove a theoretically-equivalent version of the desired property, but one where you've simplified things for the prover, such as by splitting up different cases or inlining the definitions of functions.

Some intermediate assertions may not be proved by GNATprove either because it's missing some information or because the amount of information available is confusing. You can verify these remaining assertions by other means such as testing (since they're executable) or by review. You can then choose to instruct GNATprove to ignore them, either by turning them into assumptions, as in our example, or by using a `pragma Annotate`. In both cases, the compiler generates code to check these assumptions at runtime when you enable assertions.

45.3.1 Local Ghost Variables

You can use ghost code to enhance what you can express inside intermediate assertions in the same way we did above to enhance our contracts in specifications. In particular, you'll commonly have local variables or constants whose only purpose is to be used in assertions. You'll mostly use these ghost variables to store previous values of variables or expressions you want to refer to in assertions. They're especially useful to refer to initial values of parameters and expressions since the `'Old` attribute is only allowed in postconditions.

[389] https://docs.adacore.com/live/wave/spark2014/html/spark2014_ug/en/source/specification_features.html#ghost-code

In the example below, we want to help GNATprove verify the postcondition of P. We do this by introducing a local ghost constant, X_Init, to represent this value and writing an assertion in both branches of an **if** statement that repeats the postcondition, but using X_Init.

Listing 20: show_local_ghost.ads

```
package Show_Local_Ghost is

   type T is new Natural;

   function F (X, Y : T) return Boolean is (X > Y) with Ghost;

   function Condition (X : T) return Boolean is (X mod 2 = 0);

   procedure P (X : in out T) with
     Pre  => X < 1_000_000,
     Post => F (X, X'Old);

end Show_Local_Ghost;
```

Listing 21: show_local_ghost.adb

```
package body Show_Local_Ghost is

   procedure P (X : in out T) is
      X_Init : constant T := X with Ghost;
   begin
      if Condition (X) then
         X := X + 1;
         pragma Assert (F (X, X_Init));
      else
         X := X * 2;
         pragma Assert (F (X, X_Init));
      end if;
   end P;

end Show_Local_Ghost;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Functional_Correctness.Local_Ghost
MD5: 071ee53a06a6b5880eee6e9ea06dbcf3
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
show_local_ghost.adb:7:17: info: overflow check proved
show_local_ghost.adb:8:25: info: assertion proved
show_local_ghost.adb:10:17: info: overflow check proved
show_local_ghost.adb:11:25: info: assertion proved
show_local_ghost.ads:5:13: info: implicit aspect Always_Terminates on "F" has been␣
 ↪proved, subprogram will terminate
show_local_ghost.ads:7:13: info: implicit aspect Always_Terminates on "Condition"␣
 ↪has been proved, subprogram will terminate
show_local_ghost.ads:7:52: info: division check proved
show_local_ghost.ads:11:14: info: postcondition proved
```

You can also use local ghost variables for more complex purposes such as building a data structure that serves as witness for a complex property of a subprogram. In our example,

we want to prove that the Sort procedure doesn't create new elements, that is, that all the elements present in A after the sort were in A before the sort. This property isn't enough to ensure that a call to Sort produces a value for A that's a permutation of its value before the call (or that the values are indeed sorted). However, it's already complex for a prover to verify because it involves a nesting of quantifiers. To help GNATprove, you may find it useful to store, for each index I, an index J that has the expected property.

```
procedure Sort (A : in out Nat_Array) with
  Post => (for all I in A'Range =>
             (for some J in A'Range => A (I) = A'Old (J)))
is
   Permutation : Index_Array := (1 => 1, 2 => 2, ...) with Ghost;
begin
   ...
end Sort;
```

45.3.2 Ghost Procedures

Ghost procedures can't affect the value of normal variables, so they're mostly used to perform operations on ghost variables or to group together a set of intermediate assertions.

Abstracting away the treatment of assertions and ghost variables inside a ghost procedure has several advantages. First, you're allowed to use these variables in any way you choose in code inside ghost procedures. This isn't the case outside ghost procedures, where the only ghost statements allowed are assignments to ghost variables and calls to ghost procedures.

As an example, the **for** loop contained in Increase_A couldn't appear by itself in normal code.

Listing 22: show_ghost_proc.ads

```
1  package Show_Ghost_Proc is
2
3     type Nat_Array is array (Integer range <>) of Natural;
4
5     A : Nat_Array (1 .. 100) with Ghost;
6
7     procedure Increase_A with
8       Ghost,
9       Pre => (for all I in A'Range => A (I) < Natural'Last);
10
11 end Show_Ghost_Proc;
```

Listing 23: show_ghost_proc.adb

```
1  package body Show_Ghost_Proc is
2
3     procedure Increase_A is
4     begin
5        for I in A'Range loop
6           A (I) := A (I) + 1;
7        end loop;
8     end Increase_A;
9
10 end Show_Ghost_Proc;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Functional_Correctness.Ghost_Proc
MD5: 4b9cfe25011169a0cd3b4a3b03135dc4
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
show_ghost_proc.adb:6:25: info: overflow check proved
```

Using the abstraction also improves readability by hiding complex code that isn't part of the functional behavior of the subprogram. Finally, it can help GNATprove by abstracting away assertions that would otherwise make its job more complex.

In the example below, calling `Prove_P` with `X` as an operand only adds `P (X)` to the proof context instead of the larger set of assertions required to verify it. In addition, the proof of `P` need only be done once and may be made easier not having any unnecessary information present in its context while verifying it. Also, if GNATprove can't fully verify `Prove_P`, you can review the remaining assumptions more easily since they're in a smaller context.

```
procedure Prove_P (X : T) with Ghost,
  Global => null,
  Post   => P (X);
```

45.3.3 Handling of Loops

When the program involves a loop, you're almost always required to provide additional annotations to allow GNATprove to complete a proof because the verification techniques used by GNATprove don't handle cycles in a subprogram's control flow. Instead, loops are flattened by dividing them into several acyclic parts.

As an example, let's look at a simple loop with an exit condition.

```
Stmt1;
loop
  Stmt2;
  exit when Cond;
  Stmt3;
end loop;
Stmt4;
```

As shown below, the control flow is divided into three parts.

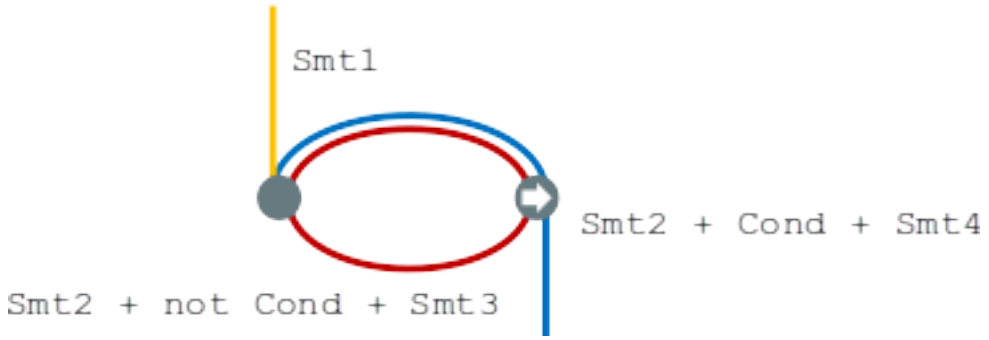

The first, shown in yellow, starts earlier in the subprogram and enters the loop statement. The loop itself is divided into two parts. Red represents a complete execution of the loop's body: an execution where the exit condition isn't satisfied. Blue represents the last execution of the loop, which includes some of the subprogram following it. For that path, the exit condition is assumed to hold. The red and blue parts are always executed after the yellow one.

GNATprove analyzes these parts independently since it doesn't have a way to track how variables may have been updated by an iteration of the loop. It forgets everything it knows

about those variables from one part when entering another part. However, values of constants and variables that aren't modified in the loop are not an issue.

In other words, handling loops in that way makes GNATprove imprecise when verifying a subprogram involving a loop: it can't verify a property that relies on values of variables modified inside the loop. It won't forget any information it had on the value of constants or unmodified variables, but it nevertheless won't be able to deduce new information about them from the loop.

For example, consider the function Find which iterates over the array A and searches for an element where E is stored in A.

Listing 24: show_find.ads

```
package Show_Find is

   type Nat_Array is array (Positive range <>) of Natural;

   function Find (A : Nat_Array; E : Natural) return Natural;

end Show_Find;
```

Listing 25: show_find.adb

```
package body Show_Find is

   function Find (A : Nat_Array; E : Natural) return Natural is
   begin
      for I in A'Range loop
         pragma Assert (for all J in A'First .. I - 1 => A (J) /= E);
         --  assertion is not proved
         if A (I) = E then
            return I;
         end if;
         pragma Assert (A (I) /= E);
         --  assertion is proved
      end loop;
      return 0;
   end Find;

end Show_Find;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Functional_Correctness.Loop
MD5: cb9cd0cb102c3baba3b21a788b6e4ae3
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
show_find.adb:6:51: info: overflow check proved
show_find.adb:6:58: medium: assertion might fail, cannot prove A (J) /= E␣
 ↪[possible fix: subprogram at show_find.ads:5 should mention A and E in a␣
 ↪precondition]
show_find.adb:6:61: info: index check proved
show_find.adb:9:20: info: range check proved
show_find.adb:11:25: info: assertion proved
show_find.ads:5:13: info: implicit aspect Always_Terminates on "Find" has been␣
 ↪proved, subprogram will terminate
gnatprove: unproved check messages considered as errors
```

At the end of each loop iteration, GNATprove knows that the value stored at index I in A must not be E. (If it were, the loop wouldn't have reached the end of the interation.) This proves the second assertion. But it's unable to aggregate this information over multiple loop iterations to deduce that it's true for all the indexes smaller than I, so it can't prove the first assertion.

45.3.4 Loop Invariants

To overcome these limitations, you can provide additional information to GNATprove in the form of a *loop invariant*. In SPARK, a loop invariant is a Boolean expression which holds true at every iteration of the loop. Like other assertions, you can have it checked at runtime by compiling the program with assertions enabled.

The major difference between loop invariants and other assertions is the way it's treated for proofs. GNATprove performs the proof of a loop invariant in two steps: first, it checks that it holds for the first iteration of the loop and then it checks that it holds in an arbitrary iteration assuming it held in the previous iteration. This is called proof by induction[390].

As an example, let's add a loop invariant to the Find function stating that the first element of A is not E.

Listing 26: show_find.ads

```
package Show_Find is

   type Nat_Array is array (Positive range <>) of Natural;

   function Find (A : Nat_Array; E : Natural) return Natural;

end Show_Find;
```

Listing 27: show_find.adb

```
package body Show_Find is

   function Find (A : Nat_Array; E : Natural) return Natural is
   begin
      for I in A'Range loop
         pragma Loop_Invariant (A (A'First) /= E);
         --  loop invariant not proved in first iteration
         --  but preservation of loop invariant is proved
         if A (I) = E then
            return I;
         end if;
      end loop;
      return 0;
   end Find;

end Show_Find;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Functional_Correctness.Loop_Invariant_1
MD5: 8d5fefdca9deacd4eb50850be91fbefe
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
```

(continues on next page)

[390] https://en.wikipedia.org/wiki/Mathematical_induction

(continued from previous page)

```
Phase 3 of 3: flow analysis and proof ...
show_find.adb:6:33: medium: loop invariant might fail in first iteration [possible␣
↪fix: subprogram at show_find.ads:5 should mention A and E in a precondition]
show_find.adb:6:33: info: loop invariant preservation proved
show_find.adb:6:37: info: index check proved
show_find.adb:10:20: info: range check proved
show_find.ads:5:13: info: implicit aspect Always_Terminates on "Find" has been␣
↪proved, subprogram will terminate
gnatprove: unproved check messages considered as errors
```

To verify this invariant, GNATprove generates two checks. The first checks that the assertion holds in the first iteration of the loop. This isn't verified by GNATprove. And indeed there's no reason to expect the first element of A to always be different from E in this iteration. However, the second check is proved: it's easy to deduce that if the first element of A was not E in a given iteration it's still not E in the next. However, if we move the invariant to the end of the loop, then it is successfully verified by GNATprove.

Not only do loop invariants allow you to verify complex properties of loops, but GNATprove also uses them to verify other properties, such as the absence of runtime errors over both the loop's body and the statements following the loop. More precisely, when verifying a runtime check or other assertion there, GNATprove assumes that the last occurrence of the loop invariant preceding the check or assertion is true.

Let's look at a version of Find where we use a loop invariant instead of an assertion to state that none of the array elements seen so far are equal to E.

Listing 28: show_find.ads

```
package Show_Find is

   type Nat_Array is array (Positive range <>) of Natural;

   function Find (A : Nat_Array; E : Natural) return Natural;

end Show_Find;
```

Listing 29: show_find.adb

```
package body Show_Find is

   function Find (A : Nat_Array; E : Natural) return Natural is
   begin
      for I in A'Range loop
         pragma Loop_Invariant
           (for all J in A'First .. I - 1 => A (J) /= E);
         if A (I) = E then
            return I;
         end if;
      end loop;
      pragma Assert (for all I in A'Range => A (I) /= E);
      return 0;
   end Find;

end Show_Find;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Functional_Correctness.Loop_Invariant_2
MD5: 21588161eaddb82f54c3cb3dcc14a6ac
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
show_find.adb:7:13: info: loop invariant initialization proved
show_find.adb:7:13: info: loop invariant preservation proved
show_find.adb:7:39: info: overflow check proved
show_find.adb:7:49: info: index check proved
show_find.adb:9:20: info: range check proved
show_find.adb:12:22: info: assertion proved
show_find.adb:12:49: info: index check proved
show_find.ads:5:13: info: implicit aspect Always_Terminates on "Find" has been␣
↪proved, subprogram will terminate
```

This version is fully verified by GNATprove! This time, it proves that the loop invariant holds in every iteration of the loop (separately proving this property for the first iteration and then for the following iterations). It also proves that none of the elements of A are equal to E after the loop exits by assuming that the loop invariant holds in the last iteration of the loop.

Note

For more details on loop invariants, see the SPARK User's Guide[391].

Finding a good loop invariant can turn out to be quite a challenge. To make this task easier, let's review the four good properties of a good loop invariant:

Property	Description
INIT	It should be provable in the first iteration of the loop.
INSIDE	It should allow proving the absence of run-time errors and local assertions inside the loop.
AFTER	It should allow proving absence of run-time errors, local assertions, and the subprogram postcondition after the loop.
PRESERVE	It should be provable after the first iteration of the loop.

Let's look at each of these in turn. First, the loop invariant should be provable in the first iteration of the loop (INIT). If your invariant fails to achieve this property, you can debug the loop invariant's initialization like any failing proof attempt using strategies for *Debugging Failed Proof Attempts* (page 1299).

Second, the loop invariant should be precise enough to allow GNATprove to prove absence of runtime errors in both statements from the loop's body (INSIDE) and those following the loop (AFTER). To do this, you should remember that all information concerning a variable modified in the loop that's not included in the invariant is forgotten by GNATprove. In particular, you should take care to include in your invariant what's usually called the loop's *frame condition*, which lists properties of variables that are true throughout the execution of the loop even though those variables are modified by the loop.

Finally, the loop invariant should be precise enough to prove that it's preserved through successive iterations of the loop (PRESERVE). This is generally the trickiest part. To understand why GNATprove hasn't been able to verify the preservation of a loop invariant you provided, you may find it useful to repeat it as local assertions throughout the loop's body to determine at which point it can no longer be proved.

[391] https://docs.adacore.com/live/wave/spark2014/html/spark2014_ug/en/source/assertion_pragmas.html#loop-invariants

As an example, let's look at a loop that iterates through an array A and applies a function F to each of its elements.

Listing 30: show_map.ads

```
package Show_Map is

   type Nat_Array is array (Positive range <>) of Natural;

   function F (V : Natural) return Natural is
     (if V /= Natural'Last then V + 1 else V);

   procedure Map (A : in out Nat_Array);

end Show_Map;
```

Listing 31: show_map.adb

```
package body Show_Map is

   procedure Map (A : in out Nat_Array) is
      A_I : constant Nat_Array := A with Ghost;
   begin
      for K in A'Range loop
         A (K) := F (A (K));
         pragma Loop_Invariant
           (for all J in A'First .. K => A (J) = F (A'Loop_Entry (J)));
      end loop;
      pragma Assert (for all K in A'Range => A (K) = F (A_I (K)));
   end Map;

end Show_Map;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Functional_Correctness.Loop_Invariant_3
MD5: 1a4583c9b2b772f79bcf29cff0caa96a
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
show_map.adb:9:13: info: loop invariant initialization proved
show_map.adb:9:13: info: loop invariant preservation proved
show_map.adb:9:45: info: index check proved
show_map.adb:9:67: info: index check proved
show_map.adb:11:22: info: assertion proved
show_map.adb:11:49: info: index check proved
show_map.adb:11:62: info: index check proved
show_map.ads:5:13: info: implicit aspect Always_Terminates on "F" has been proved,␣
 ↪subprogram will terminate
show_map.ads:6:35: info: overflow check proved
```

After the loop, each element of A should be the result of applying F to its previous value. We want to prove this. To specify this property, we copy the value of A before the loop into a ghost variable, A_I. Our loop invariant states that the element at each index less than K has been modified in the expected way. We use the Loop_Entry attribute to refer to the value of A on entry of the loop instead of using A_I.

Does our loop invariant have the four properties of a good loop-invariant? When launching GNATprove, we see that INIT is fulfilled: the invariant's initialization is proved. So are INSIDE and AFTER: no potential runtime errors are reported and the assertion following the

loop is successfully verified.

The situation is slightly more complex for the PRESERVE property. GNATprove manages to prove that the invariant holds after the first iteration thanks to the automatic generation of frame conditions. It was able to do this because it completes the provided loop invariant with the following frame condition stating what part of the array hasn't been modified so far:

```
pragma Loop_Invariant
  (for all J in K .. A'Last => A (J) = (if J > K then A'Loop_Entry (J)));
```

GNATprove then uses both our and the internally-generated loop invariants to prove PRESERVE. However, in more complex cases, the heuristics used by GNATprove to generate the frame condition may not be sufficient and you'll have to provide one as a loop invariant. For example, consider a version of Map where the result of applying F to an element at index K is stored at index K-1:

Listing 32: show_map.ads

```
package Show_Map is

   type Nat_Array is array (Positive range <>) of Natural;

   function F (V : Natural) return Natural is
     (if V /= Natural'Last then V + 1 else V);

   procedure Map (A : in out Nat_Array);

end Show_Map;
```

Listing 33: show_map.adb

```
package body Show_Map is

   procedure Map (A : in out Nat_Array) is
      A_I : constant Nat_Array := A with Ghost;
   begin
      for K in A'Range loop
         if K /= A'First then
            A (K - 1) := F (A (K));
         end if;
         pragma Loop_Invariant
           (for all J in A'First .. K =>
             (if J /= A'First then A (J - 1) = F (A'Loop_Entry (J))));
         --  pragma Loop_Invariant
         --  (for all J in K .. A'Last => A (J) = A'Loop_Entry (J));
      end loop;
      pragma Assert (for all K in A'Range =>
                       (if K /= A'First then A (K - 1) = F (A_I (K))));
   end Map;

end Show_Map;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Functional_Correctness.Loop_Invariant_4
MD5: 6c51768547d3baa2c19d0e33959388fe
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
```

(continues on next page)

(continued from previous page)

```
Phase 3 of 3: flow analysis and proof ...
show_map.adb:8:18: info: overflow check proved
show_map.adb:8:18: info: index check proved
show_map.adb:11:13: info: loop invariant initialization proved
show_map.adb:12:36: medium: loop invariant might not be preserved by an arbitrary␣
 ↪iteration, cannot prove A (J - 1) = F (A'Loop_Entry (J))
show_map.adb:12:41: info: overflow check proved
show_map.adb:12:41: info: index check proved
show_map.adb:12:65: info: index check proved
show_map.adb:16:22: info: assertion proved
show_map.adb:17:50: info: overflow check proved
show_map.adb:17:50: info: index check proved
show_map.adb:17:65: info: index check proved
show_map.ads:5:13: info: implicit aspect Always_Terminates on "F" has been proved,␣
 ↪subprogram will terminate
show_map.ads:6:35: info: overflow check proved
gnatprove: unproved check messages considered as errors
```

You need to uncomment the second loop invariant containing the frame condition in order to prove the assertion after the loop.

Note

For more details on how to write a loop invariant, see the SPARK User's Guide[392].

45.4 Code Examples / Pitfalls

This section contains some code examples and pitfalls.

45.4.1 Example #1

We implement a ring buffer inside an array `Content`, where the contents of a ring buffer of length `Length` are obtained by starting at index `First` and possibly wrapping around the end of the buffer. We use a ghost function `Get_Model` to return the contents of the ring buffer for use in contracts.

Listing 34: ring_buffer.ads

```
1  package Ring_Buffer is
2
3     Max_Size : constant := 100;
4
5     type Nat_Array is array (Positive range <>) of Natural;
6
7     function Get_Model return Nat_Array with Ghost;
8
9     procedure Push_Last (E : Natural) with
10      Pre  => Get_Model'Length < Max_Size,
11      Post => Get_Model'Length = Get_Model'Old'Length + 1;
12
13 end Ring_Buffer;
```

[392] https://docs.adacore.com/live/wave/spark2014/html/spark2014_ug/en/source/how_to_write_loop_invariants.html

Listing 35: ring_buffer.adb

```
package body Ring_Buffer is

   subtype Length_Range is Natural range 0 .. Max_Size;
   subtype Index_Range  is Natural range 1 .. Max_Size;

   Content : Nat_Array (1 .. Max_Size) := (others => 0);
   First   : Index_Range               := 1;
   Length  : Length_Range              := 0;

   function Get_Model return Nat_Array with
     Refined_Post => Get_Model'Result'Length = Length
   is
      Size   : constant Length_Range := Length;
      Result : Nat_Array (1 .. Size) := (others => 0);
   begin
      if First + Length - 1 <= Max_Size then
         Result := Content (First .. First + Length - 1);
      else
         declare
            Len : constant Length_Range := Max_Size - First + 1;
         begin
            Result (1 .. Len) := Content (First .. Max_Size);
            Result (Len + 1 .. Length) := Content (1 .. Length - Len);
         end;
      end if;
      return Result;
   end Get_Model;

   procedure Push_Last (E : Natural) is
   begin
      if First + Length <= Max_Size then
         Content (First + Length) := E;
      else
         Content (Length - Max_Size + First) := E;
      end if;
      Length := Length + 1;
   end Push_Last;

end Ring_Buffer;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Functional_Correctness.Example_01
MD5: 3afd7d58f97001618acc05062115f1a3
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
ring_buffer.adb:11:22: info: refined post proved
ring_buffer.adb:11:38: info: range check proved
ring_buffer.adb:14:07: info: range check proved
ring_buffer.adb:14:41: info: length check proved
ring_buffer.adb:17:17: info: length check proved
ring_buffer.adb:17:20: info: range check proved
ring_buffer.adb:17:20: info: length check proved
ring_buffer.adb:20:61: info: range check proved
ring_buffer.adb:22:13: info: range check proved
```

(continues on next page)

(continued from previous page)

```
ring_buffer.adb:22:21: info: index check proved
ring_buffer.adb:22:26: info: index check proved
ring_buffer.adb:22:31: info: length check proved
ring_buffer.adb:22:34: info: range check proved
ring_buffer.adb:22:34: info: length check proved
ring_buffer.adb:23:13: info: range check proved
ring_buffer.adb:23:25: info: index check proved
ring_buffer.adb:23:32: info: index check proved
ring_buffer.adb:23:40: info: length check proved
ring_buffer.adb:23:43: info: range check proved
ring_buffer.adb:23:43: info: length check proved
ring_buffer.adb:32:25: info: index check proved
ring_buffer.adb:34:37: info: index check proved
ring_buffer.adb:36:24: info: range check proved
ring_buffer.ads:7:13: info: implicit aspect Always_Terminates on "Get_Model" has␣
↪been proved, subprogram will terminate
ring_buffer.ads:11:14: info: postcondition proved
```

This is correct: `Get_Model` is used only in contracts. Calls to `Get_Model` make copies of the buffer's contents, which isn't efficient, but is fine because `Get_Model` is only used for verification, not in production code. We enforce this by making it a ghost function. We'll produce the final production code with appropriate compiler switches (i.e., not using `-gnata`) that ensure assertions are ignored.

45.4.2 Example #2

Instead of using a ghost function, `Get_Model`, to retrieve the contents of the ring buffer, we're now using a global ghost variable, `Model`.

Listing 36: ring_buffer.ads

```
package Ring_Buffer is

   Max_Size : constant := 100;
   subtype Length_Range is Natural range 0 .. Max_Size;
   subtype Index_Range  is Natural range 1 .. Max_Size;

   type Nat_Array is array (Positive range <>) of Natural;

   type Model_Type (Length : Length_Range := 0) is record
      Content : Nat_Array (1 .. Length);
   end record
     with Ghost;

   Model : Model_Type with Ghost;

   function Valid_Model return Boolean;

   procedure Push_Last (E : Natural) with
     Pre  => Valid_Model
       and then Model.Length < Max_Size,
     Post => Model.Length = Model.Length'Old + 1;

end Ring_Buffer;
```

Listing 37: ring_buffer.adb

```
package body Ring_Buffer is

   Content : Nat_Array (1 .. Max_Size) := (others => 0);
```

(continues on next page)

(continued from previous page)

```
   First   : Index_Range               := 1;
   Length  : Length_Range              := 0;

   function Valid_Model return Boolean is
      (Model.Content'Length = Length);

   procedure Push_Last (E : Natural) is
   begin
      if First + Length <= Max_Size then
         Content (First + Length) := E;
      else
         Content (Length - Max_Size + First) := E;
      end if;
      Length := Length + 1;
   end Push_Last;

end Ring_Buffer;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Functional_Correctness.Example_02
MD5: 144f58bd95cd460e4ed388d4f3351fe3
```

Build output

```
ring_buffer.adb:8:08: error: ghost entity cannot appear in this context
gprbuild: *** compilation phase failed
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
generation of data representation information failed
continuing analysis with partial data representation
for details, see log file gnatprove/data_representation_generation.log
Phase 2 of 3: generation of Global contracts ...
ring_buffer.adb:8:08: error: ghost entity cannot appear in this context
gnatprove: error during generation of Global contracts
```

This example isn't correct. `Model`, which is a ghost variable, must not influence the return value of the normal function `Valid_Model`. Since `Valid_Model` is only used in specifications, we should have marked it as `Ghost`. Another problem is that `Model` needs to be updated inside `Push_Last` to reflect the changes to the ring buffer.

45.4.3 Example #3

Let's mark `Valid_Model` as `Ghost` and update `Model` inside `Push_Last`.

Listing 38: ring_buffer.ads

```
package Ring_Buffer is

   Max_Size : constant := 100;
   subtype Length_Range is Natural range 0 .. Max_Size;
   subtype Index_Range  is Natural range 1 .. Max_Size;

   type Nat_Array is array (Positive range <>) of Natural;

   type Model_Type (Length : Length_Range := 0) is record
      Content : Nat_Array (1 .. Length);
   end record
```

(continues on next page)

(continued from previous page)

```
12       with Ghost;
13
14    Model : Model_Type with Ghost;
15
16    function Valid_Model return Boolean with Ghost;
17
18    procedure Push_Last (E : Natural) with
19      Pre  => Valid_Model
20        and then Model.Length < Max_Size,
21      Post => Model.Length = Model.Length'Old + 1;
22
23 end Ring_Buffer;
```

Listing 39: ring_buffer.adb

```
1  package body Ring_Buffer is
2
3     Content : Nat_Array (1 .. Max_Size) := (others => 0);
4     First   : Index_Range               := 1;
5     Length  : Length_Range              := 0;
6
7     function Valid_Model return Boolean is
8        (Model.Content'Length = Length);
9
10    procedure Push_Last (E : Natural) is
11    begin
12       if First + Length <= Max_Size then
13          Content (First + Length) := E;
14       else
15          Content (Length - Max_Size + First) := E;
16       end if;
17       Length := Length + 1;
18       Model := (Length  => Model.Length + 1,
19                 Content => Model.Content & E);
20    end Push_Last;
21
22 end Ring_Buffer;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Functional_Correctness.Example_03
MD5: 08b74f5fe560d238550a06c6323959cf
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
ring_buffer.adb:8:21: info: range check proved
ring_buffer.adb:13:25: info: index check proved
ring_buffer.adb:15:37: info: index check proved
ring_buffer.adb:17:24: info: range check proved
ring_buffer.adb:18:13: info: discriminant check proved
ring_buffer.adb:18:41: info: range check proved
ring_buffer.adb:19:42: info: range check proved
ring_buffer.adb:19:42: info: length check proved
ring_buffer.ads:10:07: info: range check proved
ring_buffer.ads:16:13: info: implicit aspect Always_Terminates on "Valid_Model"␣
 ↪has been proved, subprogram will terminate
ring_buffer.ads:21:14: info: postcondition proved
```

This example is correct. The ghost variable `Model` can be referenced both from the body of the ghost function `Valid_Model` and the non-ghost procedure `Push_Last` as long as it's only used in ghost statements.

45.4.4 Example #4

We're now modifying `Push_Last` to share the computation of the new length between the operational and ghost code.

Listing 40: ring_buffer.ads

```
package Ring_Buffer is

   Max_Size : constant := 100;
   subtype Length_Range is Natural range 0 .. Max_Size;
   subtype Index_Range  is Natural range 1 .. Max_Size;

   type Nat_Array is array (Positive range <>) of Natural;

   type Model_Type (Length : Length_Range := 0) is record
      Content : Nat_Array (1 .. Length);
   end record
     with Ghost;

   Model : Model_Type with Ghost;

   function Valid_Model return Boolean with Ghost;

   procedure Push_Last (E : Natural) with
     Pre  => Valid_Model
       and then Model.Length < Max_Size,
     Post => Model.Length = Model.Length'Old + 1;

end Ring_Buffer;
```

Listing 41: ring_buffer.adb

```
package body Ring_Buffer is

   Content : Nat_Array (1 .. Max_Size) := (others => 0);
   First   : Index_Range               := 1;
   Length  : Length_Range              := 0;

   function Valid_Model return Boolean is
      (Model.Content'Length = Length);

   procedure Push_Last (E : Natural) is
      New_Length : constant Length_Range := Model.Length + 1;
   begin
      if First + Length <= Max_Size then
         Content (First + Length) := E;
      else
         Content (Length - Max_Size + First) := E;
      end if;
      Length := New_Length;
      Model := (Length  => New_Length,
                Content => Model.Content & E);
   end Push_Last;

end Ring_Buffer;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Functional_Correctness.Example_04
MD5: e27f0b4729be72d83f2cb981b1d00412
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
ring_buffer.adb:11:45: error: ghost entity cannot appear in this context
gnatprove: error during generation of Global contracts
```

This example isn't correct. We didn't mark local constant `New_Length` as `Ghost`, so it can't be computed from the value of ghost variable `Model`. If we made `New_Length` a ghost constant, the compiler would report the problem on the assignment from `New_Length` to `Length`. The correct solution here is to compute `New_Length` from the value of the non-ghost variable `Length`.

45.4.5 Example #5

Let's move the code updating `Model` inside a local ghost procedure, `Update_Model`, but still using a local variable, `New_Length`, to compute the length.

Listing 42: ring_buffer.ads

```
1  package Ring_Buffer is
2
3     Max_Size : constant := 100;
4     subtype Length_Range is Natural range 0 .. Max_Size;
5     subtype Index_Range  is Natural range 1 .. Max_Size;
6
7     type Nat_Array is array (Positive range <>) of Natural;
8
9     type Model_Type (Length : Length_Range := 0) is record
10       Content : Nat_Array (1 .. Length);
11    end record
12      with Ghost;
13
14    Model : Model_Type with Ghost;
15
16    function Valid_Model return Boolean with Ghost;
17
18    procedure Push_Last (E : Natural) with
19      Pre  => Valid_Model
20        and then Model.Length < Max_Size,
21      Post => Model.Length = Model.Length'Old + 1;
22
23 end Ring_Buffer;
```

Listing 43: ring_buffer.adb

```
1  package body Ring_Buffer is
2
3     Content : Nat_Array (1 .. Max_Size) := (others => 0);
4     First   : Index_Range               := 1;
5     Length  : Length_Range              := 0;
6
7     function Valid_Model return Boolean is
8        (Model.Content'Length = Length);
9
10    procedure Push_Last (E : Natural) is
11
```

(continues on next page)

(continued from previous page)

```
12       procedure Update_Model with Ghost is
13          New_Length : constant Length_Range := Model.Length + 1;
14       begin
15          Model := (Length  => New_Length,
16                    Content => Model.Content & E);
17       end Update_Model;
18
19    begin
20       if First + Length <= Max_Size then
21          Content (First + Length) := E;
22       else
23          Content (Length - Max_Size + First) := E;
24       end if;
25       Length := Length + 1;
26       Update_Model;
27    end Push_Last;
28
29 end Ring_Buffer;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Functional_Correctness.Example_05
MD5: cc97fb35205c9a6de06001cf489f34e9
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
ring_buffer.adb:8:21: info: range check proved
ring_buffer.adb:13:61: info: range check proved, in call inlined at ring_buffer.
 ↪adb:26
ring_buffer.adb:15:16: info: discriminant check proved, in call inlined at ring_
 ↪buffer.adb:26
ring_buffer.adb:16:45: info: range check proved, in call inlined at ring_buffer.
 ↪adb:26
ring_buffer.adb:16:45: info: length check proved, in call inlined at ring_buffer.
 ↪adb:26
ring_buffer.adb:21:25: info: index check proved
ring_buffer.adb:23:37: info: index check proved
ring_buffer.adb:25:24: info: range check proved
ring_buffer.ads:10:07: info: range check proved
ring_buffer.ads:16:13: info: implicit aspect Always_Terminates on "Valid_Model"␣
 ↪has been proved, subprogram will terminate
ring_buffer.ads:21:14: info: postcondition proved
```

Everything's fine here. `Model` is only accessed inside `Update_Model`, itself a ghost procedure, so it's fine to declare local variable `New_Length` without the `Ghost` aspect: everything inside a ghost procedure body is ghost. Moreover, we don't need to add any contract to `Update_Model`: it's inlined by GNATprove because it's a local procedure without a contract.

45.4.6 Example #6

The function `Max_Array` takes two arrays of the same length (but not necessarily with the same bounds) as arguments and returns an array with each entry being the maximum values of both arguments at that index.

Listing 44: array_util.ads

```
package Array_Util is

   type Nat_Array is array (Positive range <>) of Natural;

   function Max_Array (A, B : Nat_Array) return Nat_Array with
     Pre => A'Length = B'Length;

end Array_Util;
```

Listing 45: array_util.adb

```
package body Array_Util is

   function Max_Array (A, B : Nat_Array) return Nat_Array is
      R : Nat_Array (A'Range);
      J : Integer := B'First;
   begin
      for I in A'Range loop
         if A (I) > B (J) then
            R (I) := A (I);
         else
            R (I) := B (J);
         end if;
         J := J + 1;
      end loop;
      return R;
   end Max_Array;

end Array_Util;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Functional_Correctness.Example_06
MD5: 4b8a6a9b1a3d4d228fe1e944914084fe
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
array_util.adb:8:24: medium: array index check might fail [reason for check: value␣
 ↪must be a valid index into the array] [possible fix: loop at line 7 should␣
 ↪mention J in a loop invariant]
array_util.adb:13:17: medium: overflow check might fail, cannot prove upper bound␣
 ↪for J + 1 [reason for check: result of addition must fit in a 32-bits machine␣
 ↪integer] [possible fix: loop at line 7 should mention J in a loop invariant]
gnatprove: unproved check messages considered as errors
```

This program is correct, but GNATprove can't prove that J is always in the index range of B (the unproved index check) or even that it's always within the bounds of its type (the unproved overflow check). Indeed, when checking the body of the loop, GNATprove forgets everything about the current value of J because it's been modified by previous loop iterations. To get more precise results, we need to provide a loop invariant.

45.4.7 Example #7

Let's add a loop invariant that states that J stays in the index range of B and let's protect the increment to J by checking that it's not already the maximal integer value.

Listing 46: array_util.ads

```
package Array_Util is

   type Nat_Array is array (Positive range <>) of Natural;

   function Max_Array (A, B : Nat_Array) return Nat_Array with
     Pre => A'Length = B'Length;

end Array_Util;
```

Listing 47: array_util.adb

```
package body Array_Util is

   function Max_Array (A, B : Nat_Array) return Nat_Array is
      R : Nat_Array (A'Range);
      J : Integer := B'First;
   begin
      for I in A'Range loop
         pragma Loop_Invariant (J in B'Range);
         if A (I) > B (J) then
            R (I) := A (I);
         else
            R (I) := B (J);
         end if;
         if J < Integer'Last then
            J := J + 1;
         end if;
      end loop;
      return R;
   end Max_Array;

end Array_Util;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Functional_Correctness.Example_07
MD5: 917629e0683725c23198f8a905a73c57
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
array_util.adb:8:33: medium: loop invariant might not be preserved by an arbitrary␣
 ↪iteration
gnatprove: unproved check messages considered as errors
```

The loop invariant now allows verifying that no runtime error can occur in the loop's body (property INSIDE seen in section *Loop Invariants* (page 1361)). Unfortunately, GNATprove fails to verify that the invariant stays valid after the first iteration of the loop (property PRESERVE). Indeed, knowing that J is in B'Range in a given iteration isn't enough to prove it'll remain so in the next iteration. We need a more precise invariant, linking J to the value of the loop index I, like `J = I - A'First + B'First`.

45.4.8 Example #8

We now consider a version of Max_Array which takes arguments that have the same bounds. We want to prove that Max_Array returns an array of the maximum values of both its arguments at each index.

Listing 48: array_util.ads

```
package Array_Util is

   type Nat_Array is array (Positive range <>) of Natural;

   function Max_Array (A, B : Nat_Array) return Nat_Array with
     Pre  => A'First = B'First and A'Last = B'Last,
     Post => (for all K in A'Range =>
                Max_Array'Result (K) = Natural'Max (A (K), B (K)));

end Array_Util;
```

Listing 49: array_util.adb

```
package body Array_Util is

   function Max_Array (A, B : Nat_Array) return Nat_Array is
      R : Nat_Array (A'Range) := (others => 0);
   begin
      for I in A'Range loop
         pragma Loop_Invariant (for all K in A'First .. I =>
                                   R (K) = Natural'Max (A (K), B (K)));
         if A (I) > B (I) then
            R (I) := A (I);
         else
            R (I) := B (I);
         end if;
      end loop;
      return R;
   end Max_Array;

end Array_Util;
```

Listing 50: main.adb

```
with Array_Util; use Array_Util;

procedure Main is
   A : Nat_Array := (1, 1, 2);
   B : Nat_Array := (2, 1, 0);
   R : Nat_Array (1 .. 3);
begin
   R := Max_Array (A, B);
end Main;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Functional_Correctness.Example_08
MD5: d0a04c214a632466a4fe4ec6cb7f8842
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
```

(continues on next page)

(continued from previous page)

```
main.adb:8:09: medium: length check might fail [reason for check: array must be of␣
↪the appropriate length]
array_util.adb:8:35: medium: loop invariant might fail in first iteration, cannot␣
↪prove R (K) = Natural'Max (A (K), B (K))
array_util.adb:8:35: medium: loop invariant might not be preserved by an arbitrary␣
↪iteration, cannot prove R (K) = Natural'Max (A (K), B (K))
gnatprove: unproved check messages considered as errors
```

Runtime output

```
raised ADA.ASSERTIONS.ASSERTION_ERROR : Loop_Invariant failed at array_util.adb:7
```

Here, GNATprove doesn't manage to prove the loop invariant even for the first loop iteration (property INIT seen in section *Loop Invariants* (page 1361)). In fact, the loop invariant is incorrect, as you can see by executing the function `Max_Array` with assertions enabled: at each loop iteration, `R` contains the maximum of `A` and `B` only until `I - 1` because the `I`'th index wasn't yet handled.

45.4.9 Example #9

We now consider a procedural version of `Max_Array` which updates its first argument instead of returning a new array. We want to prove that `Max_Array` sets the maximum values of both its arguments into each index in its first argument.

Listing 51: array_util.ads

```
package Array_Util is

   type Nat_Array is array (Positive range <>) of Natural;

   procedure Max_Array (A : in out Nat_Array; B : Nat_Array) with
     Pre  => A'First = B'First and A'Last = B'Last,
     Post => (for all K in A'Range =>
                 A (K) = Natural'Max (A'Old (K), B (K)));

end Array_Util;
```

Listing 52: array_util.adb

```
package body Array_Util is

   procedure Max_Array (A : in out Nat_Array; B : Nat_Array) is
   begin
      for I in A'Range loop
         pragma Loop_Invariant
           (for all K in A'First .. I - 1 =>
              A (K) = Natural'Max (A'Loop_Entry (K), B (K)));
         pragma Loop_Invariant
           (for all K in I .. A'Last => A (K) = A'Loop_Entry (K));
         if A (I) <= B (I) then
            A (I) := B (I);
         end if;
      end loop;
   end Max_Array;

end Array_Util;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Functional_Correctness.Example_09
MD5: 2de4bdd9c59d7d1eccb6259067ffdcf3
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
array_util.adb:7:13: info: loop invariant preservation proved
array_util.adb:7:13: info: loop invariant initialization proved
array_util.adb:7:39: info: overflow check proved
array_util.adb:8:18: info: index check proved
array_util.adb:8:50: info: index check proved
array_util.adb:8:57: info: index check proved
array_util.adb:10:13: info: loop invariant initialization proved
array_util.adb:10:13: info: loop invariant preservation proved
array_util.adb:10:44: info: index check proved
array_util.adb:10:63: info: index check proved
array_util.adb:11:25: info: index check proved
array_util.adb:12:25: info: index check proved
array_util.ads:7:14: info: postcondition proved
array_util.ads:8:20: info: index check proved
array_util.ads:8:45: info: index check proved
array_util.ads:8:52: info: index check proved
```

Everything is proved. The first loop invariant states that the values of A before the loop index contains the maximum values of the arguments of Max_Array (referring to the input value of A with A'Loop_Entry). The second loop invariant states that the values of A beyond and including the loop index are the same as they were on entry. This is the frame condition of the loop.

45.4.10 Example #10

Let's remove the frame condition from the previous example.

Listing 53: array_util.ads

```
1  package Array_Util is
2
3     type Nat_Array is array (Positive range <>) of Natural;
4
5     procedure Max_Array (A : in out Nat_Array; B : Nat_Array) with
6       Pre  => A'First = B'First and A'Last = B'Last,
7       Post => (for all K in A'Range =>
8                   A (K) = Natural'Max (A'Old (K), B (K)));
9
10 end Array_Util;
```

Listing 54: array_util.adb

```
1  package body Array_Util is
2
3     procedure Max_Array (A : in out Nat_Array; B : Nat_Array) is
4     begin
5        for I in A'Range loop
6           pragma Loop_Invariant
7             (for all K in A'First .. I - 1 =>
8                A (K) = Natural'Max (A'Loop_Entry (K), B (K)));
9           if A (I) <= B (I) then
10             A (I) := B (I);
```

(continues on next page)

(continued from previous page)

```
11          end if;
12       end loop;
13    end Max_Array;
14
15 end Array_Util;
```

Code block metadata

```
Project: Courses.Intro_To_Spark.Proof_of_Functional_Correctness.Example_10
MD5: 8bdc8432cbb3f26f58f63457408c7172
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
array_util.adb:7:13: info: loop invariant preservation proved
array_util.adb:7:13: info: loop invariant initialization proved
array_util.adb:7:39: info: overflow check proved
array_util.adb:8:18: info: index check proved
array_util.adb:8:50: info: index check proved
array_util.adb:8:57: info: index check proved
array_util.adb:9:25: info: index check proved
array_util.adb:10:25: info: index check proved
array_util.ads:7:14: info: postcondition proved
array_util.ads:8:20: info: index check proved
array_util.ads:8:45: info: index check proved
array_util.ads:8:52: info: index check proved
```

Everything is still proved. GNATprove internally generates the frame condition for the loop, so it's sufficient here to state that `A` before the loop index contains the maximum values of the arguments of `Max_Array`.

Part V

Introduction to Embedded Systems Programming

Copyright © 2022 – 2024, AdaCore

This book is published under a CC BY-SA license, which means that you can copy, redistribute, remix, transform, and build upon the content for any purpose, even commercially, as long as you give appropriate credit, provide a link to the license, and indicate if changes were made. If you remix, transform, or build upon the material, you must distribute your contributions under the same license as the original. You can find license details on this page[393]



This course will teach you the basics of the Embedded Systems Programming using Ada.

This document was written by Patrick Rogers, with review by Stephen Baird, Tucker Taft, Filip Gajowniczek, and Gustavo A. Hoffmann.

Note

The code examples in this course use an 80-column limit, which is a typical limit for Ada code. Note that, on devices with a small screen size, some code examples might be difficult to read.

[393] http://creativecommons.org/licenses/by-sa/4.0

CHAPTER

FORTYSIX

INTRODUCTION

This is a course about embedded systems programming. Embedded systems are everywhere today, including — just to name a few — the thermostats that control a building's temperature, the power-steering controller in modern automobiles, and the control systems in charge of jet engines.

Clearly, much can depend on these systems operating correctly. It might be only a matter of comfort if the thermostat fails. But imagine what might happen if one of the critical control systems in your car failed when you're out on the freeway. When a jet engine controller is designed to have absolute control, it is known as a Full Authority Digital Engine Controller, or FADEC for short. If a FADEC fails, the result can make international news.

Using Ada can help you get it right, and for less cost than other languages, if you use it well. Many industrial organizations developing critical embedded software use Ada for that reason. Our goal is to get you started in using it well.

The course is based on the assumption that you know some of the Ada language already, preferably even some of the more advanced concepts. You don't need to know how to use Ada constructs for embedded systems, of course, but you do need to know at least the language basics. If you need that introduction, see the course *Introduction to Ada* (page 5).

We also assume that you already have some programming experience so we won't cover CS-101.

Ideally, you also have some experience with low-level programming, because we will focus on "how to do it in Ada." If you do, feel free to gloss over the introductory material. If not, don't worry. We will cover enough for the course to be of value in any case.

46.1 So, what will we actually cover?

We will introduce you to using Ada to do low level programming, such as how to specify the layout of types, how to map variables of those types to specific addresses, when and how to do unchecked programming (and how not to), and how to determine the validity of incoming data, e.g., data from sensors that are occasionally faulty.

We will discuss development using more than Ada alone, nowadays a quite common approach. Specifically, how to interface with code and data written in other languages, and how (and why) to work with assembly language.

Embedded systems interact with the outside world via embedded devices, such as A/D converters, timers, actuators, sensors, and so forth. Frequently these devices are mapped into the target memory address space. We will cover how to define and interact with these memory-mapped devices.

Finally, we will show how to handle interrupts in Ada, using portable constructs.

46.2 Definitions

Before we go any further, what do we mean by "embedded system" anyway? It's time to be specific. We're talking about a computer that is part of a larger system, in which the capability to compute is not the larger system's primary function. These computers are said to be "embedded" in the larger system: the enclosing thermostat controlling the temperature, the power steering controller in the enclosing automobile, and the FADEC embedded in the enclosing aircraft. So these are not stand-alone computers for general purpose application execution.

As such, embedded systems typically have reduced resources available, especially power, which means reduced processor speed and reduced memory on-board. For an example at the small end of the spectrum, consider the computer embedded in a wearable device: it must run for a long time on a very little battery, with comparatively little memory available. But that's often true of bigger systems too, such as systems on aircraft where power (and heat) are directly limiting factors.

As a result, developing embedded systems software can be more difficult than general application development, not to mention that this software is potentially safety-critical.

Ada is known for use in very large, very long-lived projects (e.g., deployed for decades), but it can also be used for very small systems with tight resource constraints. We'll show you how.

We used the term "computer" above. You already know what that means, but you may be thinking of your laptop or something like that, where the processor, memory, and devices are all distinct, separate components. That can be the case for embedded systems too, albeit in a different form-factor such as rack-mounted boards. However, be sure to expand your definition to include the notion of a system-on-chip (SoC), in which the processor, memory, and various useful devices are all on a single chip. Embedded systems don't necessarily involve SoC computers but they frequently do. The techniques and information in this course work on any of these kinds of computer.

46.3 Down To The Bare Metal

Ada has always had facilities designed specifically for embedded systems. The language includes constructs for directly manipulating hardware, for example, and direct interaction with assembly language. These constructs are as effective as those of any high-level programming language (yes, including C). These constructs are expressively powerful, well-specified (so there are few surprises), efficient, and portable (within reason).

We say "within reason" because portability is a difficult goal for embedded systems. That's because the hardware is so much a part of the application itself, rather than being abstracted away as in a general-purpose application. That said, the hardware details can be managed in Ada so that portability is maximized to the extent possible for the application.

But strictly speaking, not all software can or should be absolutely portable! If a specific device is required, well, the program won't work with some other device. But to the extent possible portability is obviously a good thing.

46.4 The Ada Drivers Library

Speaking of SoC computers, there is a library of freely-available device drivers in Ada. Known as the Ada Driver Library (ADL), it supports many devices on a number of vendors' products. Device drivers for timers, I2C, SPI, A/D and D/A converters, DMA, General Purpose I/O, LCD displays, sensors, and other devices are included. The ADL is available on GitHub for both non-proprietary and commercial use here: https://github.com/AdaCore/Ada_Drivers_Library.

An extensive description of a project using the ADL is available here: https://blog.adacore.com/making-an-rc-car-with-ada-and-spark

We will refer to components of this library and use some of them as examples.

CHAPTER

FORTYSEVEN

LOW LEVEL PROGRAMMING

This section introduces a number of topics in low-level programming, in which the hardware and the compiler's representation choices are much more in view at the source code level. In comparatively high level code these topics are "abstracted away" in that the programmer can assume that the compiler does whatever is necessary on the current target machine so that their code executes as intended. That approach is not sufficient in low-level programming.

Note that we do not cover every possibility or language feature. Instead, we cover the necessary concepts, and also potential surprises or pitfalls, so that the parts not covered can be learned on your own.

47.1 Separation Principle

There is a language design principle underlying the Ada facilities intended for implementing embedded software. This design principle directly affects how the language is used, and therefore, the portability and readability of the resulting application code.

This language design principle is known as the "separation principle." What's being separated? The low-level, less portable aspects of some piece of code are separated from the usage of that piece of code.

Don't confuse this with hiding unnecessary implementation details via compile-time visibility control (i.e., information hiding and encapsulation). That certainly should be done too. Instead, because of the separation principle, we specify the low-level properties of something once, when we declare it. From then on, we can use regular Ada code to interact with it. That way the bulk of the code — the usage — is like any other Ada code, and doesn't propagate the low-level details all over the client code. This greatly simplifies usage and understandability as well as easing porting to new hardware-specific aspects. You change things in one place, rather than everywhere.

For example, consider a device mapped to the memory address space of the processor. To interact with the device we interact with one or more memory cells. Reading input from the device amounts to reading the value at the associated memory location. Likewise, sending output to the device amounts to writing to that location.

To represent this device mapping we declare a variable of an appropriate type and specify the starting address the object should occupy. (There are other ways too, but for a single, statically mapped object this is the simplest approach.) We'd want to specify some other characteristics as well, but let's focus on the address.

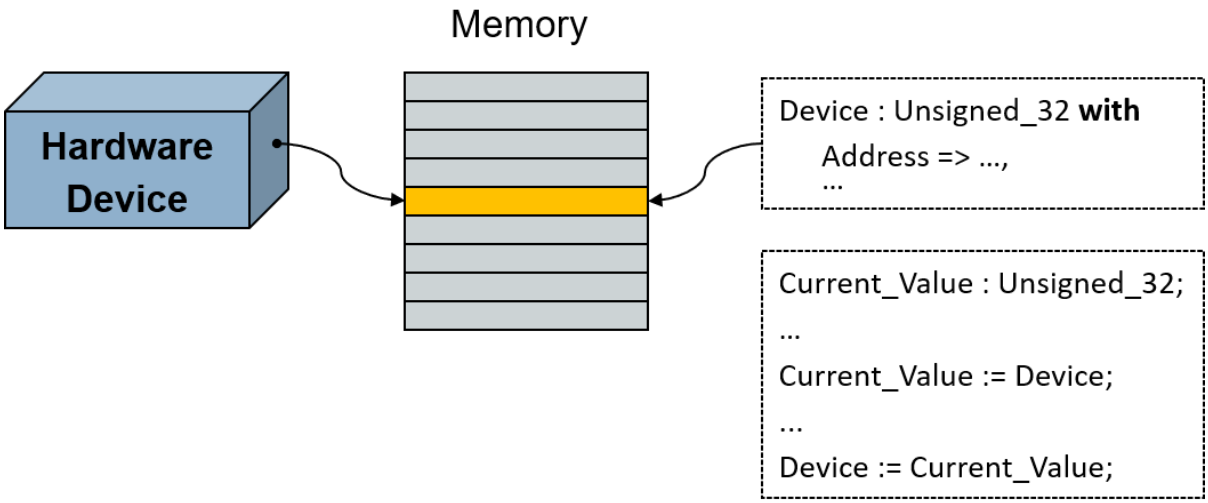

If the hardware presents an interface consisting of multiple fields within individual memory cells, we can use a record type instead of a single unsigned type representing a single word. Ada allows us to specify the exact record layout, down to the individual bit level, for any types we may need to use for the record components. When we declare the object we use that record type, again specifying the starting address. Then we can just refer to the object's record components as usual, having the compiler compute the address offsets required to access the components representing the individual hardware fields.

Note that we aren't saying that other languages cannot do this too. Many can, using good programming practices. What we're saying is that those practices are designed into the Ada way of doing it.

47.2 Guaranteed Level of Support

The Ada reference manual has an entire section dedicated to low-level programming. That's section 13, "Representation Issues," which provides facilities for developers to query and control aspects of various entities in their code, and for interfacing to hardware. Want to specify the exact layout for a record type's components? Easy, and the compiler will check your layout too. Want to specify the alignment of a type? That's easy too. And that's just the beginning. We'll talk about these facilities as we go, but there's another point to make about this section.

In particular, section 13 includes recommended levels of support to be provided by language implementations, i.e., compilers and other associated tools. Although the word "recommended" is used, the recommendations are meant to be followed.

For example, section 13.3 says that, for some entity named X, "X'`Address` should produce a useful result if X is an object that is aliased or of a by-reference type, or is an entity whose **`Address`** has been specified." So, for example, if the programmer specifies the address for a memory-mapped variable, the compiler cannot ignore that specification and instead, for the sake of performance, represent that variable using a register. The object must be represented as an addressable entity, as requested by the programmer. (Registers are not addressable.)

We mention this because, although the recommended levels of support are intended to be followed, those recommendations become **requirements** if the Systems Programming (SP) Annex is implemented by the vendor. In that case the vendor's implementation of section 13 must support at least the recommended levels. The SP Annex defines additional, optional functionality oriented toward this programming domain; you want it anyway. (Like all the annexes it adds no new syntax.) Almost all vendors, if not literally all, implement the Annex so you can rely on the recommended levels of support.

47.3 Querying Implementation Limits and Characteristics

Sometimes you need to know more about the underlying machine than is typical for general purpose applications. For example, your numerical analysis algorithm might need to know the maximum number of digits of precision that a floating-point number can have on this specific machine. For networking code, you will need to know the "endianness" of the machine so you can know whether to swap the bytes in an Ethernet packet. You'd go look in the `limits.h` file in C implementations, but in Ada we go to a package named `System` to get this information.

Clearly, these implementation values will vary with the hardware, so the package declares constants with implementation-defined values. The names of the constants are what's portable, you can count on them being the same in any Ada implementation.

However, vendors can add implementation-defined declarations to the language-defined content in package System. You might require some of those additions, but portability could then suffer when moving to a new vendor's compiler. Try not to use them unless it is unavoidable. Ideally these additions will appear in the private part of the package, so the implementation can use them but application code cannot.

For examples of the useful, language-defined constants, here are those for the numeric limits of an Ada compiler for an Arm 32-bit SoC:

```
Min_Int               : constant := Long_Long_Integer'First;
Max_Int               : constant := Long_Long_Integer'Last;

Max_Binary_Modulus    : constant := 2 ** Long_Long_Integer'Size;
Max_Nonbinary_Modulus : constant := 2 ** Integer'Size - 1;

Max_Base_Digits       : constant := Long_Long_Float'Digits;
Max_Digits            : constant := Long_Long_Float'Digits;

Max_Mantissa          : constant := 63;
Fine_Delta            : constant := 2.0 ** (-Max_Mantissa);
```

`Min_Int` and `Max_Int` supply the most-negative and most-positive integer values supported by the machine.

`Max_Binary_Modulus` is the largest power of two allowed as the modulus of a modular type definition.

But a modular type need not be defined in terms of powers of two. An arbitrary modulus is allowed, as long as it is not bigger than the machine can handle. That's specified by `Max_Nonbinary_Modulus`, the largest non-power-of-two value allowed as the modulus of a modular type definition.

`Max_Base_Digits` is the largest value allowed for the requested decimal precision in a floating-point type's definition.

We won't go over all of the above, you get the idea. Let's examine the more important contents.

Two of the most frequently referenced constants in `System` are the following, especially the first. (The values here are again for the Arm 32-bit SoC):

```
Storage_Unit : constant := 8;
Word_Size    : constant := 32;
```

`Storage_Unit` is the number of bits per memory storage element. Storage elements are the components of memory cells, and typically correspond to the individually addressable memory elements. A "byte" would correspond to a storage element with the above constant value.

Consider a typical idiom for determining the number of whole storage elements an object named X occupies:

```
Units : constant Integer := (X'Size + Storage_Unit - 1) / Storage_Unit;
```

Remember that 'Size returns a value in terms of bits. There are more direct ways to determine that size information but this will serve as an example of the sort of thing you might do with that constant.

A machine "word" is the largest amount of storage that can be conveniently and efficiently manipulated by the hardware, given the implementation's run-time model. A word consists of some number of storage elements, maybe one but typically more than one. As the unit the machine natively manipulates, words are expected to be independently addressable. (On some machines only words are independently addressable.)

Word_Size is the number of bits in the machine word. On a 32-bit machine we'd expect Word_Size to have a value of 32; on a 64-bit machine it would probably be 64, and so on.

Storage_Unit and Word_Size are obviously related.

Another frequently referenced declaration in package System is that of the type representing memory addresses, along with a constant for the null address designating no storage element.

```
type Address is private;
Null_Address : constant Address;
```

You may be wondering why type **Address** is a private type, since that choice means that we programmers cannot treat it like an ordinary (unsigned) integer value. Portability is of course the issue, because addressing, and thus address representation, varies among computer architectures. Not all architectures have a flat address space directly referenced by numeric values, although that is common. Some are represented by a base address plus an offset, for example. Therefore, the representation for type **Address** is hidden from us, the clients. Consequently we cannot simply treat address values as numeric values. Don't worry, though. The operations we need are provided.

Package *System* declares these comparison functions, for example:

```
function "<"  (Left, Right : Address) return Boolean;
function "<=" (Left, Right : Address) return Boolean;
function ">"  (Left, Right : Address) return Boolean;
function ">=" (Left, Right : Address) return Boolean;
function "="  (Left, Right : Address) return Boolean;
```

These functions are intrinsic, i.e., built-in, meaning that the compiler generates the code for them directly at the point of calls. There is no actual function body for any of them so there is no performance penalty.

Any private type directly supports the equality function, and consequently the inequality function, as well as assignment. What we don't get here is address arithmetic, again because we don't have a compile-time view of the actual representation. That functionality is provided by package System.Storage_Elements, a child package we will cover later. We should say though, that the need for address arithmetic in Ada is rare, especially compared to C.

Having type **Address** presented as a private type is not, strictly speaking, required by the language. Doing so is a good idea for the reasons given above, and is common among vendors. Not all vendors do, though.

Note that **Address** is the type of the result of the query attribute **Address**.

We mentioned potentially needing to swap bytes in networking communications software, due to the differences in the "endianness" of the machines communicating. That characteristic can be determined via a constant declared in package System as follows:

```
type Bit_Order is (High_Order_First, Low_Order_First);
Default_Bit_Order : constant Bit_Order := implementation-defined;
```

`High_Order_First` corresponds to "Big Endian" and `Low_Order_First` to "Little Endian." On a Big Endian machine, bit 0 is the most significant bit. On a Little Endian machine, bit 0 is the least significant bit.

Strictly speaking, this constant gives us the default order for bits within storage elements in record representation clauses, not the order of bytes within words. However, we can usually use it for the byte order too. In particular, if `Word_Size` is greater than `Storage_Unit`, a word necessarily consists of multiple storage elements, so the default bit ordering is the same as the ordering of storage elements in a word.

Let's take that example of swapping the bytes in a received Ethernet packet. The "wire" format is Big Endian so if we are running on a Little Endian machine we must swap the bytes received.

Suppose we want to retrieve typed values from a given buffer or bytes. We get the bytes from the buffer into a variable named `Value`, of the type of interest, and then swap those bytes within `Value` if necessary.

```
   ...
begin
   Value := ...

   if Default_Bit_Order /= High_Order_First then
      -- we're not on a Big Endian machine
      Value := Byte_Swapped (Value);
   end if;
end Retrieve_4_Bytes;
```

We have elided the code that gets the bytes into `Value`, for the sake of simplicity. How the bytes are actually swapped by function `Byte_Swapped` is also irrelevant. The point here is the if-statement: the expression compares the `Default_Bit_Order` constant to `High_Order_First` to see if this execution is on a Big Endian machine. If not, it swaps the bytes because the incoming bytes are always received in "wire-order," i.e., Big Endian order.

Another important set of declarations in package `System` define the values for priorities, including interrupt priorities. We will ignore them until we get to the section on interrupt handling.

Finally, and perhaps surprisingly, a few declarations in package `System` are almost always (if not actually always) ignored.

```
type Name is implementation-defined-enumeration-type;
System_Name : constant Name := implementation-defined;
```

Values of type `Name` are the names of alternative machine configurations supported by the implementation. `System_Name` represents the current machine configuration. We've never seen any actual use of this.

`Memory_Size` is an implementation-defined value that is intended to reflect the memory size of the configuration, in units of storage elements. What the value actually refers to is not specified. Is it the size of the address space, i.e., the amount possible, or is it the amount of physical memory actually on the machine, or what? In any case, the amount of memory available to a given computer is neither dependent upon, nor reflected by, this constant. Consequently, `Memory_Size` is not useful either.

Why have something defined in the language that nobody uses? In short, it seemed like a good idea at the time when Ada was first defined. Upward-compatibility concerns propagate these declarations forward as the language evolves, just in case somebody does use them.

47.4 Querying Representation Choices

As we mentioned in the introduction, in low-level programming the hardware and the compiler's representation choices can come to the forefront. You can, therefore, query many such choices.

For example, let's say we want to query the addresses of some objects because we are calling the imported C `memcpy` function. That function requires two addresses to be passed to the call: one for the source, and one for the destination. We can use the `'Address` attribute to get those values.

We will explore importing routines and objects implemented in other languages elsewhere. For now, just understand that we will have an Ada declaration for the imported routine that tells the compiler how it should be called. Let's assume we have an Ada function declared like so:

```
function MemCopy
  (Destination : System.Address;
   Source      : System.Address;
   Length      : Natural)
return Address
with
  Import,
  Convention => C,
  Link_Name => "memcpy",
  Pre  => Source /= Null_Address      and then
          Destination /= Null_Address and then
          not Overlapping (Destination, Source, Length),
  Post => MemCopy'Result = Destination;
--  Copies Length bytes from the object designated by Source to the object
--  designated by Destination.
```

The three aspects that do the importing are specified after the reserved word **`with`** but can be ignored for this discussion. We'll talk about them later. The preconditions make explicit the otherwise implicit requirements for the arguments passed to `memcpy`, and the postcondition specifies the expected result returned from a successful call. Neither the preconditions nor the postconditions are required for importing external entities but they are good "guard-rails" for using those entities. If we call it incorrectly the precondition will inform us, and likewise, if we misunderstand the result the postcondition will let us know (at least to the extent that the return value does that).

For a sample call to our imported routine, imagine that we have a procedure that copies the bytes of a **`String`** parameter into a `Buffer` parameter, which is just a contiguous array of bytes. We need to tell `MemCopy` the addresses of the arguments passed so we apply the `'Address` attribute accordingly:

```
procedure Put (This : in out Buffer; Start : Index; Value : String) is
   Result : System.Address with Unreferenced;
begin
   Result := MemCopy (Destination => This (Start)'Address,
                      Source      => Value'Address,
                      Length      => Value'Length);
end Put;
```

The order of the address parameters is easily confused so we use the named association format for specifying the actual parameters in the call.

Although we assign `Result` we don't otherwise use it, so we tell the compiler this is not a mistake via the `Unreferenced` aspect. And if we do turn around and reference it the compiler will complain, as it should. Note that `Unreferenced` is defined by GNAT, so usage is not necessarily portable. Other vendors may or may not implement something like it, perhaps with a different name.

(We don't show the preconditions for Put, but they would have specified that Start must be a valid index into this particular buffer, and that there must be room in the Buffer argument for the number of bytes in Value when starting at the Start index, so that we don't copy past the end of the Buffer argument.)

There are other characteristics we might want to query too.

We might want to ask the compiler what alignment it chose for a given object (or type, for all such objects).

For a type, when Alignment returns a non-zero value we can be sure that the compiler will allocate storage for objects of the type at correspondingly aligned addresses (unless we force it to do otherwise). Similarly, references to dynamically allocated objects of the type will be to properly aligned locations. Otherwise, an Alignment of zero means that the guarantee does not hold. That could happen if the type is packed down into a composite object, such as an array of Booleans. We'll discuss "packing" soon. More commonly, the smallest likely value is 1, meaning that any storage element's address will suffice. If the machine has no particular natural alignments, then all type alignments will probably be 1 by default. That would be somewhat rare today, though, because modern processors usually have comparatively strict alignment requirements.

We can ask for the amount of storage associated with various entities. For example, when applied to a task, 'Storage_Size tells us the number of storage elements reserved for the task's execution. The value includes the size of the task's stack, if it has one. We aren't told if other required storage, used internally in the implementation, is also included in this number. Often that other storage is not included in this number, but it could be.

Storage_Size is also defined for access types. The meaning is a little complicated. Access types can be classified into those that designate only variables and constants ("access-to-object") and those that can designate subprograms. Each access-to-object type has an associated storage pool. The storage allocated by **new** comes from the pool, and instances of Unchecked_Deallocation return storage to the pool.

When applied to an access-to-object type, Storage_Size gives us the number of storage elements reserved for the corresponding pool.

Note that Storage_Size doesn't tell us how much available, unallocated space remains in a pool. It includes both allocated and unallocated space. Note, too, that although each access-to-object type has an associated pool, that doesn't mean that each one has a distinct, dedicated pool. They might all share one, by default. On an operating system, such as Linux, the default shared pool might even be implicit, consisting merely of calls to the OS routines in C.

As a result, querying Storage_Size for access types and tasks is not necessarily all that useful. Specifying the sizes, on the other hand, definitely can be useful.

That said, we can create our own pool types and define precisely how they are sized and how allocation and deallocation work, so in that case querying the size for access types could be more useful.

For an array type or object, 'Component_Size provides the size in bits of the individual components.

More useful are the following two attributes that query a degree of memory sharing between objects.

Applied to an object, 'Has_Same_Storage is a Boolean function that takes another object of any type as the argument. It indicates whether the two objects' representations occupy exactly the same bits.

Applied to an object, 'Overlaps_Storage is a Boolean function that takes another object of any type as the argument. It indicates whether the two objects' representations share at least one bit.

Generally, though, we specify representation characteristics far more often than we query them. Rather than describe all the possibilities, we can just say that all the representation characteristics that can be specified can also be queried. We cover specifying representation characteristics next, so just assume the corresponding queries are available.

That said, there is one particular representation query we need to talk about explicitly, now, because there is a lot of confusion about it: the `'Size` attribute. The confusion stems from the fact that there are multiple contexts for applying the attribute, and multiple reasonable interpretations possible. We can apply the `'Size` attribute to a type, in an attempt to get information about all objects of the type, or we can apply it to individual objects to get specific information. In both cases, what actual information do we get? In the original version of Ada these questions weren't really answered so vendors did what they thought was correct. But they did not agree with each other, and portability became a problem.

For example, suppose you want to convert some value to a series of bytes in order to send the value over the wire. To do that you need to know how many bytes are required to represent the value. Many applications queried the size of the type to determine that, and then, when porting to a new vendor's compiler, found that their code no longer worked correctly. The new vendor's implementation wasn't wrong, it was just different.

Later versions of Ada answered these questions, where possible, so let's examine the contexts and meaning. Above all, though, remember that `'Size` returns values in terms of **bits**.

If we apply `'Size` to a type, the resulting value depends on the kind of type.

For scalar types, the attribute returns the *minimum* number of bits required to represent all the values of the type. Here's a diagram showing what the category "scalar types" includes:

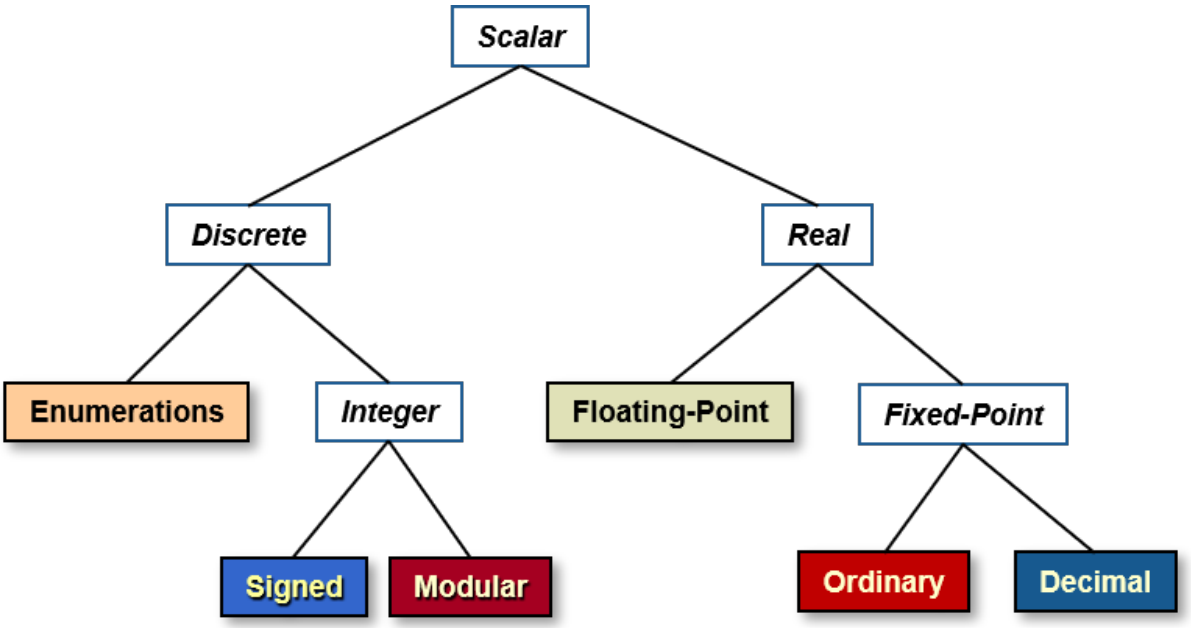

Consider type `Boolean`, which has two possible values. One bit will suffice, and indeed the language standard requires `Boolean'Size` to be the value 1.

This meaning also applies to subtypes, which can constrain the number of values for a scalar type. Consider subtype `Natural`. That's a subtype defined by the language to be type `Integer` but with a range of `0 .. Integer'Last`. On a 32-bit machine we would expect `Integer` to be a native type, and thus 32-bits. On such a machine if we say `Integer'Size` we will indeed get 32. But if we say `Natural'Size` we will get 31, not 32, because only 31 bits are needed to represent that range on that machine.

The size of objects, on the other hand, cannot be just a matter of the possible values. Consider type `Boolean` again, where `Boolean'Size` is required to be 1. No compiler is likely to

allocate one bit to a **Boolean** variable, because typical machines don't support individually-addressable bits. Instead, addresses refer to storage elements, of a size indicated by the `Storage_Unit` constant. The compiler will allocate the smallest number of storage elements necessary, consistent with other considerations such as alignment. Therefore, for a machine that has `Storage_Unit` set to a value of eight, we can assume that a compiler for that machine will allocate an entire eight-bit storage element to a stand-alone **Boolean** variable. The other seven bits are simply not used by that variable. Moreover, those seven bits are not used by any other stand-alone object either, because access would be far less efficient, and such sharing would require some kind of locking to prevent tasks from interfering with each other when accessing those stand-alone objects. (Stand-alone objects are independently addressable; they wouldn't stand alone otherwise.)

By the same token (and still assuming a 32-bit machine), a compiler will allocate more than 31 bits to a variable of subtype Natural because there is no 31-bit addressable unit. The variable will get all 32-bits.

Note that we're talking about individual, stand-alone variables. Components of composite types, on the other hand, might indeed share bytes if the individual components don't require all the bits of their storage elements. You'd have to request that representation, though, with most implementations, because accessing the components at run-time would require more machine instructions. We'll go into the details of that later.

Let's talk further about sizes of types.

For record types, `'Size` gives the minimum number of bits required to represent the whole composite value. But again, that's not necessarily the number of bits required for the objects' in-memory representation. The order of the components within the record can make a difference, as well as their alignments. The compiler will respect the alignment requirements of the components, and may add padding bytes within the record and also at the end to ensure components start at addresses compatible with their alignment requirements. As a result the overall size could be larger.

Note that Ada compilers are allowed to reorder the components; the order in memory might not match the order in the source code.

For example, consider this record type and its components:

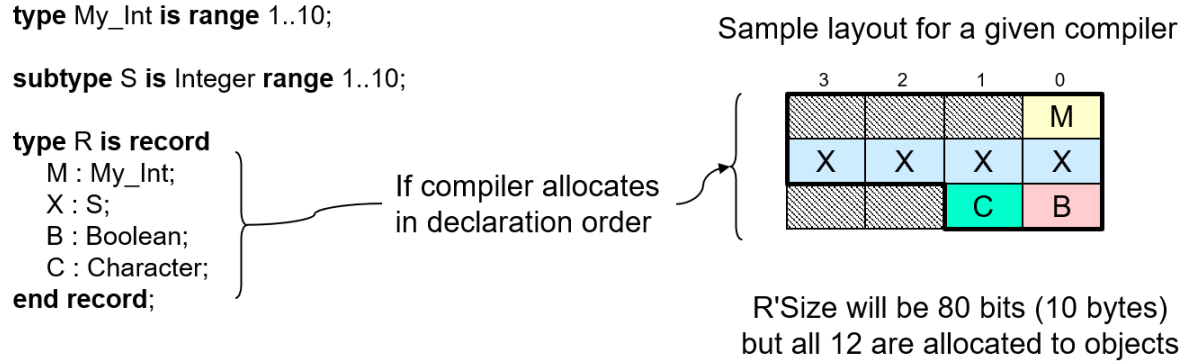

In the figure, we see a record type with some components, and a sample layout for that record type assuming the compiler does not reorder the components. Observe that some bytes allocated to objects of type R are unused (the darkly shaded ones). In this case that's because the alignment of subtype S happens to be 4 on this machine. The component X of that subtype S cannot start at byte offset 1, or 2, or 3, because those addresses would not satisfy the alignment constraint of S. (We're assuming byte 0 is at a word-aligned address.) Therefore, X starts at the object's starting address plus 4. Components B and C are of types that have an alignment of 1, so they can start at any storage element. They immediately follow the bytes allocated to component X. Therefore, `R'Size` is 80, or 10 bytes. The three bytes following component `M` are simply not used.

But what about the two bytes following the last component `C`? They could be allocated to

stand-alone objects if they would fit. More likely, though, the compiler will allocate those two bytes to objects of type R, that is, 12 bytes instead of 10 are allocated. As a result, 96 bits are actually used in memory. The extra, unused 16 bits are "padding."

Why add unused padding? It simplifies the memory allocation of objects of type R. Suppose some array type has components of record type R. Assuming the first component is aligned properly, every following component will also be aligned properly, automatically, because the two padding bytes are considered parts of the components.

To make that work, the compiler takes the most stringent alignment of all the record type's components and uses that for the alignment of the overall record type. That way, any address that satisfies the record object's alignment will satisfy the components' alignment requirements. The alignment is component X, of subtype S, is 4. The other components have an alignment of 1, therefore R'`Alignment` is 4. An aligned address plus 12 will also be an aligned address.

This rounding up based on alignment is recommended behavior for the compiler, not a requirement, but is reasonable and typical among vendors. Although it can result in unused storage, that's the price paid for speed of access (or even correctness for machines that would fault on misaligned component accesses).

As you can see, alignment is a critical factor in the sizes of composite objects. If you care about the layout of the type you very likely need to care about the alignment of the components and overall record type.

Ada compilers are allowed to reorder the components of record types in order to minimize these gaps or satisfy the alignment requirements of the components. Some compilers do, some don't. Consider the type R again, this time with the first two components switched in the component declaration order:

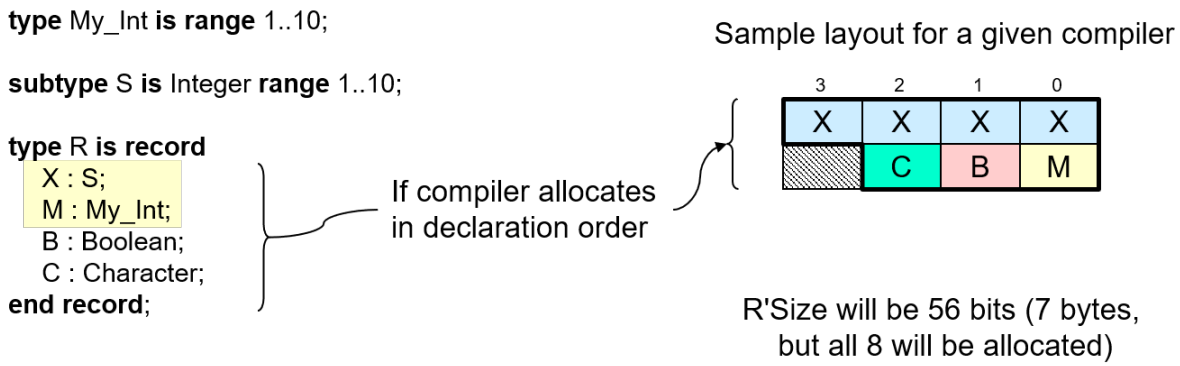

Now R'`Size` will report 56 bits instead of 80. The one trailing byte will still be padding, but only that one.

What about unbounded types, for example type **`String`**? Querying the '`Size` in that case would provide an implementation-defined result. A somewhat silly thing to do, really, since the type — by definition — doesn't specify how many components are involved.

Usually, though, you don't want to query the size of a type. Most of the time what you want is the size of objects of the type. Going back to sending values over the wire, the code should query the size of the *parameter* holding the value to be sent. That will tell you how many bits are really needed.

One last point: GNAT, and now Ada 202x, define an attribute named `Object_Size`. It does just what the name suggests: what '`Size` does when applied to objects rather than types. GNAT also defines another attribute, named `Value_Size`, that does what '`Size` does when applied to types. The former is far more useful so Ada has standardized it.

47.5 Specifying Representation

Recall that we said `Boolean'Size` is required to be 1, and that stand-alone objects of type `Boolean` are very likely allocated some integral number of storage elements (e.g., bytes) in memory, typically one. What about arrays of Booleans? Suppose we have an array of 16 Boolean components. How big are objects of the array type? It depends on the machine. Continuing with our hypothetical (but typical) byte-addressable machine, for the sake of efficient access each component is almost certainly allocated an individual byte rather than a single bit, just like stand-alone objects. Consequently, our array of 16 Booleans will be reported by `'Size` to be 128 bits, i.e., 16 bytes. If you wanted a bit-mask, in which each Boolean component is allocated a single bit and the total array size is 16 bits, you'd have a problem. The compiler assumes you want speed of access rather than storage minimization, and normally that would be the right assumption.

Naturally there is a solution. Ada allows us to specify the representation characteristics of types, and thus objects of those types, including their bit-wise layouts. It also allows us to specify the representation of individual objects. You should understand, though, that the compiler is not required to do what you ask, because you might ask the impossible. For example, if you specify that the array of 16 Booleans is to be represented completely in 15 bits, what can the compiler do? Rejecting that specification is the only reasonable response. But if you specify something possible, the compiler must do what you ask, absent some compelling reason to the contrary.

With that in mind, let's examine setting the size for types.

So, how do we specify that we want our array of 16 Boolean components to be allocated one bit per component, for a total allocation of 16 bits? There are a couple of ways, one somewhat better than the other.

First, you can ask that the compiler "pack" the components into as small a number of bits as it can:

```
type Bits16 is array (0 .. 15) of Boolean with
  Pack;
```

That likely does what you want: `Bits16'Size` will probably be 16.

But realize that the `Pack` aspect (and corresponding pragma) is merely a request that the compiler do its best to minimize the number of bits allocated, not necessarily that it do exactly what you expected or required.

We could set the size of the entire array type:

```
type Bits16 is array (0 .. 15) of Boolean with
  Size => 16;
```

But the language standard says that a `Size` clause on array and record types should not affect the internal layout of their components. That's Implementation Advice, so not normative, but implementations are really expected to follow the advice, absent some compelling reason. That's what the `Pack` aspect, record representation clauses, and `Component_Size` clauses are for. (We'll talk about record representation clauses momentarily.) That said, at least one other vendor's compiler would have changed the size of the array type because of the `Size` clause, so GNAT defines a configuration pragma named `Implicit_Packing` that overrides the default behavior. With that pragma applied, the `Size` clause would compile and suffice to make the overall size be 16. That's a vendor-defined pragma though, so not portable.

Therefore, the best way to set the size for the array type is to set the size of the individual components, via the `Component_Size` aspect as the Implementation Advice indicates. That will say what we really want, rather than a "best effort" request for the compiler, and is portable:

```
type Bits16 is array (0 .. 15) of Boolean with
  Component_Size => 1;
```

With this approach the compiler must either use the specified size for each component or refuse to compile the code. If it compiles, objects of the array type will be 16 bits total (plus any padding bits required to make objects have a size that is a multiple of Storage_Unit, typically zero on modern machines).

Now that we have a bit-mask array type, let's put it to use.

Let's say that you have an object that is represented as a simple signed integer because, for most usage, that's the appropriate representation. Sometimes, though, let's say you need to access individual bits of the object instead of the whole numeric value. Signed integer types don't provide bit-level access. In Ada we'd say that the "view" presented by the object's type doesn't include bit-oriented operations. Therefore, we need to add a view to the object that does provide them. A different view will require an additional type for the same object.

Applying different types, and thus their operations, to the same object is known as type punning[394] in computer programming. Realize that doing so circumvents the static strong typing we harness to protect us from ourselves and from others. Use it with care! (For example, limit the compile-time visibility to such code.)

One way to add a view is to express an "overlay," in which an object of one type is placed at the same memory location as a distinct object of a different type, thus "overlaying" one object over the other in memory. The different types present different views, therefore different operations available for the shared memory cells. Our hypothetical example uses two views, but you can overlay as many different views as needed. (That said, requiring a large number of different views of the same object would be suspect.)

There are other ways in Ada to apply different views, some more flexible than others, but an overlay is a simple one that will often suffice.

Here is an implementation of the overlay approach, using our bit-mask array type:

```
type Bits32 is array (0 .. 31) of Boolean with
  Component_Size => 1;

X : Integer;
Y : Bits32 with Address => X'Address;
```

We can query the addresses of objects, and other things too, but objects, especially variables, are the most common case. In the above, we say `X'Address` to query the starting address of object X. With that information we know what address to specify for our bit-mask overlay object Y. Now X and Y are aliases for the same memory cells, and therefore we can manipulate and query that memory as either a signed integer or as an array of bits. Reading or updating individual array components accesses the individual bits of the overlaid object.

Instead of the `Bits32` array type, we could have specified a modular type for the overlay Y to get a view providing bit-oriented operations. Overlaying such an array was a common idiom prior to the introduction of modular "unsigned" types in Ada, and remains useful for accessing individual bits. In other words, using a modular type for Y, you could indeed access an individual bit by passing a mask value to the **and** operator defined in any modular type's view. Using a bit array representation lets the compiler do that work for you, in the generated code. The source code will be both easier to read and more explicit about what it is doing when using the bit array overlay.

One final issue remains: in our specific overlay example the compiler would likely generate code that works. But strictly speaking it might not.

[394] https://en.wikipedia.org/wiki/Type_punning

The Ada language rules say that for such an overlaid object — Y in the example above — the compiler should not perform optimizations regarding Y that it would otherwise apply in the absence of aliases. That's necessary, functionally, but may imply degraded performance regarding Y, so keep it in mind. Aliasing precludes some desirable optimizations.

But what about X in the example above? We're querying that object's address, not specifying it, so the RM rule precluding optimizations doesn't apply to X. That can be problematic.

The compiler might very well place X in a register, for example, for the sake of the significant performance increase (another way of being friendly). But in that case `System.Null_Address` will be returned by the `X'Address` query and, consequently, the declaration for Y will not result in the desired overlaying.

Therefore, we should mark X as explicitly **`aliased`** to ensure that `X'Address` is well-defined:

```
type Bits32 is array (0 .. 31) of Boolean with
  Component_Size => 1;

X : aliased Integer;
Y : Bits32 with Address => X'Address;
```

The only difference in the version above is the addition of **`aliased`** in the declaration of X. Now we can be certain that the optimizer will not represent X in some way incompatible with the idiom, and `X'Address` will be well-defined.

In our example X and Y are clearly declared in the same compilation unit. Most compilers will be friendly in this scenario, representing X in such a way that querying the address will return a non-null address value even if **`aliased`** is not applied. Indeed, **`aliased`** is relatively new to Ada, and earlier compilers typically emitted code that would handle the overlay as intended.

But suppose, instead of being declared in the same declarative part, that X was declared in some other compilation unit. Let's say it is in the visible part of a package declaration. (Assume X is visible to clients for some good reason.) That package declaration can be, and usually will be, compiled independently of clients, with the result that X might be represented in some way that cannot supporting querying the address meaningfully.

Therefore, the declaration of X in the package spec should be marked as aliased, explicitly:

```
package P is
   X : aliased Integer;
end P;
```

Then, in the client code declaring the overlay, we only declare Y, assuming a with-clause for P:

```
type Bits32 is array (0 .. 31) of Boolean with
  Component_Size => 1;

Y : Bits32 with Address => P.X'Address;
```

All well and good, but how did the developer of the package know that some other unit, a client of the package, would query the address of X, such that it needed to be marked as aliased? Indeed, the package developer might not know. Yet the programmer is responsible for ensuring a valid and appropriate **`Address`** value is used in the declaration of Y. Execution is erroneous otherwise, so we can't say what would happen in that case. Maybe an exception is raised or a machine trap, maybe not.

Worse, the switches that were applied when compiling the spec for package P can make a difference: `P.X` might not be placed in a register unless the optimizer is enabled. Hence the client code using Y might work as expected when built for debugging, with the optimizer disabled, and then not do so when re-built for the final release. You'd probably have to solve this issue by debugging the application.

On a related note, you may be asking yourself how to know that type **Integer** is 32 bits wide, so that we know what size array to use for the bit-mask. The answer is that you just have to know the target well when doing low-level programming. The hardware becomes much more visible, as we mentioned.

That said, you could at least verify the assumption:

```
pragma Compile_Time_Error (Integer'Object_Size /= 32,
                           "Integers expected to be 32 bits");
X : aliased Integer;
Y : Bits32 with Address => X'Address;
```

That's a vendor-defined pragma so this is not fully portable. It isn't an unusual pragma, though, so at least you can probably get the same functionality even if the pragma name varies.

Overlays aren't always structured like our example above, i.e., with two objects declared at the same time. We might apply a different type to the same memory locations at different times. Here's an example from the ADL to illustrate the idea. We'll elaborate on this example later, in another section.

First, a package declaration, with two functions that provide a device-specific unique identifier located in shared memory. Each function provides the same Id value in a distinct format. One format is a string of 12 characters, the other is a sequence of three 32-bit values. Hence both representations are the same size.

```
package STM32.Device_Id is

   subtype Device_Id_Image is String (1 .. 12);

   function Unique_Id return Device_Id_Image;

   type Device_Id_Tuple is array (1 .. 3) of UInt32
     with Component_Size => 32;

   function Unique_Id return Device_Id_Tuple;

end STM32.Device_Id;
```

In the package body we implement the functions as two ways to access the same shared memory, specified by `ID_Address`:

```
with System;

package body STM32.Device_Id is

   ID_Address : constant System.Address := System'To_Address (16#1FFF_7A10#);

   function Unique_Id return Device_Id_Image is
      Result : Device_Id_Image with Address => ID_Address, Import;
   begin
      return Result;
   end Unique_Id;

   function Unique_Id return Device_Id_Tuple is
      Result : Device_Id_Tuple with Address => ID_Address, Import;
   begin
      return Result;
   end Unique_Id;

end STM32.Device_Id;
```

`System'To_Address` is just a convenient way to convert a numeric value into an **Address**

value. The primary benefit is that the call is a static expression, but we can ignore that here. Using `Import` is a good idea to ensure that the Ada code does no initialization of the object, since the value is coming from the hardware via the shared memory. Doing so may not be necessary, depending on the type used, but is a good habit to develop.

The point of this example is that we have one object declaration per function, of a type corresponding to the intended function result type. Because each function places their local object at the same address, they are still overlaying the shared memory.

Now let's return, momentarily, to setting the size of entities, but now let's focus on setting the size of objects.

We've said that the size of an object is not necessarily the same as the size of the object's type. The object size won't be smaller, but it could be larger. Why? For a stand-alone object or a parameter, most implementations will round the size up to a storage element boundary, or more, so the object size might be greater than that of the type. Think back to **`Boolean`**, where `Size` is required to be 1, but stand-alone objects are probably allocated 8 bits, i.e., an entire storage element (on our hypothetical byte-addressed machine).

Likewise, recall that numeric type declarations are mapped to underlying hardware numeric types. These underlying numeric types provide at least the capabilities we request with our type declarations, e.g., the range or number of digits, perhaps more. But the mapped numeric hardware type cannot provide less than requested. If there is no underlying hardware type with at least our requested capabilities, our declarations won't compile. That mapping means that specifying the size of a numeric type doesn't necessarily affect the size of objects of the type. That numeric hardware type is the size that it is, and is fixed by the hardware.

For example, let's say we have this declaration:

```
type Device_Register is range 0 .. 2**5 - 1 with Size => 5;
```

That will compile successfully, because there will be a signed integer hardware type with at least that range. (Not necessarily, legally speaking, but realistically speaking, there will be such a hardware type.) Indeed, it may be an 8-bit signed integer, in which case `Device_Register'Size` will give us 5, but objects of the type will have a size of 8, unavoidably, even though we set `Size` to 5.

The difference between the type and object sizes can lead to potentially problematic code:

```
type Device_Register is range 0 .. 2**8 - 1 with Size => 8;

My_Device : Device_Register
  with Address => To_Address (...);
```

The code compiles successfully, and tries to map a byte to a hardware device that is physically connected to one storage element in the processor memory space. The actual address is elided as it is not important here.

That code might work too, but it might not. We might think that `My_Device'Size` is 8, and that `My_Device'Address` points at an 8-bit location. However, this isn't necessarily so, as we saw with the supposedly 5-bit example earlier. Maybe the smallest signed integer the hardware has is 16-bits wide. The code would compile because a 16-bit signed numeric type can certainly handle the 8-bit range requested. `My_Device'Size` would be then 16, and because `'Address` gives us the *starting* storage element, `My_Device'Address` might designate the high-order byte of the overall 16-bit object. When the compiler reads the two bytes for `My_Device` what will happen? One of the bytes will be the data presented by the hardware device mapped to the memory. The other byte will contain undefined junk, whatever happens to be in the memory cell at the time. We might have to debug the code a long time to identify that as the problem. More likely we'll conclude we have a failed device.

The correct way to write the code is to specify the size of the object instead of the type:

```
type Device_Register is range 0 .. 2**8 - 1;

My_Device : Device_Register with
  Size => 8,
  Address => To_Address (...);
```

If the compiler cannot support stand-alone 8-bit objects for the type, the code won't compile.

Alternatively, we could change the earlier Size clause on the type to apply Object_Size instead:

```
type Device_Register is range 0 .. 2**8 - 1 with Object_Size => 8;

My_Device : Device_Register with
  Address => To_Address (...);
```

The choice between the two approaches comes down to personal preference, at least if only a small number of stand-alone objects of the type are going to be declared. With either approach, if the implementation cannot support 8-bit stand-alone objects, we find out that there is a problem at compile-time. That's always cheaper than debugging.

You might conclude that setting the Size for a type serves no purpose. That's not an unreasonable conclusion, given what you've seen, but in fact there are reasons to do so. However, there are only a few specific cases so we will save the reasons for the discussions of the specific cases.

There is one general case, though, for setting the 'Size of a type. Specifically, you may want to specify the size that you think is the minimum possible, and you want the compiler to confirm that belief. This would be one of the so-called "confirming" representation clauses, in which the representation detail is what the compiler would have chosen anyway, absent the specification. You're not actually changing anything, you're just getting confirmation via Size whether or not the compiler accepts the clause. Suppose, for example, that you have an enumeration type with 256 values. For enumeration types, the compiler allocates the smallest number of bits required to represent all the values, rounded up to the nearest storage element. (It's not like C, where enums are just named int values.) For 256 values, an eight-bit byte would suffice, so setting the size to 8 would be confirming. But suppose we actually had 257 enumerals, accidentally? Our size clause set to 8 would not compile, and we'd be told that something is amiss.

However, note that if your supposedly "confirming" size clause actually specifies a size larger than what the compiler would have chosen, you won't know, because the compiler will silently accept sizes larger than necessary. It just won't accept sizes that are too small.

There are other confirming representation clauses as well. Thinking again of enumeration types, the underlying numeric values are integers, starting with zero and consecutively increasing from there up to N-1, where N is the total number of enumeral values.

For example:

```
type Commands is (Off, On);

for Commands use (Off => 0, On => 1);
```

As a result, Off is encoded as 0 and On as 1. That specific underlying encoding is guaranteed by the language, as of Ada 95, so this is just a confirming representation clause nowadays. But it was not guaranteed in the original version of the language, so if you wanted to be sure of the encoding values you would have specified the above. It wasn't necessarily confirming before Ada 95, in other words.

But let's also say that the underlying numeric values are not what you want because you're interacting with some device and the commands are encoded with values other than 0 and

1. Maybe you want to use an enumeration type because you want to specify all the possible values actually used by clients. If you just used some numeric type instead and made up constants for `On` and `Off`, there's nothing to keep clients from using other numeric values in place of the two constants (absent some comparatively heavy code to prevent that from happening). Better to use the compiler to make that impossible in the first place, rather than debug the code to find the incorrect values used. Therefore, we could specify different encodings:

```
for Commands use (Off => 2, On => 4);
```

Now the compiler will use those encoding values instead of 0 and 1, transparently to client code.

The encoding values specified must maintain the relative ordering, otherwise the relational operators won't work correctly. For example, for type Commands above, Off is less than On, so the specified encoding value for Off must be less than that of On.

Note that the values given in the example no longer increase consecutively, i.e., there's a gap. That gap is OK, in itself. As long as we use the two enumerals the same way we'd use named constants, all is well. Otherwise, there is both a storage issue and a performance issue possible. Let's say that we use that enumeration type as the index for an array type. Perfectly legal, but how much storage is allocated to objects of this array type? Enough for exactly two components? Four, with two unused? The answer depends on the compiler, and is therefore not portable. The bigger the gaps, the bigger the overall storage difference possible. Likewise, imagine we have a for-loop iterating over the index values of one of these array objects. The for-loop parameter cannot be coded by the compiler to start at 0, clearly, because there is no index (enumeration) value corresponding to 0. Similarly, to get the next index, the compiler cannot have the code simply increment the current value. Working around that takes some extra code, and takes some extra time that would not be required if we did not have the gaps.

The performance degradation can be significant compared to the usual code generated for a for-loop. Some coding guidelines say that you shouldn't use an enumeration representation clause for this reason, with or without gaps. Now that Ada has type predicates we could limit the values used by clients for a numeric type, so an enumeration type is not the only way to get a restricted set of named, encoded values.

```
type Commands is new Integer with
   Static_Predicate => Commands in 2 | 4;

On    : constant Commands := 2;
Off   : constant Commands := 4;
```

The storage and performance issues bring us back to confirming clauses. We want the compiler to recognize them as such, so that it can generate the usual code, thereby avoiding the unnecessary portability and performance issues. Why would we have such a confirming clause now? It might be left over from the original version of the language, written before the Ada 95 change. Some projects have lifetimes of several decades, after all, and changing the code can be expensive (certified code, for example). Whether the compiler does recognize confirming clauses is a feature of the compiler implementation. We can expect a mature compiler to do so, but there's no guarantee.

Now let's turn to what is arguably the most common representation specification, that of record type layouts.

Recall from the discussion above that Ada compilers are allowed to reorder record components in physical memory. In other words, the textual order in the source code is not necessarily the physical order in memory. That's different from, say, C, where what you write is what you get, and you better know what you're doing. On some targets a misaligned **`struct`** component access will perform very poorly, or even trap and halt, but that's not the C compiler's fault. In Ada you'd have to explicitly specify the problematic layout. Otherwise, if compilation is successful, the Ada compiler must find a representation that will

work, either by reordering the components or by some other means. Otherwise it won't compile.

GNAT did not reorder components until relatively recently but does now, at least for the more egregious performance cases. It does this reordering silently, too, although there is a switch to have it warn you when it does. To prevent reordering, GNAT defines a pragma named `No_Component_Reorder` that does what the name suggests. You can apply it to individual record types, or globally, as a configuration pragma. But of course because the pragma is vendor defined it is not portable.

Therefore, if you care about the record components' layout in memory, the best approach is to specify the layout explicitly. For example, perhaps you are passing data to code written in C. In that case, you need the component order in memory to match the order given in the corresponding C struct declaration. That order in memory is not necessarily guaranteed from the order in the Ada source code. The Ada compiler is allowed to chose the representation unless you specify it, and it might chose a different layout from the one given. (Ordinarily, letting the compiler chose the layout is the most desirable approach, but in this case we have an external layout requirement.)

Fortunately, specifying a record type's layout is straightforward. The record layout specification consists of the storage places for some or all components, specified with a record representation clause. This clause specifies the order, position, and size of components (including discriminants, if any).

The approach is to first define the record type, as usual, using any component order you like — you're about to specify the physical layout explicitly, in the next step.

Let's reuse that record type from the earlier discussion:

```
type My_Int is range 1 .. 10;

subtype S is Integer range 1 .. 10;

type R is record
   M : My_Int;
   X : S;
   B : Boolean;
   C : Character;
end record;
```

The resulting layout might be like so, assuming the compiler doesn't reorder the components:

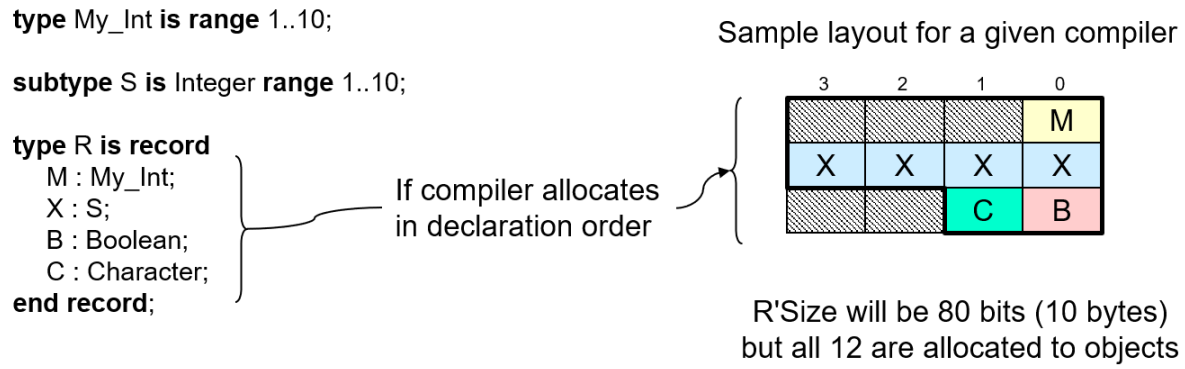

As a result, `R'Size` will be 80 bits (10 bytes), but those last two bytes will be will be allocated to objects, for an `Object_Size` of 96 bits (12 bytes). We'll change that with an explicit layout specification.

Having declared the record type, the second step consists of defining the corresponding record representation clause giving the components' layout. The clause uses syntax that somewhat mirrors that of a record type declaration. The components' names appear, as

in a record type declaration. But now, we don't repeat the components' types, instead we give their relative positions within the record, in terms of a relative offset that starts at zero. We also specify the bits we want them to occupy within the storage elements starting at that offset.

```
for R use record
   X at 0 range 0 .. 31;  -- note the order swap,
   M at 4 range 0 ..  7;  -- with this component
   B at 5 range 0 ..  7;
   C at 6 range 0 ..  7;
end record;
```

Now we'll get the optimized order, and we'll always get that order, or the layout specification won't compile in the first place. In the following diagram, both layouts, the default, and the one resulting from the record representation clause, are depicted for comparison:

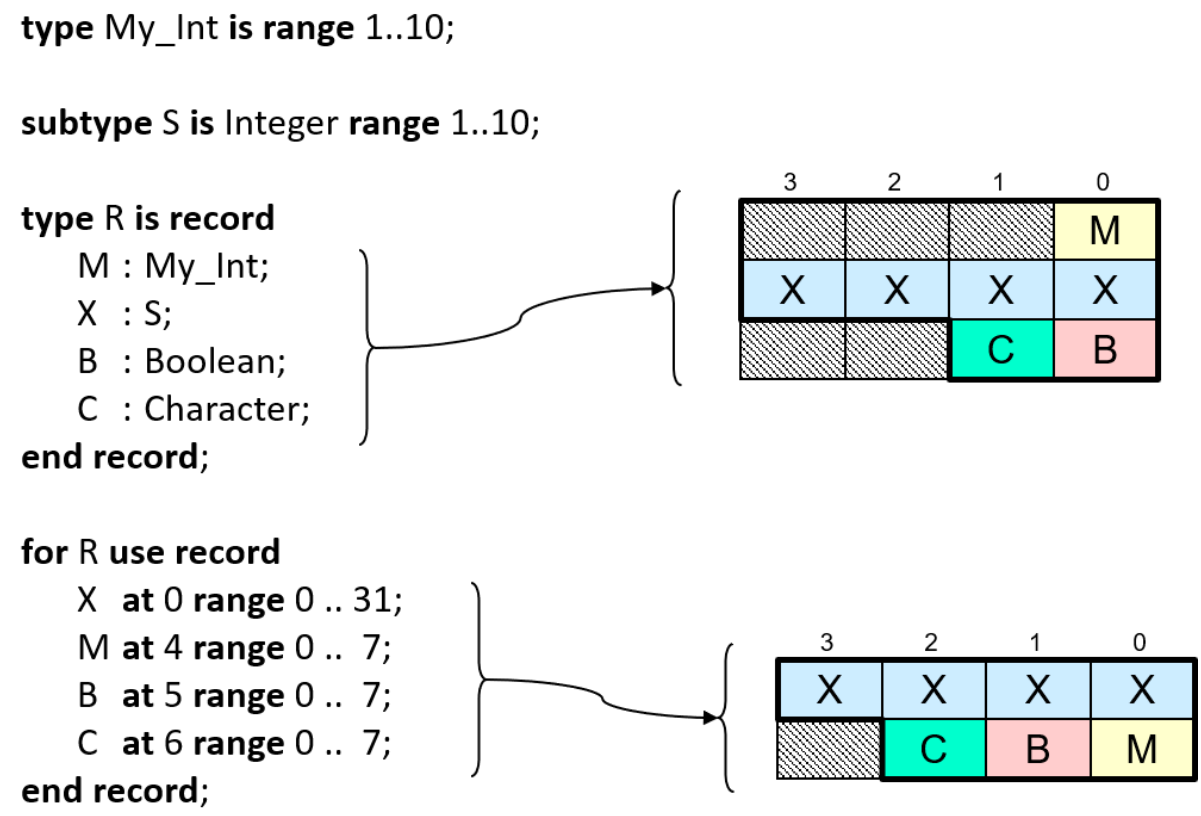

`R'Size` will be 56 bits (7 bytes), but that last padding byte will also be allocated to objects, so the `Object_Size` will be 64 bits (8 bytes).

Notice how we gave each component an offset, after the reserved word **`at`**. These offsets are in terms of storage elements, and specify their positions within the record object as a whole. They are relative to the beginning of the memory allocated to the record object so they are numbered starting at zero. We want the `X` component to be the very first component in the allocated memory so the offset for that one is zero. The `M` component, in comparison, starts at an offset of 4 because we are allocating 4 bytes to the prior component `X`: bytes 0 through 3 specifically. `M` just occupies one storage element so the next component, `B`, starts at offset 5. Likewise, component `C` starts at offset 6.

Note that there is no requirement for the components in the record representation clause to be in any particular textual order. The offsets alone specify the components' order in memory. A good style, though, is to order the components in the representation clause so that their textual order corresponds to their order in memory. Doing so facilitates our verifying that the layout is correct because the offsets will be increasing as we read the

specification.

An individual component may occupy part of a single storage element, all of a single storage element, multiple contiguous storage elements, or a combination of those (i.e., some number of whole storage elements but also part of another). The bit "range" specifies this bit-specific layout, per component, by specifying the first and last bits occupied. The X component occupies 4 complete 8-bit storage elements, so the bit range is 0 through 31, for a total of 32 bits. All the other components each occupy an entire single storage element so their bit ranges are 0 through 7, for a total of 8 bits.

The text specifying the offset and bit range is known as a "component_clause" in the syntax productions. Not all components need be specified by component_clauses, but (not surprisingly) at most one clause is allowed per component. Really none are required but it would be strange not to have some. Typically, all the components are given positions. If component_clauses are given for all components, the record_representation_clause completely specifies the representation of the type and will be obeyed exactly by the implementation.

Components not otherwise given an explicit placement are given positions chosen by the compiler. We don't say that they "follow" those explicitly positioned because there's no requirement that the explicit positions start at offset 0, although it would be unusual not to start there.

Placements must not make components overlap, except for components of variant parts, a topic covered elsewhere. You can also specify the placement of implementation-defined components, as long as you have a name to refer to them. (In addition to the components listed in the source code, the implementation can add components to help implement what you wrote explicitly.) Such names are always attribute references but the specific attributes, if any, are implementation-defined. It would be a mistake for the compiler to define such implicit components without giving you a way to refer to them. Otherwise they might go exactly where you want some other component to be placed, or overlap that place.

The positions (offsets) and the bit numbers must be static, informally meaning that they are known at compile-time. They don't have to be numeric literals, though. Numeric constants would work, but literals are the most common by far.

Note that the language does not limit support for component clauses to specific component types. They need not be one of the integer types, in particular. For example, a position can be given for components that are themselves record types, or array types. Even task types are allowed as far as the language goes, although the implementation might require a specific representation, such as the component taking no bits whatsoever (`0 .. -1`). There are restrictions that keep things sane, for example rules about how a component name can be used within the overall record layout construct, but not restrictions on the types allowed for individual components. For example, here is a record layout containing a **`String`** component, arbitrarily set to contain 11 characters:

```
type R is record
   S : String (1 .. 11);
   B : Boolean;
end record;

for R use record
   S at 0  range 0 .. 87;
   B at 11 range 0 .. 7;
end record;
```

Component S is to be the first component in memory in this example, hence the position offset is 0, for the first byte of S. Next, S is 11 characters long, or 88 bits, so the bit range is 0 .. 87. That's 11 bytes of course, so S occupies storage elements 0 .. 10. Therefore, the next component position must be at least 11, unless there is to be a gap, in which case it would be greater than 11. We'll place B immediately after the last character of S, so B is at storage element offset 11 and occupying all that one byte's bits.

We'll have more to say about record type layouts but first we need to talk about alignment.

Modern target architectures are comparatively strict about the address alignments for some of their types. If the alignment is off, an access to the memory for objects of the type can have highly undesirable consequences. Some targets will experience seriously degraded performance. On others, the target will halt altogether. As you can see, getting the alignment correct is a low-level, but vital, part of correct code on these machines.

Normally the compiler does this work for us, choosing an alignment that is both possible for the target and also optimal for speed of access. You can, however, override the compiler's alignment choice using an attribute definition clause or the `Alignment` aspect. You can do so on types other than record types, but specifying it on record types is typical. Here's our example record type with the alignment specified via the aspect:

```
type My_Int is range 1 .. 10;

subtype S is Integer range 1 .. 10;

type R is record
   M : My_Int;
   X : S;
   B : Boolean;
   C : Character;
end record with
   Alignment => 1;
```

Alignment values are in terms of storage elements. The effect of the aspect or attribute clause is to ensure that the starting address of the memory allocated to objects of the type will be a multiple of the specified value.

In fact, whenever we specify a record type layout we really should also specify the record type's alignment, even though doing so is optional. Why? The alignment makes a difference in the overall record object's size. We've seen that already, with the padding bytes: the compiler will respect the alignment requirements of the components, and may add padding bytes within the record and also at the end to ensure components start at addresses compatible with their alignment requirements. The alignment also affects the size allocated to the record type even when the components are already aligned. As a result the overall size could be larger than we want for the sake of space. Additionally, when we pass such objects to code written in other languages, we want to ensure that the starting address of these objects is aligned as the external code expects. The compiler might not choose that required alignment by default.

Specifying alignment for record types is so useful that in the first version of Ada there was no syntax to specify alignment for anything other than record types (via the obsolete **at mod** clause on record representation clauses).

For that reason GNAT provides a pragma named `Optimize_Alignment`. This is a configuration pragma that affects the compiler's choice of default alignments where no alignment is explicitly specified. There is a time/space trade-off in the selection of these values, as we've seen. The normal choice tries to balance these two characteristics, but with an argument to the pragma you can give more weight to one or the other. The best approach is to specify the alignments explicitly, per type, for those that require specific alignment values. The pragma has the nice property of giving general guidance to the compiler for what should be done for the other types and objects not explicitly specified.

Now let's look into the details. We'll use a case study for this purpose, including specifying sizes as well as alignments.

The code for the case study is as follows. It uses `Size` clauses to specify the `Sizes`, instead of the `Size` aspect, just to emphasize that the `Size` clause approach is not obsolete.

```
package Some_Types is

   type Temperature is range -275 .. 1_000;
```

(continues on next page)

(continued from previous page)

```
   type Identity is range 1 .. 127;

   type Info is record
      T  : Temperature;
      Id : Identity;
   end record;

   for Info use record
      T  at 0 range 0 .. 15;
      Id at 2 range 0 .. 7;
   end record;

   for Info'Size use 24;

   type List is array (1 .. 3) of Info;
   for List'Size use 24 * 3;

end Some_Types;
```

When we compile this, the compiler will complain that the size for `List` is too small, i.e., that the minimum allowed is 96 bits instead of the 72 we specified. We specified 24 * 3 because we said the record size should be 24 bits, and we want our array to contain 3 record components of that size, so 72 seems right.

What's wrong? As we've shown earlier, specifying the record type size doesn't necessarily mean that objects (in this case array components) are that size. The object size could be bigger than we specified for the type. In this case, the compiler says we need 96 total bits for the array type, meaning that each of the 3 array components is 32 bits wide instead of 24.

Why is it 32 bits? Because the alignment for `Info` is 2 (on this machine). The record alignment is a multiple of the largest alignment of the enclosed components. The alignment for type `Temperature` (2), is larger than the alignment for type `Identity` (1), therefore the alignment for the whole record type is 2. We need to go from that number of storage elements to a number of bits for the size.

Here's where it gets subtle. The alignment is in terms of storage elements. Each storage element is of a size in bits given by `System.Storage_Unit`. We've said that on our hypothetical machine `Storage_Unit` is 8, so storage elements are 8 bits wide on this machine. Bytes, in other words. Therefore, to get the required size in bits, we have to find a multiple of the two 8-bit bytes (specified by the alignment) that has at least the number of bits we gave in the `Size` clause. Two bytes only provides 16 bits, so that's not big enough, we need at least 24 bits. The next multiple of 2 bytes is 4 bytes, providing 32 bits, which is indeed larger than 24. Therefore, the overall size of the record type, consistent with the alignment, is 4 bytes, or 32 bits. That's why the compiler says each array component is 32 bits wide.

But for our example let's say that we really want to use only 72 total bits for the array type (and that we want three array components). That's the size we specified, after all. So how do we get the record type to be 24 bits instead of 32? Yes, you guessed it, we change the alignment for the record type. If we change it from 2 to 1, the size of 24 bits will work. Adding this `Alignment` clause line will do that:

```
for Info'Alignment use 1;
```

An alignment of 1 means that any address will work, assuming that addresses refer to entire storage elements. (An alignment of 0 would mean that the address need not start on a storage element boundary, but we know of no such machines.)

We can even entirely replace the `Size` clause with the `Alignment` clause, because the `Size` clause specifying 24 bits is just confirming: it's the value that `'Size` would return anyway.

The problem is the object size.

Now, you may be wondering why an alignment of 1 would work, given that the alignment of the `Temperature` component is 2. Wouldn't it slow down the code, or even trap? Well, maybe. It depends on the machine. If it doesn't work we would just have to use 32 bits for the record type, with the original alignment of 2, for a larger total array size. Of course, if the compiler recognizes that a representation cannot be supported it must reject the code, but the compiler might not recognize the problem.

We said earlier that there are only a small number of reasons to specify `'Size` for a type. We can mention one of them now. Setting `'Size` can be useful to give the minimum number of bits to use for a component of a packed composite type, that is, within either a record type or an array type that is explicitly packed via the aspect or pragma Pack. It says that the compiler, when giving its best effort, shouldn't compress components of the type any smaller than the number of bits specified. No, it isn't earth-shattering, but other uses are more valuable, to be discussed soon.

One thing we will leave unaddressed (pun intended) is the question of bit ordering and byte ordering within our record layouts. In other words, the "endian-ness". That's a subject beyond the scope of this course. Suffice it to say that GNAT provides a way to specify record layouts that are independent of the endian-ness of the machine, within some implementation-oriented limits. That's obviously useful when the code might be compiled for a different ISA in the future. On the other hand, if your code is specifically for a single ISA, e.g. Arm, even if different boards and hardware vendors are involved, there's no need to be independent of the endian-ness. It will always be the same in that case. (Those are "famous last words" though.) For an overview of the GNAT facility, an attribute named attribute `Scalar_Storage_Order` see https://www.adacore.com/papers/lady-ada-mediates-peace-treaty-in-endianness-war.

Although specifying record type layouts and alignments are perhaps the most common representation characteristics expressed, there are a couple of other useful cases. Both involve storage allocation.

One useful scenario concerns tasking. We can specify the number of storage elements reserved for the execution of a task object, or all objects of a task type. You use the `Storage_Size` aspect to do so:

```
task Servo with
  Storage_Size => 1 * 1024,
  ...
```

Or the corresponding pragma:

```
task Servo is
   pragma Storage_Size (1 * 1024);
end Servo;
```

The aspect seems textually cleaner and lighter unless you have task entries to declare as well. In that case the line for the pragma wouldn't add all that much. That's a matter of personal aesthetics anyway.

The specified number of storage elements includes the size of the task's stack (GNAT does have one, per task). The language does not specify whether or not it includes other storage associated with the task used for implementing and managing the task execution. With GNAT, the extent of the primary stack size is the value returned, ignoring any other storage used internally in the run-time library for managing the task.

The GNAT run-time library allocates a default stack amount to each task, with different defaults depending on the underlying O.S., or lack thereof, and the target. You need to read the documentation to find the actual amount, or, with GNAT, read the code.

You would need to specify this amount in order to either increase or decrease the allocated storage. If the task won't run properly, perhaps crashing at strange and seemingly random

places, there's a decent chance it is running out of stack space. That might also be the reason if you have a really deep series of subprogram calls that fails. The correction is to increase the allocation, as shown above. How much? Depends on the application code. The quick-and-dirty approach is to iteratively increase the allocation until the task runs properly. Then, reverse the approach until it starts to fail again. Add a little back until it runs, and leave it there. We'll mention a much better approach momentarily (**GNATstack**).

Even if the task doesn't seem to run out of task stack, you might want to reduce it anyway, to the extent possible, because the total amount of storage on your target might be limited. Some of the GNAT bare-metal embedded targets have very small amounts of memory available, so much so that the default task stack allocations would exhaust the memory available quickly. That's what the example above does: empirical data showed that the `Servo` task could run with just 1K bytes allocated, so we reduced it from the default accordingly. (We specified the size with that expression for the sake of readability, relative to using literals directly.)

Notice we said "empirical data" above. How do we know that we exercised the task's thread of control exhaustively, such that the arrived-at allocation value covers the worst case? We don't, not with certainty. If we really must know the allocation will suffice for all cases, say because this is a high-integrity application, we would use **GNATstack**. GNATstack is an offline tool that exploits data generated by the compiler to compute worst-case stack requirements per subprogram and per task. As a static analysis tool, its computation is based on information known at compile time. It does not rely on empirical run-time information.

The other useful scenario for allocating storage concerns access types, specifically access types whose values designate objects, as opposed to designating subprograms. (Remember, objects are either variables or constants.) There is no notion of dynamically allocating procedures and functions in Ada so access-to-subprogram types are not relevant here. But objects can be of protected types (or task types), and protected objects can "contain" entries and protected subprograms, so there's a lot of expressive power available. You just don't dynamically allocate procedures or functions as such.

First, a little background on access types, to supplement what we said earlier.

By default, the implementation chooses a standard storage pool for each named access-to-object type. The storage allocated by an allocator (i.e., **new**) for such a type comes from the associated pool.

Several access types can share the same pool. By default, the implementation might choose to have a single global storage pool, used by all such access types. This global pool might consist merely of calls to operating system routines (e.g., `malloc`), or it might be a vendor-defined pool instead. Alternatively, the implementation might choose to create a new pool for each access-to-object type, reclaiming the pool's memory when the access type goes out of scope (if ever). Other schemes are possible.

Finally, users may define new pool types, and may override the choice of pool for an access-to-object type by specifying `Storage_Pool` for the type. In this case, allocation (via **new**) takes memory from the user-defined pool and deallocation puts it back into that pool, transparently.

With that said, here's how to specify the storage to be used for an access-to-object type. There are two ways to do it.

If you specify `Storage_Pool` for an access type, you indicate a specific pool object to be used (user-defined or vendor-defined). The pool object determines how much storage is available for allocation via **new** for that access type.

Alternatively, you can specify `Storage_Size` for the access type. In this case, an implementation-defined pool is used for the access type, and the storage available is at least the amount requested, maybe more (it might round up to some advantageous block size, for example). If the implementation cannot satisfy the request, `Storage_Error` is raised.

It should be clear that that the two alternatives are mutually exclusive. Therefore the compiler will not allow you to specify both.

Each alternative has advantages. If your only concern is the total number of allocations possible, use `Storage_Size` and let the implementation do the rest. However, maybe you also care about the behavior of the allocation and deallocation routines themselves, beyond just providing and reclaiming the storage. In that case, use `Storage_Pool` and specify a pool object of the appropriate type. For example, you (or the vendor, or someone else) might create a pool type in which the allocation routine performs in constant time, because you want to do **`new`** in a real-time application where predictability is essential.

Lastly, an idiom: when using `Storage_Size` you may want to specify a value of zero. That means you intend to do no allocations whatsoever, and want the compiler to reject the code if you try. Why would you want an access type that doesn't allow dynamically allocating objects? It isn't as unreasonable as it might sound. If you plan to use the access type strictly with aliased objects, never doing any allocations, you can have the compiler enforce your intent. There are application domains that prohibit dynamic allocations due to the difficulties in analyzing their behavior, including issues of fragmentation and exhaustion. Access types themselves are allowed in these domains. You'd simply use them to designate aliased objects alone. In addition, in this usage scenario, if the implementation associates an actual pool with each access type, the pool's storage would be wasted since you never intend to allocate any storage from it. Specifying a size of 0 tells the implementation not to waste that storage.

Before we end this section, there is a GNAT compiler switch you should know about. Th `-gnatR?` switch instructs the compiler to list the representation details for the types, objects and subprograms in the compiled file(s). Both implementation-defined and user-defined representation details are presented. The '?' is just a placeholder and can be one of the following characters:

```
[0|1|2|3|4][e][j][m][s]
```

Increasing numeric values provide increasing amounts of information. The default is '1' and usually will suffice. See the GNAT User's Guide for Native Platforms for the details of the switch in section 4.3.15 Debugging Control[395].

You'll have to scroll down some to find that specific switch but it is worth finding and remembering. When you cannot understand what the compiler is telling you about the representation of something, this switch is your best friend.

47.6 Unchecked Programming

Ada is designed to be a reliable language by default, based as it is on static strong typing and high-level semantics. Many of the pitfalls that a developer must keep in the back of their mind with other languages do not apply in Ada, and are typically impossible. That protection extends to low-level programming as well, e.g., the Separation Principle. Nevertheless, low-level programming occasionally does require mechanisms that allow us to go beyond the safety net provided by the type rules and high-level language constructs.

One such mechanism (unchecked conversion) provides a way to circumvent the type system, a system otherwise firmly enforced by the compiler on our behalf. Note that by "circumventing the type system" we do not include so-called "checked" conversions. These conversions have meaningful semantics, and are, therefore, allowed by the language using a specific syntax. This conversion syntax is known as "functional" syntax because it looks like a function call, except that the "function" name is a type name, and the parameter is the object or value being converted to that type. These conversions are said to be "checked" because only specific kinds of types are allowed, and the compiler checks that such conversions are indeed between these allowed types.

[395] https://docs.adacore.com/gnat_ugn-docs/html/gnat_ugn/gnat_ugn/building_executable_programs_with_gnat.html#debugging-control

Instead, this section discusses "unchecked" programming, so-called because the compiler does not check for meaningful semantics. There are multiple mechanisms for unchecked programming in Ada: in addition to circumventing the type system, we can also deallocate a previously-allocated object, and can create an access value without the usual checks. In all cases the responsibility for correct meaning and behavior rests on the developer. Very few, if any, checks are done by the compiler. If we convert a value to another type that generally makes no sense, for example a task object converted to a record type, we are on our own. If we deallocate an allocated object more than once, it is our fault and Bad Things inevitably result.

Likened to "escape hatches," the facilities for unchecked programming are explicit in Ada. Their use is very clear in the source code, and is relatively heavy: each mechanism is provided by the language in the form of a generic library subprogram that must be specified in a context clause ("with-clause") at the top of the file, and then instantiated prior to use, like any generic. For an introduction to generic units in Ada, see that section in the introductory Ada course: *Introduction to Ada* (page 123)

You should understand that the explicitly unchecked facilities in Ada are no more unsafe than the implicitly unchecked facilities in other languages. There's no safety-oriented reason to "drop down" to C, for example, to do low-level programming. For that matter, the low-level programming facilities in Ada are at least as powerful as those in other languages, and probably more so.

We will explore unchecked storage deallocation in a separate book so let's focus on unchecked type conversions.

Unchecked type conversions are achieved by instantiating this language-defined generic library function, a "child" of the root package named "Ada":

```
generic
   type Source(<>) is limited private;
   type Target(<>) is limited private;
function Ada.Unchecked_Conversion (S : Source) return Target
   with Pure, Nonblocking, Convention => Intrinsic;
```

The function, once instantiated and eventually invoked, returns the caller's value passed to S (of type `Source`) as if it is a value of type `Target`. That value can then be used in any way consistent with the `Target` type.

The two generic parameters, `Source` and `Target`, are defined in a manner that makes them very permissive in terms of the types they will accept when instantiated. To understand how, you need to understand a little bit of Ada's terminology and design for generic unit parameters. (If you are already familiar with generic formal types and how they are matched, feel free to skip this material.)

First, the terminology. The type parameters defined by a generic unit are known as "generic formal types," or "generic formals" for short. Types `Source` and `Target` are the generic formals in the unit above. When instantiating such a generic, clients must specify a type for each generic formal type. The types specified by the client are known as "generic actual types," or "generic actuals" for short. You can remember that by the fact that the actuals are the types "actually" given to the generic unit to work with when instantiated. (You may laugh, but that mnemonic works.)

Now we're ready to discuss the language design concept. The idea is that the syntax of a generic formal type indicates what kind of generic actual is required for a legal instantiation. This is known as the "Contract Model" because we can think of the formal parameters as expressing a contract between the generic unit's implementation and the client code that instantiates the generic. The contract is enforced by the compiler, in that it will reject any instantiation that attempts to specify some actual type that does not match the formal's requirements.

For example, if the generic computes some value for any floating point type, that floating-point type would be declared as a generic formal type, and would be defined so that only

some floating-point type could be used for the corresponding actual type:

```
generic
   type Real is digits <>;
```

The formal parameter syntax reflects the syntax of a floating-point type declaration, except that the <> (the "box") indicates that the generic does not care how many digits are available. The generic actual will be some floating point type and it will specify the number of decimal digits.

If instead we try to match that formal with some actual that is anything other than a floating-point type the compiler will reject the instantiation. Therefore, within the generic body, the implementation code can be written with the assurance that the characteristics and capabilities required of a floating point type will be available. That's the Contract Model in full: the requirements are a matter of the generic unit's purpose and implementation, so the formal parameters reflect those requirements and the compiler ensures they will be met.

Some generic units, though, do not require specifically numeric actual types. These generics can use less specific syntax for their formal types, and as a result, more kinds of actual types are permitted in the instantiations. Remember the Contract Model and this will make sense. The contract between the generic and the clients is, in this case, more permissive: it does not require a numeric type in order to implement whatever it does.

For illustration, suppose we want a generic procedure that will exchange two values of some type. What operations does the generic unit require in the implementation in order to swap two values? There are two: assignment, as you might expect, but also the ability to declare objects of the type (the "temporary" used to hold one of the values during the swap steps). As long as the body can do that, any type will suffice, so the generic formals are written to be that permissive. What is the syntax that expresses that permissiveness, you ask? To answer that, first consider simple, non-generic private types from the user's point of view. For example:

```
package P is
   type Foo is private;
   procedure Do_Something (This : Foo);
private
   type Foo is ...  -- whatever
end P;
```

There are two "views" associated with the package: one for the "visible" part of the package spec (declaration), known as the "partial" view, and one for the "private" part of the package spec and the package body, known as the "full" view. The differences between the two views are a function of compile-time visibility.

The partial view is what clients (i.e., users) of the package have: the ability to do things that a type name provides, such as declarations of objects, as well as some basic operations such as assignment, some functions for equality and inequality, some conversions, and whatever subprograms work on the type (the procedure `Do_Something` above). Practically speaking, that's about all that the partial view provides. That's quite a lot, in fact, and corresponds to the classic definition of an "abstract data type."

The code within the package private part and package body has the full view. This code has compile-time visibility to the full definition for type Foo, so there are additional capabilities available to this code. For example, if the full definition for `Foo` is as an array type, indexing will be available with the private part and body. If Foo is fully defined as some numeric type, arithmetic operations will be possible within the package, and so on.

Therefore, the full view provides capabilities for type `Foo` that users of the type cannot access via the partial view. Only the implementation for type `Foo` and procedure `Do_Something` have the potential to access them.

Now, back to the generic formal parameter. If the generic unit doesn't care what the actual type is, and just needs to be able do assignment and object declaration, a "generic formal private type" expresses exactly that:

```
generic
   type Item is private;
procedure Exchange( Left, Right : in out Item );

procedure Exchange( Left, Right : in out Item ) is
   Old_Left : Item;
begin
   Old_Left := Left;
   Left := Right;
   Right := Old_Left;
end Exchange;
```

Inside generic procedure Exchange, the view of type `Item` is as if `Item` were some private type declared in a package, with only the partial view available. But the operations provided by a partial view are sufficient to implement the body of Exchange: only assignment and object declaration are required. Any additional capabilities that the generic actual type may have — array indexing, arithmetic operators, whatever — are immaterial because they are not required. That's the Contract Model: only the specified view's required capabilities are important. Anything else the type can also do is not relevant.

But consider limited types. Those types don't allow assignment, by definition. Therefore, an instantiation that specified a limited actual type for the generic formal type Item above would be rejected by the compiler. The contract specifies the ability to do assignment so a limited type would violate the contract.

Finally, as mentioned, our Exchange generic needs to declare the "temporary" object `Old_Left`. A partial view of a private type allows that. But not all types are sufficient, by their name alone, to declare objects. Unconstrained array types, such as type **`String`**, are a familiar example: they require the bounds to be specified when declaring objects; the name **`String`** alone is insufficient. Therefore, such types would also violate the contract and, therefore, would be rejected by the compiler when attempting to instate generic procedure Exchange.

Suppose, however, that we have some other generic unit whose implementation does not need to declare objects of the formal type. In that case, a generic actual type that did not support object declaration (by the name alone) would be acceptable for an instantiation. The generic formal syntax for expressing that contract uses these tokens: (<>) in addition to the other syntax mentioned earlier:

```
generic
   type Foo(<>) is private;
```

In the above, the generic formal type Foo expresses the fact that it can allow unconstrained types — known as "indefinite types" — when instantiated because it will not attempt to use that type name to declare objects. Of course, the compiler will also allow constrained types (e.g., **`Integer`**, **`Boolean`**, etc.) in instantiations because it doesn't matter one way or the other inside the generic implementation. The Contract Model says that additional capabilities, declaring objects in this case, are allowed but not required. (There is a way to declare objects of indefinite types, but not using the type name alone. The unchecked facilities don't need to declare objects so we will not show how to do it.)

Now that you understand the Contract Model (perhaps more than you cared), we are ready to examine the generic formal type parameters for `Ada.Unchecked_Conversion`. Here's the declaration again:

```
generic
   type Source(<>) is limited private;
```

(continues on next page)

(continued from previous page)

```
   type Target(<>) is limited private;
function Ada.Unchecked_Conversion (S : Source) return Target
   with Pure, Nonblocking, Convention => Intrinsic;
```

The two generic formal types, Source, and Target, are the types used for the incoming value and the returned value, respectively. Both formals are "indefinite, limited private types" in the jargon, but now you know what that means. Inside the implementation of the generic function, neither Source nor Target will be used to declare objects (the (<>) syntax). Likewise, neither type will be used in an assignment statement (the "limited" reserved word). And finally, no particular kind of type is required for Source or Target (the **private** reserved word). That's a fairly restricted usage within the generic implementation, but as a result the contract can be very permissive: the generic can be instantiated with almost any type. It doesn't matter if the actual is limited or not, private or not, and indefinite or not. The generic implementation doesn't need those capabilities to implement a conversion so they are not part of the contract expressed by the generic formal types.

What sort of type would be disallowed? Abstract types, and incomplete types. However, it is impossible to declare objects of those types, for good reasons, so unchecked conversion is never needed for them.

Note that the result value is returned by-reference whenever possible, in which case it is just a view of the Source bits in the formal parameter S and not a copy. For a Source type that is not a by-copy type, the result of an unchecked conversion will typically be returned by-reference (so that the result and the parameter S share the same storage); for a by-copy Source type, a copy is made.

The compiler can restrict instantiations but implementers are advised by the language standard to avoid them unless they are required by the target environment. For example, an instantiation for types for which unchecked conversion can't possibly make sense might be disallowed.

Clients can apply language- and vendor-defined restrictions as well, via pragma Restrictions. In particular, the language defines the No_Dependence restriction, meaning that no client's context clause can specify the unit specified. As a result no client can instantiate the generic for unchecked conversion:

```
pragma Restrictions (No_Dependence => Ada.Unchecked_Conversion);
```

hence there would be no use of unchecked conversion.

From the Contract Model's point of view most any type can be converted to some other type via this generic function. But practically speaking, some limitations are necessary. The following must all be true for the conversion effect to be defined by the language:

- S'Size = Target'Size
- S'Alignment is a multiple of Target'Alignment, or Target'Alignment is 0 (meaning no alignment required whatsoever)
- Target is not an unconstrained composite type
- S and Target both have a contiguous representation
- The representation of S is a representation of an object of the target subtype

We will examine these requirements in turn, but realize that they are not a matter of legality. Compilers can allow instantiations that violate these requirements. Rather, they are requirements for conversions to have the defined effect.

The first requirement is that the size (in bits) for the parameter S, of type Source, is the same as the size of the Target type. That's reasonable if you consider it. What would it mean to convert, for example, a 32-bit value to an 8-bit value? Which 8 bits should be used?

As a result, one of the few reasons for setting the size of a type (as opposed to the size of an object) is for the sake of well-defined unchecked conversions. We might make the size larger than it would need to be because we want to convert a value of that type to what would otherwise be a larger Target type.

Because converting between types that are not the same size is so open to interpretation, most compilers will issue a warning when the sizes are not the same. Some will even reject the instantiation. GNAT will issue a warning for these cases when the warnings are enabled, but will allow the instantiation. We're supposed to know what we are doing, after all. The warning is enabled via the specific `-gnatwz` switch or the more general `-gnatwa` switch. GNAT tries to be permissive. For example, in the case of discrete types, a shorter source is first zero or sign extended as necessary, and a shorter target is simply truncated on the left. See the GNAT RM for the other details.

The next requirement concerns alignment. As we mentioned earlier, modern architectures tend to have strict alignment requirements. We can meaningfully convert to a type with a stricter alignment, or to a type with no alignment requirement, but converting in the other direction would require a copy.

Next, recall that objects of unconstrained types, such as unconstrained array types or discriminated record types, must have their constraints specified when the objects are declared. We cannot just declare a **String** object, for example, we must also specify the lower and upper bounds. Those bounds are stored in memory, logically as part of the **String** object, since each object could have different bounds (that's the point, after all). What, then, would it mean to convert some value of a type that has no bounds to a type that requires bounds? The third requirement says that it is not meaningful to do so.

The next requirement is that the argument for S, and the conversion target type Target, have a contiguous representation in memory. In other words, each storage unit must be immediately adjacent, physically, to the next logical storage unit in the value. Such a representation for any given type is not required by the language, although on typical modern architectures it is common. (The type `System.Storage_Elements.Storage_Array` is an exception, in that a contiguous representation is guaranteed.) An instance of `Ada.Unchecked_Conversion` just takes the bits of S and treats them as if they are bits for a value of type Target (more or less), and does not handle issues of segmentation.

The last requirement merely states that the bits of the argument S, when treated as a value of type Target, must actually be a bit-pattern representing a value of type Target (strictly, the subtype). For example, with signed integers, any bit pattern (of the right size) represents a valid value for those types. In contrast, consider an enumeration type. By default, the underlying representational values are the same as the position values, i.e., starting at zero and increasing by one. But users can override that representation: they can start with any value and, although the values must increase, they need not increase by one:

```
type Toggle_Switch is (Off, On);
for Toggle_Switch use (Off => 0, On => 4);
```

If we covert an unsigned integer (of the right size) to a `Toggle_Switch` value, what would it mean if the Source value was neither 0 nor 4?

We've said that the instantiations are likely allowed, hence callable functions are created. If the above requirements are not met, what happens?

What happens depends on the Target type, that is, the result type for the conversion. Specifically, it depends on whether the target type is a "scalar" type. As we mentioned earlier, a scalar type is either a "discrete" type or a "real" type, which are themselves further defined, as the figure below indicates. Any other type is a non-scalar type, e.g., record types, access types, task types, and so on.

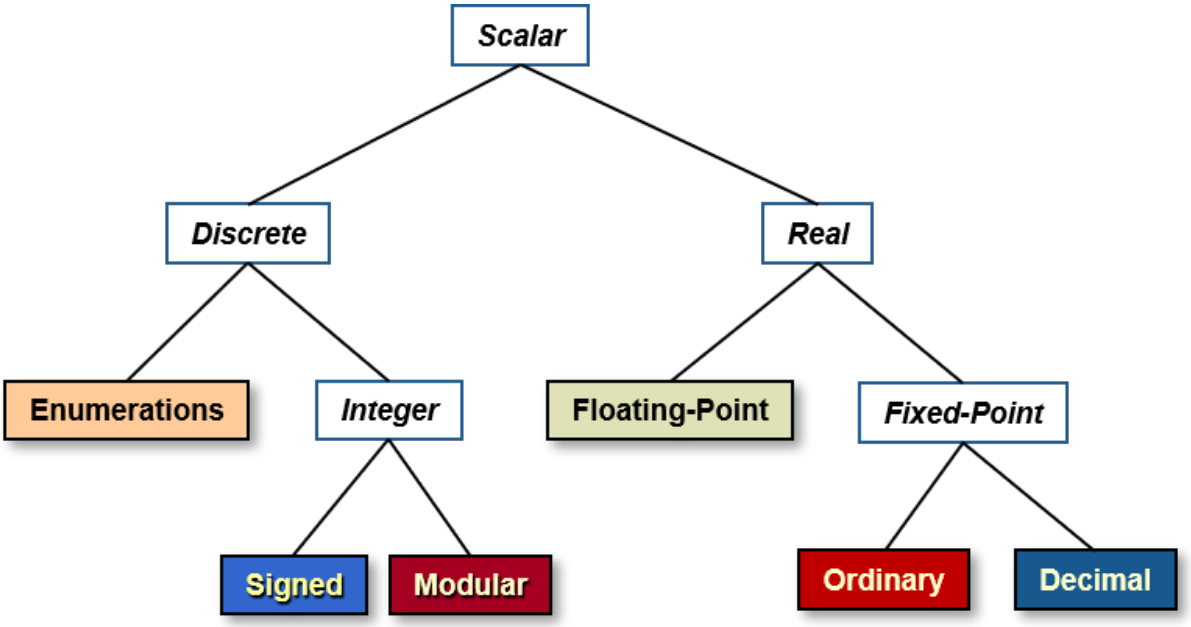

When the requirements for meaningful instantiations are not respected and the Target type is a scalar type, the result returned from the call is implementation defined and is potentially an invalid representation. For example, type Toggle_Switch is an enumeration type, hence it is a scalar type. Therefore, if we covert an unsigned integer (of the right size) to a Toggle_Switch value, and the Source value is neither 0 nor 4, the resulting value is an invalid representation. That's the same as an object of type Toggle_Switch that is never assigned a value. The random junk in the bits may or may not be a valid Toggle_Switch value. That's not a good situation, clearly, but it is well-defined: if it is detected, either Constraint_Error or Program_Error is raised. If the situation is not detected, execution continues using the invalid representation. In that case it may or may not be detected, near the call or later. For example:

```
with Ada.Unchecked_Conversion;
with Ada.Text_IO;  use Ada.Text_IO;
with Interfaces;   use Interfaces;

procedure Demo is

   type Toggle_Switch is (Off, On) with Size => 8;
   for Toggle_Switch use (Off => 1, On => 4);

   function As_Toggle_Switch is new Ada.Unchecked_Conversion
     (Source => Unsigned_8, Target => Toggle_Switch);

   T1 : Toggle_Switch;
   T2 : Toggle_Switch;
begin
   T1 := As_Toggle_Switch (12);  -- neither 1 nor 4
   if T1 = Off then
      Put_Line ("T1's off");
   else
      Put_Line ("T1's on");
   end if;
   T2 := T1;
   if T2 = Off then
      Put_Line ("T2's off");
   else
      Put_Line ("T2's on");
   end if;
```

(continues on next page)

(continued from previous page)

```
   Put_Line (T2'Image);
end Demo;
```

In the execution of the code above, the invalid representation value in T1 is not detected, except that it is copied into T2, where it is eventually detected when 'Image is applied to T2. The invalid representation is not detected in the assignment statement or the comparison because we want the optimizer to be able to avoid emitting a check prior to every use of the value. Otherwise the generated code would be too slow. (The language explicitly allows this optimization.)

The evaluation of an object having an invalid representation value due to unchecked conversion is a so-called "bounded error" because the results at run-time are predictable and limited to one of those three possibilities: the two possible exceptions, or continued execution.

Continued execution might even work as hoped, but such code is not portable and should be avoided. A new vendor's compiler, or even a new version of a given vendor's compiler, might detect the situation and raise an exception. That happens, and it ends up costing developer time to make the required application code changes.

The possibilities get much worse when the result type is not a scalar type. In this case, the *effect* of the call — not the value returned by the call — is implementation defined. As a result, the possible run-time behavior is unpredictable and, consequently, from the language rules point of view anything is possible. Such execution is said to be "erroneous."

Why the difference based on scalar versus non-scalar types? Scalar types have a simple representation: their bits directly represent their values. Non-scalar types don't always have a simple representation that can be verified by examining their bits.

For example, we can have record types with discriminants that control the size of the corresponding objects because the record type contains an array component that uses the discriminant to set the upper bound. These record types might have multiple discriminants, and multiple dependent components. As a result, an implementation could have hidden, internal record components. These internal components might be used to store the starting address of the dependent components, for example, or might use pointers to provide a level of indirection. If an unchecked conversion did not provide correct values for these internal components, the effect of referencing the record object would be unpredictable.

Even a comparatively simple record type with one such dependent component is sufficient to illustrate the problem. There are no internal, hidden components involved:

```
with Ada.Unchecked_Conversion;
with Ada.Text_IO;              use Ada.Text_IO;
with System;                   use System;  -- for Storage_Unit
with System.Storage_Elements; use System.Storage_Elements;

procedure Demo_Erroneous is

   subtype Buffer_Size is Storage_Offset range 1 .. Storage_Offset'Last;

   type Bounded_Buffer (Capacity : Buffer_Size) is record
      Content : Storage_Array (1 .. Capacity);
      Length  : Storage_Offset := 0;
   end record;

   procedure Show_Capacity (This : Bounded_Buffer);

   subtype OneK_Bounded_Buffer is Bounded_Buffer (Capacity => 1 * 1024);

   function As_OneK_Bounded_Buffer is new Ada.Unchecked_Conversion
     (Source => Storage_Array, Target => OneK_Bounded_Buffer);
```

(continues on next page)

(continued from previous page)

```
   Buffer   : OneK_Bounded_Buffer;
   Sequence : Storage_Array (1 .. Buffer'Size / Storage_Unit);

   procedure Show_Capacity (This : Bounded_Buffer) is
   begin
      Put_line ("This.Capacity is" & This.Capacity'Image);
   end Show_Capacity;

begin
   Buffer := As_OneK_Bounded_Buffer (Sequence);
   Put_Line ("Buffer capacity is" & Buffer.Capacity'Image);
   Show_Capacity (Buffer);
   Put_Line ("Done");
end Demo_Erroneous;
```

In the above, the type Bounded_Buffer has an array component Content that depends on the discriminant Capacity for the number of array components. This is an extremely common idiom. However, unchecked conversion is only meaningful, as defined earlier, when converting to constrained target types. Bounded_Buffer is not constrained, so we define a constrained subtype (OneK_Bounded_Buffer) for the sake of the conversion.

The specific Buffer object is 8320 bits (1024 * 8, plus 2 * 64), as is the Sequence object, so the sizes are the same.

The alignment of OneK_Bounded_Buffer is 8, and Storage_Array's alignment is 1, so the Target type is a multiple of the Source type, as required.

Both types have a contiguous representation, and the sequence of bytes can be a valid representation for the record type, although it certainly might not be valid. For example, if we change the discriminant from what the subtype specifies, we would have an invalid representation for that subtype.

So we can reasonably invoke an unchecked conversion between the array of bytes and the record type. However, as you can see in the code and as the compiler warns, we never assigned a value to the Sequence array object. The unchecked conversion from that Sequence of bytes includes the discriminant value, so it is very possible that we will get a discriminant value that is not 1K.

We can test that possibility by running the program. In the first call to Put_Line, the program prints the Capacity discriminant for the Buffer object. The compiler knew it was 1024, so it doesn't get the discriminant component from memory, it just directly prints 1024. However, we can force the compiler to query the discriminant in memory. We can pass Buffer to procedure Show_Capacity, which takes any Bounded_Buffer, and there query (print) the Capacity component under that different view. That works because the view inside the procedure Show_Capacity is as of Bounded_Buffer, in which the discriminant value is unknown at compile-time.

In the above examples, we are responsible for ensuring that the enumeration representation encoding and the record discriminant value are correct when converted from some other type. That's not too hard to recognize because we can literally see in the source code that there is something to be maintained by the conversions. However, there might be hidden implementation artifacts that we cannot see in the source code but that must be maintained nevertheless.

For example, the compiler's implementation for some record type might use dynamic memory allocations instead of directly representing some components. That would not appear in the source code. As a simpler example of invisible implementation issues, consider again our earlier record type:

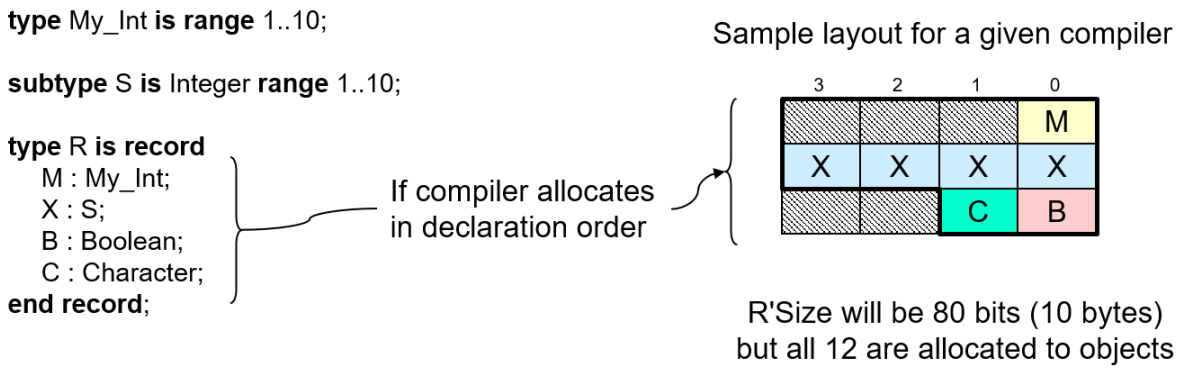

As we discussed earlier, between the bytes that are allocated to the record components are some other bytes that are not used at all. As usual, the compiler must implement the language-defined equality operator for the record type. One way to implement that function would be to generate code that checks the equality for each component individually, ignoring any unused bytes. But suppose you have a large record type with many components. The code for checking record level equality will be extensive and inefficient. An alternative implementation for the compiler would be to use a "block compare" machine instruction to check the equality of the entire record at once, rather than component-by-component. That will be considerably more efficient because the block-compare instruction just compares the bits from one starting address to another ending address. But in that case the "unused" bytes are not skipped so the values within those bytes become significant. Comparison of those unused bytes will only work if their values are defined and assigned in each record object. Compilers that may use a block-comparison approach will, therefore, always set those unused bytes to a known value (typically zero). That is part of the valid representation for values of the type, and consequently must be maintained by our unchecked conversions. This being a non-scalar target type, failure to do so results in erroneous execution, i.e., undefined behavior. "There be dragons" as ancient maps of the unknown world once said.

As you can see, you should use unchecked conversions with considerable care and thought. Moreover, because unchecked programming is such a low-level activity, and has vendor-defined implementation issues, it is not only less portable than high-level coding, it is also less portable than other low-level programming. You will be well served if you limit the use of unchecked conversions overall. If your application code is performing unchecked conversions all over the code, something is very likely wrong, or at least very questionable. A well-designed Ada program should not need ubiquitous unchecked conversions.

That said, of course sometimes unchecked conversions are reasonable. But even then, it is better to isolate and hide their use via compile-time visibility controls. For example, instead of having clients invoke unchecked conversion instances many times, have a procedure that is invoked many times, and let the procedure body do the conversion. That way, the clients see a high-level specification of functionality, and, if the conversion needs to be changed later, there is only that one conversion usage (the procedure body) to change. This approach is really just another example of isolating and hiding code that might need to change in the future.

47.7 Data Validity

Our earlier demo program assigned an incorrect value via unchecked conversion into an object of an enumeration type that had non-standard representation values. The value assigned was not one of those representation values so the object had an invalid representation. Certain uses of an invalid representation value will be erroneous, and we saw that the effect of erroneous execution was unpredictable and unbounded.

That example was somewhat artificial, for the sake of illustration. But we might get an

invalid value in a real-world application. For example, we could get an invalid value from a sensor. Hardware sensors are frequently unreliable and noisy. We might get an invalid value from a call to an imported function implemented in some other language. Whenever an assignment is aborted, the target of the assignment might not be fully assigned, leading to so-called "abnormal" values. Other causes are also possible. The problem is not unusual in low-level programming.

How do we avoid the resulting bounded errors and erroneous execution?

In addition to assignment statements, we can safely apply the `Valid` attribute to the object. This language-defined attribute returns a Boolean value indicating whether or not the object's value is a valid representation for the object's subtype. (More details in a moment.) There is no portable alternative to check an object's validity. Here's an example:

```
with Ada.Unchecked_Conversion;
with Ada.Text_IO;  use Ada.Text_IO;
with Interfaces;   use Interfaces;
with System;

procedure Demo_Validity_Check is

   type Toggle_Switch is (Off, On) with Size => 8;
   for Toggle_Switch use (Off => 1, On => 4);

   T1 : Toggle_Switch;

   function Sensor_Reading (Default : Toggle_Switch) return Toggle_Switch is

      function As_Toggle_Switch is new Ada.Unchecked_Conversion
        (Source => Unsigned_8, Target => Toggle_Switch);

      Result : Toggle_Switch;
      Sensor : Unsigned_8;
      --  for Sensor'Address use System'To_Address (...);

   begin
      Result := As_Toggle_Switch (Sensor);
      return (if Result'Valid then Result else Default);
   end Sensor_Reading;

begin
   T1 := Sensor_Reading (Default => Off); -- arbitrary
   Put_Line (T1'Image);
end Demo_Validity_Check;
```

In the above, `Sensor_Reading` is the high-level, functional API provided to clients. The function hides the use of the unchecked conversion, and also hides the memory-mapped hardware interface named `Sensor`. We've commented out the address clause since we don't really have a memory mapped device available. You can experiment with this program by changing the code to assign a value to `Sensor` (e.g., when it is declared). It is an unsigned 8-bit quantity so any value in the corresponding range would be allowed.

In addition to checking for a valid representation, thus preventing the bounded error, Valid also checks that the object is not abnormal, so erroneous execution can be prevented too. (It also checks that any subtype predicate defined for the `Target` type is also satisfied, but that's a lesson for another day.)

However, the `Valid` attribute can be applied only to scalar objects. There is no language-defined attribute for checking objects of composite types. That's because it would be very hard to implement for some types, if not impossible. For example, given a typical run-time model, it is impossible to check the validity of an access value component. Therefore, you must individually check the validity of scalar record or array components.

At least, you would have to check them individually in standard Ada. GNAT defines another Boolean attribute, named `Valid_Scalars`, to check them all for us. This attribute returns **`True`** if the evaluation of `Valid` returns **`True`** for every scalar subcomponent of the enclosing composite type. It also returns **`True`** when there are no scalar subcomponents. See the GNAT RM for more information.

CHAPTER

FORTYEIGHT

MULTI-LANGUAGE DEVELOPMENT

Software projects often involve more than one programming language. Typically that's because there is existing code that already does something we need done and, for that specific code, it doesn't make economic sense to redevelop it in some other language. Consider the rotor blade model in a high-fidelity helicopter simulation. Nobody touches the code for that model except for a few specialists, because the code is extraordinarily complex. (This complexity is unavoidable because a rotor blade's dynamic behavior is so complex. You can't even model it as one physical piece because the tip is traveling so much faster than the other end.) Complex and expensive models like that are a simulator company's crown jewels; their cost is meant to be amortized over as many projects as possible. Nobody would imagine redeveloping it simply because a new project is to be written in a different language.

Therefore, Ada includes extensive facilities to "import" foreign entities into Ada code, and to "export" Ada entities to code in foreign languages. The facilities are so useful that Ada has been used purely as "glue code" to allow code written in two other programming languages to be used together.

You've already seen an introduction to Ada and C code working together in the *"Interfacing" section of the Ada introductory course* (page 175). If you have not seen that material, be sure to see it first. We will cover some further details not already discussed there, and then go into the details of the facilities not covered elsewhere, but we assume you're familiar with it.

The Ada foreign language interfacing facilities include both "general" and "language-specific" capabilities. The "general" facilities are known as such because they are not tied to any specific language. These pragmas and aspects work with any of the supported foreign languages. In contrast, the "language-specific" interfacing facilities are collections of Ada declarations that provide Ada analogues for specific foreign language types and subprograms. For example, as you saw in that "Interfacing" section, there is a package with a number of declarations for C types, such as `int`, `float`, and `double`, as well as C "strings", with subprograms to convert back and forth between them and Ada's string type. Other languages are also supported, both by the Ada Standard and by vendor additions. You will frequently use both the "general" and the "language-specific" facilities together.

All these interfacing capabilities are defined in Annex B of the language standard. Note that Annex B is not a "Specialized Needs" annex, unlike some of the other annexes. The Specialized Needs annexes are wholly optional, whereas all Ada implementations must implement Annex B. However, some parts of Annex B are optional, so more precisely we should say that every implementation must support all the required features of Annex B. That comes down mainly to the package `Interfaces` (more on that package in a moment). However, if an implementation does implement any optional part of Annex B, it must be implemented as described by the standard, or with less functionality. An implementation cannot use the same name for some facility (aspect, etc.) but with different semantics. That's true of the Specialized Needs annexes too: not every part need be implemented, but any part that is implemented must conform to the standard. In practice, for Annex B, all implementations provide the required parts, but not all provide support for all the "language-specific" foreign

languages' interfaces. The vendors make a business decision for the optional parts, just as they do regarding the Specialized Needs annexes.

48.1 General Interfacing

In the "Interfacing" section of the Ada introductory course you saw that Ada defines aspects and pragmas for working with foreign languages. These aspects and pragmas are functionally interchangeable, and we will use whichever one of the two that is most convenient in our discussion. The pragmas are officially "obsolescent," but that merely means that a newer approach is available, in this case the corresponding aspects. You can use either one without concern for future support because language constructs that are obsolescent are not removed from the language. Any compiler that supports such constructs will almost certainly support them forever, for the sake of not invalidating existing customers' code. The pragmas have been in the language since Ada 95 so there's a lot of existing code using them. Changing the compiler isn't cost-free, after all, so why spend the money to potentially lose a customer? Likewise, a brand new compiler will also probably support them, for the sake of potentially gaining a customer.

The general interfacing facility consists of these aspects and pragmas, specifically `Import`, `Export`, and `Convention`. As you saw in the Ada Introduction course, `Import` brings a foreign entity into Ada code, `Export` does the opposite, and `Convention` supplies additional information and directives to the compiler. We will go into the details of each.

Regardless of whether the Ada code is importing or exporting some entity, there will be an Ada declaration for that entity. That declaration tells the compiler how the entity can be used, as usual. The interfacing aspects and pragmas are then applied to these Ada declarations.

If we are exporting, then the entity is implemented in Ada. For a subprogram that means there will also be a subprogram body matching the declaration, and the compiler will enforce that requirement as usual. In contrast, if we are importing a subprogram, then it is not implemented in Ada, and therefore there will be no corresponding subprogram body for the Ada declaration. The compiler would not allow it if we tried. In that case the `Import` is the subprogram's completion.

Subprograms often have a separate declaration. Sometimes that's required, for example when we want to include a subprogram as part of a package's API, but at other times it is optional. Remember that a subprogram body acts as a corresponding declaration when there is no separate declaration defined. Thus, either way, we have a subprogram declaration available for the interfacing aspects and/or pragmas.

For data that are imported or exported, we'll have the declaration of the object in Ada to which we can apply the necessary interfacing aspects/pragmas. But we will also have the types for these objects, and as you will see, the types can be part of interfacing too.

48.1.1 Aspect/Pragma Convention

As you saw in the *"Interfacing" section of the Ada introductory course* (page 175), when importing and exporting you'll also specify the "convention" for the entity in question. The pragmas for importing and exporting include a parameter for this purpose. When using the aspects, you'll specify the `Convention` aspect too.

For types, though, you will specify the `Convention` aspect/pragma alone, without `Import` or `Export`. In this case the convention specifies the layout for objects of that type, presumably a layout different than the Ada compiler would normally use. You would need to specify this other layout either because you're going to later declare and export an object of the type, or because you are going to declare an object of the type and pass it as a argument to an imported subprogram.

For example, Ada specifies that multi-dimensional arrays are represented in memory in row-major order. In contrast, the Fortran standard specifies column-major order. If we want to define a type in Ada that can be used for passing parameters to Fortran routines, we need to specify that convention for the type. For example:

```
type Matrix is array (Rows, Columns) of Float
  with Convention => Fortran;
```

(Rows and Columns are user-defined discrete subtypes.)

As a result when we declare Matrix objects the Ada compiler will use the column-major layout. That makes it possible to pass objects of the type to imported Fortran subprograms because the formal parameter will also be of type Matrix. The imported Fortran routine will then see the parameter in memory as it expects to see it. So although you wouldn't need to import or export a type itself, you might very well import or export an object of the type, or pass it as a argument.

When Convention is applied to subprograms, a natural mistake is to think that we are specifying the programming language used to implement the subprogram. In reality, the convention indicates the subprogram calling convention, not the implementation language. The calling convention specifies how parameters are passed to and from subprogram calls, how result values for functions are returned, the order that parameters are pushed on the call stack, how dynamically-sized parameters are passed, and so on. Ordinarily these are matters you don't need to consider because you're working within a single convention automatically, in other words the one used by the Ada compiler you're using.

To illustrate that the convention is not the implementation language, consider a subprogram that we intend to import and call from Ada. This imported routine is implemented in assembly language, but, in addition, let's say it is written to use the same calling convention as the Ada compiler we are using for Ada code. Therefore, the calling convention would be Ada even though the implementation is in assembler.

```
procedure P (X : Integer) with
   ...
   Convention => Ada,
   ...
```

In the example above, Ada is known as a convention identifier, as is Fortran in the earlier example. Convention identifiers are defined by the Ada language standard, but also by Ada vendors.

The Ada standard defines two convention identifiers: Ada (the default), and Intrinsic. In addition, Annex B defines convention identifiers C, COBOL, and Fortran. Support for these Annex B conventions is optional.

GNAT supports the standard and Annex B conventions, as well as the following: Assembler, "C_PLUS_PLUS" (or CPP), Stdcall, WIN32, and a few others. C_PLUS_PLUS is the convention identifier required by the standard when C++ is supported. (Convention identifiers are actual identifiers, not strings, so they must obey the syntax rules for identifiers. "C++" would not be a valid identifier.) See the GNAT User Guide for those other GNAT-specific conventions.

Stdcall and WIN32 actually do specify a particular calling convention, but for those convention identifiers that are language names, how do we get from the name to a calling convention?

The ultimate requirement for any calling convention is compatibility with the Ada compiler we are using. Specifically, the Ada compiler must recognize what the calling convention specifies, and support importing and exporting subprograms with that convention applied.

For the Ada convention that's simple. There is no standard calling convention for Ada. Convention Ada simply means the calling convention applied by the Ada compiler we happen to be using. (We'll talk about Intrinsic shortly.)

So far, so good. But how to we get from those other language names to corresponding calling conventions? There is no standard calling convention for, say, C, any more than there is a standard calling convention for Ada.

In fact we don't get to the calling convention, at least not directly. What the language name in the convention identifier actually tells us is that, when that convention is supported, there is a compiler for that foreign language that uses a calling convention known to, and supported by, the Ada compiler we are using. The Ada compiler vendor defines which languages it supports, after all. For example, when supported, convention C means that there is a compatible C compiler known to the Ada compiler vendor. For GNAT you can guess which C compiler that might be.

It's actually pretty straightforward once you have the big picture. If the convention is supported, the Ada compiler in use knows of a compiler for that language with which it can work. Annex B just defines some convention identifiers for the sake of portability.

But suppose a given Ada compiler supports more than one vendor for a given programming language? In that case the Ada compiler would define and support multiple convention identifiers for the same programming language. Presumably these identifiers would be differentiated by the compiler vendors' names. Thus we might have available conventions `GNU_Fortran` and `Intel_Fortran` if both were supported. The `Fortran` convention identifier would then indicate the default vendor's compiler.

The `Intrinsic` calling convention represents subprograms that are "built in" to the compiler. When such a subprogram is called the compiler doesn't actually generate the code for an out-of-line call. Instead, the compiler emits the assembly code — often just a single instruction — corresponding to the intrinsic subprogram's name. There will be a separate declaration for the subprogram, but no actual subprogram body containing a sequence of statements. The compiler just knows what to emit in place of the call.

For example:

```
function Shift_Left
  (Value  : Unsigned_16;
   Amount : Natural)
  return Unsigned_16
    with ..., Convention => Intrinsic;
```

The effect is much like a subprogram call that is always in-lined, except that there's no body for the subprogram. In this example the compiler simply issues a shift-left instruction in assembly language.

You'll see the `Intrinsic` convention applied to many language-defined subprograms. For example:

```
generic
   type Source(<>) is limited private;
   type Target(<>) is limited private;
function Ada.Unchecked_Conversion(S : Source) return Target
   with ..., Convention => Intrinsic;
```

Thus when we call an instantiation of `Ada.Unchecked_Conversion` there is no actual call made to some subprogram. The compiler just treats the bits of S as a value of type `Target`.

Intrinsic subprograms are a good way to access interesting capabilities of the target hardware, without having to write the assembly language yourself (although we will show how to do that, later, directly in Ada). For example, some targets provide an instruction that atomically compares and swaps a value in memory. Ada 2022 just added a standard package for this, but before that we could use the following to access a gcc built-in:

```
-- Perform an atomic compare and swap: if the current value of
-- Destination.all is Comparand, then write New_Value into Destination.all.
```

(continues on next page)

(continued from previous page)

```
-- Returns an indication of whether the swap took place.

function Sync_Val_Compare_And_Swap_Bool_8
  (Destination : access Unsigned_8;
   Comparand   : Unsigned_8;
   New_Value   : Unsigned_8)
   return Boolean
with Convention => Intrinsic,
     ...
```

We would specify additional aspects beyond that of `Convention` but these have not yet been discussed. That's what the ellipses indicate in the various examples above.

48.1.2 Aspect/Pragma Import and Export

You've already seen these aspects in the Ada Introduction course, but for completeness: `Import` brings a foreign entity into Ada code, and `Export` makes an Ada entity available to foreign code. In practice, these entities consist of objects and subprograms, but the language doesn't impose many restrictions. It is up to the vendor to decide what makes sense for their specific target.

The aspects `Import` and `Export` are so-called Boolean aspects because their value is either **`True`** or **`False`**. For example:

```
Obj : Matrix with
   Export => True,
   ...
```

For any Boolean-valued aspect the default is **`True`** so you only need to give the value explicitly if that value is **`False`**. There would be no point in doing that in these two cases, of course. Hence we just give the aspect name:

```
Obj : Matrix with
   Export,
   ...
```

Recall that objects of some types are initialized automatically during the objects' elaboration, unless they are explicitly initialized as part of their declarations. Access types are like that, for example. Objects of these types are default initialized to **`null`** as part of ensuring that their values are always meaningful (absent unchecked conversion).

```
type Reference is access Integer;

Obj : Reference;
```

In the above the value of `Obj` is **`null`**, just as if we had explicitly set it that way.

But that initialization is a problem if we are importing an object of an access type. Presumably the value is set by the foreign code, so automatic initialization to null would overwrite the incoming value. Therefore, the language guarantees that implicit initialization won't be applied to imported objects.

```
type Reference is access Integer;

Obj : Reference with Import;
```

Now the value of `Obj` is whatever the foreign code sets it to, and is not, in other words, overwritten during elaboration of the declaration.

48.1.3 Aspect/Pragma External_Name and Link_Name

For an entity with a `True` `Import` or `Export` aspect, we can also specify a so-called external name or link name. These names are specified via aspects `External_Name` and `Link_Name` respectively.

An external name is a string value indicating the name for some entity as known by foreign language code. For an entity that Ada code imports, this is the name that the foreign code declares it to be. For an entity that Ada code exports, this is the name that the foreign code is told to use. This string value is exactly the name to be used, so if you misspell the name the link will fail. For example:

```
function Sync_Val_Compare_And_Swap_Bool_8
  (Destination : access Unsigned_8;
   Comparand   : Unsigned_8;
   New_Value   : Unsigned_8)
  return Boolean
with
  Import,
  Convention    => Intrinsic,
  External_Name => "__sync_bool_compare_and_swap_1";
```

The `External_Name` and `Link_Name` values are strings because the foreign unit names don't necessary follow the Ada rules for identifiers (the leading underscores in this case). Note that the ending digit in the name above is different from the declared Ada name.

Usually, the name of the imported or exported entity is precisely known and hence exactly specified by `External_Name`. Sometimes, however, a compilation system may have a linker "preprocessor" that augments the name actually used by the linkage step. For example, an implementation might always prepend "_" and then pass the result to the system linker. In that case we don't want to specify the exact name. Instead, we want to provide the "starting point" for the name modification. That's the purpose of the aspect `Link_Name`.

If you don't specify either `External_Name` or `Link_Name` the compilation system will choose one in some implementation-defined manner. Typically this would be the entity's defining name in the Ada declaration, or some simple transformation thereof. But usually we know the name exactly and so we use `External_Name` to give it.

As you can see, it really wouldn't make sense to specify both `External_Name` and `Link_Name` since the semantics of the two conflict. But if both are specified for some reason, the `External_Name` value is ignored.

Note that `Link_Name` cannot be specified for `Intrinsic` subprograms because there is no actual unit being linked into the executable, because intrinsics are built-in. In this case you must specify the `External_Name`.

Finally, because you will see a lot the pragma usage we should go into enough detail so that you know what you're looking at when you see them.

Pragma `Import` and pragma `Export` work almost like a subprogram call. Parameters cannot be omitted unless named notation is used. Reordering the parameters is not permitted, however, unlike subprogram calls.

The BNF syntax is as follows. We show Import, but Export has identical parameters:

```
pragma Import(
    [Convention =>] convention_identifier,
    [Entity =>] local_name
 [, [External_Name =>] external_name_string_expression]
 [, [Link_Name =>] link_name_string_expression]);
```

As you can see, the parameters correspond to the individual aspects `Convention`, `External_Name`, and `Link_Name`. When using aspects you don't need to say which Ada entity

you're applying the aspects to, because the aspects are part of the entity declaration syntax. In contrast, the pragma is distinct from the declaration so we must specify what's being imported or exported via the `Entity` parameter. That's the declared Ada name, in other words. Note that both the `External_Name` and `Link_Name` parameters are optional.

Here's that same built-in function, using the pragma to import it:

```
-- Perform an atomic compare and swap: if the current value of
-- Destination.all is Comparand, then write New_Value into Destination.all.
-- Returns an indication of whether the swap took place.

function Sync_Val_Compare_And_Swap_Bool_8
  (Destination : access Unsigned_8;
   Comparand   : Unsigned_8;
   New_Value   : Unsigned_8)
   return Boolean;

pragma Import (Intrinsic,
               Sync_Val_Compare_And_Swap_Bool_8,
               "__sync_bool_compare_and_swap_1");
```

The first pragma parameter is for the convention. The next parameter, the `Entity`, is the Ada unit's declared name. The last parameter is the external name. The compiler either knows what we are referencing by that external name or it will reject the pragma. As we mentioned before, the string value for the name is not required to match the Ada unit name.

You will see later that there are other convention identifiers as well, but we will wait for the *Specific Interfacing section* (page 1433) to introduce those.

48.1.4 Package Interfaces

Package `Interfaces` must be provided by all Ada implementations. The package is intended to provide types that reflect the actual numeric types provided by the target hardware. Of course, the standard has no way to know what hardware is involved, therefore the actual content is implementation-defined. But even so, it is possible to standardize the names for these types, and that is what the language standard does.

Specifically, the standard defines the format for the names for the hardware's signed and modular (unsigned) integer types, and for the floating-point types.

The signed integers have names of the form `Integer_n`, where *n* is the number of bits used by the machine-supported type. The type for an eight-bit signed integer would be named `Integer_8`, for example, and then `Integer_16` and so on for the larger types, for as many as the target machine supports.

Likewise, for the unsigned integers, the names are of the form `Unsigned_n`, with the same meaning for *n*. The colloquial eight-bit "byte" would be named `Unsigned_8`, with `Unsigned_16` for the 16-bit version, and so on, again for as many as the machine supports.

For floating-point types it is harder to talk about a format that is sufficiently common to standardize. The IEEE floating-point standard is well known and widely used, however, so if the machine does support the IEEE format that name can be used. Such types would be named `IEEE_Float_n`, again with the same meaning for *n*. Thus we might see declarations for types `IEEE_Float_32` and `IEEE_Float_64` and so on, for all the machine supported floating-point types.

In addition to these type declarations, for the unsigned integers only, there will be declarations for shift and rotate operations provided as intrinsic functions.

The resulting package declaration might look something like this:

```
package Interfaces is

```

(continues on next page)

(continued from previous page)

```
   type Integer_8  is range -2 ** 7 .. 2 ** 7 - 1;

   type Integer_16 is range -2 ** 15 .. 2 ** 15 - 1;

   type Integer_32 is range -2 ** 31 .. 2 ** 31 - 1;

   ...

   type Unsigned_8 is mod 2 ** 8;

   function Shift_Left   (Value : Unsigned_8;  Amount : Natural) return Unsigned_8;
   function Shift_Right  (Value : Unsigned_8;  Amount : Natural) return Unsigned_8;
   function Rotate_Left  (Value : Unsigned_8;  Amount : Natural) return Unsigned_8;
   function Rotate_Right (Value : Unsigned_8;  Amount : Natural) return Unsigned_8;
   function Shift_Right_Arithmetic (Value : Unsigned_8;  Amount : Natural)
     return Unsigned_8;

   type Unsigned_16 is mod 2 ** 16;

   function Shift_Left  (Value : Unsigned_16;  Amount : Natural)
     return Unsigned_16;
   function Shift_Right (Value : Unsigned_16;  Amount : Natural)
     return Unsigned_16;
   ...

   type Unsigned_32 is mod 2 ** 32;

   function Shift_Left  (Value : Unsigned_32;  Amount : Natural)
     return Unsigned_32;
   function Shift_Right (Value : Unsigned_32;  Amount : Natural)
     return Unsigned_32;
   ...

   type IEEE_Float_32 is digits 6;
   type IEEE_Float_64 is digits 15;
   ...

end Interfaces;
```

As you can see, when you need to write code in terms of the hardware's numeric types, this package is a great resource. There's no need to declare your own `UInt32` type, for example, although of course you could, trivially:

```
type UInt32 is mod 2 ** 32;
```

But if you do, realize that you won't get the shift and rotate operations for your type. Those are only defined for the types in package `Interfaces`. If you do need to declare such a type, and you do want the additional shift/rotate operations, use inheritance:

```
type UInt32 is new Interfaces.Unsigned_32;
```

GNAT also defines a pragma, as an alternative to inheritance:

```
type UInt32 is mod 2 ** 32;
pragma Provide_Shift_Operators (UInt32);
```

The approach using inheritance is preferable because it is portable, all other things being equal.

One reason to make up your own unsigned type is that you need one that does not in fact reflect the target hardware's numeric types. For example, a hardware device register might have gaps of bits that are currently not used by the device. Those gaps are frequently not

the size of a type declared in package `Interfaces`. We might need an `Unsigned_3` type, for example. That's a reasonable thing to do.

48.2 Language-Specific Interfacing

In addition to the aspects and pragmas for importing and exporting entities that work with any language, Ada also defines standard language-specific facilities for interfacing with a set of foreign languages. The standard defines which languages, but vendors can (and do) expand the set.

Specifically, the "language-specific" interfacing facilities are collections of Ada declarations that provide Ada analogues for specific foreign language types and subprograms. Package `Interfaces` is the root package for a hierarchy of packages that organize these declarations by language, with one or more child packages per language.

Note that the declarations within package `Interfaces` are, by definition, compile-time visible to any child package in the subsystem. Thus whenever one of the language-specific packages needs to mention the machine types they are automatically available.

The standard defines specific support for foreign languages C, COBOL, and Fortran. Thus there are one or more child packages rooted at `Interfaces` that have those language names as their child package names: `Interfaces.C`, `Interfaces.COBOL`, and `Interfaces.Fortran`.

The material below will focus on C and, to a lesser extent, Fortran, ignoring altogether the support for COBOL. That's not because COBOL is unimportant. There is a lot of COBOL business software out there in use. Rather, we skip COBOL because it is not relevant to embedded systems. Similarly, although Fortran is extensively used, especially in high-performance computing, it is not used extensively in embedded systems. We will provide some information about the Fortran support but will not dwell on it.

Even though we do not consider C to be appropriate for large development projects, neither technically not economically, it has its place in small, low-criticality embedded systems. Ada developers can profit from existing device drivers and mature libraries coded in C, for example. Hence interfacing to it is important.

What about C++? Interfacing to C++ is tricky compared to C, because of the vendor-defined name-mangling, automatic invocations of constructors and destructors, exceptions, and so on. Generally, interfacing with C++ code can be facilitated by preventing much of those difficulties using the `extern "C" { ... }` linkage-specification. Doing so then makes the bracketed C++ code look like C, so the C interfacing facilities then can be used.

48.2.1 Package Interfaces.C

The child package `Interfaces.C` supports interfacing with units written in the C programming language. Support is in the form of Ada constants and types, and some subprograms. The constants correspond to C's `limits.h` header file, and the Ada types correspond to types for C's `int`, `short`, `unsigned_short`, `unsigned_long`, `unsigned_char`, `size_t`, and so on. There is also support for converting Ada's type `String` to/from `char_array`, and similarly for type `Wide_String`, etc.

It's a large package so we will elide parts. The idea is to give you a feel for what's there. If you want the details, see either the Ada reference manual or bring up the source code in GNAT Studio.

```
package Interfaces.C is

   --  Declaration's based on C's <limits.h>

   CHAR_BIT  : constant := 8;
```

(continues on next page)

(continued from previous page)

```
   SCHAR_MIN : constant := -128;
   SCHAR_MAX : constant := 127;
   UCHAR_MAX : constant := 255;

   --  Signed and Unsigned Integers. Note that in GNAT, we have ensured that
   --  the standard predefined Ada types correspond to the standard C types

   type int   is new Integer;
   type short is new Short_Integer;
   type long  is range -(2 ** (System.Parameters.long_bits - Integer'(1)))
     .. +(2 ** (System.Parameters.long_bits - Integer'(1))) - 1;
   type long_long is new Long_Long_Integer;

   type signed_char is range SCHAR_MIN .. SCHAR_MAX;
   for signed_char'Size use CHAR_BIT;

   type unsigned           is mod 2 ** int'Size;
   type unsigned_short     is mod 2 ** short'Size;
   type unsigned_long      is mod 2 ** long'Size;
   type unsigned_long_long is mod 2 ** long_long'Size;

   ...

   --  Floating-Point

   type C_float     is new Float;
   type double      is new Standard.Long_Float;
   type long_double is new Standard.Long_Long_Float;

   ----------------------------
   -- Characters and Strings --
   ----------------------------

   type char is new Character;

   nul : constant char := char'First;

   function To_C   (Item : Character) return char;
   function To_Ada (Item : char)      return Character;

   type char_array is array (size_t range <>) of aliased char;
   for char_array'Component_Size use CHAR_BIT;

   ...

end Interfaces.C;
```

The primary purpose of these types is for use in the formal parameters of Ada subprograms imported from C or exported to C. The various conversion functions can be called from within Ada to manipulate the actual parameters.

When writing the Ada subprogram declaration corresponding to a C function, an Ada procedure directly corresponds to a void function. An Ada procedure also corresponds to a C function if the return value is always to be ignored. Otherwise, the Ada declaration should be a function.

As we said, the types declared in this package can be used as the formal parameter types. That is the intended and recommended approach. However, some Ada types naturally correspond to C types, and you might see them used instead of those from `Interfaces.C`. Type `int` is the C native integer type for the target, for example, as is type **`Integer`** in Ada. Likewise, C's type **`float`** and type Ada's **`Float`** are likely compatible. GNAT goes to some lengths to maintain compatibility with C, since the two gcc compilers share so much internal

technology. Other vendors might not do so. Best practice is use the types in `Interfaces.C` for your parameters.

Of course, the types in `Interfaces.C` are not sufficient for all uses. You will often need to use user-defined types for the formal parameters, such as enumeration types and record types.

Ada enumeration types are compatible with C's enums but note that C requires enum values to be the size of an `int`, whereas Ada does not. The Ada compiler uses whatever sized machine type will support the specified number of enumeral values. It might therefore be smaller than an `int` but it might also be larger. (Declaring more enumeration values than would fit in an integer is unlikely except in tool-generated code, but it is possible.) For example:

```
type Small_Enum is (A, B, C);
```

If we printed the object size for `Small_Enum` we'd get 8 (on a typical machine with GNAT). Therefore, applying the aspect `Convention` to the Ada enumeration type declaration is a good idea:

```
type Small_Enum is (A, B, C) with Convention => C;
```

Now the object size will be 32, the same as `int`.

Speaking of enumeration types, note that Ada 2022 added a boolean type to `Interfaces.C` named `C_Bool` to match that of C99, so you should use it instead of Ada's **`Boolean`** type for formal parameters.

A simple Ada record type is compatible with a C struct, but remember that the Ada compiler is allowed to reorder the record components. The compiler would do that if it saw that the layout was inefficient, but the point here is that the compiler could do it silently. As a result, you should specify the record layout explicitly using a record representation clause, matching the layout of the C struct in question. Then there will be no question of the layouts matching. Once your record types get more complicated, for example with discriminants or tagged record extensions, things get tricky. Your best bet it to stick with the simple cases when interfacing to C.

Some types that you might think would correspond do not, at least not necessarily. For example, an Ada access type's value might be represented as a simple address, but it might not. In GNAT, an access value designating a value of some unconstrained array type (e.g., **`String`**) is comprised of two addresses, by default. One designates the characters and the other designates the bounds. You can override that with a pragma, but you must know to do so. For example, if we run the following program, we will see that the object size for the access type `Name` is twice the object size of `System.`**`Address`**:

```
with Ada.Text_IO;  use Ada.Text_IO;
with System;       use System;

procedure Demo is

   type Name is access String;

begin
   Put_Line (Address'Object_Size'Image);
   Put_Line (Name'Object_Size'Image);
end Demo;
```

Some Ada types simply have no corresponding type in C, such as record extensions, task types, and protected types. You'll have to pass those as an "opaque" type, usually as an address. It isn't clear that a C function would know what to do with values of these types, but the general notion of passing an opaque type as an address is useful and not uncommon. Of course, that approach forgoes all type safety, so avoid it when possible.

In addition to the types for the formal parameters, you'll also need to know how parameters are passed to and from C functions. That affects the parameter profiles on both sides, Ada and C. The text in Annex B for `Interfaces.C` specifies how parameters are to be passed back and forth between Ada and C so that your subprogram declarations can be portable. That's the approach for each supported programming language, i.e., in the discussion of the corresponding child package under `Interfaces`.

The rules are expressed in terms of scalar types, "elementary" types, array types, and record types. Remember that scalar types are composed of the discrete types and the real types, so we're talking about the signed and modular integers, enumerations, floating-point, and the two kinds of fixed-point types. The "elementary" types consist of the scalars and access types. The rules are fairly intuitive, but throw in Ada's access parameters and parameter modes and some subtleties arise. We won't cover all the various rules but will explore some of the subtleties.

First, the easy cases: mode **`in`** scalar parameters, such as `int`, as simply passed by copy. Scalar parameters are passed by copy anyway in Ada so the mechanism aligns with C in a straightforward manner. A record type T is passed by reference, so on the C side we'd see `t*` where `t` is a C struct corresponding to T. A constrained array type in Ada with a component type T would correspond to a C formal parameter `t*` where `t` corresponds to T. An Ada access parameter **`access`** T corresponds on the C side to `t*` where `t` corresponds to T. And finally, a private type is passed according to the full definition of the type; the fact that it is private is just a matter of controlling the client view, being private doesn't affect how it is passed. There are other simple cases, such as access-to-subprogram types, but we can leave that to the Annex.

Now to the more complicated cases. First, some C ABIs (application binary interfaces) pass small structs by copy instead of by reference. That can make sense, in particular when the struct is small, say the size of an address or smaller. In that case there's no performance benefit to be had by passing a reference. When that situation applies, there is another convention we have not yet mentioned: `C_Pass_By_Copy`. As a result the record parameter will be passed by copy instead of the default, by reference (i.e., T rather than *T), as long as the mode is **`in`**. For example:

```
type R2 is record
   V : int;
end record
with Convention => C_Pass_By_Copy;

procedure F2 (P : R2) with
   Import,
   Convention => C,
   External_Name => "f2";
```

```
struct R2 {
   int V;
};

void f2 (R2 p);
```

On the C side we expect that p is passed by copy and indeed that is how we find it. That said, passing record values to structs by reference is the more common programmer choice. Like arrays, records are typically larger than an address. The point here is that the Ada code can be configured easily to match the C code.

Next, consider passing array values, both to and from C. When passing an array value to C, remember that Ada array types have bounds. Those bounds are either specified at compile time when they are declared, or, for unconstrained array types, specified elsewhere, at run-time.

Array types are not first-class types in C, and C has no notion of unconstrained array types, or even of upper bounds. Therefore, passing an unconstrained array type value is interest-

ing. One approach is to avoid them. Instead, declare a sufficiently large constrained array as a subtype of the unconstrained array type, and then just pass the actual upper bound you want, along with the array object itself.

```
type List is array (Integer range <>) of Interfaces.C.int;

subtype Constrained_List is List (1 .. 100);

procedure P (V : Constrained_List;  Size : Interfaces.C.int);
pragma Import (C, P, "p");

Obj : Constrained_List := (others => 42);  -- arbitrary values
```

With that, we can just pass the value by reference as usual on the C side:

```
void p (int* v, int size) {
  // whatever
}
```

But that's assuming we know how many array components are sufficient from the C code's point of view. In the example above we'll pass a value up to 100 to the `Size` parameter and hope that is sufficient.

Really, it would work to use the unconstrained array type as the formal parameter type instead:

```
type List is array (Integer range <>) of Interfaces.C.int;

procedure P (V : List;  Size : Interfaces.C.int);
pragma Import (C, P, "p");
```

The C function parameter profile wouldn't change. But why does this work? With values of unconstrained array types, the bounds are stored with the value. Typically they are stored just ahead of the first component, but it is implementation-defined. So why doesn't the above accidentally pass the bounds instead of the first array component itself? It works because we are guaranteed by the Ada language that passing an array will pass (the address of) the components, not the bounds, even for Ada unconstrained array types.

Now for the other direction: passing an array from C to Ada. Here the lack of bounds information on the C side really makes a difference. We can't just pass the array by itself because that would not include the bounds, unlike an Ada call to an Ada routine. In this case the approach is the similar to the first alternative described above, in which we declare a very large array and then pass the bounds explicitly:

```
type List is array (Natural) of int;
--  DO NOT DECLARE AN OBJECT OF THIS TYPE

procedure P (V : List; Size : Interfaces.C.int);
pragma Export (C, P, "p");

procedure P (V : List; Size : Interfaces.C.int) is
begin
   for J in 0 .. Size - 1 loop
      -- whatever
   end loop;
end P;
```

```
extern void p (int* v, int size);

int x [100];

p (x, 100);  // call to Ada routine, passing x
```

The fundamental idea is to declare an Ada type big enough to handle anything conceivably needed on the C side. Subtype `Natural` means `0 .. Integer'Last` so `List` is quite large indeed. Just be sure never to declare an object of that type. You'll probably run out of storage on an embedded target.

Earlier we said that it is the Ada type that determines how parameters are passed, and that scalars and elementary types are always passed by copy. For mode `in` that's simple, the copy to the C formal parameter is done and that's all there is to it. But suppose the mode is instead `out` or `in out`? In that case the presumably updated value must be returned to the caller, but C doesn't do that by copy. Here the compiler will come to the rescue and make it work, transparently. Specifically, we just declare the Ada subprogram's formal parameter type as usual, but on the C formal we use a reference. We're talking about scalar and elementary types so let's use `int` arbitrarily. We make the mode `in out` but `out` would also serve:

```
procedure P (Formal : in out int);
```

```
void function p (int* formal);
```

Now the compiler does its magic: it generates code to make a copy of the actual parameter, but it makes that copy into a hidden temporary object. Then, when calling the C routine, it passes the address of the hidden object, which corresponds to the reference expected on the C side. The C code updates the value of the temporary object via the reference, and then, on return, the compiler copies the value back from the temporary to the actual parameter. Problem solved, if a bit circuitous.

There are other aspects to interfacing with C, such as variadic functions that take a varying number of arguments, but you can find these elsewhere in the learn courses.

Next, we examine the child packages under `Interfaces.C`. These packages are not used as much as the parent `Interfaces.C` package so we will provide an overview. You can look up the contents within GNAT Studio or the Ada language standard.

48.2.2 Package Interfaces.C.Strings

Package `Interfaces.C` declares types and subprograms allowing an Ada program to allocate, reference, update, and free C-style strings. In particular, the private type `chars_ptr` corresponds to a common use of `char *` in C programs, and an object of this type can be passed to imported subprograms for which `char *` is the type of the argument of the C function. A subset of the package content is as follows:

```
package Interfaces.C.Strings is

   type chars_ptr is private;
   ...

   function New_Char_Array (Chars : in char_array) return chars_ptr;

   function New_String (Str : in String) return chars_ptr;

   procedure Free (Item : in out chars_ptr);
   ...

   function Value (Item : in chars_ptr) return char_array;
   function Value (Item : in chars_ptr) return String;
   ...

   function Strlen (Item : in chars_ptr) return size_t;
```

(continues on next page)

(continued from previous page)

```
   procedure Update (Item   : in chars_ptr;
                     Offset : in size_t;
                     Chars  : in char_array;
                     Check  : in Boolean := True);

   ...

end Interfaces.C.Strings;
```

Note that allocation might be via malloc, or via Ada's allocator **new**. In either case, the returned value is guaranteed to be compatible with char*. Deallocation must be via the supplied procedure Free.

An amusing point is that you can overwrite the end of the char array just like you can in C, via procedure Update. The Check parameter indicates whether overwriting past the end is checked. The default is **True**, unlike in C, but you could pass an explicit **False** if you felt the need to do something questionable.

48.2.3 Package Interfaces.C.Pointers

The generic package Interfaces.C.Pointers allows us to perform C-style operations on pointers. It includes an access type named Pointer, various Value functions that dereference a Pointer value and deliver the designated array, several pointer arithmetic operations, and "copy" procedures that copy the contents of a source pointer into the array designated by a destination pointer.

We won't go into the details further. See the Ada RM for more.

48.2.4 Package Interfaces.Fortran

Like Interfaces.C, package Interfaces.Fortran defines Ada types to be used when working with subprograms using the Fortran calling convention. These types have representations that are identical to the default representations of the Fortran intrinsic types *Integer*, *Real*, *Double Precision*, *Complex*, *Logical*, and *Character* in some supported Fortran implementation. And like the C package, the ways that parameters of various types are passed are also specified.

We leave the details to you to look up in the language standard, if you find them needed in an embedded application.

48.2.5 Machine Code Insertions (MCI)

When working close to the hardware, especially when interacting with a device, it is not uncommon for the hardware to require a very specific set of assembly language instructions to be generated. There are two ways to achieve this: the right way and the wrong way.

The wrong way is to experiment with the source code and compiler switches until you get the exact assembly code you need generated (assuming it is possible at all). But what happens when the next compiler release arrives with a new optimization? And abandon all hope if you go to a new compiler vendor. This approach is both labor-intensive and very brittle.

The right way is to express the precise assembly code sequence explicitly within the Ada source code. (That's true to any high level language, not just Ada.) Or you can call an intrinsic function, if there is one that does exactly what you need. We will focus on inserting it directly, in what is known as "machine code insertion", or "inline assembler."

As an example of the need for this capability, consider the GPIO (General Purpose I/O) port on an STM32 Arm microcontroller. Each port contains 16 individual I/O pins, each of which can be configured as an independent discrete input or output, or as a control line for a

device, with pull-up or pull-down registers, with different clock speeds, and so on. Different on-chip devices use various collections of pins in ways specific to the devices, and require exclusive assignment of the pins. However, any given pin can be used by several different devices. For example, pin 11 on port A ("PA11") can be used by USART #1 as the clear-to-send ("CTS") line, or the CAN #1 bus Rx line, or Channel 4 of Timer 1, among others. Therefore, one of the responsibilities of the system designer is to allocate pins to devices, ensuring that they are allocated uniquely. It is difficult to debug the case in which a pin is accidentally configured for one device and then reconfigured for use with another device (assuming the first device remains in use). To help ensure exclusive allocations, every GPIO port on this Arm implementation has a way of locking the configuration of each I/O pin. That way, some other part of the software can't successfully change the configuration accidentally, for use with some other device. Even if the same configuration was to be used for another device, the lock prevents the accidental update so we find out about the unintentional sharing.

To lock a pin on a port requires a special sequence of reads and writes to a GPIO register for that port. A specific bit pattern is required during the reads and writes. The sequence and bit pattern is such that accidentally locking the pin is highly unlikely.

Once we see how to express assembly language sequences in general we will see how to get the necessary sequence to lock a port/pin pair. Unfortunately, although you can express exactly the code sequence required, such a sequence of assembly language instructions is clearly target hardware-specific. That means portability is inherently limited. Moreover, the syntax for expressing it varies with the vendor, even for the same target hardware. Being able to insert it at the Ada source level doesn't help with either portability issue. You should understand that the use-case for machine code insertion is for small, short sequences. Otherwise you would write the code in assembly language directly, in a separate file. That might obtain a degree of vendor independence, at least for the given target, but not necessarily. The use of inline assembler is intended for cases in which a separate file containing assembly language is not simpler.

With those caveats in place, let's first examine how to do it in general and then how to express it with GNAT specifically.

The right way to express an arbitrary sequence of one or more assembly language statements is to use so-called "code statements." A code statement is an Ada statement, but it is also a qualified expression of a type defined in package `System.Machine_Code`. The content of that package, and the details of code statements, are implementation-defined. Although that affects portability there really is no alternative because we are talking about machine instruction sets, which vary considerably and cannot be standardized at this level.

Package `System.Machine_Code` contains types whose values provide a way of expressing assembly instructions. For example, let's say that there is a "HLT" instruction that halts the processor for some target. There is no other parameter required, just that op-code. Let's also say that one of the types in `System.Machine_Code` is for these "short" instructions consisting only of an op-code. The syntax for the type declaration would then allow the following code statement:

```
Short_Instruction'(Command => HLT);
```

Each of `Short_Instruction`, `Command`, and `HLT` are defined by the vendor in this hypothetical version of package `System.Machine_Code`. You can see why we say that it is both a statement (note the semicolon) and a qualified expression (note the apostrophe).

Code statements must appear in a subprogram body, after the **`begin`**. Only code statements are allowed in such a body, only use-clauses can be in the declarative part, and no exception handlers are allowed. The complete example would be as follows:

```
procedure Halt -- stops processor
   with Inline;
```

(continues on next page)

(continued from previous page)

```
with System.Machine_Code; use System.Machine_Code;
procedure Halt is
begin
   Short_Instruction'(Command => HLT);
end Halt;
```

With that, to halt the processor the Ada code can simply call procedure `Halt`. When the optimizer is enabled there will be no code emitted to make the call, we'd simply see the halt instruction emitted directly in-line.

Package `System.Machine_Code` provides access to machine instructions but as we mentioned, the content is vendor-defined. In addition, the package itself is optional, but is required if Annex C, the Systems Programming Annex, is implemented by the vendor. In practice most all vendors provide this annex.

In GNAT, the content of `System.Machine_Code` looks something like this:

```
type Asm_Input_Operand  is ...
type Asm_Output_Operand is ...
type Asm_Input_Operand_List  is array (Integer range <>) of Asm_Input_Operand;
type Asm_Output_Operand_List is array (Integer range <>) of Asm_Output_Operand;

type Asm_Insn is private;

...

function Asm
   (Template : String;
    Outputs  : Asm_Output_Operand := No_Output_Operands;
    Inputs   : Asm_Input_Operand  := No_Input_Operands;
    Clobber  : String  := "";
    Volatile : Boolean := False) return Asm_Insn;
```

With this package content, the expression in a code statement is of type Asm_Insn, short for "assembly instruction." Multiple overloaded functions named `Asm` return values of that type.

The `Template` parameter in a string containing one or more assembly language instructions. These instructions are specific to the target machine. The parameter `Outputs` provides mappings from registers to source-level entities that are updated by the assembly statement(s). `Inputs` provides mappings from source-level entities to registers for inputs. `Volatile`, when True, tells the compiler not to optimize the call away, and `Clobber` tells the compiler which registers, or memory, if any, are altered by the instructions in `Template`. ("Clobber" is colloquial English for "destroy.") That last is important because the compiler was likely already using some of those registers so the compiler will need to restore them after the call.

We could say, for example, the following, taking all the defaults except for `Volatile`:

```
Asm ("nop", Volatile => True);
```

As you can imagine the full details are extensive, beyond the scope of this introduction. See the GNAT User Guide ("Inline Assembler") for all the gory details.

Now, back to our GPIO port/bin locking example. The port type is declared as follows:

```
type GPIO_Port is limited record
   ...
   LCKR : Word with Atomic;  -- lock register
   ...
end record with ...
```

We've elided all but the LCKR component representing the "lock register" within each port. We'd have a record representation clause to ensure the required layout but that's not important here. `Word` is an unsigned (modular) 32-bit integer type. One of the hardware requirements for accessing the lock register is that the entire register has to be read or written whenever any bits within it are accessed. The compiler must not, for example, write one of the bytes within the register in order to set or clear a bit within that part of the register. Therefore we mark the register as Atomic. If the compiler cannot honor that aspect the compilation will fail, so we would know there is a problem.

Per the ST Micro Reference Manual, the lock control bit is referred to as LCKK and is bit #16, i.e., the first in the upper half of the LCKR register word.

```
LCCK : constant Word := 16#0001_0000#;  -- the "lock control bit"
```

That bit is also known as the "Lock Key" (hence the abbreviation) because it is used to control the locking of port/pin configurations.

There are 16 GPIO pins per port, represented by the lower 16 bits of the register. Each one of these 16 bits corresponds to one of the 16 GPIO pins on a port. If any given bit reads as a 1 then the corresponding pin is locked.

Graphically that looks like this:

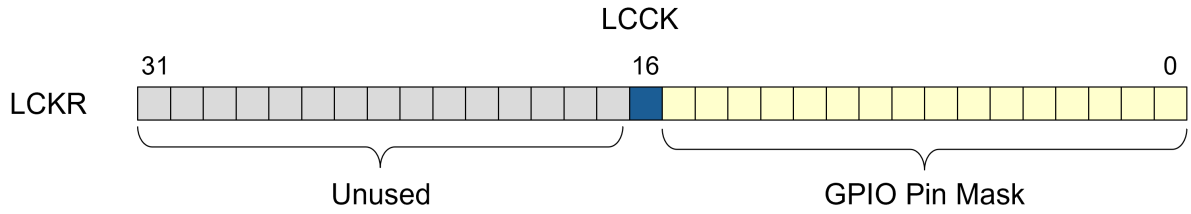

Therefore, the Ada types are:

```
type GPIO_Pin is
   (Pin_0, Pin_1, Pin_2,  Pin_3,  Pin_4,  Pin_5,  Pin_6,  Pin_7,
    Pin_8, Pin_9, Pin_10, Pin_11, Pin_12, Pin_13, Pin_14, Pin_15);

for GPIO_Pin use (Pin_0  => 16#0001#,
                  Pin_1  => 16#0002#,
                  Pin_2  => 16#0004#,
                  ...
                  Pin_15 => 16#8000#);
```

Note that we had to override the default enumeration representation so that each pin — each enumeral value — would occupy a single dedicated bit in the bit-mask.

With that in place, let's lock a pin. A specific sequence is required to set a pin's lock bit. The sequence writes and reads values from the port's LCKR register. Remember that this 32-bit register has 16 bits for the pin mask (0 .. 15), with bit #16 used as the "lock control bit".

1. write a 1 to the lock control bit with a 1 in the pin bit mask for the pin to be locked
2. write a 0 to the lock control bit with a 1 in the pin bit mask for the pin to be locked
3. do step 1 again
4. read the entire LCKR register
5. read the entire LCKR register again (optional)

Throughout the sequence the same value for the lower 16 bits of the word must be maintained (i.e., the pin mask), including when clearing the LCCK bit in the upper half.

If we wrote this in Ada it would look like this:

```
procedure Lock (Port : in out GPIO_Port;  Pin : GPIO_Pin) is
   Temp : Word with Volatile;
begin
   --  set the lock control bit and the pin bit, clear the others
   Temp := LCCK or Pin'Enum_Rep;
   --  write the lock and pin bits
   Port.LCKR := Temp;
   --  clear the lock bit in the upper half
   Port.LCKR := Pin'Enum_Rep;
   --  write the lock bit again
   Port.LCKR := Temp;
   --  read the lock bit
   Temp := Port.LCKR;
   --  read the lock bit again
   Temp := Port.LCKR;
end Lock;
```

`Pin'Enum_Rep` gives us the underlying value for the enumeration value. We cannot use `'Pos` because that attribute provides the logical position number within the enumerated values, and as such always increases consecutively. We need the underlying representation value that we specified explicitly.

The Ada procedure works, but only if the optimizer is enabled (which also precludes debugging). But even so, there is no guarantee that the required assembly language instruction sequence would be generated, especially one that maintains that required bit mask value on each access. A machine-code insertion is appropriate for all the reasons presented earlier:

```
procedure Lock (Port : in out GPIO_Port;
                Pin  :        GPIO_Pin) is
   use System.Machine_Code, ASCII, System;
begin
   Asm ("orr  r3, %1, #65536" & LF & HT &  -- 0) Temp := LCCK or Pin'Enum_Rep
        "str  r3, [%0, #28]"  & LF & HT &  -- 1) Port.LCKR := Temp
        "str  %1, [%0, #28]"  & LF & HT &  -- 2) Port.LCKR := Pin'Enum_Rep
        "str  r3, [%0, #28]"  & LF & HT &  -- 3) Port.LCKR := Temp
        "ldr  r3, [%0, #28]"  & LF & HT &  -- 4) Temp := Port.LCKR
        "ldr  r3, [%0, #28]"  & LF & HT,   -- 5) Temp := Port.LCKR
        Inputs => (Address'Asm_Input ("r", This'Address), -- %0
                   (GPIO_Pin'Asm_Input ("r", Pin))),       -- %1
        Volatile => True,
        Clobber  => ("r3"));
end Lock;
```

We've combined the instructions into one `Asm` expression. As a result, we can use ASCII line-feed and horizontal tab characters to format the listing produced by the compiler so that each instruction is on a separate line and aligned with the previous instruction, as if we had written the sequence in assembly language directly. That enhances readability later, during examination of the compiler output to verify the required sequence was emitted.

In the above, `"%0"` is the first input, containing the address of the `Port` parameter. `"%1"` is the other input, the value of the `Pin` parameter. We're using register `r3` explicitly, as the "temporary" variable, so we tell the compiler that it has been "clobbered."

If we examine the assembly language output from compiling the file, we find the body of procedure `Lock` is as hoped:

```
ldr  r2, [r0, #4]
ldrh r1, [r0, #8]
.syntax unified
orr  r3, r1, #65536
str  r3, [r2, #28]
```

(continues on next page)

(continued from previous page)

```
str  r1, [r2, #28]
str  r3, [r2, #28]
ldr  r3, [r2, #28]
ldr  r3, [r2, #28]
```

The first two statements load register 2 (r2) and register 1 (r1) with the subprogram parameters, i.e., the port and pin, respectively. Register 2 gets the starting address of the port record, in particular. (Offset #28 is the location of the LCKR register. The port is passed by reference so that address is actually that of the hardware device.)

We will have separately declared procedure Lock with inlining enabled, so whenever we call the procedure we will get the exact assembly language sequence required to lock the indicated pin on the given port, without any additional code for a procedure call.

Note that we get the calling convention right automatically, because the subprogram is not a foreign entity written in some other language (such as assembly language). It's an Ada subprogram with special content so the Ada convention applies as usual.

48.3 When Ada Is Not the Main Language

When multiple programming languages are involved, the main procedure might not be implemented in Ada. Maybe the bulk of the program is written in C, for example, and this C code calls some Ada routines that have been exported (with the C convention).

That means the Ada builder does not create the executable image's entry point. In fact the Ada main procedure is never the entry point for the final executable image, it's just where the application code begins, like the C `main` function. There are setup and initialization steps that must happen before any program can execute on a target, and the entry point code is responsible for this functionality. For example, on a bare machine target, the hardware must be initialized, the trap vectors installed, the segments initialized, and so on. On a target running an operating system, the OS is responsible for that initialization but there will be OS-specific initialization steps too. For example, if command-line arguments are supported these may be gathered. All this initialization code is generated by the builder, regardless of the language, followed by a call to the main routine.

Some of the initialization is specific to Ada programming, and must occur before any calls occur to the exported Ada routines. In particular, the entry point code emitted by the Ada builder initializes the Ada run-time system and calls all the elaboration routines for the library units in the application code. Only then does the emitted code invoke the Ada main. If the Ada builder is not going to create the executable it has no chance to emit the code to do that prior initialization. A foreign language builder will not emit such code, so we have a problem.

You could learn enough about how the foreign builder works, and how your Ada builder works, to create a work-around. You could learn what the Ada builder would emit, in other words, and ensure those routines are called manually, either directly or by augmenting the builder scripts (assuming that's possible). But the work-around would be labor-intensive and not robust to changes by the tool vendors. It would be an ugly hack, in other words.

That work-around would not be portable either. The Ada standard can't address hardware- or OS-specific initialization, but it can standardize the name for a routine to do the Ada-specific initialization. Specifically, procedure `adainit` initializes the Ada application code and the Ada run-time library. Similarly, one might need to shut down the Ada code when no further calls will be made to the exported Ada routines. Procedure `adafinal` performs this shut-down functionality. Neither procedure has parameters.

The main function in the other language is intended to import these routines and manually call them each exactly once. `adainit` must be called prior to any calls to the Ada code, and `adafinal` is to be called after all the calls to the Ada code.

For example:

```c
#include "stdio.h"

extern int checksum (char *input, int count);

extern void adainit (void);
extern void adafinal (void);

int main (int argc, char *argv[]) {
   char * Str = "Hello World!";
   int sum;
   adainit ();
   sum = checksum (Str, strlen (Str));
   adafinal ();
   printf ("checksum for '%s' is %d", Str, sum);
   return 0;
}
```

In the above, we have an Ada routine to compute a checksum, called by a C main function. Therefore, we use "extern" to tell the C compiler that the "checksum" function is defined elsewhere, i.e., in the Ada routine. Likewise, we tell the compiler that functions `adainit` and `adafinal` are defined elsewhere. The call to `adainit` is made before the call to any Ada code, thus all the elaboration code is guaranteed to happen before `checksum` needs it. Once the Ada code is not needed, the call to `adafinal` can be made.

Both `adainit` and `adafinal` have no effect after the first invocation. That means you cannot structure your foreign code to iteratively call the two routines whenever you want to invoke some Ada code. In practice you just call them once in the main and be done with it.

CHAPTER

FORTYNINE

INTERACTING WITH DEVICES

Interacting with hardware devices is one of the more frequent activities in embedded systems programming. It is also one of the most enjoyable because you can make something happen in the physical world. There's a reason that making an LED blink is the "hello world" of embedded programming. Not only is it easy to do, it is surprisingly satisfying. I suspect that even the developers of "Full Authority Digital Engine Controllers" (FADEC) — the computers that are in complete, total control of commercial airline engines — have fond memories of making an LED blink early in their careers. And of course a blinking LED is a good way to indicate application status, especially if off-board I/O is limited, which is often the case.

Working at the device register level can be error prone and relatively slow, in terms of source-lines-of-code (SLOC) produced. That's partly because the hardware is in some cases complicated, and partly because of the way the software is written. Using bit masks for setting and clearing bits is not a readable approach, comparatively speaking. There's just not enough information transmitted to the reader. It might be clear enough when written, but will you see it that way months later? Readability is important because programs are read many more times than they are written. Also, an unreadable program is more difficult to maintain, and maintenance is where most money is spent in long-lived applications. Comments can help, until they are out of date. Then they are an active hindrance.

For example, what do you think the following code does? This is real code, where `temp` and `temp2` are unsigned 32-bit integers:

```
temp = ((uint32_t)(GPIO_AF) <<
          ((uint32_t)((uint32_t)GPIO_PinSource & (uint32_t)0x07) * 4));
GPIOx->AFR[GPIO_PinSource >> 0x03] &= ~((uint32_t)0xF <<
          ((uint32_t)((uint32_t)GPIO_PinSource & (uint32_t)0x07) * 4));
temp_2 = GPIOx->AFR[GPIO_PinSource >> 0x03] | temp;
GPIOx->AFR[GPIO_PinSource >> 0x03] = temp_2;
```

That's unfair to ask, absent any context. The code configures a general purpose I/O (GPIO) pin on an Arm microcontroller for one of the "alternate functions". `GPIOx` is a pointer to a GPIO port, `GPIO_PinSource` is a GPIO pin number, and `GPIO_AF` is the alternate function number. But let's say you knew that. Is the code correct? The longer it takes to know, the less productive you are.

The fact that the code above is in C is beside the point. If we wrote it the same way in Ada it would be equally opaque, if not more so. There are simpler approaches. Judicious use of record and array types is one. We'll say more about that later, but the underlying idea is to let the compiler do as much work for us as possible. For example, the data structures used in the code above require explicit shifting whenever they are accessed. If we can avoid that at the source code level — by having the compiler do it for us — we will have simplified the code considerably. Furthermore, letting the compiler do the work for us makes the code more maintainable (which is where the money is). For example, if the code does the shifting explicitly and the data structures are changed, we'll have to change the number of bits to shift left or right. Constants will help there, but we still have to remember to change them;

the compiler won't complain if we forget. In contrast, if we let the compiler do this shifting for us, the amounts to shift will be changed automatically.

Some devices are very simple. In these cases the application may interact directly with the device without unduly affecting productivity. For example, there was a board that had a user-accessible rotary switch with sixteen distinct positions. Users could set the switch to whatever the application code required, e.g., to indicate some configuration information. The entire software interface to this device consisted of a single read-only 8-bit byte in memory. That's all there was to it: you read the memory and thus got the numeric setting of the switch.

More complex devices, however, usually rely on software abstraction to deal with the complexity. Just as abstraction is a fundamental way to combat complexity in software, abstraction also can be used to combat the complexity of driving sophisticated hardware. The abstraction is presented to users by a software "device driver" that exists as a layer between the application code and the hardware device. The layer hides the gory details of the hardware manipulation behind subprograms, types, and parameters.

We say that the device driver layer is an abstraction because, at the least, the names of the procedures and functions indicate what they do, so at the call site you can tell *what* is being done. That's the point of abstraction: it allows us to focus on what, rather than how. Consider that GPIO pin configuration code block again. Instead of writing that block every time we need to configure the alternate function for a pin, suppose we called a function:

```
GPIO_PinAFConfig(USARTx_TX_GPIO_PORT, USARTx_TX_SOURCE, USARTx_TX_AF);
```

The `GPIO_PinAFConfig` function is part of the GPIO device driver provided by the STM32 Standard Peripherals Library (SPL). Even though that's not the best function name conceivable, calls to the function will be far more readable than the code of the body, and we only have to make sure the function implementation is correct once. And assuming the device drivers' subprograms can be inlined, the subprogram call imposes no performance penalty.

Note the first parameter to the call above: `USARTx_TX_GPIO_PORT`. There are multiple GPIO ports on an Arm implementation; the vendor decides how many. In this case one of them has been connected to a USART (Universal Synchronous Asynchronous Receiver Transmitter), an external device for sending and receiving serial data. When there are multiple devices, good software engineering suggests that the device driver present a given device as one of a type. That's what an "abstract data type" (ADT) provides for software and so the device driver applies the same design. An ADT is essentially a class, in class-oriented languages. In Ada, an ADT is represented as a private type declared in a package, along with subprograms that take the type as a parameter.

The Ada Drivers Library (ADL) provided by AdaCore and the Ada community uses this design to supply Ada drivers for the timers, I2C, A/D and D/A converters, and other devices common to microcontrollers. Multiple devices are presented as instances of abstract data types. A variety of development platforms from various vendors are supported, including the STM32 series boards. The library is available on GitHub for both non-proprietary and commercial use here: https://github.com/AdaCore/Ada_Drivers_Library. We are going to use some of these drivers as illustrations in the following sections.

49.1 Non-Memory-Mapped Devices

Some devices are connected to the processor on a dedicated bus that is separate from the memory bus. The Intel processors, for example, used to have (and may still have) instructions for sending and receiving data on this bus. These are the "in" and "out" instructions, and their data-length specific variants.

The original version of Ada defined a package named `Low_Level_IO` for such architectures, but there were very few implementations (maybe just one, known to support the Intel processors). As a result, the package was actually removed from the language standard.

Implementations could still support the package, it just wouldn't be a standard package. That's different from constructs that are marked as "obsolescent" by the standard, e.g., the pragmas replaced by aspects, among other things. Obsolescent constructs are still part of the standard.

If a given target machine has such I/O instructions for the device bus, these can be invoked in Ada via machine-code insertions. For example:

```
procedure Send_Control (Device : Port;  Data : Unsigned_16) is
   pragma Suppress (All_Checks);
begin
   asm ("outw %1, (%0)",
        Inputs  => (Port'Asm_Input("dx",Device),
                    Unsigned_16'Asm_Input("ax",Data)),
        Clobber => "ax, dx");
end Send_Control;


procedure Receive_Control (Device : Port;  Data : out Unsigned_16) is
   pragma Suppress (All_Checks);
begin
   asm ("inw (%1), %0",
        Inputs   => (Port'Asm_Input("dx",Device)),
        Outputs  => (Unsigned_16'Asm_Output("=ax",Data)),
        Clobber  => "ax, dx",
        Volatile => True);
end Receive_Control;
```

Applications could use these subprograms to set the frequency of the Intel PC tone generator, for example, and to turn it on and off. (You can't do that any more in application code because modern operating systems don't give applications direct access to the hardware, at least not by default.)

Although the `Low_Level_IO` package is no longer part of the language, you can write this sort of thing yourself, or vendors can do it. That's possible because the Systems Programming Annex, when implemented, guarantees fully effective use of machine-code inserts. That means you can express anything the compiler could emit. The guarantee is important because otherwise the compiler might "get in the way." For example, absent the guarantee, the compiler would be allowed to insert additional assembly language statements in between yours. That can be a real problem, depending on what your statements do. For instance, if your MCI assembly statements do something and then check a resulting condition code, such as the overflow flag, those interleaved compiler-injected statements might clear that condition code before your code can check it. Fortunately, the annex guarantees that sort of thing cannot happen.

49.2 Memory-Mapped Devices

In *another earlier chapter* (page 1389), we said that we could query the address of some object, and we also showed how to use that result to specify the address of some other object. We used that capability to create an "overlay," in which two objects are used to refer to the same memory locations. As we indicated in that discussion, you would not use the same type for each object — the point, after all, is to provide a view of the shared underlying memory cells that is not already available otherwise. Each distinct type would provide a distinct view of the memory values, that is, a set of operations providing some required functionality.

For example, here's an overlay composed of a 32-bit signed integer object and a 32-bit array object:

```
type Bits32 is array (0 .. 31) of Boolean
   with Component_Size => 1;

X : aliased Integer_32;
Y : Bits32 with Address => X'Address;
```

Because one view is as an integer and the other as an array, we can access that memory using the two different views' operations. Using the view as an array object (Y) we can access individual bits of the memory shared with X. Using the view as an integer (X), we can do arithmetic on the contents of that memory. (We could have used an unsigned integer instead of the signed type, and thereby gained the bit-oriented operations, but that's not the point.)

Very often, though, there is only one Ada object that we place at some specific address. That's because the Ada object is meant to be the software interface to some memory-mapped hardware device. In this scenario we don't have two overlaid Ada objects, we just have one. The other "object" is the hardware device mapped to that starting address. Since they are at the same memory location(s), accessing the Ada object accesses the hardware device.

For a real-world but nonetheless simple example, recall that example of a rotary switch on the front of our embedded computer that we mentioned in the introduction. This switch allows humans to provide some very simple input to the software running on the computer.

```
Rotary_Switch : Unsigned_8 with
  Address => System.Storage_Elements.To_Address (16#FFC0_0801#);
```

We declare the object and also specify the address, but not by querying some entity. We already know the address from the hardware documentation. But we cannot simply use an integer address literal from that documentation because type `System.Address` is almost always a private type. We need a way to compose an `Address` value from an integer value. The package `System.Storage_Elements` defines an integer representation for `Address` values, among other useful things, and a way to convert those integer values to `Address` values. The function `To_Address` does that conversion.

As a result, in the Ada code, reading the value of the variable `Rotary_Switch` reads the number on the actual hardware switch.

Note that if you specify the wrong address, it is hard to say what happens. Likewise, it is an error for an address clause to disobey the object's alignment. The error cannot be detected at compile time, in general, because the address is not necessarily known at compile time. There's no requirement for a run-time check for the sake of efficiency, since efficiency seems paramount here. Consequently, this misuse of address clauses is just like any other misuse of address clauses — execution of the code is erroneous, meaning all bets are off. You need to know what you're doing.

What about writing to the variable? Is that meaningful? In this particular example, no. It is effectively read-only memory. But for some other device it very well could be meaningful, certainly. It depends on the hardware. But in this case, assigning a value to the `Rotary_Switch` variable would have no effect, which could be confusing to programmers. It looks like a variable, after all. We wouldn't declare it as a constant because the human user could rotate the switch, resulting in a different value read. Therefore, we would hide the Ada variable behind a function, precluding the entire issue. Clients of the function can then use it for whatever purpose they require, e.g., as the unique identifier for a computer in a rack.

Let's talk more about the type we use to represent a memory-mapped device. As we said, that type defines the view we have for the object, and hence the operations we have available for accessing the underlying mapped device.

We choose the type for the representative Ada variable based on the interface of the hardware mapped to the memory. If the interface is a single monolithic register, for example,

then an integer (signed or unsigned) of the necessary size will suffice. But suppose the interface is several bytes wide, and some of the bytes have different purposes from the others? In that case, a record type is the obvious solution, with distinct record components dedicated to the different parts of the hardware interface. We could use individual bits too, of course, if that's what the hardware does. Ada is particularly good at this fine-degree of representation because record components of any types can be specified in the layout, down to the bit level, within the record.

In addition, we might want to apply more than one type, at any one time, to a given memory-mapped device. Doing so allows the client code some flexibility, or it might facilitate an internal implementation. For example, the STM32 boards from ST Microelectronics include a 96-bit device unique identifier on each board. The identifier starts at a fixed memory location. In this example we provide two different views — types — for the value. One type provides the identifier as a String containing twelve characters, whereas another type provides the value as an array of three 32-bit unsigned words (i.e., 12 bytes). The two types are applied by two overloaded functions that are distinguished by their return type:

```
package STM32.Device_Id is

   subtype Device_Id_Image is String (1 .. 12);

   function Unique_Id return Device_Id_Image;

   type Device_Id_Tuple is array (1 .. 3) of UInt32
     with Component_Size => 32;

   function Unique_Id return Device_Id_Tuple;

end STM32.Device_Id;
```

The subtype Device_Id_Image is the view of the 96-bits as an array of twelve 8-bit characters. (Using type **String** here isn't essential. We could have defined an array of bytes instead of **Character**.) Similarly, subtype Device_Id_Tuple is the view of the 96-bits as an array of three 32-bit unsigned integers. Clients can then choose how they want to view the unique id by choosing which function to call.

In the package body we implement the functions as two ways to access the same shared memory:

```
with System;

package body STM32.Device_Id is

   ID_Address : constant System.Address := System'To_Address (16#1FFF_7A10#);

   function Unique_Id return Device_Id_Image is
      Result : Device_Id_Image with Address => ID_Address, Import;
   begin
      return Result;
   end Unique_Id;

   function Unique_Id return Device_Id_Tuple is
      Result : Device_Id_Tuple with Address => ID_Address, Import;
   begin
      return Result;
   end Unique_Id;

end STM32.Device_Id;
```

The GNAT-defined attribute System'To_Address in the declaration of ID_Address is the same as the function System.Storage_Elements.To_Address except that, if the argument is static, the function result is static. This means that such an expression can be used in

contexts (e.g., preelaborable packages) which require a static expression and where the function call could not be used (because the function call is always non-static, even if its argument is static).

The only difference in the bodies is the return type and matching type for the local `Result` variable. Both functions read from the same location in memory.

Earlier we indicated that the bit-pattern implementation of the GPIO function could be expressed differently, resulting in more readable, therefore maintainable, code. The fact that the code is in C is irrelevant; the same approach in Ada would not be any better. Here's the complete code for the function body:

```
void GPIO_PinAFConfig(GPIO_TypeDef *GPIOx,
                      uint16_t      GPIO_PinSource,
                      uint8_t       GPIO_AF)
{
  uint32_t temp = 0x00;
  uint32_t temp_2 = 0x00;

  /* Check the parameters */
  assert_param(IS_GPIO_ALL_PERIPH(GPIOx));
  assert_param(IS_GPIO_PIN_SOURCE(GPIO_PinSource));
  assert_param(IS_GPIO_AF(GPIO_AF));

  temp = ((uint32_t)(GPIO_AF) <<
           ((uint32_t)((uint32_t)GPIO_PinSource & (uint32_t)0x07) * 4));
  GPIOx->AFR[GPIO_PinSource >> 0x03] &= ~((uint32_t)0xF <<
           ((uint32_t)((uint32_t)GPIO_PinSource & (uint32_t)0x07) * 4));
  temp_2 = GPIOx->AFR[GPIO_PinSource >> 0x03] | temp;
  GPIOx->AFR[GPIO_PinSource >> 0x03] = temp_2;
}
```

The problem, other than the magic numbers (some named constants would have helped), is that the code is doing nearly all the work instead of off-loading it to the compiler. Partly that's because in C we cannot declare a numeric type representing a 4-bit quantity, so everything is done in terms of machine units, in this case 32-bit unsigned integers.

Why do we need 4-bit values? At the hardware level, each memory-mapped GPIO port has a sequence of 16 4-bit quantities, one for each of the 16 pins on the port. Those 4-bit quantities specify the "alternate functions" that the pin can take on, if needed. The alternate functions allow a given pin to do more than act as a single discrete I/O pin. For example, a pin could be connected to the incoming lines of a USART. We use the configuration routine to apply the specific 4-bit code representing the alternate function required for our application.

These 16 4-bit alternate function fields are contiguous in the register (hence memory) so we can represent them as an array with a total size of 64-bits (i.e., 16 times 4). In the C version this array has two components of type **`uint32_t`** so it must compute where the corresponding 4-bit value for the pin is located within those two words. In contrast, the Ada version of the array has components of the 4-bit type, rather than two 32-bit components, and simply uses the pin number as the index. The resulting Ada procedure body is extremely simple:

```
procedure Configure_Alternate_Function
  (Port : in out GPIO_Port;
   Pin  : GPIO_Pin;
   AF   : GPIO_Alternate_Function_Code)
is
begin
   Port.AFR (Pin) := AF;
end Configure_Alternate_Function;
```

In the Ada version, AFR is a component within the `GPIO_Port` record type, much like in the C code's struct. However, Ada allows us to declare a much more descriptive set of types,

and it is these types that allows the developer to off-load the work to the compiler.

First, in Ada we can declare a 4-bit numeric type:

```
type Bits_4 is mod 2**4 with Size => 4;
```

The Bits_4 type was already globally defined elsewhere so we just derive our 4-bit "alternate function code" type from it. Doing so allows the compiler to enforce simple strong typing so that the two value spaces are not accidentally mixed. This approach also increases understanding for the reader:

```
type GPIO_Alternate_Function_Code is new Bits_4;
--  We cannot use an enumeration type because there are duplicate binary
--  values
```

Hence type GPIO_Alternate_Function_Code is a copy of Bits_4 in terms of operations and values, but is not the same type as Bits_4 so the compiler will keep them separate for us.

We can then use that type as the array component type for the representation of the AFR:

```
type Alternate_Function_Fields is
  array (GPIO_Pin) of GPIO_Alternate_Function_Code
  with Component_Size => 4, Size => 64;  -- both in units of bits
```

Note that we can use the GPIO Pin parameter directly as the index into the array type, obviating any need to massage the Pin value in the procedure. That's possible because the type GPIO_Pin is an enumeration type:

```
type GPIO_Pin is
  (Pin_0, Pin_1, Pin_2,  Pin_3,  Pin_4,  Pin_5,  Pin_6,  Pin_7,
   Pin_8, Pin_9, Pin_10, Pin_11, Pin_12, Pin_13, Pin_14, Pin_15);

for GPIO_Pin use
  (Pin_0  => 16#0001#,
   Pin_1  => 16#0002#,
   Pin_2  => 16#0004#,
   Pin_3  => 16#0008#,
   Pin_4  => 16#0010#,
   Pin_5  => 16#0020#,
   Pin_6  => 16#0040#,
   Pin_7  => 16#0080#,
   Pin_8  => 16#0100#,
   Pin_9  => 16#0200#,
   Pin_10 => 16#0400#,
   Pin_11 => 16#0800#,
   Pin_12 => 16#1000#,
   Pin_13 => 16#2000#,
   Pin_14 => 16#4000#,
   Pin_15 => 16#8000#);
```

In the hardware, the GPIO_Pin values don't start at zero and monotonically increase. Instead, the values are bit patterns, where one bit within each value is used. The enumeration representation clause allows us to express that representation.

Type Alternate_Function_Fields is then used to declare the AFR record component in the GPIO_Port record type:

```
type GPIO_Port is limited record
   MODER      : Pin_Modes_Register;
   OTYPER     : Output_Types_Register;
   Reserved_1 : Half_Word;
   OSPEEDR    : Output_Speeds_Register;
```

(continues on next page)

(continued from previous page)

```
   PUPDR      : Resistors_Register;
   IDR        : Half_Word;       --  input data register
   Reserved_2 : Half_Word;
   ODR        : Half_Word;       --  output data register
   Reserved_3 : Half_Word;
   BSRR_Set   : Half_Word;       --  bit set register
   BSRR_Reset : Half_Word;       --  bit reset register
   LCKR       : Word with Atomic;
   AFR        : Alternate_Function_Fields;
   Unused     : Unaccessed_Gap;
end record with
  Size => 16#400# * 8;

for GPIO_Port use record
   MODER      at 0  range 0 .. 31;
   OTYPER     at 4  range 0 .. 15;
   Reserved_1 at 6  range 0 .. 15;
   OSPEEDR    at 8  range 0 .. 31;
   PUPDR      at 12 range 0 .. 31;
   IDR        at 16 range 0 .. 15;
   Reserved_2 at 18 range 0 .. 15;
   ODR        at 20 range 0 .. 15;
   Reserved_3 at 22 range 0 .. 15;
   BSRR_Set   at 24 range 0 .. 15;
   BSRR_Reset at 26 range 0 .. 15;
   LCKR       at 28 range 0 .. 31;
   AFR        at 32 range 0 .. 63;
   Unused     at 40 range 0 .. 7871;
end record;
```

These declarations define a record type that matches the content and layout of the STM32 GPIO Port memory-mapped device.

Let's compare the two procedure implementations again. Here they are, for convenience:

```
void GPIO_PinAFConfig(GPIO_TypeDef *GPIOx,
                      uint16_t      GPIO_PinSource,
                      uint8_t       GPIO_AF)
{
  uint32_t temp = 0x00;
  uint32_t temp_2 = 0x00;

  /* Check the parameters */
  assert_param(IS_GPIO_ALL_PERIPH(GPIOx));
  assert_param(IS_GPIO_PIN_SOURCE(GPIO_PinSource));
  assert_param(IS_GPIO_AF(GPIO_AF));

  temp = ((uint32_t)(GPIO_AF) <<
            ((uint32_t)((uint32_t)GPIO_PinSource & (uint32_t)0x07) * 4));
  GPIOx->AFR[GPIO_PinSource >> 0x03] &= ~((uint32_t)0xF <<
            ((uint32_t)((uint32_t)GPIO_PinSource & (uint32_t)0x07) * 4));
  temp_2 = GPIOx->AFR[GPIO_PinSource >> 0x03] | temp;
  GPIOx->AFR[GPIO_PinSource >> 0x03] = temp_2;
}
```

```
procedure Configure_Alternate_Function
  (Port : in out GPIO_Port;
   Pin  : GPIO_Pin;
   AF   : GPIO_Alternate_Function_Code)
is
begin
```

(continues on next page)

(continued from previous page)

```
   Port.AFR (Pin) := AF;
end Configure_Alternate_Function;
```

Which one is correct? Both. But clearly, the Ada version is far simpler, so much so that it is immediately obvious that it is correct. Not so for the coding approach used in the C version, comparatively speaking. It is true that the Ada version required a couple more type declarations, but those make the procedure body far simpler. That resulting simplicity is a reflection of the balance between data structures and executable statements that we should always try to achieve. Ada just makes that easier to achieve than in some other languages.

Of course, the underlying hardware likely has no machine-supported 4-bit unsigned type so larger hardware numeric types are used in the generated code. Hence there are shifts and masking being done in the Ada version as well, but they do not appear in the source code. The developer has let the compiler do that work. An additional benefit of this approach is that the compiler will change the shifting and masking code for us if we change the explicit type declarations.

Why is simplicity so important? Simplicity directly increases understandability, which directly affects correctness and maintainability, which greatly affects the economic cost of the software. In large, long-lived projects, maintenance is by far the largest economic cost driver. In high-integrity applications, correctness is essential. Therefore, doing anything reasonable to keep the code as simple as possible is usually worth the effort. In some projects the non-functional requirements, especially performance, can dictate less simple code, but that won't apply to all of the code. Where possible, simplicity rules.

One more point about the GPIO ports. There are as many of these ports as the Arm microcontroller vendor decides to implement. And as we said, they are memory-mapped, at addresses specified by the vendor. If the memory used by all the ports is contiguous, we can conveniently use an array of the `GPIO_Port` record type to represent all the ports implemented. We would just set the array object's address at the address specified for the first port object in memory. Then, normal array indexing will provide access to any given port in the memory-mapped hardware.

This array approach requires each array component — the `GPIO_Port` record type — to be the right size so that all the array components start on addresses corresponding to the start of the next port in hardware.

That starting address correspondence for the array components is obtained automatically as long as the record type includes all the memory used by any individual device. In that case the next array component will indeed start at an address matching the next device in hardware. Note that this assumes the first array component matches the address of the first hardware device in memory. The first array component is at the same address as the whole array object itself (a fact that is guaranteed by the language), so the array address must be set to whatever the vendor documentation specified for the first port.

However, in some cases the vendor will leave gaps of unused memory for complicated memory-mapped objects like these ports. They do so for the sake of future expansion of the implementation, e.g., to add new features or capacity. The gaps are thus between consecutive hardware devices.

These gaps are presumably (hopefully!) included in the memory layout documented for the device, but it won't be highlighted particularly. You should check, therefore, that the documented starting addresses of the second and subsequent array components are what you will get with a simple array object having components of that record type.

For example, the datasheet for the STM32F407 Arm implementation indicates that the GPIO ports start at address 16#4002_0000#. That's where GPIO_A begins. The next port, GPIO_B, starts at address 16#4002_0400#, or a byte offset of 1024 in decimal. In the STM32F4 Reference Manual, however, the GPIO port register layout indicates a size for any one port that is much less than 1024 bytes. As you saw earlier in the corresponding record

type declaration, on the STM32F4 each port only requires 40 (decimal) bytes. Hence there's a gap of unused memory between the ports, including after the last port, of 984 bytes (7872 bits).

To represent the gap, an "extra", unused record component was added, with the necessary location and size specified within the record type, so that the unused memory is included in the representation. As a result, each array component will start at the right address (again, as long as the first one does). Telling the compiler, and future maintainers, that this extra component is not meant to be referenced by the software would not hurt. You can use the pragma or aspect `Unreferenced` for that purpose. Here's the code again, for convenience:

```
type GPIO_Port is limited record
   MODER      : Pin_Modes_Register;
   OTYPER     : Output_Types_Register;
   Reserved_1 : Half_Word;
   OSPEEDR    : Output_Speeds_Register;
   PUPDR      : Resistors_Register;
   IDR        : Half_Word;       --  input data register
   Reserved_2 : Half_Word;
   ODR        : Half_Word;       --  output data register
   Reserved_3 : Half_Word;
   BSRR_Set   : Half_Word;       --  bit set register
   BSRR_Reset : Half_Word;       --  bit reset register
   LCKR       : Word with Atomic;
   AFR        : Alternate_Function_Fields;
   Unused     : Unaccessed_Gap with Unreferenced;
end record with
   Size => 16#400# * 8;

for GPIO_Port use record
   MODER      at 0  range 0 .. 31;
   OTYPER     at 4  range 0 .. 15;
   Reserved_1 at 6  range 0 .. 15;
   OSPEEDR    at 8  range 0 .. 31;
   PUPDR      at 12 range 0 .. 31;
   IDR        at 16 range 0 .. 15;
   Reserved_2 at 18 range 0 .. 15;
   ODR        at 20 range 0 .. 15;
   Reserved_3 at 22 range 0 .. 15;
   BSRR_Set   at 24 range 0 .. 15;
   BSRR_Reset at 26 range 0 .. 15;
   LCKR       at 28 range 0 .. 31;
   AFR        at 32 range 0 .. 63;
   Unused     at 40 range 0 .. 7871;
end record;
```

The type for the gap, `Unaccessed_Gap`, must represent 984 bytes so we declared an array like so:

```
Gap_Size : constant := 984;  -- bytes
--  There is a gap of unused, reserved memory after the end of the
--  bytes used by any given memory-mapped GPIO port. The size of the
--  gap is indicated in the STM32F405xx etc. Reference Manual, RM 0090.
--  Specifically, Table 1 shows the starting and ending addresses mapped
--  to the GPIO ports, for an allocated size of 16#400#, or 1024 (decimal)
--  bytes per port. However, in the same document, the register map for
--  these ports shows only 40 bytes currently in use. Presumably this gap is
--  for future expansion when additional functionality or capacity is added,
--  such as more pins per port.

type Unaccessed_Gap is array (1 .. Gap_Size) of Unsigned_8 with
   Component_Size => Unsigned_8'Size,
```

(continues on next page)

(continued from previous page)

```
   Size           => Gap_Size * Unsigned_8'Size;
--  This type is used to represent the necessary gaps between GPIO
--  ports in memory. We explicitly allocate a record component of
--  this type at the end of the record type for that purpose.
```

We also set the size of the entire record type to 16#400# bytes since that is the total of the required bytes plus the gap, as per the documentation. As such, this is a "confirming" size clause because the reserved gap component increases the required size to that value (which is the point). We don't really need to do both, i.e., declare the reserved gap component and also set the record type size to the larger value. We could have done either one alone. One could argue that setting the size alone would have been simpler, in that it would obviate the type declaration and corresponding record component declaration. Being doubly explicit seemed a good idea at the time.

49.3 Dynamic Address Conversion

In the overlay example there were two distinct Ada objects, of two different types, sharing one (starting) address. The overlay provides two views of the memory at that address because there are two types involved. In this idiom the address is known when the code is written, either because it is a literal value specified in some hardware spec, or it is simply the address of the other object (in which case the actual address value is neither known nor relevant).

When there are several views required, declaring multiple overlaid variables at the same address absolutely can work, but can be less convenient than an alternative idiom. The alternative is to convert an address value to a value of an access type. Dereferencing the resulting access value provides a view of the memory corresponding to the designated type, starting at the converted address value.

For example, perhaps a networking component is given a buffer — an array of bytes — representing a received message. A subprogram is called with the buffer as a parameter, or the parameter can be the address of the buffer. If the subprogram must interpret this array via different views, this alternative approach works well. We could have an access type designating a message preamble, for example, and convert the first byte's address into such an access value. Dereferencing the conversion gives the preamble value. Likewise, the subprogram might need to compute a checksum over some of the bytes, so a different view, one of an array of a certain set size, could be used. Again, we could do that with overlaid objects but the alternative can be more convenient.

Here's a simple concrete example to illustrate the approach. Suppose we want to have a utility to swap the two bytes at any arbitrary address. Here's the declaration:

```
procedure Swap2 (Location : System.Address);
```

Callers pass the address of an object intended to have its (first) two bytes swapped:

```
Swap2 (Z'Address);
```

In the call, Z is of type `Interfaces.Integer_16`, for example, or `Unsigned_16`, or even something bigger as long as you only care about swapping the first two bytes.

The incomplete implementation using the conversion idiom could be like so:

```
procedure Swap2 (Location : System.Address) is
   X : Word renames To_Pointer (Location).all;
begin
   X :=  Shift_Left (X, 8) or Shift_Right (X, 8);
end Swap2;
```

The declaration of X is the pertinent part.

In the declaration, X is of type Word, a type (not yet shown) derived from Interfaces.Unsigned_16. Hence X can have the inherited shift and logical **or** operations applied.

The To_Pointer (Location) part of the declaration is a function call. The function returns the conversion of the incoming address value in Location into an access value designating Word values. We'll explain how to do that momentarily. The **.all** explicitly dereferences the access value resulting from the function call.

Finally, X renames the Word designated by the converted access value. The benefit of the renaming, in addition to the simpler name, is that the function is only called once, and the access value deference is only evaluated once.

Now for the rest of the implementation not shown earlier.

```
type Word is new Interfaces.Unsigned_16;

package Word_Ops is new System.Address_To_Access_Conversions (Word);
use Word_Ops;
```

System.Address_To_Access_Conversions is a language-defined generic package that provides just two functions: one to convert an address value to an access type, and one to convert in the opposite direction:

```
generic
   type Object (<>) is limited private;
package System.Address_To_Access_Conversions is

   type Object_Pointer is access all Object;

   function To_Pointer (Value : Address) return Object_Pointer;
   function To_Address (Value : Object_Pointer) return Address;

   pragma Convention (Intrinsic, To_Pointer);
   pragma Convention (Intrinsic, To_Address);

end System.Address_To_Access_Conversions;
```

Object is the generic formal type parameter, i.e., the type we want our converted addresses to designate via the type Object_Pointer. In the byte-swapping example, the type Word was passed to Object in the instantiation.

The access type used by the functions is Object_Pointer, declared along with the functions. Object_Pointer designates values of the type used for the generic actual parameter, in this case Word.

Note the pragma Convention applied to each function, indicating that there is no actual function call involved; the compiler emits the code directly, if any code is actually required. Otherwise the compiler just treats the incoming **Address** bits as a value of type Object_Pointer.

The instantiation specifies type Word as the generic actual type parameter, so now we have a set of functions for that type, in particular To_Pointer.

Let's look at the code again, this time with the additional declarations:

```
type Word is new Interfaces.Unsigned_16;

package Word_Ops is new System.Address_To_Access_Conversions (Word);
use Word_Ops;

procedure Swap2 (Location : System.Address) is
   X : Word renames To_Pointer(Location).all;
```

(continues on next page)

(continued from previous page)

```
begin
   X :=  Shift_Left (X, 8) or Shift_Right (X, 8);
end Swap2;
```

`Word_Ops` is the generic instance, followed immediately by a **`use`** clause so that we can refer to the visible content of the package instance conveniently.

In the renaming expression, `To_Pointer (Location)` converts the incoming address in `Location` to a pointer designating the `Word` at that address. The **`.all`** dereferences the resulting access value to get the designated `Word` value. Hence `X` refers to that two-byte value in memory.

We could almost certainly achieve the same affect by replacing the call to the function in `To_Pointer` with a call to an instance of `Ada.Unchecked_Conversion`. The conversion would still be between an access type and a value of type `System.`**`Address`**, but the access type would require declaration by the user. In both cases there would be an instantiation of a language-defined facility, so there's not much saving in lines of source code, other than the access type declaration. Because `System.Address_To_Access_Conversions` is explicitly intended for this purpose, good style suggests its use in preference to unchecked conversion, but both approaches are common in production code.

In either case, the conversion is not required to work, although in practice it will, most of the time. Representing an access value as an address value is quite common because it matches the typical underlying hardware's memory model. But even so, a single address is not necessarily sufficient to represent an access value for any given designated type. In that case problems arise, and they are difficult to debug.

For example, in GNAT, access values designating values of unconstrained array types, such as **`String`**, are represented as two addresses, known as "fat pointers". One address points to the bounds for the specific array object, since they can vary. The other address designates the characters. Therefore, conversions of a single address to an access value requiring fat pointers will not work using unchecked conversions. (There is a way, however, to tell GNAT to use a single address value, but it is an explicit step in the code. Once done, though, unchecked conversions would then work correctly.)

You can alternatively use generic package `System.Address_To_Access_Conversions`. That generic is defined for the purpose of converting addresses to access values, and vice versa. But note that the implementation of the generic's routines must account for the representation their compiler uses for unbounded types like **`String`**.

49.4 Address Arithmetic

Part of "letting the compiler do the work for you" is not doing address arithmetic in the source code if you can avoid it. Instead, for instance, use the normal "dot notation" to reference components, and let the compiler compute the offsets to those components. The approach to implementing procedure `Configure_Alternate_Function` for a `GPIO_Port` is a good example.

That said, sometimes address arithmetic is the most direct expression of what you're trying to implement. For example, when implementing your own memory allocator, you'll need to do address arithmetic.

Earlier in this section we mentioned the package `System.Storage_Elements`, for the sake of the function that converts integer values to address values. The package also defines functions that provide address arithmetic. These functions work in terms of type `System.`**`Address`** and the package-defined type `Storage_Offset`. The type `Storage_Offset` is an integer type with an implementation-defined range. As a result you can have positive and negative offsets, as needed. Addition and subtraction of offsets to/from addresses is supported, as well as the **`mod`** operator.

Combined with package System (for type System.Address), the functions and types in this package provide the kinds of address arithmetic other languages provide. Nevertheless, you should prefer having the compiler do these computations for you, if possible.

Here's an example illustrating the facilities. The procedure defines an array of record values, then traverses the array, printing the array components as it goes. (This is not the way to really implement such code. It's just an illustration for address arithmetic.)

```
with Ada.Text_IO;               use Ada.Text_IO;
with System.Storage_Elements;   use System.Storage_Elements;
with System.Address_To_Access_Conversions;

procedure Demo_Address_Arithmetic is

   type R is record
      X : Integer;
      Y : Integer;
   end record;

   R_Size : constant Storage_Offset := R'Object_Size / System.Storage_Unit;

   Objects : aliased array (1 .. 10) of aliased R;     --  arbitrary bounds

   Objects_Base : constant System.Address := Objects'Address;

   Offset : Storage_Offset;

   --  display the object of type R at the address specified by Location
   procedure Display_R (Location : in System.Address) is

      package R_Pointers is new System.Address_To_Access_Conversions (R);
      use R_Pointers;

       Value : R renames To_Pointer (Location).all;
      --  The above converts the address to a pointer designating an R value
      --  and dereferences it, using the name Value to refer to the
      --  dereferenced R value.
   begin
      Put (Integer'Image (Value.X));
      Put (", ");
      Put (Integer'Image (Value.Y));
      New_Line;
   end Display_R;

begin
   Objects := ((0,0), (1,1), (2,2), (3,3), (4,4),
               (5,5), (6,6), (7,7), (8,8), (9,9));

   Offset := 0;

   --  walk the array of R objects, displaying each one individually by
   --  adding the offset to the base address of the array
   for K in Objects'Range loop
      Display_R (Objects_Base + Offset);
      Offset := Offset + R_Size;
   end loop;
end Demo_Address_Arithmetic;
```

Seriously, this is just for the purpose of illustration. It would be much better to just index into the array directly.

CHAPTER

FIFTY

GENERAL-PURPOSE CODE GENERATORS

In *another chapter* (page 1425), we mentioned that the best way to get a specific set of machine instructions emitted from the compiler is to write them ourselves, in the Ada source code, using machine-code insertions (MCI). The rationale was that the code generator will make reasonable assumptions, including the assumption that performance is of uppermost importance, but that these assumptions can conflict with device requirements.

For example, the code generator might not issue the specific sequence of machine code instructions required by the hardware. The GPIO pin "lock" sequence in that referenced chapter is a good example. Similarly, the optimizer might remove what would otherwise be "redundant" read/writes to a memory-mapped variable.

The code generator might issue instructions to read a small field in a memory-mapped record object using byte-sized accesses, when instead the device requires whole-word or half-word access instructions.

The code generator might decide to load a variable from memory into a register, accessing the register when the value is required. Typically that approach will yield far better performance than going to memory every time the value is read or updated. But suppose the variable is for a memory-mapped device? In that case we really need the generated code to go to memory every time.

As you can see, there are times when we cannot let the code generator make the usual assumptions. Therefore, Ada provides aspects and pragmas that developers can use to inform the compiler of facts that affect code generation in this regard.

These facilities are defined in the Systems Programming Annex, C.6, specifically. The title of that sub-clause is "Shared Variables" because the objects (memory) can be shared between tasks as well as between hardware devices and the host computer. We ignore the context of variables shared between tasks, focusing instead of shared memory-mapped devices, as this course is about embedded systems.

When describing these facilities we will use aspects, but remember that the corresponding pragmas are defined as well, except for one. (We'll mention it later.) For the other aspects, the pragmas existed first and, although obsolescent, remain part of the language and supported. There's no need to change your existing source code using the pragmas to use the aspects instead, unless you need to change it for some other reason.

As this is an introduction, we will not go into absolutely all the details, but will instead give a sense of what the language provides, and why.

50.1 Aspect Independent

To interface with a memory-mapped device, there will be an Ada object of an appropriate type that is mapped to one or more bytes of memory. The software interacts with the device by reading and/or writing to the memory locations mapped to the device, using the operations defined by the type in terms of normal Ada semantics.

Some memory-mapped devices can be directly represented by a single scalar value, usually of some signed or unsigned numeric type. More sophisticated devices almost always involve several distinct input and output fields. Therefore, representation in the software as a record object is very common. Ada record types have such extensive and flexible support for controlling their representation, down to the individual bit level, that using a record type makes sense. (And as mentioned, using normal record component access via the "dot notation" offloads to the compiler the address arithmetic needed to access individual memory locations mapped to the device.) And of course the components of the mapped record type can themselves be of scalar and composite types too, so an extensive descriptive capability exists with Ada.

Let's say that one of these record components is smaller than the size of the smallest addressable memory unit on the machine, which is to say, smaller than the machine instructions can read/write memory individually. A Boolean record component is a good example, and very common. The machine cannot usually read/write single bits in memory, so the generated code will almost certainly read or write a byte to get the enclosed single-bit Boolean component. It might use a larger sized access too, a half-word or word. Then the generated code masks off the bits that are not of interest and does some shifts to get the desired component.

Reading and writing the bytes surrounding the component accessed in the source code can cause a problem. In particular, some devices react to being read or written by doing something physical in the hardware. That's the device designer's intent for the software. But we don't want that to happen accidentally due to surrounding bytes being accessed.

Therefore, to prevent these "extra" bytes from being accessed, we need a way to tell the compiler that we need the read or write accesses for the given object to be independent of the surrounding memory. If the compiler cannot do so, we'll get an error and the compilation will fail. That beats debugging, every time.

Therefore, the aspect `Independent` specifies that the code generated by the compiler must be able to load and store the memory for the specified object without also accessing surrounding memory. More completely, it declares that a type, object, or component must be independently addressable by the hardware. If applied to a type, it applies to all objects of the type.

Likewise, aspect `Independent_Components` declares that the individual components of an array or record type must be independently addressable.

With either aspect the compiler will reject the declaration if independent access is not possible for the type/object in question.

For example, if we try to mark each Boolean component of a record type as `Independent` we can do so, either individually or via `Indepndent_Components`, but doing so will require that each component is a byte in size (or whatever the smallest addressable unit happens to be on this machine). We cannot make each Boolean component occupy one bit within a given byte if we want them to be independently accessed.

```
package P is

   type R is record
      B0 : Boolean;
      B1 : Boolean;
      B2 : Boolean;
      B3 : Boolean;
      B4 : Boolean;
      B5 : Boolean;
   end record with
     Size => 8,
     Independent_Components;

   for R use record
```

(continues on next page)

(continued from previous page)

```
      B0 at 0 range 0 .. 0;
      B1 at 0 range 1 .. 1;
      B2 at 0 range 2 .. 2;
      B3 at 0 range 3 .. 3;
      B4 at 0 range 4 .. 4;
      B5 at 0 range 5 .. 5;
   end record;

end P;
```

For a typical target machine the compiler will reject that code, complaining that the `Size` for R' must be at least 48 bits, i.e., 8 bits per component. That's because the smallest quantity this machine can independently address is an 8-bit byte.

But if we don't really need the individual bits to be independently accessed — and let's hope no hardware designer would define such a device — then we have more flexibility. We could, for example, require that objects of the entire record type be independently accessible:

```
package Q is

   type R is record
      B0 : Boolean;
      B1 : Boolean;
      B2 : Boolean;
      B3 : Boolean;
      B4 : Boolean;
      B5 : Boolean;
   end record with
     Size => 8,
     Independent;

   for R use record
      B0 at 0 range 0 .. 0;
      B1 at 0 range 1 .. 1;
      B2 at 0 range 2 .. 2;
      B3 at 0 range 3 .. 3;
      B4 at 0 range 4 .. 4;
      B5 at 0 range 5 .. 5;
   end record;

end Q;
```

This the compiler should accept, assuming a machine that can access bytes in memory individually, without having to read some number of other bytes.

But for another twist, suppose we need one of the components to be aliased, so that we can construct access values designating it via the **`Access`** attribute? For example, given the record type R above, and some object `Foo` of that type, suppose we want to say `Foo.B0'Access`? We'd need to mark the component as **`aliased`**:

```
package QQ is

   type R is record
      B0 : aliased Boolean;
      B1 : Boolean;
      B2 : Boolean;
      B3 : Boolean;
      B4 : Boolean;
      B5 : Boolean;
   end record with
     Size => 8,
```

(continues on next page)

(continued from previous page)

```
     Independent;

   for R use record
      B0 at 0 range 0 .. 0;
      B1 at 0 range 1 .. 1;
      B2 at 0 range 2 .. 2;
      B3 at 0 range 3 .. 3;
      B4 at 0 range 4 .. 4;
      B5 at 0 range 5 .. 5;
   end record;

end QQ;
```

The compiler will once again reject the code, complaining that the size of B0 must be a multiple of a `Storage_Unit`, in other words, the size of something independently accessible in memory on this machine.

Why? The issue here is that aliased objects, including components of composite types, must be represented in such a way that creating the designating access ("pointer") value is possible. The component B0, if allocated only one bit, would not allow an access value to be created due to the usual machine accessibility limitation we've been discussing.

Similarly, a record component that is of some by-reference type, such as any tagged type, introduces the same issues as an aliased component. That's because the underlying implementation of by-reference parameter passing is much like a `'Access` attribute reference.

As important as the effect of this aspect is, you probably won't see it specified. There are other aspects that are more typically required. However, the semantics of `Independent` are part of the semantics of some of these other aspects. Applying them applies `Independent` too, in effect. So even though you don't typically apply it directly, you need to understand the independent access semantics. We discuss these other, more commonly applied aspects next.

These representation aspects may be specified for an object declaration, a component declaration, a full type declaration, or a generic formal (complete) type declaration. If any of these aspects are specified True for a type, then the corresponding aspect is True for all objects of the type.

50.2 Aspect `Volatile`

Earlier we said that the compiler (specifically the optimizer) might decide to load a variable from memory into a register, accessing the register when the value is required or updated. Similarly, the compiler might reorder instructions, and remove instructions corresponding to redundant assignments in the source code. Ordinarily we'd want those optimizations, but in the context of embedded memory-mapped devices they can be problematic.

The hardware might indeed require the source code to read or write to the device in a way that the optimizer would consider redundant, and in order to interact with the device we need every read and write to go to the actual memory for the mapped device, rather than a register. As developers we have knowledge about the context that the compiler lacks.

The compiler is aware of the fact that the Ada object is memory-mapped because of the address clause placing the object at a specific address. But the compiler does not know we are interacting with an external hardware device. Perhaps, instead, the object is mapped to a specific location because some software written in another language expects to access it there. In that case redundant reads or writes of the same object really would be redundant. The fact that we are interacting with a hardware device makes a difference.

In terms of the language rules, we need reading from, and writing to, such devices to be part of what the language refers to as the "external effects" of the software. These effects

are what the code must actually produce. Anything else — the internal effects — could be removed by the optimizer.

For example, suppose you have a program that writes a value to some variable and also writes the string literal "42" to a file. That's is absolutely all that the program contains.

```
with Ada.Text_IO;  use Ada.Text_IO;

procedure Demo is
   Output : File_Type;
   Silly  : Integer;
begin
   Silly := 0;
   Create (Output, Out_File, "output.txt");
   Put (Output, "42");
   Close (Output);
end Demo;
```

The value of the variable `Silly` is not used in any way so there is no point in even declaring the variable, much less generating code to implement the assignment. The update to the variable has only an internal effect. With warnings enabled we'll receive notice from the compiler, but they're just warnings.

However, writing to the file is an external effect because the file persists beyond the end of the program's execution. The optimizer (when enabled) would be free to remove any access to the variable `Silly`, but not the write to the file.

We can make the compiler recognize that a software object is part of an external effect by applying the aspect `Volatile`. (Aspect `Atomic` is pertinent too. More in a moment.) As a result, the compiler will generate memory load or store instructions for every read or update to the object that occurs in the source code. Furthermore, it cannot generate any additional loads or stores to that variable, and it cannot reorder loads or stores from their order in the source code. "What You See Is What You Get" in other words.

```
with Ada.Text_IO;  use Ada.Text_IO;

procedure Demo is
   Output : File_Type;
   Silly  : Integer with Volatile;
begin
   Silly := 0;
   Create (Output, Out_File, "output.txt");
   Put (Output, "42");
   Close (Output);
end Demo;
```

If we compile the above, we won't get the warning we got earlier because the compiler is now required to generate the assignment for `Silly`.

The variable `Silly` is not even a memory-mapped object, but remember that we said these aspects are important to the tasking context too, for shared variables. We're ignoring that context in this course.

There is another reason to mark a variable as `Volatile`. Sometimes you want to have exactly the load and store instructions generated that match those of the Ada code, even though the volatile object is not a memory-mapped object. For example, *elsewhere* (page 1425) we said that the best way to achieve exact assembly instruction sequences is the use of machine-code inserts (MCI). That's true, but for the moment let's say we want to write it in Ada without the MCIs. Our earlier example was the memory-mapped GPIO ports on Arm microcontrollers produced by ST Microelectronics. Specifically, these ports have a "lock" per GPIO pin that allows the developer to configure the pin and then lock it so that no other configuration can accidentally change the configuration of that pin. Doing so requires an exact sequence of loads and stores. If we wrote this in Ada it would look like this:

```
procedure Lock
  (Port : in out GPIO_Port;
   Pin  : GPIO_Pin)
is
   Temp : Word with Volatile;
begin
   --  set the lock control bit and the pin
   --  bit, clear the others
   Temp := LCCK or Pin'Enum_Rep;

   --  write the lock and pin bits
   Port.LCKR := Temp;

   --  clear the lock bit in the upper half
   Port.LCKR := Pin'Enum_Rep;

   --  write the lock bit again
   Port.LCKR := Temp;

   --  read the lock bit
   Temp := Port.LCKR;

   --  read the lock bit again
   Temp := Port.LCKR;
end Lock;
```

Temp is marked volatile for the sake of getting exactly the load and stores that we express in the source code, corresponding to the hardware locking protocol. It's true that Port is a memory-mapped object, so it too would be volatile, but we also need Temp to be volatile.

This high-level coding approach will work, and is simple enough that MCIs might not be needed. However, what really argues against it is that the correct sequence of emitted code requires the optimizer to remove all the other cruft that the code generator would otherwise include. (The gcc code generator used by the GNAT compiler generates initially poor code, by design, relying on the optimizer to clean it up.) In other words, we've told the optimizer not to change or add loads and stores for Temp, but without the optimizer enabled the code generator generates other code that gets in the way. That's OK in itself, as far as procedure Lock is concerned, but if the optimizer is sufficiently enabled we cannot debug the rest of the code. Using MCIs avoids these issues. The point, though, is that not all volatile objects are memory mapped.

So far we've been illustrating volatility with scalar objects, such as Lock.Temp above. What about objects of array and record types? (There are other "composite" types in Ada but they are not pertinent here.)

When aspect Volatile is applied to a record type or an object of such a type, all the record components are automatically volatile too.

For an array type (but not a record type), a related aspect Volatile_Components declares that the components of the array type — but not the array type itself — are volatile. However, if the Volatile aspect is specified, then the Volatile_Components aspect is automatically applied too, and vice versa. Thus components of array types are covered automatically.

If an object (of an array type or record type) is marked volatile then so are all of its subcomponents, even if the type itself is not marked volatile.

Therefore aspects Volatile and Volatile_Components are nearly equivalent. In fact, Volatile_Components is superfluous. The language provides the Volatile_Components aspect only to give symmetry with the Atomic_Components and Independent_Components aspects. You can simply apply Volatile and be done with it.

Finally, note that applying aspect Volatile does not implicitly apply Independent, although

you can specify it explicitly if need be.

50.3 Aspect Atomic

Consider the GPIO pin configuration lock we've mentioned a few times now, that freezes the configuration of a given pin on a given GPIO port. The register, named LCKR for "lock register", occupies 32-bits, but only uses 17 total bits (currently). The low-order 16 bits, [0:15], represent the 16 GPIO pins on the given port. Bit #16 is the lock bit. That bit is the first bit in the upper half of the entire word. To freeze the configuration of a given pin in [0:15], the lock bit must be set at the same time as the bit to be frozen. In other words, the lower half and the upper half of the 32-bit word representing the register must be written together, at the same time. That way, accidental (un)freezing is unlikely to occur, because the most efficient, hence typical way for the generated code to access individual bits is for the compiler to load or store just the single byte that contains the bit or bits in question.

This indivisibility effect can be specified via aspect `Atomic`. As a result, all reads and updates of such an object as a whole are indivisible. In practice that means that the entire object is accessed with one load or store instruction. For a 16-bit object, all 16-bits are loaded and stored at once. For a 32-bit object, all 32-bits at once, and so on. The upper limit is the size of the largest machine scalar that the processor can manipulate with one instruction, as defined by the target processor. The typical lower bound is 8, for a byte-addressable machine.

Therefore, within the record type representing a GPIO port, we include the lock register component and apply the aspect `Atomic`:

```
type GPIO_Port is limited record
   ...
   LCKR : UInt32 with Atomic;
   ...
end record with
  ...
  Size => 16#400# * 8;
```

Hence loads and stores to the LCKR component will be done atomically, otherwise the compiler will let us know that it is impossible. That's all we need to do for the lock register to be read and updated atomically.

You should understand that only accesses to the whole, entire object are atomic. In the case of the lock register, the entire object is a record component, but that causes no problems here.

There is, however, something we must keep in mind when manipulating the values of atomic objects. For the lock register we're using a scalar type to represent the register, an unsigned 32-bit integer. There are no sub-components because scalar types don't have components, by definition. We simply use the bit-level operations to set and clear the individual bits. But we cannot set the bits — the lock bit and the bit for the I/O pin to freeze — one at a time because the locking protocol requires all the bits to be written at the same time, and only the entire 32-bit load and stores are atomic. Likewise, if instead of a scalar we used a record type or an array type to represent the bits in the lock register, we could not write individual record or array components one at a time, for the same reason we could not write individual bits using the unsigned scalar. The `Atomic` aspect only applies to loads and stores of the entire register.

Therefore, to update or read individual parts of an atomic object we must use a coding idiom in which we explicitly read or write the entire object to get to the parts. For example, to read an individual record component, we'd first read the entire record object into a temporary variable, and then access the component of that temporary variable. Likewise, to update one or more individual components, we'd first read the record object into a temporary variable, update the component or components within that temporary, and then write the

temporary back to the mapped device object. This is known as the "read-modify-write" idiom. You'll see this idiom often, regardless of the programming language, because the hardware requirement is not unusual. Fortunately Ada defines another aspect that makes the compiler do this for us. We'll describe it in the next section.

Finally, there are issues to consider regarding the other aspects described in this section.

If you think about atomic behavior in the context of machine instructions, loading and storing from/to memory atomically can only be performed for quantities that are independently addressable. Consequently, all atomic objects are considered to be specified as independently addressable too. Aspect specifications and representation items cannot change that fact. You can expect the compiler to reject any aspect or representation choice that would prevent this from being true.

Likewise, atomic accesses only make sense on actual memory locations, not registers. Therefore all atomic objects are volatile objects too, automatically.

However, unlike volatile objects, the components of an atomic object are not automatically atomic themselves. You'd have to mark these types or objects explicitly, using aspect `Atomic_Components`. Unlike `Volatile_Components`, aspect `Atomic_Components` is thus useful.

As is usual with Ada programming, you can rely on the compiler to inform you of problems. The compiler will reject an attempt to specify `Atomic` or `Atomic_Components` for an object or type if the implementation cannot support the indivisible and independent reads and updates required.

50.4 Aspect `Full_Access_Only`

Many devices have single-bit flags in the hardware that are not allocated to distinct bytes. They're packed into bytes and words shared with other flags. It isn't just individual bits either. Multi-bit fields that are smaller than a byte, e.g., two 4-bit quantities packed into a byte, are common. We saw that with the GPIO alternate functions codes earlier.

Ordinarily in Ada we represent such composite hardware interfaces using a record type. (Sometimes an array type makes more sense. That doesn't change anything here.) Compared to using bit-patterns, and the resulting bit shifting and masking in the source code, a record type representation and the resulting "dot notation" for accessing components is far more readable. It is also more robust because the compiler does all the work of retrieving these individual bits and bit-fields for us, doing any shifting and masking required in the generated code. The loads and stores are done by the compiler in whatever manner the compiler thinks most efficient.

When the hardware device requires atomic accesses to the memory mapped to such flags, we cannot let the compiler generate whatever width load and store accesses it thinks best. If full-word access is required, for example, then only loads and stores for full words can work. Yet aspect `Atomic` only guarantees that the entire object, in this case the record object, is loaded and stored indivisibly, via one instruction. The aspect doesn't apply to reads and updates to individual record components.

In the section on `Atomic` above, we mentioned that proper access to individual components of atomic types/objects can be achieved by a "read-modify-write" idiom. In this idiom, to read a component you first read into a temporary the entire enclosing atomic object. Then you read the individual component from that temporary variable. Likewise, to update an individual component, you start with the same approach but then update the component(s) within the temporary, then store the entire temporary back into the mapped atomic object. Applying aspect `Atomic` to the enclosing object ensures that reading and writing the temporary will be atomic, as required.

Using bit masks and bit patterns to access logical components as an alternative to a record type doesn't change the requirement for the idiom.

Consider the STM32F4 DMA device. The device contains a 32-bit stream configuration register that requires 32-bit reads and writes. We can map that register to an Ada record type like so:

```
type Stream_Config_Register is record
   --  ...
   Direction         : DMA_Data_Transfer_Direction;
   P_Flow_Controller : Boolean;
   TCI_Enabled       : Boolean;  -- transfer complete
   HTI_Enabled       : Boolean;  -- half-transfer complete
   TEI_Enabled       : Boolean;  -- transfer error
   DMEI_Enabled      : Boolean;  -- direct mode error
   Stream_Enabled    : Boolean;
end record
   with Atomic, Size => 32;
```

The "confirming" size clause ensures we have declared the type correctly such that it will fit into 32-bits. There will also be a record representation clause to ensure the record components are located internally as required by the hardware. We don't show that part.

The aspect `Atomic` is applied to the entire record type, ensuring that the memory mapped to the hardware register is loaded and stored only as 32-bit quantities. In this example it isn't that we want the loads and stores to be indivisible. Rather, we want the generated machine instructions that load and store the object to use 32-bit word instructions, even if we are only reading or updating a component of the object. That's what the hardware requires for all accesses.

Next we'd use that type declaration to declare one of the components of an enclosing record type representing one entire DMA "stream":

```
type DMA_Stream is record
   CR   : Stream_Config_Register;
   NDTR : Word;    -- upper half must remain at reset value
   PAR  : Address; -- peripheral address register
   M0AR : Address; -- memory 0 address register
   M1AR : Address; -- memory 1 address register
   FCR  : FIFO_Control_Register;
end record
   with Volatile, Size => 192;  -- 24 bytes
```

Hence any individual DMA stream record object has a component named CR that represents the corresponding configuration register.

The DMA controllers have multiple streams per unit so we'd declare an array of `DMA_Stream` components. This array would then be part of another record type representing a DMA controller. Objects of the `DMA_Controller` type would be mapped to memory, thus mapping the stream configuration registers to memory.

Now, given all that, suppose we want to enable a stream on a given DMA controller. Using the read-modify-write idiom we would do it like so:

```
procedure Enable
   (Unit   : in out DMA_Controller;
    Stream : DMA_Stream_Selector)
is
   Temp : Stream_Config_Register;
   --  these registers require 32-bit accesses, hence the temporary
begin
   Temp := Unit.Streams (Stream).CR;  --  read entire CR register
   Temp.Stream_Enabled := True;
   Unit.Streams (Stream).CR := Temp;  --  write entire CR register
end Enable;
```

That works, and of course the procedural interface presented to clients hides the details, as it should.

To be fair, the bit-pattern approach can express the idiom concisely, as long as you're careful. Here's the C code to enable and disable a selected stream:

```
#define DMA_SxCR_EN    ((uint32_t)0x00000001)

/* Enable the selected DMAy Streamx by setting EN bit */
DMAy_Streamx->CR  |=  DMA_SxCR_EN;

/* Disable the selected DMAy Streamx by clearing EN bit */
DMAy_Streamx->CR  &=  ~DMA_SxCR_EN;
```

The code reads and writes the entire CR register each time it is referenced so the requirement is met.

Nevertheless, the idiom is error-prone. We might forget to use it at all, or we might get it wrong in one of the very many places where we need to access individual components.

Fortunately, Ada provides a way to have the compiler implement the idiom for us, in the generated code. Aspect `Full_Access_Only` specifies that all reads of, or writes to, a component are performed by reading and/or writing all of the nearest enclosing full access object. Hence we add this aspect to the declaration of `Stream_Config_Register` like so:

```
type Stream_Config_Register is record
   --  ...
   Direction         : DMA_Data_Transfer_Direction;
   P_Flow_Controller : Boolean;
   TCI_Enabled       : Boolean;  -- transfer complete interrupt
   HTI_Enabled       : Boolean;  -- half-transfer complete
   TEI_Enabled       : Boolean;  -- transfer error interrupt
   DMEI_Enabled      : Boolean;  -- direct mode error interrupt
   Stream_Enabled    : Boolean;
end record
   with Atomic, Full_Access_Only, Size => 32;
```

Everything else in the declaration remains unchanged.

Note that `Full_Access_Only` can only be applied to `Volatile` types or objects. `Atomic` types are automatically `Volatile` too, so either one is allowed. You'd need one of those aspects anyway because `Full_Access_Only` just specifies the accessing instruction requirements for the generated code when accessing components.

The big benefit comes in the source code accessing the components. Procedure `Enable` is now merely:

```
procedure Enable
   (Unit   : in out DMA_Controller;
    Stream : DMA_Stream_Selector)
is
begin
   Unit.Streams (Stream).CR.Stream_Enabled := True;
end Enable;
```

This code works because the compiler implements the read-modify-write idiom for us in the generated code.

The aspect `Full_Access_Only` is new in Ada 2022, and is based on an implementation-defined aspect that GNAT first defined named `Volatile_Full_Access`. You'll see that GNAT aspect throughout the Arm device drivers in the Ada Drivers Library, available here: https://github.com/AdaCore/Ada_Drivers_Library. Those drivers were the motivation for the GNAT aspect.

Unlike the other aspects above, there is no pragma corresponding to the aspect `Full_Access_Only` defined by Ada 2022. (There is such a pragma for the GNAT-specific version named `Volatile_Full_Access`, as well as an aspect.)

CHAPTER

FIFTYONE

HANDLING INTERRUPTS

51.1 Background

Embedded systems developers offload functionality from the application processor onto external devices whenever possible. These external devices may be on the same "chip" as the central processor (e.g., within a System-on-Chip) or they may just be on the same board, but the point here is that they are not the processor executing the application. Offloading work to these other devices enables us to get more functionality implemented in a target platform that is usually very limited in resources. If the processor has to implement everything we might miss deadlines or perhaps not fit into the available code space. And, of course, some specialized functionality may simply require an external device, such as a sensor.

For a simple example, a motor encoder is a device attached to a motor shaft that can be used to count the number of full or partial rotations that the shaft has completed. When the shaft is rotating quickly, the application would need to interact with the encoder frequently to get an up-to-date count, representing a non-trivial load on the application processor. There are ways to reduce that load, which we discuss shortly, but by far the simplest and most efficient approach is to do it all in hardware: use a timer device driven directly by the encoder. The timer is connected to the encoder such that the encoder signals act like an external clock driving the timer's internal counter. All the application processor must do to get the encoder count is query the timer's counter. The timer is almost certainly memory-mapped, so querying the timer amounts to a memory access.

In some cases, we even offload communication with these external devices onto other external devices. For example, the I2C[396] (Inter-Integrated Circuit) protocol is a popular two-wire serial protocol for communicating between low-level hardware devices. Individual bits of the data are sent by driving the data line high and low in time with the clock signal on the other line. The protocol has been around for a long time and many embedded devices use it to communicate. We could have the application drive the data line for each individual bit in the protocol. Known as "bit-banging," that would be a significant load on the processor when the overall traffic volume is non-trivial. Fortunately, there are dedicated devices — I2C transceivers — that will implement the protocol for us. To send application data to another device using the I2C protocol, we just give the transceiver the data and destination address. The rest is done in the transceiver hardware. Receiving data is of course also possible. I2C transceivers are ubiquitous because the protocol is so common among device implementations. A USART[397] / UART[398] is a similar example.

Having offloaded some of the work, the application must have some way to interact with the device in order to know what is happening. Maybe the application has requested the external device perform some service — an analog-to-digital conversion, say — and must know when that function has completed. Maybe a communications device is receiving incoming data for the application to process. Or maybe that communications device has completed sending outgoing data and is ready for more to send.

[396] https://en.wikipedia.org/wiki/I%C2%B2C
[397] https://en.wikipedia.org/wiki/Universal_synchronous_and_asynchronous_receiver-transmitter
[398] https://en.wikipedia.org/wiki/Universal_asynchronous_receiver-transmitter

Ultimately, interaction with the external device will be either synchronous or asynchronous, and has system-level design implications.

For synchronous interaction, the application periodically queries the device, typically a status flag or function on the device. Known as "polling," this approach is simple to implement but wastes cycles when the external device has not yet completed the request. After all, the point of offloading the work is to allow the application processor to execute other functionality. Polling negates that benefit. On the other hand, if the expected time to completion is extremely short, polling can be sufficiently efficient to make sense.

Usually, there's enough time involved so that polling is undesirable. The external environment takes time to respond and change state. Maybe a sensor has been designed to wait passively for something to happen in the external world, and only on the infrequent occurrence of that event should the application be notified. Perhaps a switch is to be toggled in certain circumstances, or an intruder detected. In this case, nothing happens for extended intervals.

As a consequence of all this, there's a very good chance that the internal processor should not poll these external devices.

Before we discuss the asynchronous alternative, there's another issue to consider. However the notification from the external device is implemented, a very quick response from the internal processor may be required. Think back to that serial port with a USART again. The USART is responsible for composing the arriving characters (or bytes) from their individual incoming bits on the receiving line. When all the bits for a single character have arrived, what happens next depends on the software design. In the simplest case, the internal processor copies the single character from the USART to an internal buffer and then goes back to doing something else while the next full character arrives in the USART. The response to the USART must be fairly quick because the next incoming character's bits are arriving. The internal processor must get the current character before it is overwritten by the next arriving character, otherwise we'll lose data. So we can say that the response to the notification from the external device must often be very quick.

Now, ideally in the USART case, we would further offload the work from the internal processor. Instead of having the processor copy each arriving character from the USART into an application buffer, we would have another external hardware device — a direct memory access (DMA)[399] device — copy each arriving character from the USART to the buffer. A DMA device copies data from one location to another, in this case from the address of the USART's one-character memory-mapped register to the address of the application buffer in memory. The copy is performed by the DMA hardware so it is extremely fast and costs the main processor no cycles. But even with this approach, we need to notify the application that a complete message is ready for processing. We might need to do that quickly so that enough time remains for the application to process the message content prior to the arrival of the next message.

Therefore, the general requirement is for an external device to be able to asynchronously notify the internal processor, and for the notification to be implemented in such a way that the beginning of the response can be sufficiently and predictably quick.

Fortunately, computers already have such a mechanism: interrupts. The details vary considerably with the hardware architecture, but the overall idea is independent of the ISA[400]: an external event can trigger a response from the processor by becoming "active." The current state of the application is temporarily stored, and then an interrupt response routine, known as an "interrupt handler" is executed. Upon completion of the handler, the original state of the application is restored and the application continues execution. The time between the interrupt becoming active and the start of the responding handler execution is known as the "interrupt latency."

Hardware interrupts typically have priorities assigned, depending on the hardware. These priorities are applied when multiple interrupts are triggered at the same time, to define

[399] https://en.wikipedia.org/wiki/Direct_memory_access
[400] https://en.wikipedia.org/wiki/Instruction_set_architecture

the order in which the interrupts are presented and the handlers invoked. The canonical model is that only higher-priority interrupts can preempt handlers executing in response to interrupts with lower or equal priority.

Ada defines a model for hardware interrupts and interrupt handling that closely adheres to the conceptual model described above. If you have experience with interrupt handling, you will recognize them in the Ada model. One very important point to make about the Ada facilities is that they are highly portable, so they don't require extensive changes when moving to an new target computer. Part of that portability is due to the language-defined model.

Before we go into the Ada facility details, there's a final point. Sometimes we *do* want the application to wait for the external device. When would that be the case? To answer that, we need to introduce another term. The act of saving and restoring the state of the interrupted application software is known as "interrupt context switching." If the time for the device to complete the application request is approximately that of the context switching, the application might as well wait for the device after issuing the request.

Another reason to consider polling is that the architectural complexity of interrupt handling is greater than that of polling. If your system has some number of devices to control and polling them would be fast enough for the application to meet requirements, it is simpler to do so. But that will likely only work for a few devices, or at least a few that have short response time requirements.

The application code can wait for the device by simply entering a loop, exiting only when some external device status flag indicates completion of the function. The loop itself, in its simplest form, would contain only the test for exiting. As mentioned earlier, polling in a tight loop like this only makes sense for very fast device interactions. That's not the usual situation though, so polling should not be your default design assumption. Besides, active polling consumes power. On an embedded platform, conserving power is often important.

That loop polling the device will never exit if the device can fail to signal completion. Or maybe it might take too long in some odd case. If you don't want to be potentially stuck in the loop indefinitely, chewing up cycles and power, you can add an upper bound on the number of attempts, i.e., loop iterations. For example:

```
procedure Await_Data_Ready (This : in out Three_Axis_Gyroscope) is
   Max_Status_Attempts : constant := 10_000;
   --  This upper bound is arbitrary but must be sufficient for the
   --  slower gyro data rate options and higher clock rates.  It need
   --  not be as small as possible, the point is not to hang forever.
begin
   Polling: for K in 1 .. Max_Status_Attempts loop
      if Data_Status (This).ZYX_Available then
         return;
      end if;
   end loop Polling;
   raise Gyro_Failure;
end Await_Data_Ready;
```

In the above, Data_Status is a function that returns a record object containing Boolean flags. The if-statement queries one of those flags. Thus the loop either detects the desired device status or raises an exception after the maximum number of attempts have been made. In this version, the maximum is a known upper bound so a local constant will suffice. The maximum could be passed as a parameter instead, or declared in a global "configuration" package containing such constants.

Presumably, the upper bound on the attempts is either specified by the device documentation or empirically determined. Sometimes, however, the documentation will instead specify a maximum possible response time, for instance 30 milliseconds. Any time beyond that maximum indicates a device failure.

In the code above, the number of iterations indirectly defines the amount of elapsed time

the caller waits. That time varies with the target's system clock and the generated instructions' required clock cycles, hence the approach is not portable. Alternatively, we can work in terms of actual time, which will be portable across all targets with a sufficiently precise clock.

You can use the facilities in package `Ada.Real_Time` to work with time values. That package defines a type `Time_Span` representing time intervals, useful for expressing relative values such as elapsed time. There is also type `Time` representing an absolute value on the timeline. A function `Clock` returns a value of type `Time` representing "now," along with overloaded addition and subtraction operators taking `Time` and `Time_Span` parameters. The package also provides operators for comparing `Time` values. (The value returned by `Clock` is monotonically increasing so you don't need to handle time zone jumps and other such things, unlike the function provided by `Ada.Calendar`.)

If the timeout is not context-specific then we'd use a constant as we did above, otherwise we'd allow the caller to specify the timeout. For example, here's a polling routine included with the DMA device driver we've mentioned a few times now. Some device-specific parts have been removed to keep the example simple. The appropriate timeout varies, so it is a parameter to the call:

```
procedure Poll_For_Completion
  (This    : in out DMA_Controller;
   Stream  : DMA_Stream_Selector;
   Timeout : Time_Span;
   Result  : out DMA_Error_Code)
is
   Deadline : constant Time := Clock + Timeout;
begin
   Result := DMA_No_Error;  -- initially
   Polling : loop
      exit Polling when Status (This, Stream, Transfer_Complete_Indicated);
      if Clock >= Deadline then
         Result := DMA_Timeout_Error;
         return;
      end if;
   end loop Polling;
   Clear_Status (This, Stream, Transfer_Complete_Indicated);
end Poll_For_Completion;
```

In this approach, we compute the deadline as a point on the timeline by adding the value returned from the `Clock` function (i.e., "now") to the time interval specified by the parameter. Then, within the loop, we compare the value of the `Clock` to that deadline.

Finally, with another design approach we can reduce the processor cycles "wasted" when the polled device is not yet ready. Specifically, in the polling loop, when the device has not yet completed the requested function, we can temporarily relinquish the processor so that other tasks within the application can execute. That isn't perfect because we're still checking the device status even though we cannot exit the loop. And it requires other tasks to exist in your design, although that's probably a good idea for other reasons (e.g., logical threads having different, non-harmonic periods). This approach would look like this (an incomplete example):

```
procedure Poll_With_Delay is
   Next_Release : Time;
   Period       : constant Time_Span := Milliseconds (30); -- let's say
begin
   Next_Release := Clock;
   loop
      exit when Status (...);
      Next_Release := Next_Release + Period;
      delay until Next_Release;
```

(continues on next page)

(continued from previous page)

```
   end loop;
end Poll_With_Delay;
```

The code above will check the status of some device every 30 milliseconds (an arbitrary period just for illustration) until the `Status` function result allows the loop to exit. If the device "hangs" the loop is never exited, but as you saw there are ways to address that possibility. When the code does not exit the loop, the next point on the timeline is computed and the task executing the code then suspends, allowing the other tasks in the application to execute. Eventually, the next release point is reached and so the task becomes ready to execute again (and will, subject to priorities).

But how long should the polling task suspend when awaiting the device? We need to suspend long enough for the other tasks to get something done, but not so long that the device isn't handled fast enough. Finding the right balance is often not simple, and is further complicated by the "task switching" time. That's the time it takes to switch the execution context from one task to another, in this case in response to the "delay until" statement suspending the polling task. And it must be considered in both directions: when the delay expires we'll eventually switch back to the polling task.

As you can see, polling is easily expressed but has potentially significant drawbacks and architectural ramifications so it should be avoided as a default approach.

Now let's explore the Ada interrupt facilities.

51.2 Language-Defined Interrupt Model

The Ada language standard defines a model for hardware interrupts, as well as language-defined mechanisms for handling interrupts consistent with that model. The model is defined in Annex C, the "Systems Programming" annex, section 3 "Interrupt Support." The following is the text of that section with only a few simplifications and elisions.

- Interrupts are said to occur. An occurrence of an interrupt is separable into generation and delivery.
  - Generation of an interrupt is the event in the underlying hardware or system that makes the interrupt available to the program.
  - Delivery is the action that invokes part of the program as response to the interrupt occurrence.
- Between generation and delivery, the interrupt occurrence is pending.
- Some or all interrupts may be blocked. When an interrupt is blocked, all occurrences of that interrupt are prevented from being delivered.
- Certain interrupts are reserved. A reserved interrupt is either an interrupt for which user-defined handlers are not supported, or one which already has an attached handler by some other RTL-defined means. The set of reserved interrupts is determined by the hardware and run-time library (RTL).
- Program units can be connected to non-reserved interrupts. While connected, the program unit is said to be attached to that interrupt. The execution of that program unit, the interrupt handler, is invoked upon delivery of the interrupt occurrence.
- While a handler is attached to an interrupt, it is called once for each delivered occurrence of that interrupt.
- The corresponding interrupt is blocked while the handler executes. While an interrupt is blocked, all occurrences of that interrupt are prevented from being delivered. Whether such occurrences remain pending or are lost is determined by the hardware and the RTL.

- Each interrupt has a default treatment which determines the system's response to an occurrence of that interrupt when no user-defined handler is attached. The set of possible default treatments is defined by the RTL.
- An exception propagated from a handler that is invoked by an interrupt has no effect. In particular, it is not propagated out of the handler, in the same way that exceptions do not propagate outside of task bodies.
- If the `Ceiling_Locking` policy is in effect, the interrupt handler executes with the active priority that is the ceiling priority of the corresponding protected object. ("Protected object" is abbreviated as "PO" for convenience).
- If the hardware or the underlying system holds pending interrupt occurrences, the RTL must provide for later delivery of these occurrences to the program.

(The above is not everything in the model but we can ignore the rest in this introduction.)

Because interrupt occurrences are generated by the hardware and delivered by the underlying system software (run-time library or real-time operating system), the application code is mainly responsible for responding to occurrences. Of course, the application must first configure the relevant external devices so that they generate the expected interrupts.

The actual response is application-specific but is also hardware-specific. The latter often (but not always) requires clearing the interrupt status within the generating device so that the same occurrence is not delivered again.

Furthermore, the standard model requires the underlying software to block further occurrences while the handler executes, and only allow preemption by higher-priory interrupt occurrences (if any). The application handlers are not responsible for these semantics either. As you will see, the choice of program unit used for expressing handlers makes this all very convenient for the developer.

As a consequence, in terms of the response, the application developer must write the specific handlers and attach those handlers to the corresponding interrupts. Attaching the handlers is implemented in the underlying system software, and it is this same underlying software that delivers the occurrences.

We will now explore the Ada facilities in detail. At the end of this chapter we will explore some common idioms using these mechanisms, especially with regard to the handlers' interaction with the rest of the application.

51.3 Interrupt Handlers

Interrupt handling is, by definition, asynchronous: some event occurs that causes the processor to suspend the application, respond to the event, and then resume application execution.

Because these events are asynchronous, the actions performed by the interrupt handler and the application are subject to the same sorts of race conditions as multiple tasks acting on shared data.

For example, a "reader" task may be in the act of reading (copying) the value of some shared variable, only to be preempted by a "writer" task that updates the value of the variable. In that case, when the "reader" task resumes execution, it will finish the read operation but will, as a result, have a value that is partly from the old value and partly from the new value. The effect is unpredictable. An interrupt handler can have the same effect on shared data as the preempting "writer" task that interrupts the "reader" task. This problem is possible for shared data of any type that is not atomically read or written. You can think of large record objects if that helps, but it even applies to some scalars.

That scenario applies even if no explicit tasks are declared in the application. That's because an implicit "environment task" is executing the main subprogram. In that case, the

main subprogram is the entire application, but more typically some non-null application code is actively executing in one or more tasks.

But it's not just a matter of tasks. We said that interrupts usually have priorities. Typically that means a higher-priority interrupt will preempt the execution of the handler for a lower-priority interrupt. It's the same issue.

Furthermore, the fact that an interrupt has occurred needs to be communicated to the application, for example to say that updated data are available, perhaps a sensor reading or characters from a serial port. As we said above, we usually don't want to poll for that fact, so the application must be able to suspend until the event has occurred. Often we'll have a dedicated task within the application that suspends, rather than the entire application, but that's an application detail.

Ada's protected objects address all these asynchronous issues. Shared data declared within a protected object can be accessed only via protected procedures or protected entries, both of which execute with mutually exclusive access. Hence no race conditions are possible.

Here is an extremely simple, but realistic, example of a PO. This is not an interrupt handler example — we'll get to that — but it does show a shared variable and a protected procedure that executes with mutually exclusive access no matter how many tasks concurrently call it. The PO provides unique serial numbers.

```
protected Serial_Number is
   procedure Get_Next (Number : out Positive);
private
   Value : Positive := 1;
end Serial_Number;


protected body Serial_Number is

   procedure Get_Next (Number : out Positive) is
   begin
      Number := Value;
      Value := Value + 1;
   end Get_Next;

end Serial_Number;
```

Imagine there are multiple assembly lines creating devices of various sorts. Each device gets a unique serial number. These assembly lines run concurrently, so the calls to `Get_Next` occur concurrently. Without mutually exclusive access to the `Value` variable, multiple devices could get the same serial number.

Protected entries can suspend a caller until some condition is true; in this case, the fact that an interrupt has occurred and been handled. (As we will see, a protected entry is not the only way to synchronize with an accessing task, but it is the most robust and general.)

Here's an example of a PO with a protected entry:

```
protected type Persistent_Signal is
   entry Wait;
   procedure Send;
private
   Signal_Arrived : Boolean := False;
end Persistent_Signal;


protected body Persistent_Signal is

   entry Wait when Signal_Arrived is
   begin
```

(continues on next page)

(continued from previous page)

```
      Signal_Arrived := False;
   end Wait;

   procedure Send is
   begin
      Signal_Arrived := True;
   end Send;

end Persistent_Signal;
```

This is a PO providing a "Persistent Signal" abstraction. It allows a task to wait for a "signal" from another task. The signal is not lost if the receiving task is not already waiting, hence the term "persistent." Specifically, if `Signal_Arrived` is **`False`**, a caller to `Wait` will be suspended until `Signal_Arrived` becomes **`True`**. A caller to Send sets `Signal_Arrived` to **`True`**. If a caller to `Wait` was already present, suspended, it will be allowed to continue execution. If no caller was waiting, eventually some caller will arrive, find `Signal_Arrived` **`True`**, and will be allowed to continue. In either case, the `Signal_Arrived` flag will be set back to **`False`** before the `Wait` caller is released. Protected objects can have a priority assigned, similar to tasks, so they are integrated into the global priority semantics including interrupt priorities.

Therefore, in Ada an interrupt handler is a protected procedure declared within some protected object (PO). A given PO may handle more than one interrupt, and if so, may use one or more protected procedures to do so.

Interrupts can be attached to a protected procedure handler using a mechanism we'll discuss shortly. When the corresponding interrupt occurs, the attached handler is invoked. Any exceptions propagated by the handler's execution are ignored and do not go past the procedure.

While the protected procedure handler executes, the corresponding interrupt is blocked. As a consequence, another occurrence of that same interrupt will not preempt the handler's execution. However, if the hardware does not allow interrupts to be blocked, no blocking occurs and a subsequent occurrence would preempt the current execution of the handler. In that case, your handlers must be written with that possibility in mind. Most targets do block interrupts so we will assume that behavior in the following descriptions.

The standard mutually exclusive access provided to the execution of protected procedures and entries is enforced whether the "call" originates in hardware, via an interrupt, or in the application software, via some task. While any protected action in the PO executes, the corresponding interrupt is blocked, such that another occurrence will not preempt the execution of that actions' procedure or entry body execution in the PO.

On some processors blocked interrupts are lost, they do not persist. However, if the hardware can deliver an interrupt that had been blocked, the Systems Programming Annex requires the handler to be invoked again later, subject to the PO semantics described above.

The default treatment for a given interrupt depends on the RTL implementation. The default may be to jump immediately to system-defined handler that merely loops forever, thereby "hanging" the system and preventing any further execution of the application. On a bare-board target that would be a very common approach. Alternatively the default could be to ignore the interrupt entirely.

As mentioned earlier, some interrupts may be reserved, meaning that the application cannot install a replacement handler. For instance, most bare-board systems include a clock that is driven by a dedicated interrupt. The application cannot (or at least should not) override the interrupt handler for that interrupt. The determination of which interrupts are reserved is RTL-defined. Attempting to attach a user-defined handler for a reserved interrupt raises `Program_Error`, and the existing treatment is unchanged.

51.4 Interrupt Management

Ada defines a standard package that provides a primary type for identifying individual interrupts, as well as subprograms that take a parameter of that type in order to manage the system's interrupts and handlers. The package is named `Ada.Interrupts`, appropriately.

The primary type in that package is named `Interrupt_Id` and is an compiler-defined discrete type, meaning that it is either an integer type (signed or not) or an enumeration type. That representation is guaranteed so you can be sure that `Interrupt_Id` can be used, for example, as the index for an array type.

Package `Ada.Interrupts` provides functions to query whether a given interrupt is reserved, or if an interrupt has a handler attached. Procedures are defined to allow the application to attach and detach handlers, among other things. These procedures allow the application to dynamically manage interrupts. For example, when a new external device is added, perhaps as a "hot spare" replacing a damaged device, or when a new external device is simply connected to the target, the application can arrange to handle the new interrupts without having to recompile the application or restart application execution.

However, typically you will not use these procedures or functions to manage interrupts. In part that's because the architecture is usually static, i.e., the handlers are set up once and then never changed. In that case you won't need to query whether a given exception is reserved at run-time, or to check whether a handler is attached. You'd know that already, as part of the system architecture choices. For the same reasons, another mechanism for attaching handlers is more commonly used, and will be explained in that section. The package's type `Interrupt_Id`, however, will be used extensively.

A child package `Ada.Interrupts.Names` defines a target-dependent set of constants providing meaningful names for the `Interrupt_Id` values the target supports. Both the number of constants and their names are defined by the compiler, reflecting the variations in hardware available. This package and the enclosed constants are used all the time. For the sake of illustration, here is part of the package declaration for a Cortex M4F microcontroller supported by GNAT:

```
package Ada.Interrupts.Names is
   Sys_Tick_Interrupt     : constant Interrupt_ID := 1;
   ...
   EXTI0_Interrupt        : constant Interrupt_ID := 8;
   ....
   DMA1_Stream0_Interrupt : constant Interrupt_ID := 13;
   ...
   HASH_RNG_Interrupt     : constant Interrupt_ID := 80;
   ...
end Ada.Interrupts.Names;
```

Notice `HASH_RNG_Interrupt`, the name for `Interrupt_Id` value 80 on this target. That is the interrupt that the on-chip random number generator hardware uses to signal that a new value is available. We will use this interrupt in an example at the end of this chapter.

The representation chosen by the compiler for `Interrupt_Id` is very likely an integer, as in the above package, so the child package provides readable names for the numeric values. If `Interrupt_Id` is represented as an enumeration type the enumeral values are probably sufficiently readable, but the child package must be provided by the vendor nonetheless.

51.5 Associating Handlers With Interrupts

As we mentioned above, the Ada standard provides two ways to attach handlers to interrupts. One is procedural, described earlier. The other mechanism is automatic, achieved during elaboration of the protected object enclosing the handler procedure. The behavior is not unlike the activation of tasks: declared tasks are activated automatically as a result

of their elaboration, whereas dynamically allocated tasks are activated as a result of their allocations.

We will focus exclusively on the automatic, elaboration-driven attachment model because that is the more common usage, and as a result, that is what GNAT supports on bare-board targets. It is also the mechanism that the standard Ravenscar and Jorvik profiles require. Our examples are consistent with those targets.

In the elaboration-based attachment model, we specify the interrupt to be attached to a given protected procedure within a protected object. This interrupt specification occurs within the enclosing protected object declaration. (Details in a moment.) When the enclosing PO is elaborated, the run-time library installs that procedure as the handler for that interrupt. A given PO may contain one or more interrupt handler procedures, as well as any other protected subprograms and entries.

In particular, we can associate an interrupt with a protected procedure by applying the aspect `Attach_Handler` to that procedure as part of its declaration, with the `Interrupt_Id` value as the aspect parameter. The association can also be achieved via a pragma with the same name as the aspect. Strictly speaking, the pragma `Attach_Handler` is obsolescent, but that just means that there is a newer way to make the association (i.e., the aspect). The pragma is not illegal and will remain supported. Because the pragma existed in a version of Ada prior to aspects you will see a lot of existing code using the pragma. You should become familiar with it. There's no language-driven reason to change the source code to use the aspect. New code should arguably use the aspect, but there's no technical reason to prefer one over the other.

Here is an example of a protected object with one protected procedure interrupt handler. It uses the `Attach_Handler` aspect to tie a random number generator interrupt to the `RNG_Controller.Interrupt_Handler` procedure:

```
protected RNG_Controller is
   ...
   entry Get_Random (Value : out UInt32);
private

   Last_Sample    : UInt32 := 0;
   Buffer         : Ring_Buffer;
   Data_Available : Boolean := False;

   procedure Interrupt_Handler with
      Attach_Handler => Ada.Interrupts.Names.HASH_RNG_Interrupt;

end RNG_Controller;
```

That's all that the developer must do to install the handler. The compiler and run-time library do the rest, automatically.

The local variables are declared in the private part, as required by the language, because they are shared data meant to be protected from race conditions. Therefore, the only compile-time access possible is via visible subprograms and entries declare in the visible part. Those subprograms and entries execute with mutually exclusive access so no race conditions are possible, as guaranteed by the language.

Note that procedure `Interrupt_Handler` is declared in the private part of `RNG_Controller`, rather than the visible part. That location is purely a matter of choice (unlike the variables), but there is a good reason to hide it: application software can call an interrupt handler procedure too. If you don't ever intend for that to happen, have the compiler enforce your intent. An alert code reader will then recognize that clients cannot call that procedure. If, on the other hand, the handler is declared in the visible part, the reader must examine more of the code to determine whether there are any callers in the application code. Granted, a software call to an interrupt handler is rare, but not illegal, so you should state your intent in the code in an enforceable manner.

Be aware that the Ada compiler is allowed to place restrictions on protected procedure handlers. The compiler can restrict the content of the procedure body, for example, or it might forbid calls to the handler from the application software. The rationale is to allow direct invocation by the hardware, to minimize interrupt latency to the extent possible.

For completeness, here's the same RNG_Controller protected object using the pragma instead of the aspect to attach the interrupt to the handler procedure:

```
protected RNG_Controller is
   ...
   entry Get_Random (Value : out UInt32);
private

   Last_Sample    : UInt32 := 0;
   Buffer         : Ring_Buffer;
   Data_Available : Boolean := False;

   procedure Interrupt_Handler;
   pragma Attach_Handler (Interrupt_Handler,
                          Ada.Interrupts.Names.HASH_RNG_Interrupt;

end RNG_Controller;
```

As you can see, there isn't much difference. The aspect is somewhat more succinct. (The choice of where to declare the procedure remains the same.)

In this attachment model, protected declarations containing interrupt handlers must be declared at the library level. That means they must be declared in library packages. (Protected objects cannot be library units themselves, just as tasks cannot. They must be declared within some other unit.) Here is the full declaration for the RNG_Controller PO declared within a package — in this case within a package body:

```
with Ada.Interrupts.Names;
with Bounded_Ring_Buffers;

package body STM32.RNG.Interrupts is

   package UInt32_Buffers is new Bounded_Ring_Buffers (Content => UInt32);
   use UInt32_Buffers;


   protected RNG_Controller is
      ...
      entry Get_Random (Value : out UInt32);
   private

      Last_Sample    : UInt32 := 0;
      Samples        : Ring_Buffer (Upper_Bound => 9);  -- arbitrary
      Data_Available : Boolean := False;

      procedure Interrupt_Handler with
        Attach_Handler => Ada.Interrupts.Names.HASH_RNG_Interrupt;

   end RNG_Controller;

   ...

end STM32.RNG.Interrupts;
```

But note that we're talking about protected declarations, a technical term that encompasses not only protected types but also anonymously-typed protected objects. In the RNG_Controller example, the PO does not have an explicit type declared; it is anonymously-typed. (Task objects can also be anonymously-typed.) You don't have to

use a two-step process of first declaring the type and then an object of the type. If you only need one, no explicit type is required.

Although interrupt handler protected types must be declared at library level, the Ada model allows you to have an object of the type declared elsewhere, not necessarily at library level. However, note that the Ravenscar and Jorvik profiles require protected interrupt handler objects — anonymously-typed or not — to be declared at the library level too, for the sake of analysis. The profiles also require the elaboration-based attachment mechanism we have shown. For the sake of the widest applicability, and because with GNAT the most likely use-case involves either Ravenscar or Jorvik, we are following those restrictions in our examples.

51.6 Interrupt Priorities

Many (but not all) processors assign priorities to interrupts, with blocking and preemption among priorities of different levels, much like preemptive priority-based task semantics. Consequently, the priority semantics for interrupt handlers are as if a hardware "task," executing at an interrupt level priority, calls the protected procedure handler.

Interrupt handlers in Ada are protected procedures, which do not have priorities individually, but the enclosing protected object can be assigned a priority that will apply to the handler(s) when executing.

Therefore, protected objects can have priorities assigned using values of subtype `System.Interrupt_Priority`, which are high enough to require the blocking of one or more interrupts. The specific values among the priority subtypes are not standardized but the intent is that interrupt priorities are higher (more urgent) than non-interrupt priorities, as if they are declared like so in package `System`:

```
subtype Any_Priority is Integer range compiler-defined;

subtype Priority is Any_Priority
   range Any_Priority'First .. compiler-defined;

subtype Interrupt_Priority is Any_Priority
   range Priority'Last + 1 .. Any_Priority'Last;
```

For example, here are the subtype declarations in the GNAT compiler for an Arm Cortex M4 target:

```
subtype Any_Priority       is Integer      range 0 .. 255;
subtype Priority           is Any_Priority range Any_Priority'First .. 240;
subtype Interrupt_Priority is Any_Priority range
   Priority'Last + 1  .. Any_Priority'Last;
```

Although the ranges are compiler-defined, when the Systems Programming Annex is implemented the range of `System.Interrupt_Priority` must include at least one value. Vendors are not required to have a distinct priority value in `Interrupt_Priority` for each hardware interrupt possible on a given target. On a bare-metal target, they probably will have a one-to-one correspondence, but might not in a target with an RTOS or host OS.

A PO containing an interrupt handler procedure must be given a priority within the `Interrupt_Priority` subtype's range. To do so, we apply the aspect `Interrupt_Priority` to the PO. Perhaps confusingly, the aspect and the value's required subtype have the same name.

```
with Ada.Interrupts.Names;  use Ada.Interrupts.Names;
with System;                use System;

package Gyro_Interrupts is
```

(continues on next page)

(continued from previous page)

```
   protected Handler with
      Interrupt_Priority => Interrupt_Priority'Last
   is
   private
      procedure IRQ_Handler;
      pragma Attach_Handler (IRQ_Handler, EXTI2_Interrupt);
   end Handler;

end Gyro_Interrupts;
```

The code above uses the highest (most urgent) interrupt priority value but some other value could be used instead, as long as it is in the `Interrupt_Priority` subtype's range. `Constraint_Error` is raised otherwise.

There is also an alternative pragma, now obsolescent, with the same name as the aspect and subtype. Here is an example:

```
with Ada.Interrupts.Names;  use Ada.Interrupts.Names;

package Gyro_Interrupts is

   protected Handler is
      pragma Interrupt_Priority (245);
   private
      procedure IRQ_Handler;
      pragma Attach_Handler (IRQ_Handler, EXTI2_Interrupt);
   end Handler;

end Gyro_Interrupts;
```

In the above we set the interrupt priority to 245, presumably a value conformant with this specific target. You should be familiar with this pragma too, because there is some much existing code using it. New code should use the aspect, ideally.

If we don't specify the priority for some protected object containing an interrupt handler (using either the pragma or the aspect), the initial priority of protected objects of that type is compiler-defined, but within the range of the subtype `Interrupt_Priority`. Generally speaking, you should specify the priorities per those of the interrupts handled, assuming they have distinct values, so that you can reason concretely about the relative blocking behavior at run-time.

Note that the parameter specifying the priority is optional for the `Interrupt_Priority` pragma. When none is given, the effect is as if the value `Interrupt_Priority'Last` was specified.

```
with Ada.Interrupts.Names;  use Ada.Interrupts.Names;

package Gyro_Interrupts is

   protected Handler is
      pragma Interrupt_Priority;
   private
      ...
   end Handler;

end Gyro_Interrupts;
```

No pragma parameter is given in the above, therefore `Gyro_Interrupts.Handler` executes at `Interrupt_Priority'Last` when invoked.

While an interrupt handler is executing, the corresponding interrupt is blocked. Therefore,

the same interrupt will not be delivered again while the handler is executing. Plus, the protected object semantics mean that no software caller is also concurrently executing within the protected object. So no data race conditions are possible. If the system does not support blocking, however, the interrupt is not blocked when the handler executes.

In addition, when interrupt priorities are involved, hardware blocking typically extends to interrupts of equal or lower priority.

You should understand that a higher-priority interrupt could preempt the execution of a lower-priority interrupt's handler. Handlers do not define "critical sections" in which the processor cannot be preempted at all (other than the case of the highest priority interrupt).

Preemption does not cause data races, usually, because the typical case is to have a given protected object handle only one interrupt. It follows that only that one interrupt handler has visibility to the protected data in any given protected object, therefore only that one handler can update it. Any preempting handler would be in a different protected object, hence the preempting handler could not possibly update the data in the preempted handler's PO. No data race condition is possible.

However, protected objects can contain handlers for more than one interrupt. In that case, depending on the priorities, the execution of a higher-priority handler could preempt the execution of a lower priority handler in that same PO. Because each handler in the PO can update the local protected data, these data are effectively shared among asynchronous writers. Data race conditions are, as a result, possible.

The solution to the case of multiple handlers in a single PO is to assign the PO a priority not less than the highest of the interrupt priorities for which it contains handlers. That's known as the "ceiling priority" and works the same as when applying the ceiling for the priorities of caller tasks in the software. Then, whenever any interrupt handled by that PO is delivered, the handler executes at the ceiling priority, not necessarily the priority of the specific interrupt handled. All interrupts at a priority equal or lower than the PO priority are blocked, so no preemption by another handler within that same PO is possible. As a result, a handler for a higher priority interrupt must be in a different PO. If that higher priority handler is invoked, it can indeed preempt the execution of the handler for the lower priority interrupt in another PO. But because these two handlers will not be in the same PO, they will not share the data, so again no race condition is possible.

Note also that software callers will execute at the PO priority as well, so their priority may be increased during that execution. As you can see, the Ceiling Priority Protocol integrates application-level priorities, for tasks and protected objects, with interrupt-level priorities for interrupt handlers.

The Ceiling Locking Protocol is requested by specifying the `Ceiling_Locking` policy (see ARM D.3) to the pragma `Locking_Policy`. Both Ravenscar and Jorvik do so, automatically.

51.7 Common Design Idioms

In this section we explore some of the common idioms used when writing interrupt handlers in Ada.

51.7.1 Parameterizing Handlers

Suppose we have more than one instance of a kind of device. For example, multiple DMA controllers are often available on a System-on-Chip such as an Arm microcontroller. We can simplify our code by defining a device driver **type**, with one object of the type per supported hardware device. This is the same abstract data type (ADT) approach we'd take for software objects in application code, and in general for device drivers when multiple hardware instances are available.

We can also apply the ADT approach to interrupt handlers when we have multiple devices of a given kind that can generate interrupts. In this case, the type will be fully implemented

as a protected type containing at least one interrupt handling procedure, with or without additional protected procedures or entries.

As is the case with abstract data types in general, we can tailor each object with discriminants defined with the type, in order to "parameterize" the type and thus allow distinct objects to have different characteristics. For example, we might define a bounded buffer ADT with a discriminant specifying the upper bound, so that distinct objects of the single type could have different bounds. In the case of hardware device instances, one of these parameters will often specify the device being driven, but we can also specify other device-specific characteristics. In particular, for interrupt handler types both the interrupt to handle and the interrupt priority can be discriminants. That's possible because the aspects/pragmas do not require their values to be specified via literals, unlike what was done in the `RNG_Controller` example above.

For example, here is the declaration for an interrupt handler ADT named `DMA_Interrupt_Controller`. This type manages the interrupts for a given DMA device, known as a `DMA_Controller`. Type `DMA_Controller` is itself an abstract data type, declared elsewhere.

```
protected type DMA_Interrupt_Controller
  (Controller   : not null access DMA_Controller;
   Stream       : DMA_Stream_Selector;
   IRQ          : Ada.Interrupts.Interrupt_Id;
   IRQ_Priority : System.Interrupt_Priority)
with
   Interrupt_Priority => IRQ_Priority
is

   procedure Start_Transfer
     (Source      : Address;
      Destination : Address;
      Data_Count  : UInt16);

   procedure Abort_Transfer (Result : out DMA_Error_Code);

   procedure Clear_Transfer_State;

   function Buffer_Error return Boolean;

   entry Wait_For_Completion (Status : out DMA_Error_Code);

private

   procedure Interrupt_Handler with Attach_Handler => IRQ;

   No_Transfer_In_Progess : Boolean := True;
   Last_Status            : DMA_Error_Code := DMA_No_Error;
   Had_Buffer_Error       : Boolean := False;

end DMA_Interrupt_Controller;
```

In the above, the `Controller` discriminant provides an access value designating the specific `DMA_Controller` device instance to be managed. Each DMA device supports multiple independent conversion "streams" so the `Stream` discriminant specifies that characteristic. The `IRQ` and `IRQ_Priority` discriminants specify the handler values for that specific device and stream. These discriminant values are then used in the `Interrupt_Priority` pragma and the `Attach_Handler` aspect in the private part. ("IRQ" is a command handler name across programming languages, and is an abbreviation for "interrupt request.")

Here then are the declarations for two instances of the interrupt handler type:

```
DMA2_Stream0 : DMA_Interrupt_Controller
   (Controller   => DMA_2'Access,
    Stream       => Stream_0,
    IRQ          => DMA2_Stream0_Interrupt,
    IRQ_Priority => Interrupt_Priority'Last);

DMA2_Stream5 : DMA_Interrupt_Controller
   (Controller   => DMA_2'Access,
    Stream       => Stream_5,
    IRQ          => DMA2_Stream5_Interrupt,
    IRQ_Priority => Interrupt_Priority'Last);
```

In the above, both objects `DMA2_Stream0` and `DMA2_Stream5` are associated with the same object named `DMA2`, an instance of the `DMA_Controller` type. The difference in the objects is the stream that generates the interrupts they handle. One object handles `Stream_0` interrupts and the other handles those from `Stream_5`. Package `Ada.Interrupts.Names` for this target (for GNAT) declares distinct names for the streams and devices generating the interrupts, hence `DMA2_Stream0_Interrupt` and `DMA2_Stream5_Interrupt`.

On both objects the priority is the highest interrupt priority (and hence the highest overall), `Interrupt_Priority'Last`. That will work, but of course all interrupts will be blocked during the execution of the handler, as well as the execution of any other subprogram or entry in the same PO. That means that the clock interrupt is blocked for that interval, for example. We use that interrupt value in our demonstrations for expedience, but in a real application you'd almost certainly use a lower value specific to the interrupt handled.

We could reduce the number of discriminants, and also make the code more robust, by taking advantage of the requirement that type `Interrupt_Id` be a discrete type. As such, it can be used as the index type into arrays. Here is a driver example with only the `Interrupt_Id` discriminant required:

```
Device_Priority : constant array (Interrupt_Id) of Interrupt_Priority := ( ... );

protected type Device_Interface
  (IRQ : Interrupt_Id)
with
   Interrupt_Priority => Device_Priority (IRQ)
is
   procedure Handler with Attach_Handler => IRQ;
   ...
end Device_Interface;
```

Now we use the one `IRQ` discriminant both to assign the priorities for distinct objects and to attach their handler procedures.

51.7.2 Multi-Level Handlers

Interrupt handlers are intended to be very brief, in part because they prevent lower priority interrupts and application tasks from executing.

However, complete interrupt processing may require more than just the short protected procedure handler's activity. Therefore, two levels of handling are common: the protected procedure interrupt handler and a task. The handler does the least possible and then signals the task to do the rest.

Of course, sometimes the handler does everything required and just needs to signal the application. In that case, the awakened task does no further "interrupt processing" but simply uses the result.

Regardless, the same issues apply: 1) How do application tasks synchronize with the handlers? Assuming the task is not polling the event, at some point the task must stop what

it was doing and suspend, waiting for the handler to signal it. 2) Once synchronized, how can the handlers pass data to the tasks?

Using protected objects for interrupt handling provides an efficient mechanism that elegantly addresses both issues. In addition, when data communication is not required, another standard language mechanism is available. These give rise to two design idioms. We will explore both.

In the first idiom, the protected object contains a protected entry as well as the interrupt handler procedure. The task suspends on the entry when ready for the handler results, controlled by the barrier condition as usual. The protected handler procedure responds to interrupts, managing data (if any) as required. When ready, based on what the handler does, the handler sets the entry barrier to `True`. That allows the suspended task to execute the entry body. The entry body can do whatever is required, possibly just copying the local protected data to the entry parameters. Of course, the entry may be used purely for synchronizing with the handler, i.e., suspending and resuming the task, in which case there would be no parameters passed.

The image below depicts this design.

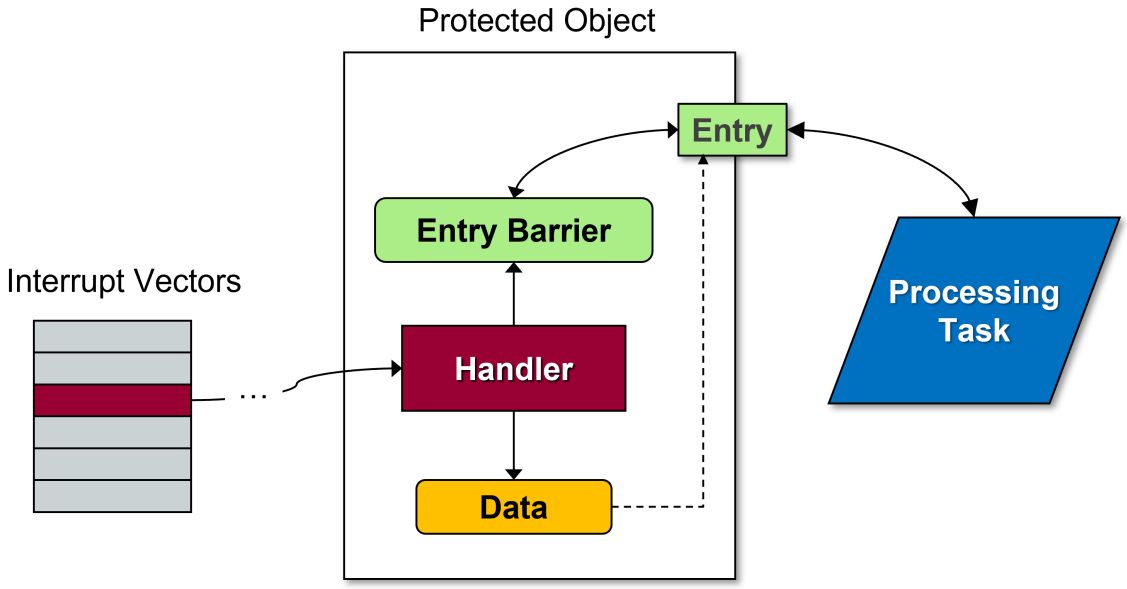

The `DMA_Interrupt_Controller` described earlier actually uses this design.

```
protected type DMA_Interrupt_Controller
  (Controller   : not null access DMA_Controller;
   Stream       : DMA_Stream_Selector;
   IRQ          : Ada.Interrupts.Interrupt_Id;
   IRQ_Priority : System.Interrupt_Priority)
with
   Interrupt_Priority => IRQ_Priority
is

   procedure Start_Transfer
     (Source      : Address;
      Destination : Address;
      Data_Count  : UInt16);

   procedure Abort_Transfer (Result : out DMA_Error_Code);
```

(continues on next page)

(continued from previous page)

```
   procedure Clear_Transfer_State;

   function Buffer_Error return Boolean;

   entry Wait_For_Completion (Status : out DMA_Error_Code);

private

   procedure Interrupt_Handler with Attach_Handler => IRQ;

   No_Transfer_In_Progess : Boolean := True;
   Last_Status            : DMA_Error_Code := DMA_No_Error;
   Had_Buffer_Error       : Boolean := False;

end DMA_Interrupt_Controller;
```

The client application code (task) calls procedure `Start_Transfer` to initiate the DMA transaction, then presumably goes off to accomplish something else, and eventually calls the `Wait_For_Completion` entry. That call blocks the task if the device has not yet completed the DMA transfer. The interrupt handler procedure, cleverly named `Interrupt_Handler`, handles the interrupts, one of which indicates that the transfer has completed. Device errors also generate interrupts so the handler detects them and acts accordingly. Eventually, the handler sets the barrier to **`True`** and the task can get the status via the entry parameter.

```
procedure Start_Transfer
   (Source      : Address;
    Destination : Address;
    Data_Count  : UInt16)
is
begin
   No_Transfer_In_Progess := False;
   Had_Buffer_Error := False;
   Clear_All_Status (Controller.all, Stream);
   Start_Transfer_with_Interrupts
     (Controller.all,
      Stream,
      Source,
      ...,
      Enabled_Interrupts =>
        (Half_Transfer_Complete_Interrupt => False,
         others  => True));
end Start_Transfer;


entry Wait_For_Completion
   (Status : out DMA_Error_Code)
when
   No_Transfer_In_Progress
is
begin
   Status := Last_Status;
end Wait_For_Completion;
```

In the above, the entry barrier consists of the Boolean variable `No_Transfer_In_Progress`. Procedure `Start_Transfer` first sets that variable to **`False`** so that a caller to `Wait_For_Completion` will suspend until the transaction completes one way or the other. Eventually, the handler sets `No_Transfer_In_Progress` to **`True`**.

```
procedure Interrupt_Handler is
```

(continues on next page)

(continued from previous page)

```
   subtype Checked_Status_Flag is DMA_Status_Flag with
      Static_Predicate => Checked_Status_Flag /= Half_Transfer_Complete_Indicated;
begin
   for Flag in Checked_Status_Flag loop
      if Status (Controller.all, Stream, Flag) then
         case Flag is
            when FIFO_Error_Indicated =>
               Last_Status := DMA_FIFO_Error;
               Had_Buffer_Error := True;
               No_Transfer_In_Progess := not Enabled (Controller.all, Stream);
            when Direct_Mode_Error_Indicated =>
               Last_Status := DMA_Direct_Mode_Error;
               No_Transfer_In_Progess := not Enabled (Controller.all, Stream);
            when Transfer_Error_Indicated =>
               Last_Status := DMA_Transfer_Error;
               No_Transfer_In_Progess := True;
            when Transfer_Complete_Indicated =>
               Last_Status := DMA_No_Error;
               No_Transfer_In_Progess := True;
         end case;
         Clear_Status (Controller.all, Stream, Flag);
      end if;
   end loop;
end Interrupt_Handler;
```

This device driver doesn't bother with interrupts indicating that transfers are half-way complete so that specific status flag is ignored. In response to an interrupt, the handler checks each status flag to determine what happened. Note the resulting assignments for both the protected variables `Last_Status` and `No_Transfer_In_Progess`. The variable `No_Transfer_In_Progess` controls the entry, and `Last_Status` is passed to the caller via the entry formal parameter. When the interrupt handler exits, the resulting protected action allows the now-enabled entry call to execute.

In the second design idiom, the handler again synchronizes with the application task, but not using a protected entry.

The image below depicts this design.

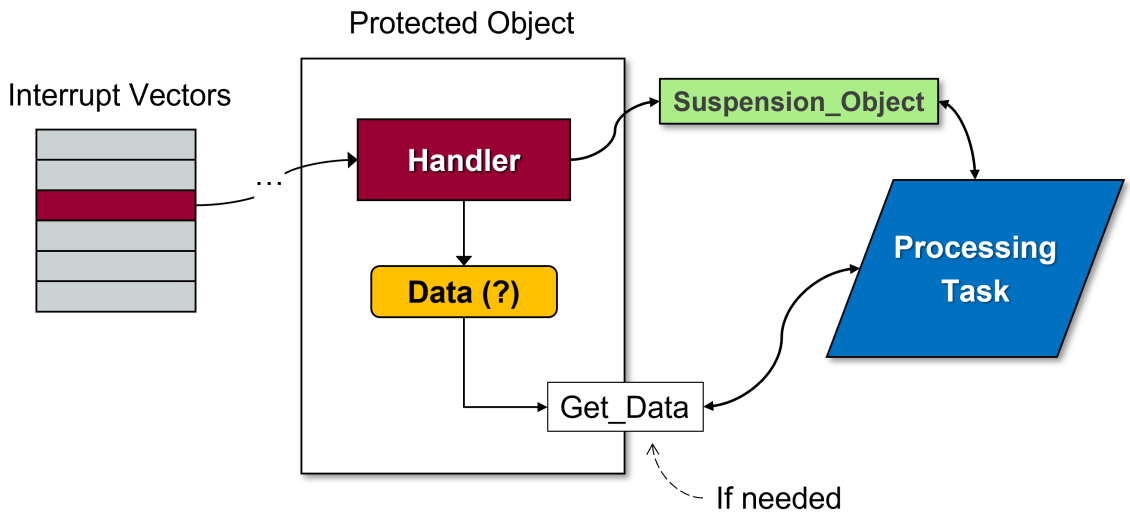

In this approach, the task synchronizes with the handler using a Suspension_Object variable. The type Suspension_Object is defined in the language standard package Ada.Synchronous_Task_Control. Essentially, the type provides a thread-safe Boolean flag. Callers can suspend themselves (hence the package name) until another task resumes them by setting the flag to **True**. Here's the package declaration, somewhat elided:

```
package Ada.Synchronous_Task_Control is

   type Suspension_Object is limited private;

   procedure Set_True (S : in out Suspension_Object);

   procedure Set_False (S : in out Suspension_Object);

   function Current_State (S : Suspension_Object) return Boolean;

   procedure Suspend_Until_True (S : in out Suspension_Object);

private
   ...
end Ada.Synchronous_Task_Control;
```

Tasks call Suspend_Until_True to suspend themselves on some object of the type passed as the parameter. The call suspends the caller until that object becomes **True**. If it is already **True**, the caller continues immediately. Objects of type Suspension_Object are automatically set to **False** initially, and become **True** via a call to Set_True. As part of the return from a call to Suspend_Until_True, the flag is set back to **False**. As a result, you probably only need those two subprograms.

The interrupt handler procedure responds to interrupts, eventually setting some visible Suspension_Object to **True** so that the caller will be signaled and resume. Here's an example showing both the protected object, with handler, and a Suspension_Object declaration:

```
with Ada.Interrupts.Names;          use Ada.Interrupts.Names;
with Ada.Synchronous_Task_Control;  use Ada.Synchronous_Task_Control;

package Gyro_Interrupts is

   Data_Available : Suspension_Object;

   protected Handler is
      pragma Interrupt_Priority;
   private
      procedure IRQ_Handler
        with Attach_Handler => EXTI2_Interrupt;
   end Handler;

end Gyro_Interrupts;
```

In the code above, Gyro_Interrupts.Data_Available is the Suspension_Object variable visible both to the interrupt handler PO and the client task.

EXTI2_Interrupt is "external interrupt number 2" on this particular microcontroller. It is connected to an external device, not on the SoC itself. Specifically, it is connected to a L3GD20 MEMS motion sensor[401], a three-axis digital output gyroscope. This gyroscope can be either polled or generate interrupts when ever data are available. The handler is very simple:

[401] https://www.st.com/en/mems-and-sensors/l3gd20.html

```
with STM32.EXTI;  use STM32.EXTI;

package body Gyro_Interrupts is

   protected body Handler is

      procedure IRQ_Handler is
      begin
         if External_Interrupt_Pending (EXTI_Line_2) then
            Clear_External_Interrupt (EXTI_Line_2);
            Set_True (Data_Available);
         end if;
      end IRQ_Handler;

   end Handler;

end Gyro_Interrupts;
```

The handler simply clears the interrupt and resumes the caller task via a call to Set_True on the variable declared in the package spec.

The lack of an entry means that no data can be passed to the task via entry parameters. It is possible to pass data to the task but doing so would require an additional protected procedure or function.

The gyroscope hardware device interface is in package L3GD20. Here are the pertinent parts:

```
package L3GD20 is

   type Three_Axis_Gyroscope is tagged limited private;

   procedure Initialize
      (This        : in out Three_Axis_Gyroscope;
       Port        : Any_SPI_Port;
       Chip_Select : Any_GPIO_Point);

   ...

   procedure Enable_Data_Ready_Interrupt  (This : in out Three_Axis_Gyroscope);

   ...

   type Angle_Rate is new Integer_16;

   type Angle_Rates is record
      X : Angle_Rate;  -- pitch, per Figure 2, pg 7 of the Datasheet
      Y : Angle_Rate;  -- roll
      Z : Angle_Rate;  -- yaw
   end record with Size => 3 * 16;

   ...

   procedure Get_Raw_Angle_Rates
      (This  : Three_Axis_Gyroscope;
       Rates : out Angle_Rates);

   ...

end L3GD20;
```

With those packages available, we can write a simple main program to use the gyro. The real demo displayed the readings on an LCD but we've elided all those irrelevant details:

```
with Gyro_Interrupts;
with Ada.Synchronous_Task_Control;  use Ada.Synchronous_Task_Control;
with L3GD20;                        use L3GD20;
with STM32.Board;
...

procedure Demo_L3GD20 is

   Axes : L3GD20.Angle_Rates;

   ...

   procedure Await_Raw_Angle_Rates (Rates : out L3GD20.Angle_Rates) is
   begin
      Suspend_Until_True (Gyro_Interrupts.Data_Available);
      L3GD20.Get_Raw_Angle_Rates (STM32.Board.Gyro, Rates);
   end Await_Raw_Angle_Rates;

   ...

begin
   Configure_Gyro;
   Configure_Gyro_Interrupt;
   ...
   loop
      Await_Raw_Angle_Rates (Axes);
      ...
   end loop;
end Demo_L3GD20;
```

The demo is a main procedure, even though we've been describing the client application code in terms of tasks. The main procedure is executed by the implicit "environment task" so it all still works. `Await_Raw_Angle_Rates` suspends (if necessary) on `Gyro_Interrupts.Data_Available` and then calls `L3GD20.Get_Raw_Angle_Rates` to get the rate values.

The operations provided by `Suspension_Object` are faster than protected entries, and noticeably so. However, that performance difference is due to the fact that `Suspension_Object` provides so much less capability than entries. In particular, there is no notion of protected actions, nor expressive entry barriers for condition synchronization, nor parameters to pass data while synchronized. Most importantly, there is no caller queue, so at most one caller can be waiting at a time on any given `Suspension_Object` variable. You'll get `Program_Error` if you try. Protected entries should be your first design choice. Note that the Ravenscar restrictions can make use of `Suspension_Object` much more likely.

51.8 Final Points

As you can see, the semantics of protected objects are a good fit for interrupt handling. However, other forms of handlers are allowed to be supported. For example, the compiler and RTL for a specific target may include support for interrupts generated by a device known to be available with that target. For illustration, let's imagine the target always has a serial port backed by a UART. In addition to handlers as protected procedure without parameters, perhaps the compiler and RTL support interrupt handlers with a single parameter of type `Unsigned_8` (or larger) as supported by the UART.

Overall, the interrupt model defined and supported by Ada is quite close to the canonical model presented by most programming languages, in part because it matches the model presented by typical hardware.

CHAPTER

FIFTYTWO

CONCLUSION

In the introduction to this course, we defined an "embedded system" as a computer that is part of a larger system, in which the capability to compute is not the larger system's primary function. These computers are said to be "embedded" in the larger system. That, in itself, sets this kind of programming apart from the more typical host-oriented programming. But the context also implies fewer resources are available, especially memory and electrical power, as well as processor power. Add to those limitations a frequent reliability requirement and you have a demanding context for development.

Using Ada can help you in this context, and for less cost than other languages, if you use it well. Many industrial organizations developing critical embedded software use Ada for that reason. Our goal in this course was to get you started in using it well.

To that end, we spent a lot of time talking about how to use Ada to do low level programming, such as how to specify the layout of types, how to map variables of those types to specific addresses, when and how to do unchecked programming (and how not to), and how to determine the validity of incoming data. Ada has a lot of support for this activity so there was much to explore.

Likewise, we examined development using Ada in combination with other languages, a not uncommon approach. Specifically, we saw how to interface with code and data written in other languages, and how (and why) to work with assembly language. Development in just one language is becoming less common over time so these were important aspects to know.

One of the more distinctive activities of embedded programming involves interacting with the outside world via embedded devices, such as A/D converters, timers, actuators, sensors, and so forth. (This can be one of the more entertaining activities as well.) We covered how to interact with these memory-mapped devices using representation specifications, data structures that simplified the functional code, and time-honored aspects of software engineering, including abstract data types.

Finally, we explored how to handle interrupts in Ada, another distinctive part of embedded systems programming. As we saw, Ada has extensive support for handling interrupts, using the same building blocks — protected objects — used in concurrent programming. These constructs provide a way to handle interrupts that is as portable as possible, in what is otherwise a very hardware-specific endeavor.

In the course, we mentioned a library of freely-available device drivers in Ada known as the Ada Driver Library (ADL). The ADL is a good resource for learning how Ada can be used to develop software for embedded systems using real-world devices and processors. Becoming familiar with it would be a good place to go next. Contributing to it would be even better! The ADL is available on GitHub for both non-proprietary and commercial use here: https://github.com/AdaCore/Ada_Drivers_Library.

Part VI

What's New in Ada 2022

Copyright © 2022 – 2023, AdaCore

This book is published under a CC BY-SA license, which means that you can copy, redistribute, remix, transform, and build upon the content for any purpose, even commercially, as long as you give appropriate credit, provide a link to the license, and indicate if changes were made. If you remix, transform, or build upon the material, you must distribute your contributions under the same license as the original. You can find license details on this page[402]



This course presents an overview of the new features of the latest Ada 2022 standard.

This document was written by Maxim Reznik and reviewed by Richard Kenner.

Note

The code examples in this course use an 80-column limit, which is a typical limit for Ada code. Note that, on devices with a small screen size, some code examples might be difficult to read.

Note

Each code example from this book has an associated "code block metadata", which contains the name of the "project" and an MD5 hash value. This information is used to identify a single code example.

You can find all code examples in a zip file, which you can download from the learn website[403]. The directory structure in the zip file is based on the code block metadata. For example, if you're searching for a code example with this metadata:

- Project: Courses.Intro_To_Ada.Imperative_Language.Greet
- MD5: cba89a34b87c9dfa71533d982d05e6ab

you will find it in this directory:

```
projects/Courses/Intro_To_Ada/Imperative_Language/Greet/
cba89a34b87c9dfa71533d982d05e6ab/
```

In order to use this code example, just follow these steps:

1. Unpack the zip file;
2. Go to target directory;
3. Start GNAT Studio on this directory;
4. Build (or compile) the project;
5. Run the application (if a main procedure is available in the project).

[402] http://creativecommons.org/licenses/by-sa/4.0
[403] https://learn.adacore.com/zip/learning-ada_code.zip

CHAPTER

FIFTYTHREE

INTRODUCTION

This is a collection of short code examples demonstrating new features of the Ada 2022 Standard[404] as they are implemented in GNAT Ada compiler.

To use some of these features, you may need to use a compiler command line switch or pragma. Compilers starting with GNAT Community Edition 2021[405] or GCC 11[406] use `pragma Ada_2022;` or the `-gnat2022` switch. Older compilers use `pragma Ada_2020;` or `-gnat2020`. To use the square brackets syntax or `'Reduce` expressions, you need `pragma Extensions_Allowed (On);` or the `-gnatX` switch.

53.1 References

- Draft Ada 2022 Standard[407]
- Ada 202x support in GNAT[408] blog post

[404] http://www.ada-auth.org/standards/22aarm/html/AA-TTL.html
[405] https://blog.adacore.com/gnat-community-2021-is-here
[406] https://gcc.gnu.org/gcc-11/
[407] http://www.ada-auth.org/standards/22aarm/html/AA-TTL.html
[408] https://blog.adacore.com/ada-202x-support-in-gnat

CHAPTER

FIFTYFOUR

'IMAGE ATTRIBUTE FOR ANY TYPE

Note

Attribute 'Image for any type is supported by

- GNAT Community Edition 2020 and latter
- GCC 11

54.1 'Image attribute for a value

Since the publication of the Technical Corrigendum 1[409] in February 2016, the 'Image attribute can now be applied to a value. So instead of My_Type'Image (Value), you can just write Value'Image, as long as the Value is a name[410]. These two statements are equivalent:

```
Ada.Text_IO.Put_Line (Ada.Text_IO.Page_Length'Image);

Ada.Text_IO.Put_Line
  (Ada.Text_IO.Count'Image (Ada.Text_IO.Page_Length));
```

54.2 'Image attribute for any type

In Ada 2022, you can apply the 'Image attribute to any type, including records, arrays, access types, and private types. Let's see how this works. We'll define array, record, and access types and corresponding objects and then convert these objects to strings and print them:

Listing 1: main.adb

```
1  with Ada.Text_IO;
2
3  procedure Main is
4     type Vector is array (Positive range <>) of Integer;
5
6     V1 : aliased Vector := [1, 2, 3];
7
8     type Text_Position is record
9        Line, Column : Positive;
10    end record;
11
```

(continues on next page)

[409] https://reznikmm.github.io/ada-auth/rm-4-NC/RM-0-1.html
[410] https://reznikmm.github.io/ada-auth/rm-4-NC/RM-4-1.html#S0091

(continued from previous page)

```
12    Pos : constant Text_Position := (Line => 10, Column => 3);
13
14    type Vector_Access is access all Vector;
15
16    V1_Ptr : constant Vector_Access := V1'Access;
17
18 begin
19    Ada.Text_IO.Put_Line (V1'Image);
20    Ada.Text_IO.Put_Line (Pos'Image);
21    Ada.Text_IO.New_Line;
22    Ada.Text_IO.Put_Line (V1_Ptr'Image);
23 end Main;
```

Code block metadata

```
Project: Courses.Ada_2022_Whats_New.Image_Attribute
MD5: c58d3133c45d780305a2b5c88d159764
```

Runtime output

```


[ 1,  2,  3]

(LINE =>  10,
 COLUMN =>  3)

(access 7fff075f43c8)
```

```
$ gprbuild -q -P main.gpr
  Build completed successfully.
$ ./main
  [ 1,  2,  3]
  (LINE =>  10,
   COLUMN =>  3)
  (access 7fff64b23988)
```

Note the square brackets in the array image output. In Ada 2022, array aggregates could be written *this way* (page 1511)!

54.3 References

- ARM 4.10 Image Attributes[411]
- AI12-0020-1[412]

[411] http://www.ada-auth.org/standards/22aarm/html/AA-4-10.html
[412] http://www.ada-auth.org/cgi-bin/cvsweb.cgi/ai12s/ai12-0020-1.txt

CHAPTER

FIFTYFIVE

REDEFINING THE 'IMAGE ATTRIBUTE

In Ada 2022, you can redefine 'Image attribute for your type, though the syntax to do this has been changed several times. Let's see how it works in GNAT Community 2021.

Note

Redefining attribute 'Image is supported by

- GNAT Community Edition 2021 (using Text_Buffers)
- GNAT Community Edition 2020 (using Text_Output.Utils)
- GCC 11 (using Text_Output.Utils)

In our example, let's redefine the 'Image attribute for a location in source code. To do this, we provide a new Put_Image aspect for the type:

Listing 1: main.adb

```
with Ada.Text_IO;
with Ada.Strings.Text_Buffers;

procedure Main is

   type Source_Location is record
      Line   : Positive;
      Column : Positive;
   end record
     with Put_Image => My_Put_Image;

   procedure My_Put_Image
     (Output : in out Ada.Strings.Text_Buffers.Root_Buffer_Type'Class;
      Value  : Source_Location);

   procedure My_Put_Image
     (Output : in out Ada.Strings.Text_Buffers.Root_Buffer_Type'Class;
      Value  : Source_Location)
   is
      Line   : constant String := Value.Line'Image;
      Column : constant String := Value.Column'Image;
      Result : constant String :=
        Line (2 .. Line'Last) & ':' & Column (2 .. Column'Last);
   begin
       Output.Put (Result);
   end My_Put_Image;

   Line_10 : constant Source_Location := (Line => 10, Column => 1);

begin
```

(continues on next page)

(continued from previous page)

```
31    Ada.Text_IO.Put_Line (Line_10'Image);
32 end Main;
```

Code block metadata

```
Project: Courses.Ada_2022_Whats_New.Image_Redefine
MD5: 4c77a3589eaba3a4c1b70200913ad6b8
```

Runtime output

```
10:1
```

55.1 What's the Root_Buffer_Type?

Let's see how it's defined in the `Ada.Strings.Text_Buffers` package.

```
type Root_Buffer_Type is abstract tagged limited private;

procedure Put
  (Buffer : in out Root_Buffer_Type;
   Item   : in     String) is abstract;
```

In addition to `Put`, there are also `Wide_Put`, `Wide_Wide_Put`, `Put_UTF_8`, `Wide_Put_UTF_16`. And also `New_Line`, `Increase_Indent`, `Decrease_Indent`.

55.2 Outdated draft implementation

GNAT Community Edition 2020 and GCC 11 both provide a draft implementation that's incompatible with the Ada 2022 specification. For those versions, `My_Put_Image` looks like:

```
procedure My_Put_Image
  (Sink  : in out Ada.Strings.Text_Output.Sink'Class;
   Value : Source_Location)
is
   Line   : constant String := Value.Line'Image;
   Column : constant String := Value.Column'Image;
   Result : constant String :=
     Line (2 .. Line'Last) & ':' & Column (2 .. Column'Last);
begin
    Ada.Strings.Text_Output.Utils.Put_UTF_8 (Sink, Result);
end My_Put_Image;
```

55.3 References

- ARM 4.10 Image Attributes[413]
- AI12-0020-1[414]
- AI12-0384-2[415]

[413] http://www.ada-auth.org/standards/22aarm/html/AA-4-10.html
[414] http://www.ada-auth.org/cgi-bin/cvsweb.cgi/AI12s/AI12-0020-1.TXT
[415] http://www.ada-auth.org/cgi-bin/cvsweb.cgi/ai12s/AI12-0384-2.TXT

CHAPTER

FIFTYSIX

USER-DEFINED LITERALS

Note

User-defined literals are supported by

- GNAT Community Edition 2020
- GCC 11

In Ada 2022, you can define string, integer, or real literals for your types. The compiler will convert such literals to your type at run time using a function you provide. To do so, specify one or more new aspects:

- `Integer_Literal`
- `Real_Literal`
- `String_Literal`

For our example, let's define all three for a simple type and see how they work. For simplicity, we use a `Wide_Wide_String` component for the internal representation:

Listing 1: main.adb

```
with Ada.Wide_Wide_Text_IO;
with Ada.Characters.Conversions;

procedure Main is

   type My_Type (Length : Natural) is record
      Value : Wide_Wide_String (1 .. Length);
   end record
     with String_Literal => From_String,
       Real_Literal      => From_Real,
       Integer_Literal   => From_Integer;

   function From_String (Value : Wide_Wide_String) return My_Type is
      ((Length => Value'Length, Value => Value));

   function From_Real (Value : String) return My_Type is
      ((Length => Value'Length,
        Value  => Ada.Characters.Conversions.To_Wide_Wide_String (Value)));

   function From_Integer (Value : String) return My_Type renames From_Real;

   procedure Print (Self : My_Type) is
   begin
      Ada.Wide_Wide_Text_IO.Put_Line (Self.Value);
   end Print;
```

(continues on next page)

(continued from previous page)

```
26
27 begin
28    Print ("Test ""string""");
29    Print (123);
30    Print (16#DEAD_BEEF#);
31    Print (2.99_792_458e+8);
32 end Main;
```

Code block metadata

```
Project: Courses.Ada_2022_Whats_New.User_Defined_Literals
MD5: 755732418174c841bd88a8330cdc3e01
```

Runtime output

```
Test "string"
123
16#DEAD_BEEF#
2.99_792_458e+8
```

As you see, real and integer literals are converted to strings while preserving the formatting in the source code, while string literals are decoded: `From_String` is passed the specified string value. In all cases, the compiler translates these literals into function calls.

56.1 Turn Ada into JavaScript

Do you know that *'5'+3* in JavaScript is *53*?

```
> '5'+3
'53'
```

Now we can get the same result in Ada! But before we do, we need to define a custom `+` operator:

Listing 2: main.adb

```
1  with Ada.Wide_Wide_Text_IO;
2  with Ada.Characters.Conversions;
3
4  procedure Main is
5
6     type My_Type (Length : Natural) is record
7        Value : Wide_Wide_String (1 .. Length);
8     end record
9       with String_Literal => From_String,
10        Real_Literal      => From_Real,
11        Integer_Literal   => From_Integer;
12
13    function "+" (Left, Right : My_Type) return My_Type is
14      (Left.Length + Right.Length, Left.Value & Right.Value);
15
16    function From_String (Value : Wide_Wide_String) return My_Type is
17       ((Length => Value'Length, Value => Value));
18
19    function From_Real (Value : String) return My_Type is
20       ((Length => Value'Length,
21         Value  => Ada.Characters.Conversions.To_Wide_Wide_String (Value)));
22
23    function From_Integer (Value : String) return My_Type renames From_Real;
```

(continues on next page)

(continued from previous page)

```
24
25    procedure Print (Self : My_Type) is
26    begin
27       Ada.Wide_Wide_Text_IO.Put_Line (Self.Value);
28    end Print;
29
30 begin
31    Print ("5" + 3);
32 end Main;
```

Code block metadata

```
Project: Courses.Ada_2022_Whats_New.User_Defined_Literals_JS
MD5: 2d6eaf2d1b5bf560a90d4c6e491a2495
```

Runtime output

```
53
```

Jokes aside, this feature is very useful. For example it allows a "native-looking API" for *big integers* (page 1531).

56.2 References

- ARM 4.2.1 User-Defined Literals[416]
- AI12-0249-1[417]
- AI12-0342-1[418]

[416] http://www.ada-auth.org/standards/22rm/html/RM-4-2-1.html
[417] http://www.ada-auth.org/cgi-bin/cvsweb.cgi/AI12s/AI12-0249-1.TXT
[418] http://www.ada-auth.org/cgi-bin/cvsweb.cgi/AI12s/AI12-0342-1.TXT

CHAPTER

FIFTYSEVEN

ADVANCED ARRAY AGGREGATES

Note

These array aggregates are supported by

- GNAT Community Edition 2020
- GCC 11

57.1 Square brackets

In Ada 2022, you can use square brackets in array aggregates. Using square brackets simplifies writing both empty aggregates and single-element aggregates. Consider this:

Listing 1: show_square_brackets.ads

```
1  package Show_Square_Brackets is
2
3     type Integer_Array is array (Positive range <>) of Integer;
4
5     Old_Style_Empty : Integer_Array := (1 .. 0 => <>);
6     New_Style_Empty : Integer_Array := [];
7
8     Old_Style_One_Item : Integer_Array := (1 => 5);
9     New_Style_One_Item : Integer_Array := [5];
10
11 end Show_Square_Brackets;
```

Code block metadata

```
Project: Courses.Ada_2022_Whats_New.Square_Brackets
MD5: 2914b9435684a1eecd2567548969a3ed
```

Short summary for parentheses and brackets

- Record aggregates use parentheses
- *Container aggregates* (page 1515) use square brackets
- Array aggregates can use both square brackets and parentheses, but parentheses usage is obsolescent

57.2 Iterated Component Association

There is a new kind of component association:

```
Vector : Integer_Array := [for J in 1 .. 5 => J * 2];
```

This association starts with **for** keyword, just like a quantified expression. It declares an index parameter that you can use in the computation of a component.

Iterated component associations can nest and can be nested in another association (iterated or not). Here we use this to define a square matrix:

```
Matrix : array (1 .. 3, 1 .. 3) of Positive :=
 [for J in 1 .. 3 =>
   [for K in 1 .. 3 => J * 10 + K]];
```

Iterated component associations in this form provide both element indices and values, just like named component associations:

```
Data : Integer_Array (1 .. 5) :=
  [for J in 2 .. 3 => J, 5 => 5, others => 0];
```

Here Data contains (0, 2, 3, 0, 5), not (2, 3, 5, 0, 0).

Another form of iterated component association corresponds to a positional component association and provides just values, but no element indices:

```
Vector_2 : Integer_Array := [for X of Vector => X / 2];
```

You cannot mix these forms in a single aggregate.

It's interesting that such aggregates were originally proposed more than 25 years ago!

Complete code snippet:

Listing 2: show_iterated_component_association.adb

```
1  with Ada.Text_IO;
2
3  procedure Show_Iterated_Component_Association is
4
5     type Integer_Array is array (Positive range <>) of Integer;
6
7     Old_Style_Empty : Integer_Array := (1 .. 0 => <>);
8     New_Style_Empty : Integer_Array := [];
9
10    Old_Style_One_Item : Integer_Array := (1 => 5);
11    New_Style_One_Item : Integer_Array := [5];
12
13    Vector : constant Integer_Array := [for J in 1 .. 5 => J * 2];
14
15    Matrix : constant array (1 .. 3, 1 .. 3) of Positive :=
16      [for J in 1 .. 3 =>
17        [for K in 1 .. 3 => J * 10 + K]];
18
19    Data : constant Integer_Array (1 .. 5) :=
20      [for J in 2 .. 3 => J, 5 => 5, others => 0];
21
22    Vector_2 : constant Integer_Array := [for X of Vector => X / 2];
23 begin
24    Ada.Text_IO.Put_Line (Vector'Image);
25    Ada.Text_IO.Put_Line (Matrix'Image);
26    Ada.Text_IO.Put_Line (Data'Image);
```

(continues on next page)

(continued from previous page)

```
27    Ada.Text_IO.Put_Line (Vector_2'Image);
28 end Show_Iterated_Component_Association;
```

Code block metadata

```
Project: Courses.Ada_2022_Whats_New.Iterated_Component_Association
MD5: 9bc822b59c2c423019917728aab75c69
```

Runtime output

```
[ 2,  4,  6,  8,  10]

[
 [ 11,  12,  13],

 [ 21,  22,  23],

 [ 31,  32,  33]]

[ 0,  2,  3,  0,  5]

[ 1,  2,  3,  4,  5]
```

57.3 References

- ARM 4.3.3 Array Aggregates[419]
- AI12-0212-1[420]
- AI12-0306-1[421]

[419] http://www.ada-auth.org/standards/22aarm/html/AA-4-3-3.html
[420] http://www.ada-auth.org/cgi-bin/cvsweb.cgi/AI12s/AI12-0212-1.TXT
[421] http://www.ada-auth.org/cgi-bin/cvsweb.cgi/AI12s/AI12-0306-1.TXT

CHAPTER

FIFTYEIGHT

CONTAINER AGGREGATES

Note

Container aggregates are supported by

- GNAT Community Edition 2021
- GCC 11

Ada 2022 introduces container aggregates, which can be used to easily create values for vectors, lists, maps, and other aggregates. For containers such as maps, the aggregate must use named associations to provide keys and values. For other containers it uses positional associations. Only square brackets are allowed. Here's an example:

Listing 1: main.adb

```
with Ada.Text_IO;
with Ada.Containers.Vectors;
with Ada.Containers.Ordered_Maps;

procedure Main is

   package Int_Vectors is new Ada.Containers.Vectors
     (Positive, Integer);

   X : constant Int_Vectors.Vector := [1, 2, 3];

   package Float_Maps is new Ada.Containers.Ordered_Maps
     (Integer, Float);

   Y : constant Float_Maps.Map := [-10 => 1.0, 0 => 2.5, 10 => 5.51];
begin
   Ada.Text_IO.Put_Line (X'Image);
   Ada.Text_IO.Put_Line (Y'Image);
end Main;
```

Code block metadata

```
Project: Courses.Ada_2022_Whats_New.Container_Aggregates_1
MD5: 317c252582f75f248a154bd843388aaa
```

Runtime output

```
 [ 1,  2,  3]

[-10 =>  1.00000E+00,  0 =>  2.50000E+00,  10 =>  5.51000E+00]
```

At run time, the compiler creates an empty container and populates it with elements one by one. If you define a new container type, you can specify a new `Aggregate` aspect to enable container aggregates for your container and let the compiler know what subprograms to use to construct the aggregate:

Listing 2: main.adb

```
procedure Main is

   package JSON is
      type JSON_Value is private
        with Integer_Literal => To_JSON_Value;

      function To_JSON_Value (Text : String) return JSON_Value;

      type JSON_Array is private
        with Aggregate => (Empty       => New_JSON_Array,
                           Add_Unnamed => Append);

      function New_JSON_Array return JSON_Array;

      procedure Append
        (Self  : in out JSON_Array;
         Value : JSON_Value) is null;

   private
      type JSON_Value is null record;
      type JSON_Array is null record;

      function To_JSON_Value (Text : String) return JSON_Value
        is (null record);

      function New_JSON_Array return JSON_Array is (null record);
   end JSON;

   List : JSON.JSON_Array := [1, 2, 3];
   -------------------------------------
begin
   --  Equivalent old initialization code
   List := JSON.New_JSON_Array;
   JSON.Append (List, 1);
   JSON.Append (List, 2);
   JSON.Append (List, 3);
end Main;
```

Code block metadata

```
Project: Courses.Ada_2022_Whats_New.Container_Aggregates_2
MD5: d930702be4e6b4836afab082e8abe633
```

The equivalent for maps is:

Listing 3: main.adb

```
procedure Main is

   package JSON is
      type JSON_Value is private
        with Integer_Literal => To_JSON_Value;

      function To_JSON_Value (Text : String) return JSON_Value;

```

(continues on next page)

(continued from previous page)

```
      type JSON_Object is private
        with Aggregate => (Empty     => New_JSON_Object,
                           Add_Named => Insert);

      function New_JSON_Object return JSON_Object;

      procedure Insert
        (Self  : in out JSON_Object;
         Key   : Wide_Wide_String;
         Value : JSON_Value) is null;

   private
      type JSON_Value is null record;
      type JSON_Object is null record;

      function To_JSON_Value (Text : String) return JSON_Value
        is (null record);

      function New_JSON_Object return JSON_Object is (null record);
   end JSON;

   Object : JSON.JSON_Object := ["a" => 1, "b" => 2, "c" => 3];
   ------------------------------------------------------------
begin
   --  Equivalent old initialization code
   Object := JSON.New_JSON_Object;
   JSON.Insert (Object, "a", 1);
   JSON.Insert (Object, "b", 2);
   JSON.Insert (Object, "c", 3);
end Main;
```

Code block metadata

```
Project: Courses.Ada_2022_Whats_New.Container_Aggregates_3
MD5: c39c651e3e2f48c515c87c4cc6b979e9
```

You can't specify both Add_Named and Add_Unnamed subprograms for the same type. This prevents you from defining JSON_Value with both array and object aggregates present. But we can define conversion functions for array and object and get code almost as dense as the same code in native JSON. For example:

Listing 4: main.adb

```
procedure Main is

   package JSON is
      type JSON_Value is private
        with Integer_Literal => To_Value, String_Literal => To_Value;

      function To_Value (Text : String) return JSON_Value;
      function To_Value (Text : Wide_Wide_String) return JSON_Value;

      type JSON_Object is private
        with Aggregate => (Empty     => New_JSON_Object,
                           Add_Named => Insert);

      function New_JSON_Object return JSON_Object;

      procedure Insert
        (Self  : in out JSON_Object;
         Key   : Wide_Wide_String;
```

(continues on next page)

(continued from previous page)

```
         Value : JSON_Value) is null;

      function From_Object (Self : JSON_Object) return JSON_Value;

      type JSON_Array is private
        with Aggregate => (Empty       => New_JSON_Array,
                           Add_Unnamed => Append);

      function New_JSON_Array return JSON_Array;

      procedure Append
        (Self  : in out JSON_Array;
         Value : JSON_Value) is null;

      function From_Array (Self : JSON_Array) return JSON_Value;

   private
      type JSON_Value is null record;
      type JSON_Object is null record;
      type JSON_Array is null record;

      function To_Value (Text : String) return JSON_Value is
        (null record);
      function To_Value (Text : Wide_Wide_String) return JSON_Value is
        (null record);
      function New_JSON_Object return JSON_Object is
        (null record);
      function New_JSON_Array return JSON_Array is
        (null record);
      function From_Object (Self : JSON_Object) return JSON_Value is
        (null record);
      function From_Array (Self : JSON_Array) return JSON_Value is
        (null record);
   end JSON;

   function "+" (X : JSON.JSON_Object) return JSON.JSON_Value
     renames JSON.From_Object;
   function "-" (X : JSON.JSON_Array) return JSON.JSON_Value
     renames JSON.From_Array;

   Offices : JSON.JSON_Array :=
     [+["name"   => "North American Office",
        "phones" => -[1_877_787_4628,
                      1_866_787_4232,
                      1_212_620_7300],
        "email"  => "info@adacore.com"],
      +["name"   => "European Office",
        "phones" => -[33_1_49_70_67_16,
                      33_1_49_70_05_52],
        "email"  => "info@adacore.com"]];
   ------------------------------------------------------------------
begin
   --  Equivalent old initialization code is too long to print it here
   null;
end Main;
```

Code block metadata

```
Project: Courses.Ada_2022_Whats_New.Container_Aggregates_4
MD5: a2770961eab00ee297fffa280cd9a481
```

The `Offices` variable is supposed to contain this value:

```
[{"name"  : "North American Office",
  "phones": [18777874628,
             18667874232,
             12126207300],
  "email" : "info@adacore.com"},
 {"name"  : "European Office",
  "phones": [33149706716,
             33149700552],
  "email" : "info@adacore.com"}]
```

58.1 References

- ARM 4.3.5 Container Aggregates[422]
- AI12-0212-1[423]

[422] http://www.ada-auth.org/standards/22aarm/html/AA-4-3-5.html
[423] http://www.ada-auth.org/cgi-bin/cvsweb.cgi/AI12s/AI12-0212-1.TXT

CHAPTER

FIFTYNINE

DELTA AGGREGATES

Note

Delta aggregates are supported by

- GNAT Community Edition 2019
- GCC 9

Sometimes you need to create a copy of an object, but with a few modifications. Before Ada 2022, doing this involves a dummy object declaration or an aggregate with associations for each property. The dummy object approach doesn't work in contract aspects or when there are limited components. On the other hand, re-listing properties in an large aggregate can be very tedious and error-prone. So, in Ada 2022, you can use a *delta aggregate* instead.

59.1 Delta aggregate for records

The delta aggregate for a record type looks like this:

```
type Vector is record
   X, Y, Z : Float;
end record;

Point_1 : constant Vector := (X => 1.0, Y => 2.0, Z => 3.0);

Projection_1 : constant Vector := (Point_1 with delta Z => 0.0);
```

The more components you have, the more you will like the delta aggregate.

59.2 Delta aggregate for arrays

You can also use delta aggregates for arrays to change elements, but not bounds. Moreover, it only works for one-dimensional arrays of non-limited components.

```
type Vector_3D is array (1 .. 3) of Float;

Point_2 : constant Vector_3D := [1.0, 2.0, 3.0];
Projection_2 : constant Vector_3D := [Point_2 with delta 3 => 0.0];
```

You can use parentheses for array aggregates, but you can't use square brackets for record aggregates.

Here is the complete code snippet:

Listing 1: main.adb

```
with Ada.Text_IO;

procedure Main is

   type Vector is record
      X, Y, Z : Float;
   end record;

   Point_1 : constant Vector := (X => 1.0, Y => 2.0, Z => 3.0);
   Projection_1 : constant Vector := (Point_1 with delta Z => 0.0);

   type Vector_3D is array (1 .. 3) of Float;

   Point_2 : constant Vector_3D := [1.0, 2.0, 3.0];
   Projection_2 : constant Vector_3D := [Point_2 with delta 3 => 0.0];
begin
   Ada.Text_IO.Put (Float'Image (Projection_1.X));
   Ada.Text_IO.Put (Float'Image (Projection_1.Y));
   Ada.Text_IO.Put (Float'Image (Projection_1.Z));
   Ada.Text_IO.New_Line;
   Ada.Text_IO.Put (Float'Image (Projection_2 (1)));
   Ada.Text_IO.Put (Float'Image (Projection_2 (2)));
   Ada.Text_IO.Put (Float'Image (Projection_2 (3)));
   Ada.Text_IO.New_Line;
end Main;
```

59.3 References

- ARM 4.3.4 Delta Aggregates[424]
- AI12-0127-1[425]

[424] http://www.ada-auth.org/standards/22aarm/html/AA-4-3-4.html
[425] http://www.ada-auth.org/cgi-bin/cvsweb.cgi/AI12s/AI12-0127-1.TXT

CHAPTER

SIXTY

TARGET NAME SYMBOL (@)

Note

Target name symbol is supported by

- GNAT Community Edition 2019
- GCC 9

Ada 2022 introduces a new symbol, `@`, which can only appear on the right hand side of an assignment statement. This symbol acts as the equivalent of the name on the left hand side of that assignment statement. It was introduced to avoid code duplication: instead of retyping a (potentially long) name, you can use `@`. This symbol denotes a constant, so you can't pass it into [`in`] `out` arguments of a subprogram.

As an example, let's calculate some statistics for `My_Data` array:

Listing 1: statistics.ads

```
package Statistics is

   type Statistic is record
      Count : Natural := 0;
      Total : Float := 0.0;
   end record;

   My_Data : array (1 .. 5) of Float := [for J in 1 .. 5 => Float (J)];

   Statistic_For_My_Data : Statistic;

end Statistics;
```

Code block metadata

```
Project: Courses.Ada_2022_Whats_New.Assignment_Tagged_Intro
MD5: 8ca75d894ed8ddbdb459aee0ce0c427d
```

To do this, we loop over `My_Data` elements:

Listing 2: main.adb

```
with Ada.Text_IO;

procedure Main is

   type Statistic is record
      Count : Natural := 0;
      Total : Float := 0.0;
```

(continues on next page)

(continued from previous page)

```
   end record;

   My_Data : constant array (1 .. 5) of Float :=
     [for J in 1 .. 5 => Float (J)];

   Statistic_For_My_Data : Statistic;

begin
   for Data of My_Data loop
      Statistic_For_My_Data.Count := @ + 1;
      Statistic_For_My_Data.Total := @ + Data;
   end loop;

   Ada.Text_IO.Put_Line (Statistic_For_My_Data'Image);
end Main;
```

Code block metadata

```
Project: Courses.Ada_2022_Whats_New.Assignment_Tagged_2
MD5: b116e7a172d43547b227eb27fb994366
```

Runtime output

```
(COUNT =>  5,
 TOTAL =>  1.50000E+01)
```

Each right hand side is evaluated only once, no matter how many @ symbols it contains. Let's verify this by introducing a function call that prints a line each time it's called:

Listing 3: main.adb

```
with Ada.Text_IO;

procedure Main is

   My_Data : array (1 .. 5) of Float := [for J in 1 .. 5 => Float (J)];

   function To_Index (Value : Positive) return Positive is
   begin
      Ada.Text_IO.Put_Line ("To_Index is called.");
      return Value;
   end To_Index;

begin
   My_Data (To_Index (1)) := @ ** 2 - 3.0 * @;
   Ada.Text_IO.Put_Line (My_Data'Image);
end Main;
```

Code block metadata

```
Project: Courses.Ada_2022_Whats_New.Assignment_Tagged_3
MD5: ed946d4e1b90df28fbd358d17033279d
```

Runtime output

```
To_Index is called.

[-2.00000E+00,  2.00000E+00,  3.00000E+00,  4.00000E+00,  5.00000E+00]
```

This use of @ may look a bit cryptic, but it's the best solution that was found. Unlike other languages (e.g., `sum += x;` in C), this approach lets you use @ an arbitrary number of times

within the right hand side of an assignment statement.

60.1 Alternatives

In C++, the previous statement could be written with a reference type (one line longer!):

```
auto& a = my_data[to_index(1)];
a = a * a - 3.0 * a;
```

In Ada 2022, you can use a similar renaming:

```
declare
   A renames My_Data (To_Index (1));
begin
   A := A ** 2 - 3.0 * A;
end;
```

Here we use a new short form of the rename declaration, but this still looks too heavy, and even worse, it can't be used for discriminant-dependent components.

60.2 References

- ARM 5.2.1 Target Name Symbols[426]
- AI12-0125-3[427]

[426] http://www.ada-auth.org/standards/22aarm/html/AA-5-2-1.html
[427] http://www.ada-auth.org/cgi-bin/cvsweb.cgi/AI12s/AI12-0125-3.TXT

CHAPTER

SIXTYONE

ENUMERATION REPRESENTATION

Note

Enumeration representation attributes are supported by

- GNAT Community Edition 2019
- GCC 9

Enumeration types in Ada are represented as integers at the machine level. But there are actually two mappings from enumeration to integer: a literal position and a representation value.

61.1 Literal positions

Each enumeration literal has a corresponding position in the type declaration. We can easily obtain it from the `Type'Pos (Enum)` attribute.

Listing 1: main.adb

```
with Ada.Text_IO;
with Ada.Integer_Text_IO;

procedure Main is
begin
   Ada.Text_IO.Put ("Pos(False) =");
   Ada.Integer_Text_IO.Put (Boolean'Pos (False));
   Ada.Text_IO.New_Line;
   Ada.Text_IO.Put ("Pos(True)  =");
   Ada.Integer_Text_IO.Put (Boolean'Pos (True));
end Main;
```

Code block metadata

```
Project: Courses.Ada_2022_Whats_New.Enum_Val.Pos
MD5: de7c39f83f7df231dd648606579996a8
```

Runtime output

```
Pos(False) =           0
Pos(True)  =           1
```

For the reverse mapping, we use `Type'Val (Int)`:

Listing 2: main.adb

```
with Ada.Text_IO;

procedure Main is
begin
   Ada.Text_IO.Put_Line (Boolean'Val (0)'Image);
   Ada.Text_IO.Put_Line (Boolean'Val (1)'Image);
end Main;
```

Code block metadata

```
Project: Courses.Ada_2022_Whats_New.Enum_Val.Val
MD5: 43f712d25552970bccc4c0c84089d927
```

Runtime output

```
FALSE
TRUE
```

61.2 Representation values

The representation value defines the *internal* code, used to store enumeration values in memory or CPU registers. By default, enumeration representation values are the same as the corresponding literal positions, but you can redefine them. Here, we created a copy of **Boolean** type and assigned it a custom representation.

In Ada 2022, we can get an integer value of the representation with **Type**'Enum_Rep(Enum) attribute:

Listing 3: main.adb

```
with Ada.Text_IO;
with Ada.Integer_Text_IO;

procedure Main is
   type My_Boolean is new Boolean;
   for My_Boolean use (False => 3, True => 6);
begin
   Ada.Text_IO.Put ("Enum_Rep(False) =");
   Ada.Integer_Text_IO.Put (My_Boolean'Enum_Rep (False));
   Ada.Text_IO.New_Line;
   Ada.Text_IO.Put ("Enum_Rep(True)  =");
   Ada.Integer_Text_IO.Put (My_Boolean'Enum_Rep (True));
end Main;
```

Code block metadata

```
Project: Courses.Ada_2022_Whats_New.Enum_Val.Enum_Rep
MD5: 384ad9de7124c8131aa83ab71da58964
```

Runtime output

```
Enum_Rep(False) =          3
Enum_Rep(True)  =          6
```

And, for the reverse mapping, we can use **Type**'Enum_Val (Int):

Listing 4: main.adb

```
with Ada.Text_IO;
with Ada.Integer_Text_IO;

procedure Main is
   type My_Boolean is new Boolean;
   for My_Boolean use (False => 3, True => 6);
begin
   Ada.Text_IO.Put_Line (My_Boolean'Enum_Val (3)'Image);
   Ada.Text_IO.Put_Line (My_Boolean'Enum_Val (6)'Image);

   Ada.Text_IO.Put ("Pos(False) =");
   Ada.Integer_Text_IO.Put (My_Boolean'Pos (False));
   Ada.Text_IO.New_Line;
   Ada.Text_IO.Put ("Pos(True)  =");
   Ada.Integer_Text_IO.Put (My_Boolean'Pos (True));
end Main;
```

Code block metadata

```
Project: Courses.Ada_2022_Whats_New.Enum_Val.Enum_Val
MD5: 6e06202472d4cf0ea7c68461ac7afcb1
```

Runtime output

```
FALSE
TRUE
Pos(False) =          0
Pos(True)  =          1
```

Note that the `'Val(X)/'Pos(X)` behaviour still is the same.

Custom representations can be useful for integration with a low level protocol or hardware.

61.3 Before Ada 2022

This doesn't initially look like an important feature, but let's see how we'd do the equivalent with Ada 2012 and earlier versions. First, we need an integer type of matching size, then we instantiate `Ada.Unchecked_Conversion`. Next, we call `To_Int/From_Int` to work with representation values. And finally an extra type conversion is needed:

Listing 5: main.adb

```
with Ada.Text_IO;
with Ada.Integer_Text_IO;
with Ada.Unchecked_Conversion;

procedure Main is

   type My_Boolean is new Boolean;
   for My_Boolean use (False => 3, True => 6);
   type My_Boolean_Int is range 3 .. 6;
   for My_Boolean_Int'Size use My_Boolean'Size;

   function To_Int is new Ada.Unchecked_Conversion
     (My_Boolean, My_Boolean_Int);

   function From_Int is new Ada.Unchecked_Conversion
     (My_Boolean_Int, My_Boolean);
```

(continues on next page)

(continued from previous page)

```
17
18 begin
19    Ada.Text_IO.Put ("To_Int(False) =");
20    Ada.Integer_Text_IO.Put (Integer (To_Int (False)));
21    Ada.Text_IO.New_Line;
22    Ada.Text_IO.Put ("To_Int(True)  =");
23    Ada.Integer_Text_IO.Put (Integer (To_Int (True)));
24    Ada.Text_IO.New_Line;
25    Ada.Text_IO.Put ("From_Int (3)  =");
26    Ada.Text_IO.Put_Line (From_Int (3)'Image);
27    Ada.Text_IO.New_Line;
28    Ada.Text_IO.Put ("From_Int (6)  =");
29    Ada.Text_IO.Put_Line (From_Int (6)'Image);
30 end Main;
```

Code block metadata

```
Project: Courses.Ada_2022_Whats_New.Enum_Val.Conv
MD5: 7c7624ed024b26036389f77dbd6cb109
```

Runtime output

```
To_Int(False) =          3
To_Int(True)  =          6
From_Int (3)  =FALSE

From_Int (6)  =TRUE
```

Even with all that, this solution doesn't work for generic formal type (because `T'Size` must be a static value)!

We should note that these new attributes may already be familiar to GNAT users because they've been in the GNAT compiler for many years.

61.4 References

- ARM 13.4 Enumeration Representation Clauses[428]
- AI12-0237-1[429]

[428] http://www.ada-auth.org/standards/22aarm/html/AA-13-4.html
[429] http://www.ada-auth.org/cgi-bin/cvsweb.cgi/AI12s/AI12-0237-1.TXT

CHAPTER

SIXTYTWO

BIG NUMBERS

Note

Big numbers are supported by

- GNAT Community Edition 2020
- GCC 11
- GCC 10 (draft, no user defined literals)

Ada 2022 introduces big integers and big real types.

62.1 Big Integers

The package `Ada.Numerics.Big_Numbers.Big_Integers` contains a type `Big_Integer` and corresponding operations such as comparison (`=`, `<`, `>`, `<=`, `>=`), arithmetic (`+`, `-`, `*`, `/`, `rem`, `mod`, `abs`, `**`), `Min`, `Max` and `Greatest_Common_Divisor`. The type also has `Integer_Literal` and `Put_Image` aspects redefined, so you can use it in a natural manner.

```
Ada.Text_IO.Put_Line (Big_Integer'Image(2 ** 256));
```

```
115792089237316195423570985008687907853269984665640564039457584007913129639936
```

62.2 Tiny RSA implementation

Note

Note that you shouldn't use `Big_Numbers` for cryptography because it's vulnerable to timing side-channels attacks.

We can implement the RSA algorithm[430] in a few lines of code. The main operation of RSA is (m^d) mod n. But you can't just write `m ** d`, because these are really big numbers and the result won't fit into memory. However, if you keep intermediate result `mod n` during the m^d calculation, it will work. Let's write this operation as a function:

Listing 1: power_mod.ads

```
1 with Ada.Numerics.Big_Numbers.Big_Integers;
2 use  Ada.Numerics.Big_Numbers.Big_Integers;
```

(continues on next page)

[430] https://en.wikipedia.org/wiki/RSA_(cryptosystem)

(continued from previous page)

```
3
4  --  Calculate M ** D mod N
5
6  function Power_Mod (M, D, N : Big_Integer) return Big_Integer;
```

Listing 2: power_mod.adb

```
1  function Power_Mod (M, D, N : Big_Integer) return Big_Integer is
2
3     function Is_Odd (X : Big_Integer) return Boolean is
4       (X mod 2 /= 0);
5
6     Result : Big_Integer := 1;
7     Exp    : Big_Integer := D;
8     Mult   : Big_Integer := M mod N;
9  begin
10    while Exp /= 0 loop
11       --  Loop invariant is Power_Mod'Result = Result * Mult**Exp mod N
12       if Is_Odd (Exp) then
13          Result := (Result * Mult) mod N;
14       end if;
15
16       Mult := Mult ** 2 mod N;
17       Exp := Exp / 2;
18    end loop;
19
20    return Result;
21 end Power_Mod;
```

Code block metadata

```
Project: Courses.Ada_2022_Whats_New.Big_Integers
MD5: 8ade78366bf7c98090ae32f9a9830cf9
```

Let's check this with the example from Wikipedia[431]. In that example, the *public key* is (n = 3233, e = 17) and the message is m = 65. The encrypted message is m^e mod n = 65^{17} mod 3233 = 2790 = c.

```
Ada.Text_IO.Put_Line (Power_Mod (M => 65, D => 17, N => 3233)'Image);
```

```
2790
```

To decrypt it with the public key (n = 3233, d = 413), we need to calculate c^d mod n = 2790^{413} mod 3233:

```
Ada.Text_IO.Put_Line (Power_Mod (M => 2790, D => 413, N => 3233)'Image);
```

```
65
```

So 65 is the original message m. Easy!

Here is the complete code snippet:

Listing 3: main.adb

```
1  with Ada.Text_IO;
2  with Ada.Numerics.Big_Numbers.Big_Integers;
3  use  Ada.Numerics.Big_Numbers.Big_Integers;
```

(continues on next page)

[431] https://en.wikipedia.org/wiki/RSA_(cryptosystem)

(continued from previous page)

```
4
5  procedure Main is
6
7     --  Calculate M ** D mod N
8
9     function Power_Mod (M, D, N : Big_Integer) return Big_Integer is
10
11       function Is_Odd (X : Big_Integer) return Boolean is
12         (X mod 2 /= 0);
13
14          Result : Big_Integer := 1;
15          Exp    : Big_Integer := D;
16          Mult   : Big_Integer := M mod N;
17    begin
18       while Exp /= 0 loop
19          --  Loop invariant is Power_Mod'Result = Result * Mult**Exp mod N
20          if Is_Odd (Exp) then
21             Result := (Result * Mult) mod N;
22          end if;
23
24          Mult := Mult ** 2 mod N;
25          Exp := Exp / 2;
26       end loop;
27
28       return Result;
29    end Power_Mod;
30
31 begin
32    Ada.Text_IO.Put_Line (Big_Integer'Image (2 ** 256));
33    --  Encrypt:
34    Ada.Text_IO.Put_Line (Power_Mod (M => 65, D => 17, N => 3233)'Image);
35    --  Decrypt:
36    Ada.Text_IO.Put_Line (Power_Mod (M => 2790, D => 413, N => 3233)'Image);
37 end Main;
```

Code block metadata

```
Project: Courses.Ada_2022_Whats_New.Big_Numbers_Tiny_RSA
MD5: 298c4a82ceafba9654d41b3a9762927d
```

Runtime output

```
 115792089237316195423570985008687907853269984665640564039457584007913129639936
 2790
 65
```

62.3 Big Reals

In addition to Big_Integer, Ada 2022 provides Big Reals[432].

62.4 References

- ARM A.5.6 Big Integers[433]
- ARM A.5.7 Big Reals[434]

[432] http://www.ada-auth.org/standards/22aarm/html/AA-A-5-7.html
[433] http://www.ada-auth.org/standards/22aarm/html/AA-A-5-6.html
[434] http://www.ada-auth.org/standards/22aarm/html/AA-A-5-7.html

- AI12-0208-1[435]

[435] http://www.ada-auth.org/cgi-bin/cvsweb.cgi/AI12s/AI12-0208-1.TXT

CHAPTER

SIXTYTHREE

INTERFACING C VARIADIC FUNCTIONS

Note

Variadic convention is supported by

- GNAT Community Edition 2020
- GCC 11

In C, variadic functions[436] take a variable number of arguments and an ellipsis as the last parameter of the declaration. A typical and well-known example is:

```
int printf (const char* format, ...);
```

Usually, in Ada, we bind such a function with just the parameters we want to use:

```
procedure printf_double
  (format : Interfaces.C.char_array;
   value  : Interfaces.C.double)
     with Import,
       Convention    => C,
       External_Name => "printf";
```

Then we call it as a normal Ada function:

```
printf_double (Interfaces.C.To_C ("Pi=%f"), Ada.Numerics.π);
```

Unfortunately, doing it this way doesn't always work because some ABI[437]s use different calling conventions for variadic functions. For example, the AMD64 ABI[438] specifies:

- `%rax` — with variable arguments passes information about the number of vector registers used;
- `%xmm0–%xmm1` — used to pass and return floating point arguments.

This means, if we write (in C):

```
printf("%d", 5);
```

The compiler will place 0 into `%rax`, because we don't pass any float argument. But in Ada, if we write:

```
procedure printf_int
  (format : Interfaces.C.char_array;
   value  : Interfaces.C.int)
```

(continues on next page)

[436] https://en.cppreference.com/w/c/variadic
[437] https://en.wikipedia.org/wiki/Application_binary_interface
[438] https://software.intel.com/sites/default/files/article/402129/mpx-linux64-abi.pdf

(continued from previous page)

```
     with Import,
       Convention    => C,
       External_Name => "printf";

printf_int (Interfaces.C.To_C ("d=%d"), 5);
```

the compiler won't use the %rax register at all. (You can't include any float argument because there's no float parameter in the Ada wrapper function declaration.) As result, you will get a crash, stack corruption, or other undefined behavior.

To fix this, Ada 2022 provides a new family of calling convention names — `C_Variadic_N`:

> The convention `C_Variadic_n` is the calling convention for a variadic C function taking *n* fixed parameters and then a variable number of additional parameters.

Therefore, the correct way to bind the `printf` function is:

```
procedure printf_int
  (format : Interfaces.C.char_array;
   value  : Interfaces.C.int)
     with Import,
       Convention    => C_Variadic_1,
       External_Name => "printf";
```

And the following call won't crash on any supported platform:

```
printf_int (Interfaces.C.To_C ("d=%d"), 5);
```

Without this convention, problems cause by this mismatch can be very hard to debug. So, this is a very useful extension to the Ada-to-C interfacing facility.

Here is the complete code snippet:

Listing 1: main.adb

```
1  with Interfaces.C;
2
3  procedure Main is
4
5     procedure printf_int
6       (format : Interfaces.C.char_array;
7        value  : Interfaces.C.int)
8       with Import,
9         Convention    => C_Variadic_1,
10        External_Name => "printf";
11
12 begin
13    printf_int (Interfaces.C.To_C ("d=%d"), 5);
14 end Main;
```

Code block metadata

```
Project: Courses.Ada_2022_Whats_New.Variadic_Import
MD5: 94515f55a93f27e4f4ecec31256645d9
```

63.1 References

- ARM B.3 Interfacing with C and C++[439]

[439] http://www.ada-auth.org/standards/22aarm/html/AA-B-3.html

- AI12-0028-1[440]

[440] http://www.ada-auth.org/cgi-bin/cvsweb.cgi/AI12s/AI12-0028-1.TXT

Part VII

Ada for the C++ or Java Developer

Copyright © 2013 – 2023, AdaCore

This book is published under a CC BY-SA license, which means that you can copy, redistribute, remix, transform, and build upon the content for any purpose, even commercially, as long as you give appropriate credit, provide a link to the license, and indicate if changes were made. If you remix, transform, or build upon the material, you must distribute your contributions under the same license as the original. You can find license details on this page[441]



This document will present the Ada language using terminology and examples that are familiar to developers that understand the C++ or Java languages.

This document was prepared by Quentin Ochem, with contributions and review from Richard Kenner, Albert Lee, and Ben Brosgol.

Note

The code examples in this course use an 80-column limit, which is a typical limit for Ada code. Note that, on devices with a small screen size, some code examples might be difficult to read.

Note

Each code example from this book has an associated "code block metadata", which contains the name of the "project" and an MD5 hash value. This information is used to identify a single code example.

You can find all code examples in a zip file, which you can download from the learn website[442]. The directory structure in the zip file is based on the code block metadata. For example, if you're searching for a code example with this metadata:

- Project: Courses.Intro_To_Ada.Imperative_Language.Greet
- MD5: cba89a34b87c9dfa71533d982d05e6ab

you will find it in this directory:

```
projects/Courses/Intro_To_Ada/Imperative_Language/Greet/
cba89a34b87c9dfa71533d982d05e6ab/
```

In order to use this code example, just follow these steps:

1. Unpack the zip file;
2. Go to target directory;
3. Start GNAT Studio on this directory;
4. Build (or compile) the project;
5. Run the application (if a main procedure is available in the project).

[441] http://creativecommons.org/licenses/by-sa/4.0
[442] https://learn.adacore.com/zip/learning-ada_code.zip

CHAPTER

SIXTYFOUR

PREFACE

Nowadays it seems like talking about programming languages is a bit passé. The technical wars of the past decade have subsided and today we see a variety of high-level and well-established languages offering functionality that can meet the needs of any programmer.

Python, Java, C++, C#, and Visual Basic are recent examples. Indeed, these languages make it easier to write code very quickly, are very flexible, offer features with highly dynamic behavior, and some even allow compilers to deduce the developer's probable intent.

Why, then, talk about yet another language? Well, by addressing the general programming market, the aforementioned languages have become poorly suited for working within the domain of high-integrity systems. In highly reliable, secure and safe applications such as those found in and around airplanes, rockets, satellites, trains, and in any device whose failure could jeopardize human life or critical assets, the programming languages used must support the high standard of software engineering necessary to maintain the integrity of the system.

The concept of verification — the practice of showing that the system behaves and performs as intended — is key in such environments. Verification can be accomplished by some combination of review, testing, static analysis, and formal proof techniques. The increasing reliance on software and increasing complexity of today's systems has made this task more difficult. Technologies and practices that might have been perfectly acceptable ten or fifteen years ago are insufficient today. Thankfully, the state of the art in analysis and proof tools and techniques has also advanced.

The latest revisions of the Ada language, Ada 2005 and Ada 2012, make enhanced software integrity possible. From its inception in the 1980s, Ada was designed to meet the requirements of high-integrity systems, and continues to be well-suited for the implementation of critical embedded or native applications. And it has been receiving increased attention recently. Every language revision has enhanced expressiveness in many areas. Ada 2012, in particular, has introduced new features for contract-based programming that are valuable to any project where verification is part of the engineering lifecycle. Along with these language enhancements, Ada compiler and tool technology has also kept pace with general computing developments over the past few years. Ada development environments are available on a wide range of platforms and are being used for the most demanding applications.

It is no secret that we at AdaCore are very enthusiastic about Ada, but we will not claim that Ada is always the solution; Ada is no more a silver bullet than any other language. In some domains other languages make sense because of the availability of particular libraries or development frameworks. For example, C++ and Java are considered good choices for desktop programs or applications where a shortened time to market is a major objective. Other areas, such as website programming or system administration, tend to rely on different formalisms such as scripting and interpreted languages. The key is to select the proper technical approach, in terms of the language and tools, to meet the requirements. Ada's strength is in areas where reliability is paramount.

Learning a new language shouldn't be complicated. Programming paradigms have not evolved much since object oriented programming gained a foothold, and the same

paradigms are present one way or another in many widely used languages. This document will thus give you an overview of the Ada language using analogies to C++ and Java — these are the languages you're already likely to know. No prior knowledge of Ada is assumed. If you are working on an Ada project now and need more background, if you are interested in learning to program in Ada, or if you need to perform an assessment of possible languages to be used for a new development, this guide is for you.

CHAPTER

SIXTYFIVE

BASICS

Ada implements the vast majority of programming concepts that you're accustomed to in C++ and Java: classes, inheritance, templates (generics), etc. Its syntax might seem peculiar, though. It's not derived from the popular C style of notation with its ample use of brackets; rather, it uses a more expository syntax coming from Pascal. In many ways, Ada is a simpler language — its syntax favors making it easier to conceptualize and read program code, rather than making it faster to write in a cleverly condensed manner. For example, full words like **begin** and **end** are used in place of curly braces. Conditions are written using **if**, **then**, **elsif**, **else**, and **end if**. Ada's assignment operator does not double as an expression, smoothly eliminating any frustration that could be caused by = being used where == should be.

All languages provide one or more ways to express comments. In Ada, two consecutive hyphens -- mark the start of a comment that continues to the end of the line. This is exactly the same as using // for comments in C++ and Java. There is no equivalent of /* ... */ block comments in Ada; use multiple -- lines instead.

Ada compilers are stricter with type and range checking than most C++ and Java programmers are used to. Most beginning Ada programmers encounter a variety of warnings and error messages when coding more creatively, but this helps detect problems and vulnerabilities at compile time — early on in the development cycle. In addition, dynamic checks (such as array bounds checks) provide verification that could not be done at compile time. Dynamic checks are performed at run time, similar to what is done in Java.

Ada identifiers and reserved words are case insensitive. The identifiers VAR, var and VaR are treated as the same; likewise **begin**, **BEGIN**, **Begin**, etc. Language-specific characters, such as accents, Greek or Russian letters, and Asian alphabets, are acceptable to use. Identifiers may include letters, digits, and underscores, but must always start with a letter. There are 73 reserved keywords in Ada that may not be used as identifiers, and these are:

abort	else	null	select
abs	elsif	of	separate
abstract	end	or	some
accept	entry	others	subtype
access	exception	out	synchronized
aliased	exit	overriding	tagged
all	for	package	task
and	function	pragma	terminate
array	generic	private	then
at	goto	procedure	type
begin	if	protected	until
body	in	raise	use
case	interface	range	when
constant	is	record	while
declare	limited	rem	with
delay	loop	renames	xor
delta	mod	requeue	
digits	new	return	
do	not	reverse	

Ada is designed to be portable. Ada compilers must follow a precisely defined international (ISO) standard language specification with clearly documented areas of vendor freedom where the behavior depends on the implementation. It's possible, then, to write an implementation-independent application in Ada and to make sure it will have the same effect across platforms and compilers.

Ada is truly a general purpose, multiple paradigm language that allows the programmer to employ or avoid features like run-time contract checking, tasking, object oriented programming, and generics. Efficiently programmed Ada is employed in device drivers, interrupt handlers, and other low-level functions. It may be found today in devices with tight limits on processing speed, memory, and power consumption. But the language is also used for programming larger interconnected systems running on workstations, servers, and supercomputers.

CHAPTER

SIXTYSIX

COMPILATION UNIT STRUCTURE

C++ programming style usually promotes the use of two distinct files: header files used to define specifications (.h*, *.hxx*, *.hpp*), and implementation files which contain the executable code (*.c*, *.cxx*, *.cpp*). However, the distinction between specification and implementation is not enforced by the compiler and may need to be worked around in order to implement, for example, inlining or templates.

Java compilers expect both the implementation and specification to be in the same *.java* file. (Yes, design patterns allow using interfaces to separate specification from implementation to a certain extent, but this is outside of the scope of this description.)

Ada is superficially similar to the C++ case: Ada compilation units are generally split into two parts, the specification and the body. However, what goes into those files is more predictable for both the compiler and for the programmer. With GNAT, compilation units are stored in files with a *.ads* extension for specifications and with a *.adb* extension for implementations.

Without further ado, we present the famous "Hello World" in three languages:

[Ada]

```ada
with Ada.Text_IO;
use  Ada.Text_IO;

procedure Main is
begin
   Put_Line ("Hello World");
end Main;
```

[C++]

```cpp
#include <iostream>
using namespace std;

int main(int argc, const char* argv[]) {
   cout << "Hello World" << endl;
}
```

[Java]

```java
public class Main {
   public static void main(String [] argv) {
      System.out.println ("Hello World");
   }
}
```

The first line of Ada we see is the **with** clause, declaring that the unit (in this case, the Main subprogram) will require the services of the package `Ada.Text_IO`. This is different from how *#include* works in C++ in that it does not, in a logical sense, copy/paste the code of `Ada.Text_IO` into `Main`. The **with** clause directs the compiler to make the public

interface of the Ada.Text_IO package visible to code in the unit (here Main) containing the **with** clause. Note that this construct does not have a direct analog in Java, where the entire CLASSPATH is always accessible. Also, the name Main for the main subprogram was chosen for consistency with C++ and Java style but in Ada the name can be whatever the programmer chooses.

The **use** clause is the equivalent of **using namespace** in C++, or **import** in Java (though it wasn't necessary to use **import** in the Java example above). It allows you to omit the full package name when referring to **with**'ed units. Without the **use** clause, any reference to Ada.Text_IO items would have had to be fully qualified with the package name. The Put_Line line would then have read:

```
Ada.Text_IO.Put_Line ("Hello World");
```

The word "package" has different meanings in Ada and Java. In Java, a package is used as a namespace for classes. In Ada, it's often a compilation unit. As a result Ada tends to have many more packages than Java. Ada package specifications ("package specs" for short) have the following structure:

```
package Package_Name is

   -- public declarations

private

   -- private declarations

end Package_Name;
```

The implementation in a package body (written in a *.adb* file) has the structure:

```
package body Package_Name is

   -- implementation

end Package_Name;
```

The **private** reserved word is used to mark the start of the private portion of a package spec. By splitting the package spec into private and public parts, it is possible to make an entity available for use while hiding its implementation. For instance, a common use is declaring a **record** (Ada's **struct**) whose fields are only visible to its package and not to the caller. This allows the caller to refer to objects of that type, but not to change any of its contents directly.

The package body contains implementation code, and is only accessible to outside code through declarations in the package spec.

An entity declared in the private part of a package in Ada is roughly equivalent to a protected member of a C++ or Java class. An entity declared in the body of an Ada package is roughly equivalent to a private member of a C++ or Java class.

CHAPTER

SIXTYSEVEN

STATEMENTS, DECLARATIONS, AND CONTROL STRUCTURES

67.1 Statements and Declarations

The following code samples are all equivalent, and illustrate the use of comments and working with integer variables:

[Ada]

```
--
--  Ada program to declare and modify Integers
--
procedure Main is
   --  Variable declarations
   A, B : Integer := 0;
   C    : Integer := 100;
   D    : Integer;
begin
   --  Ada uses a regular assignment statement for incrementation.
   A := A + 1;

   --  Regular addition
   D := A + B + C;
end Main;
```

[C++]

```
/*
 *  C++ program to declare and modify ints
 */
int main(int argc, const char* argv[]) {
   //  Variable declarations
   int a = 0, b = 0, c = 100, d;

   //  C++ shorthand for incrementation
   a++;

   //  Regular addition
   d = a + b + c;
}
```

[Java]

```
/*
 *  Java program to declare and modify ints
 */
public class Main {
   public static void main(String [] argv) {
```

(continues on next page)

(continued from previous page)

```
      //  Variable declarations
      int a = 0, b = 0, c = 100, d;

      //  Java shorthand for incrementation
      a++;

      //  Regular addition
      d = a + b + c;
   }
}
```

Statements are terminated by semicolons in all three languages. In Ada, blocks of code are surrounded by the reserved words **begin** and **end** rather than by curly braces. We can use both multi-line and single-line comment styles in the C++ and Java code, and only single-line comments in the Ada code.

Ada requires variable declarations to be made in a specific area called the *declarative part*, seen here before the **begin** keyword. Variable declarations start with the identifier in Ada, as opposed to starting with the type as in C++ and Java (also note Ada's use of the `:` separator). Specifying initializers is different as well: in Ada an initialization expression can apply to multiple variables (but will be evaluated separately for each), whereas in C++ and Java each variable is initialized individually. In all three languages, if you use a function as an initializer and that function returns different values on every invocation, each variable will get initialized to a different value.

Let's move on to the imperative statements. Ada does not provide `++` or `--` shorthand expressions for increment/decrement operations; it is necessary to use a full assignment statement. The `:=` symbol is used in Ada to perform value assignment. Unlike C++'s and Java's `=` symbol, `:=` can not be used as part of an expression. So, a statement like `A := B := C;` doesn't make sense to an Ada compiler, and neither does a clause like **if** `A := B` **then** `...`. Both are compile-time errors.

You can nest a block of code within an outer block if you want to create an inner scope:

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is
begin
   Put_Line ("Before the inner block");

   declare
      Alpha : Integer := 0;
   begin
      Alpha := Alpha + 1;
      Put_Line ("Now inside the inner block");
   end;

   Put_Line ("After the inner block");
end Main;
```

It is OK to have an empty declarative part or to omit the declarative part entirely — just start the inner block with **begin** if you have no declarations to make. However it is not OK to have an empty sequence of statements. You must at least provide a **null**; statement, which does nothing and indicates that the omission of statements is intentional.

67.2 Conditions

The use of the **if** statement:

[Ada]

```
if Variable > 0 then
   Put_Line (" > 0 ");
elsif Variable < 0 then
   Put_Line (" < 0 ");
else
   Put_Line (" = 0 ");
end if;
```

[C++]

```
if (Variable > 0)
   cout << " > 0 " << endl;
else if (Variable < 0)
   cout << " < 0 " << endl;
else
   cout << " = 0 " << endl;
```

[Java]

```
if (Variable > 0)
   System.out.println (" > 0 ");
else if (Variable < 0)
   System.out.println (" < 0 ");
else
   System.out.println (" = 0 ");
```

In Ada, everything that appears between the **if** and **then** keywords is the conditional expression — no parentheses required. Comparison operators are the same, except for equality (=) and inequality (/=). The English words **not**, **and**, and **or** replace the symbols !, &, and |, respectively, for performing boolean operations.

It's more customary to use && and || in C++ and Java than & and | when writing boolean expressions. The difference is that && and || are short-circuit operators, which evaluate terms only as necessary, and & and | will unconditionally evaluate all terms. In Ada, **and** and **or** will evaluate all terms; **and then** and **or else** direct the compiler to employ short circuit evaluation.

Here are what switch/case statements look like:

[Ada]

```
case Variable is
   when 0 =>
      Put_Line ("Zero");
   when 1 .. 9 =>
      Put_Line ("Positive Digit");
   when 10 | 12 | 14 | 16 | 18 =>
      Put_Line ("Even Number between 10 and 18");
   when others =>
      Put_Line ("Something else");
end case;
```

[C++]

```
switch (Variable) {
   case 0:
```

(continues on next page)

(continued from previous page)

```
      cout << "Zero" << endl;
      break;
   case 1: case 2: case 3: case 4: case 5:
   case 6: case 7: case 8: case 9:
      cout << "Positive Digit" << endl;
      break;
   case 10: case 12: case 14: case 16: case 18:
      cout << "Even Number between 10 and 18" << endl;
      break;
   default:
      cout << "Something else";
}
```

[Java]

```
switch (Variable) {
   case 0:
      System.out.println ("Zero");
      break;
   case 1: case 2: case 3: case 4: case 5:
   case 6: case 7: case 8: case 9:
      System.out.println ("Positive Digit");
      break;
   case 10: case 12: case 14: case 16: case 18:
      System.out.println ("Even Number between 10 and 18");
      break;
   default:
      System.out.println ("Something else");
}
```

In Ada, the **case** and **end case** lines surround the whole case statement, and each case starts with **when**. So, when programming in Ada, replace **switch** with **case**, and replace **case** with **when**.

Case statements in Ada require the use of discrete types (integers or enumeration types), and require all possible cases to be covered by **when** statements. If not all the cases are handled, or if duplicate cases exist, the program will not compile. The default case, **default:** in C++ and Java, can be specified using **when others** => in Ada.

In Ada, the **break** instruction is implicit and program execution will never fall through to subsequent cases. In order to combine cases, you can specify ranges using `..` and enumerate disjoint values using | which neatly replaces the multiple **case** statements seen in the C++ and Java versions.

67.3 Loops

In Ada, loops always start with the **loop** reserved word and end with **end loop**. To leave the loop, use **exit** — the C++ and Java equivalent being **break**. This statement can specify a terminating condition using the **exit when** syntax. The **loop** opening the block can be preceded by a **while** or a **for**.

The **while** loop is the simplest one, and is very similar across all three languages:

[Ada]

```
while Variable < 10_000 loop
   Variable := Variable * 2;
end loop;
```

[C++]

```
while (Variable < 10000) {
   Variable = Variable * 2;
}
```

[Java]

```
while (Variable < 10000) {
    Variable = Variable * 2;
}
```

Ada's **for** loop, however, is quite different from that in C++ and Java. It always increments or decrements a loop index within a discrete range. The loop index (or "loop parameter" in Ada parlance) is local to the scope of the loop and is implicitly incremented or decremented at each iteration of the loop statements; the program cannot directly modify its value. The type of the loop parameter is derived from the range. The range is always given in ascending order even if the loop iterates in descending order. If the starting bound is greater than the ending bound, the interval is considered to be empty and the loop contents will not be executed. To specify a loop iteration in decreasing order, use the **reverse** reserved word. Here are examples of loops going in both directions:

[Ada]

```
--  Outputs 0, 1, 2, ..., 9
for Variable in 0 .. 9 loop
   Put_Line (Integer'Image (Variable));
end loop;

--  Outputs 9, 8, 7, ..., 0
for Variable in reverse 0 .. 9 loop
   Put_Line (Integer'Image (Variable));
end loop;
```

[C++]

```
//  Outputs 0, 1, 2, ..., 9
for (int Variable = 0; Variable <= 9; Variable++) {
   cout << Variable << endl;
}

//  Outputs 9, 8, 7, ..., 0
for (int Variable = 9; Variable >=0; Variable--) {
   cout << Variable << endl;
}
```

[Java]

```
//  Outputs 0, 1, 2, ..., 9
for (int Variable = 0; Variable <= 9; Variable++) {
   System.out.println (Variable);
}

//  Outputs 9, 8, 7, ..., 0
for (int Variable = 9; Variable >= 0; Variable--) {
   System.out.println (Variable);
}
```

Ada uses the **Integer** type's 'Image attribute to convert a numerical value to a String. There is no implicit conversion between **Integer** and **String** as there is in C++ and Java. We'll have a more in-depth look at such attributes later on.

It's easy to express iteration over the contents of a container (for instance, an array, a list, or a map) in Ada and Java. For example, assuming that `Int_List` is defined as an array of

Integer values, you can use:

[Ada]

```
for I of Int_List loop
   Put_Line (Integer'Image (I));
end loop;
```

[Java]

```
for (int i : Int_List) {
   System.out.println (i);
}
```

CHAPTER

SIXTYEIGHT

TYPE SYSTEM

68.1 Strong Typing

One of the main characteristics of Ada is its strong typing (i.e., relative absence of implicit type conversions). This may take some getting used to. For example, you can't divide an integer by a float. You need to perform the division operation using values of the same type, so one value must be explicitly converted to match the type of the other (in this case the more likely conversion is from integer to float). Ada is designed to guarantee that what's done by the program is what's meant by the programmer, leaving as little room for compiler interpretation as possible. Let's have a look at the following example:

[Ada]

```ada
procedure Strong_Typing is
   Alpha  : Integer := 1;
   Beta   : Integer := 10;
   Result : Float;
begin
   Result := Float (Alpha) / Float (Beta);
end Strong_Typing;
```

[C++]

```cpp
void weakTyping () {
   int   alpha = 1;
   int   beta = 10;
   float result;

   result = alpha / beta;
}
```

[Java]

```java
void weakTyping () {
   int   alpha = 1;
   int   beta = 10;
   float result;

   result = alpha / beta;
}
```

Are the three programs above equivalent? It may seem like Ada is just adding extra complexity by forcing you to make the conversion from Integer to Float explicit. In fact it significantly changes the behavior of the computation. While the Ada code performs a floating point operation `1.0 / 10.0` and stores 0.1 in `Result`, the C++ and Java versions instead store 0.0 in `result`. This is because the C++ and Java versions perform an integer operation between two integer variables: `1 / 10` is `0`. The result of the integer division is then converted to a **`float`** and stored. Errors of this sort can be very hard to locate in complex

pieces of code, and systematic specification of how the operation should be interpreted helps to avoid this class of errors. If an integer division was actually intended in the Ada case, it is still necessary to explicitly convert the final result to **Float**:

```
-- Perform an Integer division then convert to Float
Result := Float (Alpha / Beta);
```

In Ada, a floating point literal must be written with both an integral and decimal part. `10` is not a valid literal for a floating point value, while `10.0` is.

68.2 Language-Defined Types

The principal scalar types predefined by Ada are **Integer**, **Float**, **Boolean**, and **Character**. These correspond to **int**, **float**, **bool**/**boolean**, and **char**, respectively. The names for these types are not reserved words; they are regular identifiers.

68.3 Application-Defined Types

Ada's type system encourages programmers to think about data at a high level of abstraction. The compiler will at times output a simple efficient machine instruction for a full line of source code (and some instructions can be eliminated entirely). The careful programmer's concern that the operation really makes sense in the real world would be satisfied, and so would the programmer's concern about performance.

The next example below defines two different metrics: area and distance. Mixing these two metrics must be done with great care, as certain operations do not make sense, like adding an area to a distance. Others require knowledge of the expected semantics; for example, multiplying two distances. To help avoid errors, Ada requires that each of the binary operators `+`, `-`, `*`, and `/` for integer and floating-point types take operands of the same type and return a value of that type.

```
procedure Main is
   type Distance is new Float;
   type Area is new Float;

   D1 : Distance := 2.0;
   D2 : Distance := 3.0;
   A  : Area;
begin
   D1 := D1 + D2;         -- OK
   D1 := D1 + A;          -- NOT OK: incompatible types for "+" operator
   A  := D1 * D2;         -- NOT OK: incompatible types for ":=" assignment
   A  := Area (D1 * D2); -- OK
end Main;
```

Even though the `Distance` and `Area` types above are just **Float**s, the compiler does not allow arbitrary mixing of values of these different types. An explicit conversion (which does not necessarily mean any additional object code) is necessary.

The predefined Ada rules are not perfect; they admit some problematic cases (for example multiplying two `Distances` yields a `Distance`) and prohibit some useful cases (for example multiplying two `Distances` should deliver an `Area`). These situations can be handled through other mechanisms. A predefined operation can be identified as **abstract** to make it unavailable; overloading can be used to give new interpretations to existing operator symbols, for example allowing an operator to return a value from a type different from its operands; and more generally, GNAT has introduced a facility that helps perform dimensionality checking.

Ada enumerations work similarly to C++ and Java's **enum**s.

[Ada]

```
type Day is
  (Monday,
   Tuesday,
   Wednesday,
   Thursday,
   Friday,
   Saturday,
   Sunday);
```

[C++]

```
enum Day {
   Monday,
   Tuesday,
   Wednesday,
   Thursday,
   Friday,
   Saturday,
   Sunday};
```

[Java]

```
enum Day {
   Monday,
   Tuesday,
   Wednesday,
   Thursday,
   Friday,
   Saturday,
   Sunday}
```

But even though such enumerations may be implemented using a machine word, at the language level Ada will not confuse the fact that Monday is a Day and is not an **Integer**. You can compare a Day with another Day, though. To specify implementation details like the numeric values that correspond with enumeration values in C++ you include them in the original **enum** statement:

[C++]

```
enum Day {
   Monday    = 10,
   Tuesday   = 11,
   Wednesday = 12,
   Thursday  = 13,
   Friday    = 14,
   Saturday  = 15,
   Sunday    = 16};
```

But in Ada you must use both a type definition for Day as well as a separate *representation clause* for it like:

[Ada]

```
for Day use
  (Monday    => 10,
   Tuesday   => 11,
   Wednesday => 12,
   Thursday  => 13,
   Friday    => 14,
   Saturday  => 15,
   Sunday    => 16);
```

68.4 Type Ranges

Contracts can be associated with types and variables, to refine values and define what are considered valid values. The most common kind of contract is a *range constraint* introduced with the **range** reserved word, for example:

```
procedure Main is
   type Grade is range 0 .. 100;

   G1, G2  : Grade;
   N       : Integer;
begin
   ...                 -- Initialization of N
   G1 := 80;           -- OK
   G1 := N;            -- Illegal (type mismatch)
   G1 := Grade (N);    -- Legal, run-time range check
   G2 := G1 + 10;      -- Legal, run-time range check
   G1 := (G1 + G2)/2; -- Legal, run-time range check
end Main;
```

In the above example, Grade is a new integer type associated with a range check. Range checks are dynamic and are meant to enforce the property that no object of the given type can have a value outside the specified range. In this example, the first assignment to G1 is correct and will not raise a run-time exceprion. Assigning N to G1 is illegal since Grade is a different type than **Integer**. Converting N to Grade makes the assignment legal, and a range check on the conversion confirms that the value is within 0 .. 100. Assigning G1+10 to G2 is legal since + for Grade returns a Grade (note that the literal 10 is interpreted as a Grade value in this context), and again there is a range check.

The final assignment illustrates an interesting but subtle point. The subexpression G1 + G2 may be outside the range of Grade, but the final result will be in range. Nevertheless, depending on the representation chosen for Grade, the addition may overflow. If the compiler represents Grade values as signed 8-bit integers (i.e., machine numbers in the range -128 .. 127) then the sum G1+G2 may exceed 127, resulting in an integer overflow. To prevent this, you can use explicit conversions and perform the computation in a sufficiently large integer type, for example:

```
G1 := Grade ((Integer (G1) + Integer (G2)) / 2);
```

Range checks are useful for detecting errors as early as possible. However, there may be some impact on performance. Modern compilers do know how to remove redundant checks, and you can deactivate these checks altogether if you have sufficient confidence that your code will function correctly.

Types can be derived from the representation of any other type. The new derived type can be associated with new constraints and operations. Going back to the Day example, one can write:

```
type Business_Day is new Day range Monday .. Friday;
type Weekend_Day is new Day range Saturday .. Sunday;
```

Since these are new types, implicit conversions are not allowed. In this case, it's more natural to create a new set of constraints for the same type, instead of making completely new ones. This is the idea behind *subtypes* in Ada. A subtype is a type with optional additional constraints. For example:

```
subtype Business_Day is Day range Monday .. Friday;
subtype Weekend_Day is Day range Saturday .. Sunday;
subtype Dice_Throw is Integer range 1 .. 6;
```

These declarations don't create new types, just new names for constrained ranges of their

base types.

68.5 Generalized Type Contracts: Subtype Predicates

Range checks are a special form of type contracts; a more general method is provided by Ada subtype predicates, introduced in Ada 2012. A subtype predicate is a boolean expression defining conditions that are required for a given type or subtype. For example, the `Dice_Throw` subtype shown above can be defined in the following way:

```
subtype Dice_Throw is Integer
   with Dynamic_Predicate => Dice_Throw in 1 .. 6;
```

The clause beginning with **with** introduces an Ada *aspect*, which is additional information provided for declared entities such as types and subtypes. The `Dynamic_Predicate` aspect is the most general form. Within the predicate expression, the name of the (sub)type refers to the current value of the (sub)type. The predicate is checked on assignment, parameter passing, and in several other contexts. There is a `Static_Predicate` form which introduce some optimization and constrains on the form of these predicates, outside of the scope of this document.

Of course, predicates are useful beyond just expressing ranges. They can be used to represent types with arbitrary constraints, in particular types with discontinuities, for example:

```
type Not_Null is new Integer
   with Dynamic_Predicate => Not_Null /= 0;

type Even is new Integer
   with Dynamic_Predicate => Even mod 2 = 0;
```

68.6 Attributes

Attributes start with a single apostrophe ("tick"), and they allow you to query properties of, and perform certain actions on, declared entities such as types, objects, and subprograms. For example, you can determine the first and last bounds of scalar types, get the sizes of objects and types, and convert values to and from strings. This section provides an overview of how attributes work. For more information on the many attributes defined by the language, you can refer directly to the Ada Language Reference Manual.

The `'Image` and `'Value` attributes allow you to transform a scalar value into a **String** and vice-versa. For example:

```
declare
   A : Integer := 99;
begin
   Put_Line (Integer'Image (A));
   A := Integer'Value ("99");
end;
```

Certain attributes are provided only for certain kinds of types. For example, the `'Val` and `'Pos` attributes for an enumeration type associates a discrete value with its position among its peers. One circuitous way of moving to the next character of the ASCII table is:

[Ada]

```
declare
   C : Character := 'a';
begin
   C := Character'Val (Character'Pos (C) + 1);
end;
```

A more concise way to get the next value in Ada is to use the 'Succ attribute:

```
declare
   C : Character := 'a';
begin
   C := Character'Succ (C);
end;
```

You can get the previous value using the 'Pred attribute. Here is the equivalent in C++ and Java:

[C++]

```
char c = 'a';
c++;
```

[Java]

```
char c = 'a';
c++;
```

Other interesting examples are the 'First and 'Last attributes which, respectively, return the first and last values of a scalar type. Using 32-bit integers, for instance, Integer'First returns -2^{31} and Integer'Last returns $2^{31} - 1$.

68.7 Arrays and Strings

C++ arrays are pointers with offsets, but the same is not the case for Ada and Java. Arrays in the latter two languages are not interchangable with operations on pointers, and array types are considered first-class citizens. Arrays in Ada have dedicated semantics such as the availability of the array's boundaries at run-time. Therefore, unhandled array overflows are impossible unless checks are suppressed. Any discrete type can serve as an array index, and you can specify both the starting and ending bounds — the lower bound doesn't necessarily have to be 0. Most of the time, array types need to be explicitly declared prior to the declaration of an object of that array type.

Here's an example of declaring an array of 26 characters, initializing the values from 'a' to 'z':

[Ada]

```
declare
   type Arr_Type is array (Integer range <>) of Character;
   Arr : Arr_Type (1 .. 26);
   C : Character := 'a';
begin
   for I in Arr'Range loop
      Arr (I) := C;
      C := Character'Succ (C);
   end loop;
end;
```

[C++]

```
char Arr [26];
char C = 'a';

for (int I = 0; I < 26; ++I) {
   Arr [I] = C;
   C = C + 1;
}
```

[Java]

```
char [] Arr = new char [26];
char C = 'a';

for (int I = 0; I < Arr.length; ++I) {
   Arr [I] = C;
   C = C + 1;
}
```

In C++ and Java, only the size of the array is given during declaration. In Ada, array index ranges are specified using two values of a discrete type. In this example, the array type declaration specifies the use of Integer as the index type, but does not provide any constraints (use <>, pronounced *box*, to specify "no constraints"). The constraints are defined in the object declaration to be 1 to 26, inclusive. Arrays have an attribute called 'Range. In our example, Arr'Range can also be expressed as Arr'First .. Arr'Last; both expressions will resolve to 1 .. 26. So the 'Range attribute supplies the bounds for our **for** loop. There is no risk of stating either of the bounds incorrectly, as one might do in C++ where I <= 26 may be specified as the end-of-loop condition.

As in C++, Ada **String**s are arrays of **Character**s. The C++ or Java String class is the equivalent of the Ada type Ada.Strings.Unbounded_String which offers additional capabilities in exchange for some overhead. Ada strings, importantly, are not delimited with the special character '\0' like they are in C++. It is not necessary because Ada uses the array's bounds to determine where the string starts and stops.

Ada's predefined **String** type is very straighforward to use:

```
My_String : String (1 .. 26);
```

Unlike C++ and Java, Ada does not offer escape sequences such as '\n'. Instead, explicit values from the ASCII package must be concatenated (via the concatenation operator, &). Here for example, is how to initialize a line of text ending with a new line:

```
My_String : String := "This is a line with a end of line" & ASCII.LF;
```

You see here that no constraints are necessary for this variable definition. The initial value given allows the automatic determination of My_String's bounds.

Ada offers high-level operations for copying, slicing, and assigning values to arrays. We'll start with assignment. In C++ or Java, the assignment operator doesn't make a copy of the value of an array, but only copies the address or reference to the target variable. In Ada, the actual array contents are duplicated. To get the above behavior, actual pointer types would have to be defined and used.

[Ada]

```
declare
   type Arr_Type is array (Integer range <>) of Integer;
   A1 : Arr_Type (1 .. 2);
   A2 : Arr_Type (1 .. 2);
begin
   A1 (1) := 0;
   A1 (2) := 1;

   A2 := A1;
end;
```

[C++]

```
int A1 [2];
int A2 [2];
```

(continues on next page)

(continued from previous page)

```
A1 [0] = 0;
A1 [1] = 1;

for (int i = 0; i < 2; ++i) {
   A2 [i] = A1 [i];
}
```

[Java]

```
int [] A1 = new int [2];
int [] A2 = new int [2];

A1 [0] = 0;
A1 [1] = 1;

A2 = Arrays.copyOf(A1, A1.length);
```

In all of the examples above, the source and destination arrays must have precisely the same number of elements. Ada allows you to easily specify a portion, or slice, of an array. So you can write the following:

[Ada]

```
declare
   type Arr_Type is array (Integer range <>) of Integer;
   A1 : Arr_Type (1 .. 10);
   A2 : Arr_Type (1 .. 5);
begin
   A2 (1 .. 3) := A1 (4 .. 6);
end;
```

This assigns the 4th, 5th, and 6th elements of A1 into the 1st, 2nd, and 3rd elements of A2. Note that only the length matters here: the values of the indexes don't have to be equal; they slide automatically.

Ada also offers high level comparison operations which compare the contents of arrays as opposed to their addresses:

[Ada]

```
declare
   type Arr_Type is array (Integer range <>) of Integer;
   A1 : Arr_Type (1 .. 2);
   A2 : Arr_Type (1 .. 2);
begin
   if A1 = A2 then
```

[C++]

```
int A1 [2];
int A2 [2];

bool eq = true;

for (int i = 0; i < 2; ++i) {
   if (A1 [i] != A2 [i]) {
      eq = false;
   }
}

if (eq) {
```

[Java]

```
int [] A1 = new int [2];
int [] A2 = new int [2];

if (Arrays.equals (A1, A2)) {
```

You can assign to all the elements of an array in each language in different ways. In Ada, the number of elements to assign can be determined by looking at the right-hand side, the left-hand side, or both sides of the assignment. When bounds are known on the left-hand side, it's possible to use the **others** expression to define a default value for all the unspecified array elements. Therefore, you can write:

```
declare
   type Arr_Type is array (Integer range <>) of Integer;
   A1 : Arr_Type := (1, 2, 3, 4, 5, 6, 7, 8, 9);
   A2 : Arr_Type (-2 .. 42) := (others => 0);
begin
   A1 := (1, 2, 3, others => 10);

   -- use a slice to assign A2 elements 11 .. 19 to 1
   A2 (11 .. 19) := (others => 1);
end;
```

68.8 Heterogeneous Data Structures

In Ada, there's no distinction between **struct** and **class** as there is in C++. All heterogeneous data structures are **record**s. Here are some simple records:

[Ada]

```
declare
   type R is record
      A, B : Integer;
      C    : Float;
   end record;

   V : R;
begin
   V.A := 0;
end;
```

[C++]

```
struct R {
   int A, B;
   float C;
};

R V;
V.A = 0;
```

[Java]

```
class R {
   public int A, B;
   public float C;
}

R V = new R ();
V.A = 0;
```

Ada allows specification of default values for fields just like C++ and Java. The values specified can take the form of an ordered list of values, a named list of values, or an incomplete list followed by `others => <>` to specify that fields not listed will take their default values. For example:

```
type R is record
   A, B : Integer := 0;
   C    : Float := 0.0;
end record;

V1 : R := (1, 2, 1.0);
V2 : R := (A => 1, B => 2, C => 1.0);
V3 : R := (C => 1.0, A => 1, B => 2);
V4 : R := (C => 1.0, others => <>);
```

68.9 Pointers

Pointers, references, and access types differ in significant ways across the languages that we are examining. In C++, pointers are integral to a basic understanding of the language, from array manipulation to proper declaration and use of function parameters. In Java, direct pointer manipulation is abstracted by the Java runtime. And in Ada, direct pointer manipulation is possible, but unlike C++, they are not required for basic usage with arrays and parameter passing.

We'll continue this section by explaining the difference between objects allocated on the stack and objects allocated on the heap using the following example:

[Ada]

```
declare
   type R is record
      A, B : Integer;
   end record;

   V1, V2 : R;
begin
   V1.A := 0;
   V2 := V1;
   V2.A := 1;
end;
```

[C++]

```
struct R {
   int A, B;
};

R V1, V2;
V1.A = 0;
V2 = V1;
V2.A = 1;
```

[Java]

```
public class R {
   public int A, B;
}

R V1, V2;
V1 = new R ();
```

(continues on next page)

(continued from previous page)

```
V1.A = 0;
V2 = V1;
V2.A = 1;
```

There's a fundamental difference between the Ada and C++ semantics above and the semantics for Java. In Ada and C++, objects are allocated on the stack and are directly accessed. V1 and V2 are two different objects and the assignment statement copies the value of V1 into V2. In Java, V1 and V2 are two *references* to objects of class R. Note that when V1 and V2 are declared, no actual object of class R yet exists in memory: it has to be allocated later with the **new** allocator operator. After the assignment V2 = V1, there's only one R object in memory: the assignment is a reference assignment, not a value assignment. At the end of the Java code, V1 and V2 are two references to the same objects and the V2.A = 1 statement changes the field of that one object, while in the Ada and the C++ case V1 and V2 are two distinct objects.

To obtain similar behavior in Ada, you can use pointers. It can be done through Ada's *access type*:

[Ada]

```
declare
   type R is record
      A, B : Integer;
   end record;
   type R_Access is access R;

   V1 : R_Access;
   V2 : R_Access;
begin
   V1 := new R;
   V1.A := 0;
   V2 := V1;
   V2.A := 1;
end;
```

[C++]

```
struct R {
   int A, B;
};

R * V1, * V2;
V1 = new R ();
V1->A = 0;
V2 = V1;
V2->A = 0;
```

For those coming from the Java world: there's no garbage collector in Ada, so objects allocated by the **new** operator need to be expressly freed.

Dereferencing is performed automatically in certain situations, for instance when it is clear that the type required is the dereferenced object rather than the pointer itself, or when accessing record members via a pointer. To explicitly dereference an access variable, append **.all**. The equivalent of V1->A in C++ can be written either as V1.A or V1.**all**.A.

Pointers to scalar objects in Ada and C++ look like:

[Ada]

```
procedure Main is
   type A_Int is access Integer;
   Var : A_Int := new Integer;
```

(continues on next page)

(continued from previous page)

```
begin
   Var.all := 0;
end Main;
```

[C++]

```
int main (int argc, char *argv[]) {
  int * Var = new int;
  *Var = 0;
}
```

An initializer can be specified with the allocation by appending `'(value)`:

```
Var : A_Int := new Integer'(0);
```

When using Ada pointers to reference objects on the stack, the referenced objects must be declared as being **aliased**. This directs the compiler to implement the object using a memory region, rather than using registers or eliminating it entirely via optimization. The access type needs to be declared as either **access all** (if the referenced object needs to be assigned to) or **access constant** (if the referenced object is a constant). The `'Access` attribute works like the C++ `&` operator to get a pointer to the object, but with a "scope accessibility" check to prevent references to objects that have gone out of scope. For example:

[Ada]

```
type A_Int is access all Integer;
Var : aliased Integer;
Ptr : A_Int := Var'Access;
```

[C++]

```
int Var;
int * Ptr = &Var;
```

To deallocate objects from the heap in Ada, it is necessary to use a deallocation subprogram that accepts a specific access type. A generic procedure is provided that can be customized to fit your needs — it's called `Ada.Unchecked_Deallocation`. To create your customized deallocator (that is, to instantiate this generic), you must provide the object type as well as the access type as follows:

[Ada]

```
with Ada.Unchecked_Deallocation;
procedure Main is
   type Integer_Access is access all Integer;
   procedure Free is new Ada.Unchecked_Deallocation (Integer, Integer_Access);
   My_Pointer : Integer_Access := new Integer;
begin
   Free (My_Pointer);
end Main;
```

[C++]

```
int main (int argc, char *argv[]) {
  int * my_pointer = new int;
  delete my_pointer;
}
```

CHAPTER

SIXTYNINE

FUNCTIONS AND PROCEDURES

69.1 General Form

Subroutines in C++ and Java are always expressed as functions (methods) which may or may not return a value. Ada explicitly differentiates between functions and procedures. Functions must return a value and procedures must not. Ada uses the more general term "subprogram" to refer to both functions and procedures.

Parameters can be passed in three distinct modes: **in**, which is the default, is for input parameters, whose value is provided by the caller and cannot be changed by the subprogram. **out** is for output parameters, with no initial value, to be assigned by the subprogram and returned to the caller. **in out** is a parameter with an initial value provided by the caller, which can be modified by the subprogram and returned to the caller (more or less the equivalent of a non-constant reference in C++). Ada also provides **access** parameters, in effect an explicit pass-by-reference indicator.

In Ada the programmer specifies how the parameter will be used and in general the compiler decides how it will be passed (i.e., by copy or by reference). (There are some exceptions to the "in general". For example, parameters of scalar types are always passed by copy, for all three modes.) C++ has the programmer specify how to pass the parameter, and Java forces primitive type parameters to be passed by copy and all other parameters to be passed by reference. For this reason, a 1:1 mapping between Ada and Java isn't obvious but here's an attempt to show these differences:

[Ada]

```
procedure Proc
 (Var1 : Integer;
  Var2 : out Integer;
  Var3 : in out Integer);

function Func (Var : Integer) return Integer;

procedure Proc
 (Var1 : Integer;
  Var2 : out Integer;
  Var3 : in out Integer)
is
begin
   Var2 := Func (Var1);
   Var3 := Var3 + 1;
end Proc;

function Func (Var : Integer) return Integer
is
begin
   return Var + 1;
end Func;
```

[C++]

```
void Proc
  (int Var1,
   int & Var2,
   int & Var3);

int Func (int Var);

void Proc
  (int Var1,
   int & Var2,
   int & Var3) {

   Var2 = Func (Var1);
   Var3 = Var3 + 1;
}

int Func (int Var) {
   return Var + 1;
}
```

[Java]

```
public class ProcData {
   public int Var2;
   public int Var3;

   public void Proc (int Var1) {
      Var2 = Func (Var1);
      Var3 = Var3 + 1;
   }

   public static int Func (int Var) {
      return Var + 1;
   }
}
```

The first two declarations for Proc and Func are specifications of the subprograms which are being provided later. Although optional here, it's still considered good practice to separately define specifications and implementations in order to make it easier to read the program. In Ada and C++, a function that has not yet been seen cannot be used. Here, Proc can call Func because its specification has been declared. In Java, it's fine to have the declaration of the subprogram later .

Parameters in Ada subprogram declarations are separated with semicolons, because commas are reserved for listing multiple parameters of the same type. Parameter declaration syntax is the same as variable declaration syntax, including default values for parameters. If there are no parameters, the parentheses must be omitted entirely from both the declaration and invocation of the subprogram.

69.2 Overloading

Different subprograms may share the same name; this is called "overloading." As long as the subprogram signatures (subprogram name, parameter types, and return types) are different, the compiler will be able to resolve the calls to the proper destinations. For example:

```
function Value (Str : String) return Integer;
function Value (Str : String) return Float;

V : Integer := Value ("8");
```

The Ada compiler knows that an assignment to V requires an **Integer**. So, it chooses the Value function that returns an **Integer** to satisfy this requirement.

Operators in Ada can be treated as functions too. This allows you to define local operators that override operators defined at an outer scope, and provide overloaded operators that operate on and compare different types. To express an operator as a function, enclose it in quotes:

[Ada]

```
function "=" (Left : Day; Right : Integer) return Boolean;
```

[C++]

```
bool operator = (Day Left, int Right);
```

69.3 Subprogram Contracts

You can express the expected inputs and outputs of subprograms by specifying subprogram contracts. The compiler can then check for valid conditions to exist when a subprogram is called and can check that the return value makes sense. Ada allows defining contracts in the form of Pre and Post conditions; this facility was introduced in Ada 2012. They look like:

```
function Divide (Left, Right : Float) return Float
   with Pre  => Right /= 0.0,
        Post => Divide'Result * Right < Left + 0.0001
                and then Divide'Result * Right > Left - 0.0001;
```

The above example adds a Pre condition, stating that Right cannot be equal to 0.0. While the IEEE floating point standard permits divide-by-zero, you may have determined that use of the result could still lead to issues in a particular application. Writing a contract helps to detect this as early as possible. This declaration also provides a Post condition on the result.

Postconditions can also be expressed relative to the value of the input:

```
procedure Increment (V : in out Integer)
   with Pre  => V < Integer'Last,
        Post => V = V'Old + 1;
```

V'Old in the postcondition represents the value that V had before entering Increment.

CHAPTER

SEVENTY

PACKAGES

70.1 Declaration Protection

The package is the basic modularization unit of the Ada language, as is the class for Java and the header and implementation pair for C++. An Ada package contains three parts that, for GNAT, are separated into two files: *.ads* files contain public and private Ada specifications, and *.adb* files contain the implementation, or Ada bodies.

Java doesn't provide any means to cleanly separate the specification of methods from their implementation: they all appear in the same file. You can use interfaces to emulate having separate specifications, but this requires the use of OOP techniques which is not always practical.

Ada and C++ do offer separation between specifications and implementations out of the box, independent of OOP.

```
package Package_Name is
   -- public specifications
private
   -- private specifications
end Package_Name;

package body Package_Name is
   -- implementation
end Package_Name;
```

Private types are useful for preventing the users of a package's types from depending on the types' implementation details. The **private** keyword splits the package spec into "public" and "private" parts. That is somewhat analogous to C++'s partitioning of the class construct into different sections with different visibility properties. In Java, the encapsulation has to be done field by field, but in Ada the entire definition of a type can be hidden. For example:

```
package Types is
   type Type_1 is private;
   type Type_2 is private;
   type Type_3 is private;
   procedure P (X : Type_1);
   ...
private
   procedure Q (Y : Type_1);
   type Type_1 is new Integer range 1 .. 1000;
   type Type_2 is array (Integer range 1 .. 1000) of Integer;
   type Type_3 is record
      A, B : Integer;
   end record;
end Types;
```

Subprograms declared above the **private** separator (such as P) will be visible to the package user, and the ones below (such as Q) will not. The body of the package, the implemen-

tation, has access to both parts.

70.2 Hierarchical Packages

Ada packages can be organized into hierarchies. A child unit can be declared in the following way:

```
-- root-child.ads

package Root.Child is
   --  package spec goes here
end Root.Child;

-- root-child.adb

package body Root.Child is
   --  package body goes here
end Root.Child;
```

Here, `Root.Child` is a child package of `Root`. The public part of `Root.Child` has access to the public part of `Root`. The private part of `Child` has access to the private part of `Root`, which is one of the main advantages of child packages. However, there is no visibility relationship between the two bodies. One common way to use this capability is to define subsystems around a hierarchical naming scheme.

70.3 Using Entities from Packages

Entities declared in the visible part of a package specification can be made accessible using a **with** clause that references the package, which is similar to the C++ *#include* directive. Visibility is implicit in Java: you can always access all classes located in your *CLASSPATH*. After a **with** clause, entities needs to be prefixed by the name of their package, like a C++ namespace or a Java package. This prefix can be omitted if a **use** clause is employed, similar to a C++ **using namespace** or a Java **import**.

[Ada]

```
-- pck.ads

package Pck is
   My_Glob : Integer;
end Pck;

-- main.adb

with Pck;

procedure Main is
begin
   Pck.My_Glob := 0;
end Main;
```

[C++]

```
// pck.h

namespace pck {
   extern int myGlob;
}
```

(continues on next page)

(continued from previous page)

```
// pck.cpp

namespace pck {
   int myGlob;
}

// main.cpp

#include "pck.h"

int main (int argc, char ** argv) {
   pck::myGlob = 0;
}
```

[Java]

```
// Globals.java

package pck;

public class Globals {
   public static int myGlob;
}

// Main.java

public class Main {
   public static void main (String [] argv) {
      pck.Globals.myGlob = 0;
   }
}
```

CHAPTER

SEVENTYONE

CLASSES AND OBJECT ORIENTED PROGRAMMING

71.1 Primitive Subprograms

Primitive subprograms in Ada are basically the subprograms that are eligible for inheritance / derivation. They are the equivalent of C++ member functions and Java instance methods. While in C++ and Java these subprograms are located within the nested scope of the type, in Ada they are simply declared in the same scope as the type. There's no syntactic indication that a subprogram is a primitive of a type.

The way to determine whether P is a primitive of a type T is if

1. it is declared in the same scope as T, and
2. it contains at least one parameter of type T, or returns a result of type T.

In C++ or Java, the self reference **this** is implicitly declared. It may need to be explicitly stated in certain situations, but usually it's omitted. In Ada the self-reference, called the *controlling parameter*, must be explicitly specified in the subprogram parameter list. While it can be any parameter in the profile with any name, we'll focus on the typical case where the first parameter is used as the `self` parameter. Having the controlling parameter listed first also enables the use of OOP prefix notation which is convenient.

A **class** in C++ or Java corresponds to a **tagged type** in Ada. Here's an example of the declaration of an Ada tagged type with two parameters and some dispatching and non-dispatching primitives, with equivalent examples in C++ and Java:

[Ada]

```
type T is tagged record
   V, W : Integer;
end record;

type T_Access is access all T;

function F (V : T) return Integer;

procedure P1 (V : access T);

procedure P2 (V : T_Access);
```

[C++]

```
class T {
   public:
      int V, W;

      int F ();

      void P1 ();
};
```

(continues on next page)

(continued from previous page)

```
void P2 (T * v);
```

[Java]

```
public class T {
      public int V, W;

      public int F () {};

      public void P1 () {};

      public static void P2 (T v) {};
}
```

Note that P2 is not a primitive of T — it does not have any parameters of type T. Its parameter is of type T_Access, which is a different type.

Once declared, primitives can be called like any subprogram with every necessary parameter specified, or called using prefix notation. For example:

[Ada]

```
declare
   V : T;
begin
   V.P1;
end;
```

[C++]

```
{
  T v;
  v.P1 ();
}
```

[Java]

```
{
  T v = new T ();
  v.P1 ();
}
```

71.2 Derivation and Dynamic Dispatch

Despite the syntactic differences, derivation in Ada is similar to derivation (inheritance) in C++ or Java. For example, here is a type hierarchy where a child class overrides a method and adds a new method:

[Ada]

```
type Root is tagged record
   F1 : Integer;
end record;

procedure Method_1 (Self : Root);

type Child is new Root with record
   F2 : Integer;
```

(continues on next page)

(continued from previous page)

```
end record;

overriding
procedure Method_1 (Self : Child);

procedure Method_2 (Self : Child);
```

[C++]

```
class Root {
   public:
      int f1;
      virtual void method1 ();
};

class Child : public Root {
   public:
      int f2;
      virtual void method1 ();
      virtual void method2 ();
};
```

[Java]

```
public class Root {
   public int f1;
   public void method1 ();
}

public class Child extends Root {
   public int f2;
   @Override
   public void method1 ();
   public void method2 ();
}
```

Like Java, Ada primitives on tagged types are always subject to dispatching; there is no need to mark them **virtual**. Also like Java, there's an optional keyword **overriding** to ensure that a method is indeed overriding something from the parent type.

Unlike many other OOP languages, Ada differentiates between a reference to a specific tagged type, and a reference to an entire tagged type hierarchy. While `Root` is used to mean a specific type, `Root'Class` — a class-wide type — refers to either that type or any of its descendants. A method using a parameter of such a type cannot be overridden, and must be passed a parameter whose type is of any of `Root`'s descendants (including `Root` itself).

Next, we'll take a look at how each language finds the appropriate method to call within an OO class hierarchy; that is, their dispatching rules. In Java, calls to non-private instance methods are always dispatching. The only case where static selection of an instance method is possible is when calling from a method to the **super** version.

In C++, by default, calls to virtual methods are always dispatching. One common mistake is to use a by-copy parameter hoping that dispatching will reach the real object. For example:

```
void proc (Root p) {
   p.method1 ();
}

Root * v = new Child ();

proc (*v);
```

In the above code, `p.method1()` will not dispatch. The call to `proc` makes a copy of the `Root` part of `v`, so inside `proc`, `p.method1()` refers to the `method1()` of the root object. The intended behavior may be specified by using a reference instead of a copy:

```
void proc (Root & p) {
   p.method1 ();
}

Root * v = new Child ();

proc (*v);
```

In Ada, tagged types are always passed by reference but dispatching only occurs on class-wide types. The following Ada code is equivalent to the latter C++ example:

```
declare
   procedure Proc (P : Root'Class) is
   begin
      P.Method_1;
   end;

   type Root_Access is access all Root'Class;
   V : Root_Access := new Child;
begin
   Proc (V.all);
end;
```

Dispatching from within primitives can get tricky. Let's consider a call to `Method_1` in the implementation of `Method_2`. The first implementation that might come to mind is:

```
procedure Method_2 (P : Root) is
begin
   P.Method_1;
end;
```

However, `Method_2` is called with a parameter that is of the definite type `Root`. More precisely, it is a definite view of a child. So, this call is not dispatching; it will always call `Method_1` of `Root` even if the object passed is a child of `Root`. To fix this, a view conversion is necessary:

```
procedure Method_2 (P : Root) is
begin
   Root'Class (P).Method_1;
end;
```

This is called "redispatching." Be careful, because this is the most common mistake made in Ada when using OOP. In addition, it's possible to convert from a class wide view to a definite view, and to select a given primitive, like in C++:

[Ada]

```
procedure Proc (P : Root'Class) is
begin
   Root (P).Method_1;
end;
```

[C++]

```
void proc (Root & p) {
   p.Root::method1 ();
}
```

71.3 Constructors and Destructors

Ada does not have constructors and destructors in quite the same way as C++ and Java, but there is analagous functionality in Ada in the form of default initialization and finalization.

Default initialization may be specified for a record component and will occur if a variable of the record type is not assigned a value at initialization. For example:

```
type T is tagged record
   F : Integer := Compute_Default_F;
end record;

function Compute_Default_F return Integer is
begin
   Put_Line ("Compute");
   return 0;
end Compute_Default_F;

V1 : T;
V2 : T := (F => 0);
```

In the declaration of `V1`, `T.F` receives a value computed by the subprogram `Compute_Default_F`. This is part of the default initialization. `V2` is initialized manually and thus will not use the default initialization.

For additional expressive power, Ada provides a type called `Ada.Finalization.Controlled` from which you can derive your own type. Then, by overriding the `Initialize` procedure you can create a constructor for the type:

```
type T is new Ada.Finalization.Controlled with record
   F : Integer;
end record;

procedure Initialize (Self : in out T) is
begin
   Put_Line ("Compute");
   Self.F := 0;
end Initialize;

V1 : T;
V2 : T := (F => 0);
```

Again, this default initialization subprogram is only called for `V1`; `V2` is initialized manually. Furthermore, unlike a C++ or Java constructor, `Initialize` is a normal subprogram and does not perform any additional initialization such as calling the parent's initialization routines.

When deriving from `Controlled`, it's also possible to override the subprogram `Finalize`, which is like a destructor and is called for object finalization. Like `Initialize`, this is a regular subprogram. Do not expect any other finalizers to be automatically invoked for you.

Controlled types also provide functionality that essentially allows overriding the meaning of the assignment operation, and are useful for defining types that manage their own storage reclamation (for example, implementing a reference count reclamation strategy).

71.4 Encapsulation

While done at the class level for C++ and Java, Ada encapsulation occurs at the package level and targets all entities of the language, as opposed to only methods and attributes. For example:

[Ada]

```
package Pck is
   type T is tagged private;
   procedure Method1 (V : T);
private
   type T is tagged record
      F1, F2 : Integer;
   end record;
   procedure Method2 (V : T);
end Pck;
```

[C++]

```
class T {
   public:
      virtual void method1 ();
   protected:
      int f1, f2;
      virtual void method2 ();
};
```

[Java]

```
public class T {
   public void method1 ();
   protected int f1, f2;
   protected void method2 ();
}
```

The C++ and Java code's use of **protected** and the Ada code's use of **private** here demonstrates how to map these concepts between languages. Indeed, the private part of an Ada child package would have visibility of the private part of its parents, mimicking the notion of **protected**. Only entities declared in the package body are completely isolated from access.

71.5 Abstract Types and Interfaces

Ada, C++ and Java all offer similar functionality in terms of abstract classes, or pure virtual classes. It is necessary in Ada and Java to explicitly specify whether a tagged type or class is **abstract**, whereas in C++ the presence of a pure virtual function implicitly makes the class an abstract base class. For example:

[Ada]

```
package P is

    type T is abstract tagged private;

    procedure Method (Self : T) is abstract;
 private
    type T is abstract tagged record
       F1, F2 : Integer;
    end record;

 end P;
```

[C++]

```
class T {
   public:
      virtual void method () = 0;
   protected:
      int f1, f2;
};
```

[Java]

```
public abstract class T {
   public abstract void method1 ();
   protected int f1, f2;
};
```

All abstract methods must be implemented when implementing a concrete type based on an abstract type.

Ada doesn't offer multiple inheritance the way C++ does, but it does support a Java-like notion of interfaces. An interface is like a C++ pure virtual class with no attributes and only abstract members. While an Ada tagged type can inherit from at most one tagged type, it may implement multiple interfaces. For example:

[Ada]

```
type Root is tagged record
   F1 : Integer;
end record;
procedure M1 (Self : Root);

type I1 is interface;
procedure M2 (Self : I1) is abstract;

type I2 is interface;
procedure M3 (Self : I2) is abstract;

type Child is new Root and I1 and I2 with record
   F2 : Integer;
end record;

-- M1 implicitly inherited by Child
procedure M2 (Self : Child);
procedure M3 (Self : Child);
```

[C++]

```
class Root {
   public:
      virtual void M1();
      int f1;
};

class I1 {
   public:
      virtual void M2 () = 0;
};

class I2 {
   public:
      virtual void M3 () = 0;
};

class Child : public Root, I1, I2 {
```

(continues on next page)

(continued from previous page)

```
   public:
      int f2;
      virtual void M2 ();
      virtual void M3 ();
};
```

[Java]

```
public class Root {
   public void M1();
   public int f1;
}

public interface I1 {
   public void M2 ();
}

public interface I2 {
   public void M3 ();
}

public class Child extends Root implements I1, I2 {
      public int f2;
      public void M2 ();
      public void M3 ();
}
```

71.6 Invariants

Any private type in Ada may be associated with a Type_Invariant contract. An invariant is a property of a type that must always be true after the return from of any of its primitive subprograms. (The invariant might not be maintained during the execution of the primitive subprograms, but will be true after the return.) Let's take the following example:

```
package Int_List_Pkg is

   type Int_List (Max_Length : Natural) is private
     with Type_Invariant => Is_Sorted (Int_List);

   function Is_Sorted (List : Int_List) return Boolean;

   type Int_Array is array (Positive range <>) of Integer;

   function To_Int_List (Ints : Int_Array) return Int_List;

   function To_Int_Array (List : Int_List) return Int_Array;

   function "&" (Left, Right : Int_List) return Int_List;

   ... -- Other subprograms
private

   type Int_List (Max_Length : Natural) is record
      Length : Natural;
      Data   : Int_Array (1..Max_Length);
   end record;


   function Is_Sorted (List : Int_List) return Boolean is
```

(continues on next page)

(continued from previous page)

```
      (for all I in List.Data'First .. List.Length-1 =>
            List.Data (I) <= List.Data (I+1));

end Int_List_Pkg;

package body Int_List_Pkg is

   procedure Sort (Ints : in out Int_Array) is
   begin
      ... Your favorite sorting algorithm
   end Sort;

   function To_Int_List (Ints : Int_Array) return Int_List is
      List : Int_List :=
       (Max_Length => Ints'Length,
        Length     => Ints'Length,
        Data       => Ints);
   begin
      Sort (List.Data);
      return List;
   end To_Int_List;

   function To_Int_Array (List : Int_List) return Int_Array is
   begin
      return List.Data;
   end To_Int_Array;

   function "&" (Left, Right : Int_List) return Int_List is
      Ints : Int_Array := Left.Data & Right.Data;
   begin
      Sort (Ints);
      return To_Int_List (Ints);
   end "&";

   ... -- Other subprograms
end Int_List_Pkg;
```

The `Is_Sorted` function checks that the type stays consistent. It will be called at the exit of every primitive above. It is permissible if the conditions of the invariant aren't met during execution of the primitive. In `To_Int_List` for example, if the source array is not in sorted order, the invariant will not be satisfied at the "begin", but it will be checked at the end.

CHAPTER

SEVENTYTWO

GENERICS

Ada, C++, and Java all have support for generics or templates, but on different sets of language entities. A C++ template can be applied to a class or a function. So can a Java generic. An Ada generic can be either a package or a subprogram.

72.1 Generic Subprograms

In this example, we will swap two generic objects. This is possible in Ada and C++ using a temporary variable. In Java, parameters are a copy of a reference value that is passed into the function, so modifying those references in the function scope has no effect from the caller's context. A generic swap method, like the below Ada or C++ examples is not possible in Java, so we will skip the Java version of this example.

[Ada]

```
generic
   type A_Type is private;
procedure Swap (Left, Right : in out A_Type) is
   Temp : A_Type := Left;
begin
   Left  := Right;
   Right := Temp;
end Swap;
```

[C++]

```
template <class AType>
AType swap (AType & left, AType & right) {
   AType temp = left;
   left  = right;
   right = temp;
}
```

And examples of using these:

[Ada]

```
declare
   type R is record
      F1, F2 : Integer;
   end record;

   procedure Swap_R is new Swap (R);
   A, B : R;
begin
   ...
   Swap_R (A, B);
end;
```

[C++]

```
class R {
   public:
      int f1, f2;
};

R a, b;
...
swap (a, b);
```

The C++ template becomes usable once defined. The Ada generic needs to be explicitly instantiated using a local name and the generic's parameters.

72.2 Generic Packages

Next, we're going to create a generic unit containing data and subprograms. In Java or C++, this is done through a class, while in Ada, it's a *generic package*. The Ada and C++ model is fundamentally different from the Java model. Indeed, upon instantiation, Ada and C++ generic data are duplicated; that is, if they contain global variables (Ada) or static attributes (C++), each instance will have its own copy of the variable, properly typed and independent from the others. In Java, generics are only a mechanism to have the compiler do consistency checks, but all instances are actually sharing the same data where the generic parameters are replaced by *java.lang.Object*. Let's look at the following example:

[Ada]

```
generic
   type T is private;
package Gen is
   type C is tagged record
      V : T;
   end record;

   G : Integer;
end Gen;
```

[C++]

```
template <class T>
class C{
   public:
     T v;
     static int G;
};
```

[Java]

```
public class C <T> {
     public T v;
     public static int G;
}
```

In all three cases, there's an instance variable (v) and a static variable (G). Let's now look at the behavior (and syntax) of these three instantiations:

[Ada]

```
declare
   package I1 is new Gen (Integer);
```

(continues on next page)

(continued from previous page)

```
   package I2 is new Gen (Integer);
   subtype Str10 is String (1..10);
   package I3 is new Gen (Str10);
begin
   I1.G := 0;
   I2.G := 1;
   I3.G := 2;
end;
```

[C++]

```
C <int>::G = 0;
C <int>::G = 1;
C <char *>::G = 2;
```

[Java]

```
C.G = 0;
C.G = 1;
C.G = 2;
```

In the Java case, we access the generic entity directly without using a parametric type. This is because there's really only one instance of C, with each instance sharing the same global variable G. In C++, the instances are implicit, so it's not possible to create two different instances with the same parameters. The first two assignments are manipulating the same global while the third one is manipulating a different instance. In the Ada case, the three instances are explicitly created, named, and referenced individually.

72.3 Generic Parameters

Ada offers a wide variety of generic parameters which is difficult to translate into other languages. The parameters used during instantiation — and as a consequence those on which the generic unit may rely on — may be variables, types, or subprograms with certain properties. For example, the following provides a sort algorithm for any kind of array:

```
generic
   type Component is private;
   type Index is (<>);
   with function "<" (Left, Right : Component) return Boolean;
   type Array_Type is array (Index range <>) of Component;
procedure Sort (A : in out Array_Type);
```

The above declaration states that we need a type (`Component`), a discrete type (`Index`), a comparison subprogram (`"<"`), and an array definition (`Array_Type`). Given these, it's possible to write an algorithm that can sort any `Array_Type`. Note the usage of the **`with`** reserved word in front of the function name, to differentiate between the generic parameter and the beginning of the generic subprogram.

Here is a non-exhaustive overview of the kind of constraints that can be put on types:

```
type T is private; -- T is a constrained type, such as Integer
type T (<>) is private; -- T can be an unconstrained type, such as String
type T is tagged private; -- T is a tagged type
type T is new T2 with private; -- T is an extension of T2
type T is (<>); -- T is a discrete type
type T is range <>; -- T is an integer type
type T is digits <>; -- T is a floating point type
type T is access T2; -- T is an access type, T2 is its designated type
```

CHAPTER

SEVENTYTHREE

EXCEPTIONS

Exceptions are a mechanism for dealing with run-time occurrences that are rare, that usually correspond to errors (such as improperly formed input data), and whose occurrence causes an unconditional transfer of control.

73.1 Standard Exceptions

Compared with Java and C++, the notion of an Ada exception is very simple. An exception in Ada is an object whose "type" is **exception**, as opposed to classes in Java or any type in C++. The only piece of user data that can be associated with an Ada exception is a String. Basically, an exception in Ada can be raised, and it can be handled; information associated with an occurrence of an exception can be interrogated by a handler.

Ada makes heavy use of exceptions especially for data consistency check failures at run time. These include, but are not limited to, checking against type ranges and array boundaries, null pointers, various kind of concurrency properties, and functions not returning a value. For example, the following piece of code will raise the exception `Constraint_Error`:

```
procedure P is
   V : Positive;
begin
   V := -1;
end P;
```

In the above code, we're trying to assign a negative value to a variable that's declared to be positive. The range check takes place during the assignment operation, and the failure raises the `Constraint_Error` exception at that point. (Note that the compiler may give a warning that the value is out of range, but the error is manifest as a run-time exception.) Since there is no local handler, the exception is propagated to the caller; if P is the main procedure, then the program will be terminated.

Java and C++ can **throw** and **catch** exceptions when **try**ing code. All Ada code is already implicitly within **try** blocks, and exceptions are `raised` and handled.

[Ada]

```
begin
   Some_Call;
exception
   when Exception_1 =>
      Put_Line ("Error 1");
   when Exception_2 =>
      Put_Line ("Error 2");
   when others =>
      Put_Line ("Unknown error");
end;
```

[C++]

```
try {
   someCall ();
} catch (Exception1) {
   cout << "Error 1" << endl;
} catch (Exception2) {
   cout << "Error 2" << endl;
} catch (...) {
   cout << "Unknown error" << endl;
}
```

[Java]

```
try {
   someCall ();
} catch (Exception1 e1) {
   System.out.println ("Error 1");
} catch (Exception2 e2) {
   System.out.println ("Error 2");
} catch (Throwable e3) {
   System.out.println ("Unknown error");
}
```

Raising and throwing exceptions is permissible in all three languages.

73.2 Custom Exceptions

Custom exception declarations resemble object declarations, and they can be created in Ada using the **exception** keyword:

```
My_Exception : exception;
```

Your exceptions can then be raised using a **raise** statement, optionally accompanied by a message following the **with** reserved word:

[Ada]

```
raise My_Exception with "Some message";
```

[C++]

```
throw My_Exception ("Some message");
```

[Java]

```
throw new My_Exception ("Some message");
```

Language defined exceptions can also be raised in the same manner:

```
raise Constraint_Error;
```

CHAPTER

SEVENTYFOUR

CONCURRENCY

74.1 Tasks

Java and Ada both provide support for concurrency in the language. The C++ language has added a concurrency facility in its most recent revision, C++11, but we are assuming that most C++ programmers are not (yet) familiar with these new features. We thus provide the following mock API for C++ which is similar to the Java Thread class:

```
class Thread {
   public:
      virtual void run (); // code to execute
      void start (); // starts a thread and then call run ()
      void join (); // waits until the thread is finished
};
```

Each of the following examples will display the 26 letters of the alphabet twice, using two concurrent threads/tasks. Since there is no synchronization between the two threads of control in any of the examples, the output may be interspersed.

[Ada]

```
procedure Main is -- implicitly called by the environment task
   task My_Task;

   task body My_Task is
   begin
      for I in 'A' .. 'Z' loop
         Put_Line (I);
      end loop;
   end My_Task;
begin
   for I in 'A' .. 'Z' loop
      Put_Line (I);
   end loop;
end Main;
```

[C++]

```
class MyThread : public Thread {
   public:

   void run () {
      for (char i = 'A'; i <= 'Z'; ++i) {
         cout << i << endl;
      }
   }
};
```

(continues on next page)

(continued from previous page)

```
int main (int argc, char ** argv) {
   MyThread myTask;
   myTask.start ();

   for (char i = 'A'; i <= 'Z'; ++i) {
      cout << i << endl;
   }

   myTask.join ();

   return 0;
}
```

[Java]

```
public class Main {
   static class MyThread extends Thread {
      public void run () {
         for (char i = 'A'; i <= 'Z'; ++i) {
            System.out.println (i);
         }
      }
   }

   public static void main (String args) {
      MyThread myTask = new MyThread ();
      myTask.start ();

      for (char i = 'A'; i <= 'Z'; ++i) {
         System.out.println (i);
      }
      myTask.join ();
   }
}
```

Any number of Ada tasks may be declared in any declarative region. A task declaration is very similar to a procedure or package declaration. They all start automatically when control reaches the **begin**. A block will not exit until all sequences of statements defined within that scope, including those in tasks, have been completed.

A task type is a generalization of a task object; each object of a task type has the same behavior. A declared object of a task type is started within the scope where it is declared, and control does not leave that scope until the task has terminated.

An Ada task type is somewhat analogous to a Java Thread subclass, but in Java the instances of such a subclass are always dynamically allocated. In Ada an instance of a task type may either be declared or dynamically allocated.

Task types can be parametrized; the parameter serves the same purpose as an argument to a constructor in Java. The following example creates 10 tasks, each of which displays a subset of the alphabet contained between the parameter and the 'Z' Character. As with the earlier example, since there is no synchronization among the tasks, the output may be interspersed depending on the implementation's task scheduling algorithm.

[Ada]

```
task type My_Task (First : Character);

task body My_Task is
begin
   for I in First .. 'Z' loop
```

(continues on next page)

(continued from previous page)

```
      Put_Line (I);
   end loop;
end My_Task;

procedure Main is
   Tab : array (0 .. 9) of My_Task ('G');
begin
   null;
end Main;
```

[C++]

```
class MyThread : public Thread {
   public:

   char first;

   void run () {
      for (char i = first; i <= 'Z'; ++i) {
         cout << i << endl;
      }
   }
};

int main (int argc, char ** argv) {
   MyThread tab [10];

   for (int i = 0; i < 9; ++i) {
      tab [i].first = 'G';
      tab [i].start ();
   }

   for (int i = 0; i < 9; ++i) {
      tab [i].join ();
   }

   return 0;
}
```

[Java]

```
public class MyThread extends Thread {
   public char first;

   public MyThread (char first){
      this.first = first;
   }

   public void run () {
      for (char i = first; i <= 'Z'; ++i) {
         cout << i << endl;
      }
   }
}

public class Main {
   public static void main (String args) {
      MyThread [] tab = new MyThread [10];

      for (int i = 0; i < 9; ++i) {
         tab [i] = new MyThread ('G');
```

(continues on next page)

(continued from previous page)

```
         tab [i].start ();
      }

      for (int i = 0; i < 9; ++i) {
         tab [i].join ();
      }
   }
}
```

In Ada a task may be allocated on the heap as opposed to the stack. The task will then start as soon as it has been allocated, and terminates when its work is completed. This model is probably the one that's the most similar to Java:

[Ada]

```
type Ptr_Task is access My_Task;

procedure Main is
   T : Ptr_Task;
begin
   T := new My_Task ('G');
end Main;
```

[C++]

```
int main (int argc, char ** argv) {
   MyThread * t = new MyThread ();
   t->first = 'G';
   t->start ();
   return 0;
}
```

[Java]

```
public class Main {
   public static void main (String args) {
      MyThread t = new MyThread ('G');

      t.start ();
   }
}
```

74.2 Rendezvous

A rendezvous is a synchronization between two tasks, allowing them to exchange data and coordinate execution. Ada's rendezvous facility cannot be modeled with C++ or Java without complex machinery. Therefore, this section will just show examples written in Ada.

Let's consider the following example:

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is

   task After is
      entry Go;
   end After ;

   task body After is
```

(continues on next page)

(continued from previous page)

```
   begin
      accept Go;
      Put_Line ("After");
   end After;

begin
   Put_Line ("Before");
   After.Go;
end;
```

The Go **entry** declared in `After` is the external interface to the task. In the task body, the **accept** statement causes the task to wait for a call on the entry. This particular **entry** and **accept** pair doesn't do much more than cause the task to wait until `Main` calls `After.Go`. So, even though the two tasks start simultaneously and execute independently, they can coordinate via Go. Then, they both continue execution independently after the rendezvous.

The **entry**/**accept** pair can take/pass parameters, and the **accept** statement can contain a sequence of statements; while these statements are executed, the caller is blocked.

Let's look at a more ambitious example. The rendezvous below accepts parameters and executes some code:

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is

   task After is
      entry Go (Text : String);
   end After ;

   task body After is
   begin
      accept Go (Text : String) do
         Put_Line ("After: " & Text);
      end Go;
   end After;

begin
   Put_Line ("Before");
   After.Go ("Main");
end;
```

In the above example, the `Put_Line` is placed in the **accept** statement. Here's a possible execution trace, assuming a uniprocessor:

1. At the **begin** of `Main`, task `After` is started and the main procedure is suspended.
2. `After` reaches the **accept** statement and is suspended, since there is no pending call on the Go entry.
3. The main procedure is awakened and executes the `Put_Line` invocation, displaying the string "Before".
4. The main procedure calls the Go entry. Since `After` is suspended on its **accept** statement for this entry, the call succeeds.
5. The main procedure is suspended, and the task `After` is awakened to execute the body of the **accept** statement. The actual parameter `"Main"` is passed to the **accept** statement, and the `Put_Line` invocation is executed. As a result, the string `"After: Main"` is displayed.
6. When the **accept** statement is completed, both the `After` task and the main procedure are ready to run. Suppose that the `Main` procedure is given the processor. It

reaches its **end**, but the local task `After` has not yet terminated. The main procedure is suspended.

7. The `After` task continues, and terminates since it is at its **end**. The main procedure is resumed, and it too can terminate since its dependent task has terminated.

The above description is a conceptual model; in practice the implementation can perform various optimizations to avoid unnecessary context switches.

74.3 Selective Rendezvous

The accept statement by itself can only wait for a single event (call) at a time. The **select** statement allows a task to listen for multiple events simultaneously, and then to deal with the first event to occur. This feature is illustrated by the task below, which maintains an integer value that is modified by other tasks that call `Increment`, `Decrement`, and `Get`:

```
task Counter is
   entry Get (Result : out Integer);
   entry Increment;
   entry Decrement;
end Counter;

task body Counter is
   Value : Integer := 0;
begin
   loop
      select
         accept Increment do
            Value := Value + 1;
         end Increment;
      or
         accept Decrement do
            Value := Value - 1;
         end Decrement;
      or
         accept Get (Result : out Integer) do
            Result := Value;
         end Get;
      or
         delay 60.0;  --  delay 1 minute
         exit;
      end select;
   end loop;
end Counter;
```

When the task's statement flow reaches the **select**, it will wait for all four events — three entries and a delay — in parallel. If the delay of one minute is exceeded, the task will execute the statements following the **delay** statement (and in this case will exit the loop, in effect terminating the task). The accept bodies for the `Increment`, `Decrement`, or `Get` entries will be otherwise executed as they're called. These four sections of the **select** statement are mutually exclusive: at each iteration of the loop, only one will be invoked. This is a critical point; if the task had been written as a package, with procedures for the various operations, then a "race condition" could occur where multiple tasks simultaneously calling, say, `Increment`, cause the value to only get incremented once. In the tasking version, if multiple tasks simultaneously call `Increment` then only one at a time will be accepted, and the value will be incremented by each of the tasks when it is accepted.

More specifically, each entry has an associated queue of pending callers. If a task calls one of the entries and `Counter` is not ready to accept the call (i.e., if `Counter` is not suspended at the **select** statement) then the calling task is suspended, and placed in the queue of

the entry that it is calling. From the perspective of the `Counter` task, at any iteration of the loop there are several possibilities:

- There is no call pending on any of the entries. In this case `Counter` is suspended. It will be awakened by the first of two events: a call on one of its entries (which will then be immediately accepted), or the expiration of the one minute delay (whose effect was noted above).
- There is a call pending on exactly one of the entries. In this case control passes to the **`select`** branch with an **`accept`** statement for that entry. The choice of which caller to accept, if more than one, depends on the queuing policy, which can be specified via a pragma defined in the Real-Time Systems Annex of the Ada standard; the default is First-In First-Out.
- There are calls pending on more than one entry. In this case one of the entries with pending callers is chosen, and then one of the callers is chosen to be de-queued (the choices depend on the queueing policy).

74.4 Protected Objects

Although the rendezvous may be used to implement mutually exclusive access to a shared data object, an alternative (and generally preferable) style is through a *protected object*, an efficiently implementable mechanism that makes the effect more explicit. A protected object has a public interface (its *protected operations*) for accessing and manipulating the object's components (its private part). Mutual exclusion is enforced through a conceptual lock on the object, and encapsulation ensures that the only external access to the components are through the protected operations.

Two kinds of operations can be performed on such objects: read-write operations by procedures or entries, and read-only operations by functions. The lock mechanism is implemented so that it's possible to perform concurrent read operations but not concurrent write or read/write operations.

Let's reimplement our earlier tasking example with a protected object called `Counter`:

```
protected Counter is
   function Get return Integer;
   procedure Increment;
   procedure Decrement;
private
   Value : Integer := 0;
end Counter;

protected body Counter is
   function Get return Integer is
   begin
      return Value;
   end Get;

   procedure Increment is
   begin
     Value := Value + 1;
   end Increment;

   procedure Decrement is
   begin
      Value := Value - 1;
   end Decrement;
end Counter;
```

Having two completely different ways to implement the same paradigm might seem complicated. However, in practice the actual problem to solve usually drives the choice between

an active structure (a task) or a passive structure (a protected object).

A protected object can be accessed through prefix notation:

```
Counter.Increment;
Counter.Decrement;
Put_Line (Integer'Image (Counter.Get));
```

A protected object may look like a package syntactically, since it contains declarations that can be accessed externally using prefix notation. However, the declaration of a protected object is extremely restricted; for example, no public data is allowed, no types can be declared inside, etc. And besides the syntactic differences, there is a critical semantic distinction: a protected object has a conceptual lock that guarantees mutual exclusion; there is no such lock for a package.

Like tasks, it's possible to declare protected types that can be instantiated several times:

```
declare
   protected type Counter is
      -- as above
   end Counter;

   protected body Counter is
      -- as above
   end Counter;

   C1 : Counter;
   C2 : Counter;
begin
   C1.Increment;
   C2.Decrement;
   ...
end;
```

Protected objects and types can declare a procedure-like operation known as an "entry". An entry is somewhat similar to a procedure but includes a so-called *barrier condition* that must be true in order for the entry invocation to succeed. Calling a protected entry is thus a two step process: first, acquire the lock on the object, and then evaluate the barrier condition. If the condition is true then the caller will execute the entry body. If the condition is false, then the caller is placed in the queue for the entry, and relinquishes the lock. Barrier conditions (for entries with non-empty queues) are reevaluated upon completion of protected procedures and protected entries.

Here's an example illustrating protected entries: a protected type that models a binary semaphore / persistent signal.

```
protected type Binary_Semaphore is
  entry Wait;
  procedure Signal;
private
  Signaled : Boolean := False;
end Binary_Semaphore;

protected body Binary_Semaphore is
  entry Wait when Signaled is
  begin
    Signaled := False;
  end Wait;

  procedure Signal is
  begin
    Signaled := True;
```

(continues on next page)

(continued from previous page)

```
  end Signal;
end Binary_Semaphore;
```

Ada concurrency features provide much further generality than what's been presented here. For additional information please consult one of the works cited in the *References* section.

CHAPTER

SEVENTYFIVE

LOW LEVEL PROGRAMMING

75.1 Representation Clauses

We've seen in the previous chapters how Ada can be used to describe high level semantics and architecture. The beauty of the language, however, is that it can be used all the way down to the lowest levels of the development, including embedded assembly code or bit-level data management.

One very interesting feature of the language is that, unlike C, for example, there are no data representation constraints unless specified by the developer. This means that the compiler is free to choose the best trade-off in terms of representation vs. performance. Let's start with the following example:

[Ada]

```
type R is record
   V  : Integer range 0 .. 255;
   B1 : Boolean;
   B2 : Boolean;
end record
with Pack;
```

[C++]

```
struct R {
   unsigned int v:8;
   bool b1;
   bool b2;
};
```

[Java]

```
public class R {
   public byte v;
   public boolean b1;
   public boolean b2;
}
```

The Ada and the C++ code above both represent efforts to create an object that's as small as possible. Controlling data size is not possible in Java, but the language does specify the size of values for the primitive types.

Although the C++ and Ada code are equivalent in this particular example, there's an interesting semantic difference. In C++, the number of bits required by each field needs to be specified. Here, we're stating that v is only 8 bits, effectively representing values from 0 to 255. In Ada, it's the other way around: the developer specifies the range of values required and the compiler decides how to represent things, optimizing for speed or size. The Pack aspect declared at the end of the record specifies that the compiler should optimize for size even at the expense of decreased speed in accessing record components.

Other representation clauses can be specified as well, along with compile-time consistency checks between requirements in terms of available values and specified sizes. This is particularly useful when a specific layout is necessary; for example when interfacing with hardware, a driver, or a communication protocol. Here's how to specify a specific data layout based on the previous example:

```
type R is record
   V  : Integer range 0 .. 255;
   B1 : Boolean;
   B2 : Boolean;
end record;

for R use record
   --  Occupy the first bit of the first byte.
   B1 at 0 range 0 .. 0;

   --  Occupy the last 7 bits of the first byte,
   --  as well as the first bit of the second byte.
   V  at 0 range 1 .. 8;

   --  Occupy the second bit of the second byte.
   B2 at 1 range 1 .. 1;
end record;
```

We omit the `with` Pack directive and instead use a record representation clause following the record declaration. The compiler is directed to spread objects of type R across two bytes. The layout we're specifying here is fairly inefficient to work with on any machine, but you can have the compiler construct the most efficient methods for access, rather than coding your own machine-dependent bit-level methods manually.

75.2 Embedded Assembly Code

When performing low-level development, such as at the kernel or hardware driver level, there can be times when it is necessary to implement functionality with assembly code.

Every Ada compiler has its own conventions for embedding assembly code, based on the hardware platform and the supported assembler(s). Our examples here will work with GNAT and GCC on the x86 architecture.

All x86 processors since the Intel Pentium offer the `rdtsc` instruction, which tells us the number of cycles since the last processor reset. It takes no inputs and places an unsigned 64 bit value split between the edx and eax registers.

GNAT provides a subprogram called `System.Machine_Code.Asm` that can be used for assembly code insertion. You can specify a string to pass to the assembler as well as source-level variables to be used for input and output:

```
with System.Machine_Code; use System.Machine_Code;
with Interfaces;          use Interfaces;

function Get_Processor_Cycles return Unsigned_64 is
   Low, High : Unsigned_32;
   Counter   : Unsigned_64;
begin
   Asm ("rdtsc",
        Outputs =>
          (Unsigned_32'Asm_Output ("=a", Low),
           Unsigned_32'Asm_Output ("=d", High)),
        Volatile => True);
```

(continues on next page)

(continued from previous page)

```
   Counter :=
     Unsigned_64 (High) * 2 ** 32 +
     Unsigned_64 (Low);

   return Counter;
end Get_Processor_Cycles;
```

The `Unsigned_32'Asm_Output` clauses above provide associations between machine registers and source-level variables to be updated. `"=a"` and `"=d"` refer to the eax and edx machine registers, respectively. The use of the `Unsigned_32` and `Unsigned_64` types from package `Interfaces` ensures correct representation of the data. We assemble the two 32-bit values to form a single 64 bit value.

We set the `Volatile` parameter to **`True`** to tell the compiler that invoking this instruction multiple times with the same inputs can result in different outputs. This eliminates the possibility that the compiler will optimize multiple invocations into a single call.

With optimization turned on, the GNAT compiler is smart enough to use the eax and edx registers to implement the `High` and `Low` variables, resulting in zero overhead for the assembly interface.

The machine code insertion interface provides many features beyond what was shown here. More information can be found in the GNAT User's Guide, and the GNAT Reference manual.

75.3 Interfacing with C

Much effort was spent making Ada easy to interface with other languages. The `Interfaces` package hierarchy and the pragmas `Convention`, `Import`, and `Export` allow you to make inter-language calls while observing proper data representation for each language.

Let's start with the following C code:

```
struct my_struct {
   int A, B;
};

void call (my_struct * p) {
   printf ("%d", p->A);
}
```

To call that function from Ada, the Ada compiler requires a description of the data structure to pass as well as a description of the function itself. To capture how the C **`struct my_struct`** is represented, we can use the following record along with a **`pragma`** *`Convention`*. The pragma directs the compiler to lay out the data in memory the way a C compiler would.

```
type my_struct is record
   A : Interfaces.C.int;
   B : Interfaces.C.int;
end record;
pragma Convention (C, my_struct);
```

Describing a foreign subprogram call to Ada code is called "binding" and it is performed in two stages. First, an Ada subprogram specification equivalent to the C function is coded. A C function returning a value maps to an Ada function, and a **`void`** function maps to an Ada procedure. Then, rather than implementing the subprogram using Ada code, we use a **`pragma`** *`Import`*:

```
procedure Call (V : my_struct);
pragma Import (C, Call, "call"); -- Third argument optional
```

The `Import` pragma specifies that whenever `Call` is invoked by Ada code, it should invoke the `call` function with the C calling convention.

And that's all that's necessary. Here's an example of a call to `Call`:

```
declare
   V : my_struct := (A => 1, B => 2);
begin
   Call (V);
end;
```

You can also make Ada subprograms available to C code, and examples of this can be found in the GNAT User's Guide. Interfacing with C++ and Java use implementation-dependent features that are also available with GNAT.

CHAPTER

SEVENTYSIX

CONCLUSION

All the usual paradigms of imperative programming can be found in all three languages that we surveyed in this document. However, Ada is different from the rest in that it's more explicit when expressing properties and expectations. This is a good thing: being more formal affords better communication among programmers on a team and between programmers and machines. You also get more assurance of the coherence of a program at many levels. Ada can help reduce the cost of software maintenance by shifting the effort to creating a sound system the first time, rather than working harder, more often, and at greater expense, to fix bugs found later in systems already in production. Applications that have reliability needs, long term maintenance requirements, or safety/security concerns are those for which Ada has a proven track record.

It's becoming increasingly common to find systems implemented in multiple languages, and Ada has standard interfacing facilities to allow Ada code to invoke subprograms and/or reference data structures from other language environments, or vice versa. Use of Ada thus allows easy interfacing between different technologies, using each for what it's best at.

We hope this guide has provided some insight into the Ada software engineer's world and has made Ada more accessible to programmers already familiar with programming in other languages.

CHAPTER

SEVENTYSEVEN

REFERENCES

The Ada Information Clearinghouse website http://www.adaic.org/learn/materials/, maintained by the Ada Resource Association, contains links to a variety of training materials (books, articles, etc.) that can help in learning Ada. The Development Center page http://www.adacore.com/knowledge on AdaCore's website also contains links to useful information including vides and tutorials on Ada.

The most comprehensive textbook is John Barnes' *Programming in Ada 2012*, which is oriented towards professional software developers.

Part VIII

Ada for the Embedded C Developer

Copyright © 2020 – 2024, AdaCore

This book is published under a CC BY-SA license, which means that you can copy, redistribute, remix, transform, and build upon the content for any purpose, even commercially, as long as you give appropriate credit, provide a link to the license, and indicate if changes were made. If you remix, transform, or build upon the material, you must distribute your contributions under the same license as the original. You can find license details on this page[443]



This course introduces you to the Ada language by comparing it to C. It assumes that you have good knowledge of the C language. It also assumes that the choice of learning Ada is guided by considerations linked to reliability, safety or security. In that sense, it teaches you Ada paradigms that should be applied in replacement of those usually applied in C.

This course also introduces you to the SPARK subset of the Ada programming language, which removes a few features of the language with undefined behavior, so that the code is fit for sound static analysis techniques.

This course was written by Quentin Ochem, Robert Tice, Gustavo A. Hoffmann, and Patrick Rogers and reviewed by Patrick Rogers, Filip Gajowniczek, and Tucker Taft.

Note

The code examples in this course use an 80-column limit, which is a typical limit for Ada code. Note that, on devices with a small screen size, some code examples might be difficult to read.

Note

Each code example from this book has an associated "code block metadata", which contains the name of the "project" and an MD5 hash value. This information is used to identify a single code example.

You can find all code examples in a zip file, which you can download from the learn website[444]. The directory structure in the zip file is based on the code block metadata. For example, if you're searching for a code example with this metadata:

- Project: Courses.Intro_To_Ada.Imperative_Language.Greet
- MD5: cba89a34b87c9dfa71533d982d05e6ab

you will find it in this directory:

```
projects/Courses/Intro_To_Ada/Imperative_Language/Greet/
cba89a34b87c9dfa71533d982d05e6ab/
```

In order to use this code example, just follow these steps:

1. Unpack the zip file;
2. Go to target directory;

[443] http://creativecommons.org/licenses/by-sa/4.0

3. Start GNAT Studio on this directory;
4. Build (or compile) the project;
5. Run the application (if a main procedure is available in the project).

[444] https://learn.adacore.com/zip/learning-ada_code.zip

CHAPTER

SEVENTYEIGHT

INTRODUCTION

78.1 So, what is this Ada thing anyway?

To answer this question let's introduce Ada as it compares to C for an embedded application. C developers are used to a certain coding semantic and style of programming. Especially in the embedded domain, developers are used to working at a very low level near the hardware to directly manipulate memory and registers. Normal operations involve mathematical operations on pointers, complex bit shifts, and logical bitwise operations. C is well designed for such operations as it is a low level language that was designed to replace assembly language for faster, more efficient programming. Because of this minimal abstraction, the programmer has to model the data that represents the problem they are trying to solve using the language of the physical hardware.

Let's look at an example of this problem in action by comparing the same program in Ada and C:

[C]

Listing 1: main.c

```c
#include <stdio.h>
#include <stdlib.h>

#define DEGREES_MAX           (360)
typedef unsigned int degrees;

#define MOD_DEGREES(x)   (x % DEGREES_MAX)

degrees add_angles(degrees* list, int length)
{
  degrees sum = 0;
  for(int i = 0; i < length; ++i) {
    sum += list[i];
  }

  return sum;
}

int main(int argc, char** argv)
{
  degrees list[argc - 1];

  for(int i = 1; i < argc; ++i) {
    list[i - 1] = MOD_DEGREES(atoi(argv[i]));
  }

  printf("Sum: %d\n", add_angles(list, argc - 1));

```

(continues on next page)

(continued from previous page)

```
  return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Introduction.Add_Angles_C
MD5: a6d184caaec372c538634c578b5e144b
```

Runtime output

```
Sum: 0
```

[Ada]

Listing 2: sum_angles.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO; use Ada.Text_IO;

procedure Sum_Angles is

   DEGREES_MAX : constant := 360;
   type Degrees is mod DEGREES_MAX;

   type Degrees_List is array (Natural range <>) of Degrees;

   function Add_Angles (List : Degrees_List) return Degrees
   is
      Sum : Degrees := 0;
   begin
      for I in List'Range loop
         Sum := Sum + List (I);
      end loop;

      return Sum;
   end Add_Angles;

   List : Degrees_List (1 .. Argument_Count);
begin
   for I in List'Range loop
      List (I) := Degrees (Integer'Value (Argument (I)));
   end loop;

   Put_Line ("Sum:" & Add_Angles (List)'Img);
end Sum_Angles;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Introduction.Add_Angles_Ada
MD5: b5a446e5c27aa18c917ae8c2cc6c1605
```

Runtime output

```
Sum: 0
```

Here we have a piece of code in C and in Ada that takes some numbers from the command line and stores them in an array. We then sum all of the values in the array and print the result. The tricky part here is that we are working with values that model an angle in degrees. We know that angles are modular types, meaning that angles greater than 360° can also be represented as `Angle mod 360`. So if we have an angle of 400°, this is equivalent to 40°. In order to model this behavior in C we had to create the `MOD_DEGREES`

macro, which performs the modulus operation. As we read values from the command line, we convert them to integers and perform the modulus before storing them into the array. We then call add_angles which returns the sum of the values in the array. Can you spot the problem with the C code?

Try running the Ada and C examples using the input sequence `340 2 50 70`. What does the C program output? What does the Ada program output? Why are they different?

The problem with the C code is that we forgot to call `MOD_DEGREES` in the for loop of add_angles. This means that it is possible for add_angles to return values greater than `DEGREES_MAX`. Let's look at the equivalent Ada code now to see how Ada handles the situation. The first thing we do in the Ada code is to create the type `Degrees` which is a modular type. This means that the compiler is going to handle performing the modulus operation for us. If we use the same for loop in the `Add_Angles` function, we can see that we aren't doing anything special to make sure that our resulting value is within the 360° range we need it to be in.

The takeaway from this example is that Ada tries to abstract some concepts from the developer so that the developer can focus on solving the problem at hand using a data model that models the real world rather than using data types prescribed by the hardware. The main benefit of this is that the compiler takes some responsibility from the developer for generating correct code. In this example we forgot to put in a check in the C code. The compiler inserted the check for us in the Ada code because we told the compiler what we were trying to accomplish by defining strong types.

Ideally, we want all the power that the C programming language can give us to manipulate the hardware we are working on while also allowing us the ability to more accurately model data in a safe way. So, we have a dilemma; what can give us the power of operations like the C language, but also provide us with features that can minimize the potential for developer error? Since this course is about Ada, it's a good bet we're about to introduce the Ada language as the answer to this question...

Unlike C, the Ada language was designed as a higher level language from its conception; giving more responsibility to the compiler to generate correct code. As mentioned above, with C, developers are constantly shifting, masking, and accessing bits directly on memory pointers. In Ada, all of these operations are possible, but in most cases, there is a better way to perform these operations using higher level constructs that are less prone to mistakes, like off-by-one or unintentional buffer overflows. If we were to compare the same application written using C and with Ada using high level constructs, we would see similar performance in terms of speed and memory efficiency. If we compare the object code generated by both compilers, it's possible that they even look identical!

78.2 Ada — The Technical Details

Like C, Ada is a compiled language. This means that the compiler will parse the source code and emit machine code native to the target hardware. The Ada compiler we will be discussing in this course is the GNAT compiler. This compiler is based on the GCC technology like many C and C++ compilers available. When the GNAT compiler is invoked on Ada code, the GNAT front-end expands and translates the Ada code into an intermediate language which is passed to GCC where the code is optimized and translated to machine code. A C compiler based on GCC performs the same steps and uses the same intermediate GCC representation. This means that the optimizations we are used to seeing with a GCC based C compiler can also be applied to Ada code. The main difference between the two compilers is that the Ada compiler is expanding high level constructs into intermediate code. After expansion, the Ada code will be very similar to the equivalent C code.

It is possible to do a line-by-line translation of C code to Ada. This feels like a natural step for a developer used to C paradigms. However, there may be very little benefit to doing so. For the purpose of this course, we're going to assume that the choice of Ada over C is guided by

considerations linked to reliability, safety or security. In order to improve upon the reliability, safety and security of our application, Ada paradigms should be applied in replacement of those usually applied in C. Constructs such as pointers, preprocessor macros, bitwise operations and defensive code typically get expressed in Ada in very different ways, improving the overall reliability and readability of the applications. Learning these new ways of coding, often, requires effort by the developer at first, but proves more efficient once the paradigms are understood.

In this course we will also introduce the SPARK subset of the Ada programming language. The SPARK subset removes a few features of the language, i.e., those that make proof difficult, such as pointer aliasing. By removing these features we can write code that is fit for sound static analysis techniques. This means that we can run mathematical provers on the SPARK code to prove certain safety or security properties about the code.

CHAPTER

SEVENTYNINE

THE C DEVELOPER'S PERSPECTIVE ON ADA

79.1 What we mean by Embedded Software

The Ada programming language is a general programming language, which means it can be used for many different types of applications. One type of application where it particularly shines is reliable and safety-critical embedded software; meaning, a platform with a microprocessor such as ARM, PowerPC, x86, or RISC-V. The application may be running on top of an embedded operating system, such as an embedded Linux, or directly on bare metal. And the application domain can range from small entities such as firmware or device controllers to flight management systems, communication based train control systems, or advanced driver assistance systems.

79.2 The GNAT Toolchain

The toolchain used throughout this course is called GNAT, which is a suite of tools with a compiler based on the GCC environment. It can be obtained from AdaCore, either as part of a commercial contract with GNAT Pro[445] or at no charge with the GNAT Community edition[446]. The information in this course will be relevant no matter which edition you're using. Most examples will be runnable on the native Linux or Windows version for convenience. Some will only be relevant in the context of a cross toolchain, in which case we'll be using the embedded ARM bare metal toolchain.

As for any Ada compiler, GNAT takes advantage of implementation permissions and offers a project management system. Because we're talking about embedded platforms, there are a lot of topics that we'll go over which will be specific to GNAT, and sometimes to specific platforms supported by GNAT. We'll try to make the distinction between what is GNAT-specific and Ada generic as much as possible throughout this course.

For an introduction to the GNAT Toolchain for the GNAT Community edition, you may refer to the *Introduction to GNAT Toolchain* (page 1939) course.

79.3 The GNAT Toolchain for Embedded Targets

When we're discussing embedded programming, our target device is often different from the host, which is the device we're using to actually write and build an application. In this case, we're talking about cross compilation platforms (concisely referred to as cross platforms).

The GNAT toolchain supports cross platform compilation for various target devices. This section provides a short introduction to the topic. For more details, please refer to the GNAT User's Guide Supplement for Cross Platforms[447]

[445] https://www.adacore.com/gnatpro
[446] https://www.adacore.com/community
[447] https://docs.adacore.com/gnat_ugx-docs/html/gnat_ugx/gnat_ugx.html

GNAT supports two types of cross platforms:

- **cross targets**, where the target device has an embedded operating system.
  - ARM-Linux, which is commonly found in a Raspberry-Pi, is a prominent example.
- **bareboard targets**, where the run-times do not depend on an operating system.
  - In this case, the application has direct access to the system hardware.

For each platform, a set of run-time libraries is available. Run-time libraries implement a subset of the Ada language for different use cases, and they're different for each target platform. They may be selected via an attribute in the project's GPR project file or as a command-line switch to **`GPRbuild`**. Although the run-time libraries may vary from target to target, the user interface stays the same, providing portability for the application.

Run-time libraries consists of:

1. Files that are dependent on the target board.
   - These files are responsible for configuring and interacting with the hardware.
   - They are known as a Board Support Package — commonly referred to by their abbrevation *BSP*.
2. Code that is target-independent.
   - This code implements language-defined functionality.

The bareboard run-time libraries are provided as customized run-times that are configured to target a very specific micro-controller or processor. Therefore, for different micro-controllers and processors, the run-time libraries need to be ported to the specific target. These are some examples of what needs to be ported:

- startup code / scripts;
- clock frequency initializations;
- memory mapping / allocation;
- interrupts and interrupt priorities;
- register descriptions.

For more details on the topic, please refer to the following chapters of the GNAT User's Guide Supplement for Cross Platforms[448]:

- Bareboard Topics[449]
- Customized Run-Time Libraries[450]

79.4 Hello World in Ada

The first piece of code to translate from C to Ada is the usual Hello World program:

[C]

Listing 1: main.c

```c
#include <stdio.h>

int main(int argc, const char * argv[])
{
    printf("Hello World\n");
```

(continues on next page)

[448] https://docs.adacore.com/gnat_ugx-docs/html/gnat_ugx/gnat_ugx.html
[449] http://docs.adacore.com/live/wave/gnat_ugx/html/gnat_ugx/gnat_ugx/bareboard_topics.html
[450] http://docs.adacore.com/live/wave/gnat_ugx/html/gnat_ugx/gnat_ugx/customized_run-time_libraries.html

(continued from previous page)

```
6     return 0;
7 }
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Hello_World_C
MD5: 59685c72296a032893cda71dade24196
```

Runtime output

```
Hello World
```

[Ada]

Listing 2: hello_world.adb

```
1 with Ada.Text_IO;
2
3 procedure Hello_World
4 is
5 begin
6    Ada.Text_IO.Put_Line ("Hello World");
7 end Hello_World;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Hello_World_Ada
MD5: f1a7c6a4fd679c4caea7ee31d14aab2e
```

Runtime output

```
Hello World
```

The resulting program will print `Hello World` on the screen. Let's now dissect the Ada version to describe what is going on:

The first line of the Ada code is giving us access to the `Ada.Text_IO` library which contains the `Put_Line` function we will use to print the text to the console. This is similar to C's `#include <stdio.h>`. We then create a procedure which executes `Put_Line` which prints to the console. This is similar to C's `printf` function. For now, we can assume these Ada and C features have similar functionality. In reality, they are very different. We will explore that more as we delve further into the Ada language.

You may have noticed that the Ada syntax is more verbose than C. Instead of using braces {} to declare scope, Ada uses keywords. **`is`** opens a declarative scope — which is empty here as there's no variable to declare. **`begin`** opens a sequence of statements. Within this sequence, we're calling the function `Put_Line`, prefixing explicitly with the name of the library unit where it's declared, `Ada.Text_IO`. The absence of the end of line `\n` can also be noted, as `Put_Line` always terminates by an end of line.

79.5 The Ada Syntax

Ada syntax might seem peculiar at first glance. Unlike many other languages, it's not derived from the popular C style of notation with its ample use of brackets; rather, it uses a more expository syntax coming from Pascal. In many ways, Ada is a more explicit language — its syntax was designed to increase readability and maintainability, rather than making it faster to write in a condensed manner. For example:

- full words like **`begin`** and **`end`** are used in place of curly braces.

- Conditions are written using **if**, **then**, **elsif**, **else**, and **end if**.
- Ada's assignment operator does not double as an expression, eliminating potential mistakes that could be caused by = being used where == should be.

All languages provide one or more ways to express comments. In Ada, two consecutive hyphens -- mark the start of a comment that continues to the end of the line. This is exactly the same as using // for comments in C. Multi line comments like C's /* */ do not exist in Ada.

Ada compilers are stricter with type and range checking than most C programmers are used to. Most beginning Ada programmers encounter a variety of warnings and error messages when coding, but this helps detect problems and vulnerabilities at compile time — early on in the development cycle. In addition, checks (such as array bounds checks) provide verification that could not be done at compile time but can be performed either at run-time, or through formal proof (with the SPARK tooling).

Ada identifiers and reserved words are case insensitive. The identifiers VAR, var and VaR are treated as the same identifier; likewise **begin**, **BEGIN**, **Begin**, etc. Identifiers may include letters, digits, and underscores, but must always start with a letter. There are 73 reserved keywords in Ada that may not be used as identifiers, and these are:

abort	else	null	select
abs	elsif	of	separate
abstract	end	or	some
accept	entry	others	subtype
access	exception	out	synchronized
aliased	exit	overriding	tagged
all	for	package	task
and	function	pragma	terminate
array	generic	private	then
at	goto	procedure	type
begin	if	protected	until
body	in	raise	use
case	interface	range	when
constant	is	record	while
declare	limited	rem	with
delay	loop	renames	xor
delta	mod	requeue	
digits	new	return	
do	not	reverse	

79.6 Compilation Unit Structure

Both C and Ada were designed with the idea that the code specification and code implementation could be separated into two files. In C, the specification typically lives in the .h, or header file, and the implementation lives in the .c file. Ada is superficially similar to C. With the GNAT toolchain, compilation units are stored in files with an .ads extension for specifications and with an .adb extension for implementations.

One main difference between the C and Ada compilation structure is that Ada compilation units are structured into something called packages.

79.7 Packages

The package is the basic modularization unit of the Ada language, as is the class for Java and the header and implementation pair for C. A specification defines a package and the implementation implements the package. We saw this in an earlier example when we included the `Ada.Text_IO` package into our application. The package specification has the structure:

[Ada]

```
--  my_package.ads
package My_Package is

   --  public declarations

private

   --  private declarations

end My_Package;
```

The package implementation, or body, has the structure:

```
--  my_package.adb
package body My_Package is

   --  implementation

end My_Package;
```

79.7.1 Declaration Protection

An Ada package contains three parts that, for GNAT, are separated into two files: `.ads` files contain public and private Ada specifications, and `.adb` files contain the implementation, or Ada bodies.

[Ada]

```
package Package_Name is
   -- public specifications
private
   -- private specifications
end Package_Name;

package body Package_Name is
   -- implementation
end Package_Name;
```

Private types are useful for preventing the users of a package's types from depending on the types' implementation details. Another use-case is the prevention of package users from accessing package state/data arbitrarily. The private reserved word splits the package spec into *public* and *private* parts. For example:

[Ada]

Listing 3: types.ads

```
1  package Types is
2     type Type_1 is private;
3     type Type_2 is private;
4     type Type_3 is private;
```

(continues on next page)

(continued from previous page)

```
   procedure P (X : Type_1);
   --  ...
private
   procedure Q (Y : Type_1);
   type Type_1 is new Integer range 1 .. 1000;
   type Type_2 is array (Integer range 1 .. 1000) of Integer;
   type Type_3 is record
      A, B : Integer;
   end record;
end Types;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Private_Types
MD5: ae4a9e4d10b55e7efd92d7952ba22f4f
```

Subprograms declared above the **private** separator (such as P) will be visible to the package user, and the ones below (such as Q) will not. The body of the package, the implementation, has access to both parts. A package specification does not require a private section.

79.7.2 Hierarchical Packages

Ada packages can be organized into hierarchies. A child unit can be declared in the following way:

[Ada]

```
-- root-child.ads

package Root.Child is
   --  package spec goes here
end Root.Child;

-- root-child.adb

package body Root.Child is
   --  package body goes here
end Root.Child;
```

Here, `Root.Child` is a child package of `Root`. The public part of `Root.Child` has access to the public part of `Root`. The private part of `Child` has access to the private part of `Root`, which is one of the main advantages of child packages. However, there is no visibility relationship between the two bodies. One common way to use this capability is to define subsystems around a hierarchical naming scheme.

79.7.3 Using Entities from Packages

Entities declared in the visible part of a package specification can be made accessible using a **with** clause that references the package, which is similar to the C *#include* directive. After a **with** clause makes a package available, references to the package contents require the name of the package as a prefix, with a dot after the package name. This prefix can be omitted if a **use** clause is employed.

[Ada]

Listing 4: pck.ads

```
--  pck.ads

package Pck is
   My_Glob : Integer;
end Pck;
```

Listing 5: main.adb

```
--  main.adb

with Pck;

procedure Main is
begin
   Pck.My_Glob := 0;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Using_Pkg_Entities
MD5: 4215ba710eb54478538dc001bb74ce09
```

In contrast to C, the Ada **with** clause is a *semantic inclusion* mechanism rather than a *text inclusion* mechanism; for more information on this difference please refer to *Packages* (page 35).

79.8 Statements and Declarations

The following code samples are all equivalent, and illustrate the use of comments and working with integer variables:

[C]

Listing 6: main.c

```
#include <stdio.h>

int main(int argc, const char * argv[])
{
    // variable declarations
    int a = 0, b = 0, c = 100, d;

    // c shorthand for increment
    a++;

    // regular addition
    d = a + b + c;

    // printing the result
    printf("d = %d\n", d);

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Var_Decl_C
MD5: ba258dac5c052a97da475239e2f2ce96
```

Runtime output

```
d = 101
```

[Ada]

Listing 7: main.adb

```ada
with Ada.Text_IO;

procedure Main
is
   --  variable declaration
   A, B : Integer := 0;
   C    : Integer := 100;
   D    : Integer;
begin
   --  Ada does not have a shortcut format for increment like in C
   A := A + 1;

   --  regular addition
   D := A + B + C;

   --  printing the result
   Ada.Text_IO.Put_Line ("D =" & D'Img);
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Var_Decl_Ada
MD5: eaff76f36d5f938bd806d29048df7865
```

Runtime output

```
D = 101
```

You'll notice that, in both languages, statements are terminated with a semicolon. This means that you can have multi-line statements.

The shortcuts of incrementing and decrementing

You may have noticed that Ada does not have something similar to the a`++` or a`--` operators. Instead you must use the full assignment `A := A + 1` or `A := A - 1`.

In the Ada example above, there are two distinct sections to the **`procedure`** `Main`. This first section is delimited by the **`is`** keyword and the **`begin`** keyword. This section is called the declarative block of the subprogram. The declarative block is where you will define all the local variables which will be used in the subprogram. C89 had something similar, where developers were required to declare their variables at the top of the scope block. Most C developers may have run into this before when trying to write a for loop:

[C]

Listing 8: main.c

```c
/* The C89 version */

#include <stdio.h>

int average(int* list, int length)
```

(continues on next page)

(continued from previous page)

```
{
    int i;
    int sum = 0;

    for(i = 0; i < length; ++i) {
        sum += list[i];
    }
    return (sum / length);
}

int main(int argc, const char * argv[])
{
    int vals[] = { 2, 2, 4, 4 };

    printf("Average: %d\n", average(vals, 4));

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Average_C89
MD5: 5c89aa28cba0bae4d963b235c53aedf2
```

Runtime output

```
Average: 3
```

[C]

Listing 9: main.c

```
// The modern C way

#include <stdio.h>

int average(int* list, int length)
{
    int sum = 0;

    for(int i = 0; i < length; ++i) {
        sum += list[i];
    }

    return (sum / length);
}

int main(int argc, const char * argv[])
{
    int vals[] = { 2, 2, 4, 4 };

    printf("Average: %d\n", average(vals, 4));

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Average_C_Modern
MD5: 6354863137d78adb974743915d1d4530
```

Runtime output

```
Average: 3
```

For the fun of it, let's also see the Ada way to do this:

[Ada]

Listing 10: main.adb

```ada
with Ada.Text_IO;

procedure Main is
   type Int_Array is array (Natural range <>) of Integer;

   function Average (List : Int_Array) return Integer
   is
      Sum : Integer := 0;
   begin
      for I in List'Range loop
         Sum := Sum + List (I);
      end loop;

      return (Sum / List'Length);
   end Average;

   Vals : constant Int_Array (1 .. 4) := (2, 2, 4, 4);
begin
   Ada.Text_IO.Put_Line ("Average: " & Integer'Image (Average (Vals)));
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Average_Ada
MD5: 52abb574d7a8b3bdb56715735dcd1d54
```

Runtime output

```
Average:  3
```

We will explore more about the syntax of loops in Ada in a future section of this course; but for now, notice that the `I` variable used as the loop index is not declared in the declarative section!

Declaration Flippy Floppy

Something peculiar that you may have noticed about declarations in Ada is that they are backwards from the way C does declarations. The C language expects the type followed by the variable name. Ada expects the variable name followed by a colon and then the type.

The next block in the Ada example is between the **`begin`** and **`end`** keywords. This is where your statements will live. You can create new scopes by using the **`declare`** keyword:

[Ada]

Listing 11: main.adb

```ada
with Ada.Text_IO;

procedure Main
is
```

(continues on next page)

(continued from previous page)

```
   --  variable declaration
   A, B : Integer := 0;
   C    : Integer := 100;
   D    : Integer;
begin
   --  Ada does not have a shortcut format for increment like in C
   A := A + 1;

   --  regular addition
   D := A + B + C;

   --  printing the result
   Ada.Text_IO.Put_Line ("D =" & D'Img);

   declare
      E : constant Integer := D * 100;
   begin
      --  printing the result
      Ada.Text_IO.Put_Line ("E =" & E'Img);
   end;

end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Var_Decl_Block_Ada
MD5: 9239b993a7eadb13a27bd3618a03431f
```

Runtime output

```
D = 101
E = 10100
```

Notice that we declared a new variable E whose scope only exists in our newly defined block. The equivalent C code is:

[C]

Listing 12: main.c

```
#include <stdio.h>

int main(int argc, const char * argv[])
{
    // variable declarations
    int a = 0, b = 0, c = 100, d;

    // c shorthand for increment
    a++;

    // regular addition
    d = a + b + c;

    // printing the result
    printf("d = %d\n", d);

    {
        const int e = d * 100;
        printf("e = %d\n", e);
    }

```

(continues on next page)

(continued from previous page)

```
    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Var_Decl_Block_C
MD5: 1a837795575ddc026738d92c8655ab6c
```

Runtime output

```
d = 101
e = 10100
```

Fun Fact about the C language assignment operator `=`: Did you know that an assignment in C can be used in an expression? Let's look at an example:

[C]

Listing 13: main.c

```c
#include <stdio.h>

int main(int argc, const char * argv[])
{
    int a = 0;

    if (a = 10)
        printf("True\n");
    else
        printf("False\n");

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Equal_C
MD5: 2d00ddf7e154cb888082c86b8fd36c58
```

Runtime output

```
True
```

Run the above code example. What does it output? Is that what you were expecting?

The author of the above code example probably meant to test if `a == 10` in the if statement but accidentally typed `=` instead of `==`. Because C treats assignment as an expression, it was able to evaluate `a = 10`.

Let's look at the equivalent Ada code:

[Ada]

Listing 14: main.adb

```ada
with Ada.Text_IO; use Ada.Text_IO;

procedure Main
is
   A : Integer := 0;
begin

```

(continues on next page)

(continued from previous page)

```
   if A := 10 then
      Put_Line ("True");
   else
      Put_Line ("False");
   end if;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Equal_Ada
MD5: 1500b264531dfcc7a62eeed2f22f511b
```

The above code will not compile. This is because Ada does no allow assignment as an expression.

The "use" clause

You'll notice in the above code example, after `with Ada.Text_IO;` there is a new statement we haven't seen before — `use Ada.Text_IO;`. You may also notice that we are not using the `Ada.Text_IO` prefix before the `Put_Line` statements. When we add the use clause it tells the compiler that we won't be using the prefix in the call to subprograms of that package. The use clause is something to use with caution. For example: if we use the `Ada.Text_IO` package and we also have a `Put_Line` subprogram in our current compilation unit with the same signature, we have a (potential) collision!

79.9 Conditions

The syntax of an if statement:

[C]

Listing 15: main.c

```
#include <stdio.h>

int main(int argc, const char * argv[])
{
    // try changing the initial value to change the
    //    output of the program
    int v = 0;

    if (v > 0) {
        printf("Positive\n");
    }
    else if (v < 0) {
        printf("Negative\n");
    }
    else {
        printf("Zero\n");
    }

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Condition_C
MD5: 69203e679085e73394d3620a5954262a
```

Runtime output

```
Zero
```

[Ada]

Listing 16: main.adb

```ada
with Ada.Text_IO; use Ada.Text_IO;

procedure Main
is
   --  try changing the initial value to change the
   --    output of the program
   V : constant Integer := 0;
begin
   if V > 0 then
      Put_Line ("Positive");
   elsif V < 0 then
      Put_Line ("Negative");
   else
      Put_Line ("Zero");
   end if;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Condition_Ada
MD5: 417e557708472f9022db7d8c1ed6aa33
```

Runtime output

```
Zero
```

In Ada, everything that appears between the **if** and **then** keywords is the conditional expression, no parentheses are required. Comparison operators are the same except for:

Operator	C	Ada
Equality	==	=
Inequality	!=	/=
Not	!	**not**
And	&&	**and**
Or	||	**or**

The syntax of a switch/case statement:

[C]

Listing 17: main.c

```c
#include <stdio.h>

int main(int argc, const char * argv[])
{
    // try changing the initial value to change the
    //    output of the program
    int v = 0;

    switch(v) {
        case 0:
```

(continues on next page)

(continued from previous page)

```
            printf("Zero\n");
            break;
        case 1: case 2: case 3: case 4: case 5:
        case 6: case 7: case 8: case 9:
            printf("Positive\n");
            break;
        case 10: case 12: case 14: case 16: case 18:
            printf("Even number between 10 and 18\n");
            break;
        default:
            printf("Something else\n");
            break;
    }

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Switch_Case_C
MD5: 1bdb3d0c151d71280ef9039841f7ee58
```

Runtime output

```
Zero
```

[Ada]

Listing 18: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main
is
   --  try changing the initial value to change the
   --    output of the program
   V : constant Integer := 0;
begin
   case V is
      when 0 =>
         Put_Line ("Zero");
      when 1 .. 9 =>
         Put_Line ("Positive");
      when 10 | 12 | 14 | 16 | 18 =>
         Put_Line ("Even number between 10 and 18");
      when others =>
         Put_Line ("Something else");
   end case;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Switch_Case_Ada
MD5: 09e2318b56069281c95f23310dc121d1
```

Runtime output

```
Zero
```

Switch or Case?

A switch statement in C is the same as a case statement in Ada. This may be a little strange because C uses both keywords in the statement syntax. Let's make an analogy between C and Ada: C's **switch** is to Ada's **case** as C's **case** is to Ada's **when**.

Notice that in Ada, the case statement does not use the **break** keyword. In C, we use **break** to stop the execution of a case branch from falling through to the next branch. Here is an example:

[C]

Listing 19: main.c

```c
#include <stdio.h>

int main(int argc, const char * argv[])
{
    int v = 0;

    switch(v) {
        case 0:
            printf("Zero\n");
        case 1:
            printf("One\n");
        default:
            printf("Other\n");
    }

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Switch_Case_Break_C
MD5: fd0389205476f161655caf32244d9054
```

Runtime output

```
Zero
One
Other
```

Run the above code with `v = 0`. What prints? What prints when we change the assignment to `v = 1`?

When `v = 0` the program outputs the strings `Zero` then `One` then `Other`. This is called fall through. If you add the **break** statements back into the **switch** you can stop this fall through behavior from happening. The reason why fall through is allowed in C is to allow the behavior from the previous example where we want a specific branch to execute for multiple inputs. Ada solves this a different way because it is possible, or even probable, that the developer might forget a **break** statement accidentally. So Ada does not allow fall through. Instead, you can use Ada's syntax to identify when a specific branch can be executed by more than one input. If you want a range of values for a specific branch you can use the `First .. Last` notation. If you want a few non-consecutive values you can use the `Value1 | Value2 | Value3` notation.

Instead of using the word **default** to denote the catch-all case, Ada uses the **others** keyword.

79.10 Loops

Let's start with some syntax:

[C]

Listing 20: main.c

```c
#include <stdio.h>

int main(int argc, const char * argv[])
{
    int v;

    // this is a while loop
    v = 1;
    while(v < 100) {
        v *= 2;
    }
    printf("v = %d\n", v);

    // this is a do while loop
    v = 1;
    do {
        v *= 2;
    } while(v < 200);
    printf("v = %d\n", v);

    // this is a for loop
    v = 0;
    for(int i = 0; i < 5; ++i) {
        v += (i * i);
    }
    printf("v = %d\n", v);

    // this is a forever loop with a conditional exit
    v = 0;
    while(1) {
        // do stuff here
        v += 1;
        if(v == 10)
            break;
    }
    printf("v = %d\n", v);

    // this is a loop over an array
    {
        #define ARR_SIZE (10)
        const int arr[ARR_SIZE] = { 1, 2, 3, 4, 5, 6, 7, 8, 9, 10 };
        int sum = 0;

        for(int i = 0; i < ARR_SIZE; ++i) {
            sum += arr[i];
        }
        printf("sum = %d\n", sum);
    }

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Loops_C
MD5: bcd8963884e2b2a5e364219f9b6b8fbc
```

Runtime output

```
v = 128
v = 256
v = 30
v = 10
sum = 55
```

[Ada]

Listing 21: main.adb

```
with Ada.Text_IO;

procedure Main is
   V : Integer;
begin
   --  this is a while loop
   V := 1;
   while V < 100 loop
      V := V * 2;
   end loop;
   Ada.Text_IO.Put_Line ("V = " & Integer'Image (V));

   --  Ada doesn't have an explicit do while loop
   --  instead you can use the loop and exit keywords
   V := 1;
   loop
      V := V * 2;
      exit when V >= 200;
   end loop;
   Ada.Text_IO.Put_Line ("V = " & Integer'Image (V));

   --  this is a for loop
   V := 0;
   for I in 0 .. 4 loop
      V := V + (I * I);
   end loop;
   Ada.Text_IO.Put_Line ("V = " & Integer'Image (V));

   --  this is a forever loop with a conditional exit
   V := 0;
   loop
      --  do stuff here
      V := V + 1;
      exit when V = 10;
   end loop;
   Ada.Text_IO.Put_Line ("V = " & Integer'Image (V));

   --  this is a loop over an array
   declare
      type Int_Array is array (Natural range 1 .. 10) of Integer;

      Arr : constant Int_Array := (1, 2, 3, 4, 5, 6, 7, 8, 9, 10);
      Sum : Integer := 0;
   begin
      for I in Arr'Range loop
         Sum := Sum + Arr (I);
      end loop;
```

(continues on next page)

(continued from previous page)

```
      Ada.Text_IO.Put_Line ("Sum = " & Integer'Image (Sum));
   end;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Loops_Ada
MD5: c09a092f8d2f682ce758d4bf059b954a
```

Runtime output

```
V =  128
V =  256
V =  30
V =  10
Sum =  55
```

The loop syntax in Ada is pretty straightforward. The **loop** and **end loop** keywords are used to open and close the loop scope. Instead of using the **break** keyword to exit the loop, Ada has the **exit** statement. The **exit** statement can be combined with a logic expression using the **exit when** syntax.

The major deviation in loop syntax is regarding for loops. You'll notice, in C, that you sometimes declare, and at least initialize a loop counter variable, specify a loop predicate, or an expression that indicates when the loop should continue executing or complete, and last you specify an expression to update the loop counter.

[C]

```
for (initialization expression; loop predicate; update expression) {
    // some statements
}
```

In Ada, you don't declare or initialize a loop counter or specify an update expression. You only name the loop counter and give it a range to loop over. The loop counter is **read-only**! You cannot modify the loop counter inside the loop like you can in C. And the loop counter will increment consecutively along the specified range. But what if you want to loop over the range in reverse order?

[C]

Listing 22: main.c

```
#include <stdio.h>

#define MY_RANGE (10)

int main(int argc, const char * argv[])
{

    for (int i = MY_RANGE; i >= 0; --i) {
        printf("%d\n", i);
    }

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Loop_Counter_C
MD5: 4e70078ae51d113b8fa02340258c5ed5
```

Runtime output

```
10
9
8
7
6
5
4
3
2
1
0
```

[Ada]

Listing 23: main.adb

```ada
with Ada.Text_IO; use Ada.Text_IO;

procedure Main
is
   My_Range : constant := 10;
begin
   for I in reverse 0 .. My_Range loop
      Put_Line (I'Img);
   end loop;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Loop_Counter_Ada
MD5: f25ed1a91c82620f16cd3084a6a0f475
```

Runtime output

```
 10
 9
 8
 7
 6
 5
 4
 3
 2
 1
 0
```

Tick Image

Strangely enough, Ada people call the single apostrophe symbol, ', "tick". This "tick" says the we are accessing an attribute of the variable. When we do `'Img` on a variable of a numerical type, we are going to return the string version of that numerical type. So in the for loop above, `I'Img`, or "I tick image" will return the string representation of the numerical value stored in I. We have to do this because Put_Line is expecting a string as an input parameter.

We'll discuss attributes in more details *later in this chapter* (page 1652).

In the above example, we are traversing over the range in reverse order. In Ada, we use the **reverse** keyword to accomplish this.

In many cases, when we are writing a for loop, it has something to do with traversing an array. In C, this is a classic location for off-by-one errors. Let's see an example in action:

[C]

Listing 24: main.c

```c
#include <stdio.h>

#define LIST_LENGTH (100)

int main(int argc, const char * argv[])
{
    int list[LIST_LENGTH];

    for(int i = LIST_LENGTH; i > 0; --i) {
        list[i] = LIST_LENGTH - i;
    }

    for (int i = 0; i < LIST_LENGTH; ++i)
    {
        printf("%d ", list[i]);

        if (i % 10 == 0) {
            printf("\n");
        }
    }

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Loop_Reverse_C
MD5: 710ce30066551d1aada8d4e98a6004b1
```

Runtime output

```
-55143739
99 98 97 96 95 94 93 92 91 90
89 88 87 86 85 84 83 82 81 80
79 78 77 76 75 74 73 72 71 70
69 68 67 66 65 64 63 62 61 60
59 58 57 56 55 54 53 52 51 50
49 48 47 46 45 44 43 42 41 40
39 38 37 36 35 34 33 32 31 30
29 28 27 26 25 24 23 22 21 20
19 18 17 16 15 14 13 12 11 10
9 8 7 6 5 4 3 2 1
```

[Ada]

Listing 25: main.adb

```ada
with Ada.Text_IO; use Ada.Text_IO;

procedure Main
is
   type Int_Array is array (Natural range 1 .. 100) of Integer;

   List : Int_Array;
begin

```

(continues on next page)

(continued from previous page)

```
   for I in reverse List'Range loop
      List (I) := List'Last - I;
   end loop;

   for I in List'Range loop
      Put (List (I)'Img & " ");

      if I mod 10 = 0 then
         New_Line;
      end if;
   end loop;

end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Loop_Reverse_Ada
MD5: 340b935d42a80671bb050bdad1b032f7
```

Runtime output

```
 99  98  97  96  95  94  93  92  91  90
 89  88  87  86  85  84  83  82  81  80
 79  78  77  76  75  74  73  72  71  70
 69  68  67  66  65  64  63  62  61  60
 59  58  57  56  55  54  53  52  51  50
 49  48  47  46  45  44  43  42  41  40
 39  38  37  36  35  34  33  32  31  30
 29  28  27  26  25  24  23  22  21  20
 19  18  17  16  15  14  13  12  11  10
 9  8  7  6  5  4  3  2  1  0
```

The above Ada and C code should initialize an array using a for loop. The initial values in the array should be contiguously decreasing from 99 to 0 as we index from the first index to the last index. In other words, the first index has a value of 99, the next has 98, the next 97 ... the last has a value of 0.

If you run both the C and Ada code above you'll notice that the outputs of the two programs are different. Can you spot why?

In the C code there are two problems:

1. There's a buffer overflow in the first iteration of the loop. We would need to modify the loop initialization to `int i = LIST_LENGTH - 1;`. The loop predicate should be modified to `i >= 0;`
2. The C code also has another off-by-one problem in the math to compute the value stored in `list[i]`. The expression should be changed to be `list[i] = LIST_LENGTH - i - 1;`.

These are typical off-by-one problems that plagues C programs. You'll notice that we didn't have this problem with the Ada code because we aren't defining the loop with arbitrary numeric literals. Instead we are accessing attributes of the array we want to manipulate and are using a keyword to determine the indexing direction.

We can actually simplify the Ada for loop a little further using iterators:

[Ada]

Listing 26: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

```

(continues on next page)

(continued from previous page)

```
procedure Main
is
   type Int_Array is array (Natural range 1 .. 100) of Integer;

   List : Int_Array;
begin

   for I in reverse List'Range loop
      List (I) := List'Last - I;
   end loop;

   for I of List loop
      Put (I'Img & " ");

      if I mod 10 = 0 then
         New_Line;
      end if;
   end loop;

end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Loop_Reverse_Ada_Simplified
MD5: 612046826199b00ed61271d6215596fe
```

Runtime output

```
 99  98  97  96  95  94  93  92  91  90
 89  88  87  86  85  84  83  82  81  80
 79  78  77  76  75  74  73  72  71  70
 69  68  67  66  65  64  63  62  61  60
 59  58  57  56  55  54  53  52  51  50
 49  48  47  46  45  44  43  42  41  40
 39  38  37  36  35  34  33  32  31  30
 29  28  27  26  25  24  23  22  21  20
 19  18  17  16  15  14  13  12  11  10
 9  8  7  6  5  4  3  2  1  0
```

In the second for loop, we changed the syntax to `for I of List`. Instead of I being the index counter, it is now an iterator that references the underlying element. This example of Ada code is identical to the last bit of Ada code. We just used a different method to index over the second for loop. There is no C equivalent to this Ada feature, but it is similar to C++'s range based for loop.

79.11 Type System

79.11.1 Strong Typing

Ada is considered a "strongly typed" language. This means that the language does not define any implicit type conversions. C does define implicit type conversions, sometimes referred to as *integer promotion*. The rules for promotion are fairly straightforward in simple expressions but can get confusing very quickly. Let's look at a typical place of confusion with implicit type conversion:

[C]

Listing 27: main.c

```c
#include <stdio.h>

int main(int argc, const char * argv[])
{
    unsigned char a = 0xFF;
    char b = 0xFF;

    printf("Does a == b?\n");
    if(a == b)
        printf("Yes.\n");
    else
        printf("No.\n");

    printf("a: 0x%08X, b: 0x%08X\n", a, b);

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Strong_Typing_C
MD5: cab1ac9e2c86076d8435d53904783ba0
```

Runtime output

```
Does a == b?
No.
a: 0x000000FF, b: 0xFFFFFFFF
```

Run the above code. You will notice that a `!=` b! If we look at the output of the last `printf` statement we will see the problem. a is an unsigned number where b is a signed number. We stored a value of `0xFF` in both variables, but a treated this as the decimal number `255` while b treated this as the decimal number `-1`. When we compare the two variables, of course they aren't equal; but that's not very intuitive. Let's look at the equivalent Ada example:

[Ada]

Listing 28: main.adb

```ada
with Ada.Text_IO; use Ada.Text_IO;

procedure Main
is
   type Char is range 0 .. 255;
   type Unsigned_Char is mod 256;

   A : Char := 16#FF#;
   B : Unsigned_Char := 16#FF#;
begin

   Put_Line ("Does A = B?");

   if A = B then
      Put_Line ("Yes");
   else
      Put_Line ("No");
   end if;

end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Strong_Typing_Ada
MD5: d6ef2668809159e9fb0d42f91e893222
```

Build output

```
main.adb:14:09: error: invalid operand types for operator "="
main.adb:14:09: error: left operand has type "Char" defined at line 5
main.adb:14:09: error: right operand has type "Unsigned_Char" defined at line 6
gprbuild: *** compilation phase failed
```

If you try to run this Ada example you will get a compilation error. This is because the compiler is telling you that you cannot compare variables of two different types. We would need to explicitly cast one side to make the comparison against two variables of the same type. By enforcing the explicit cast we can't accidentally end up in a situation where we assume something will happen implicitly when, in fact, our assumption is incorrect.

Another example: you can't divide an integer by a float. You need to perform the division operation using values of the same type, so one value must be explicitly converted to match the type of the other (in this case the more likely conversion is from integer to float). Ada is designed to guarantee that what's done by the program is what's meant by the programmer, leaving as little room for compiler interpretation as possible. Let's have a look at the following example:

[Ada]

Listing 29: strong_typing.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Strong_Typing is
   Alpha  : constant Integer := 1;
   Beta   : constant Integer := 10;
   Result : Float;
begin
   Result := Float (Alpha) / Float (Beta);

   Put_Line (Float'Image (Result));
end Strong_Typing;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Strong_Typing_Ada_2
MD5: bf91f01b499bcd7da1df751a9f91a767
```

Runtime output

```
 1.00000E-01
```

[C]

Listing 30: main.c

```
#include <stdio.h>

void weakTyping (void) {
    const int   alpha = 1;
    const int   beta = 10;
    float result;

    result = alpha / beta;
```

(continues on next page)

(continued from previous page)

```
    printf("%f\n", result);
}

int main(int argc, const char * argv[])
{
    weakTyping();

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Strong_Typing_C_2
MD5: e4310900cd1195d6e3d349e0c4aa758a
```

Runtime output

```
0.000000
```

Are the three programs above equivalent? It may seem like Ada is just adding extra complexity by forcing you to make the conversion from **Integer** to **Float** explicit. In fact, it significantly changes the behavior of the computation. While the Ada code performs a floating point operation 1.0 / 10.0 and stores 0.1 in `Result`, the C version instead store 0.0 in `result`. This is because the C version perform an integer operation between two integer variables: 1 / 10 is 0. The result of the integer division is then converted to a **float** and stored. Errors of this sort can be very hard to locate in complex pieces of code, and systematic specification of how the operation should be interpreted helps to avoid this class of errors. If an integer division was actually intended in the Ada case, it is still necessary to explicitly convert the final result to **Float**:

[Ada]

```
-- Perform an Integer division then convert to Float
Result := Float (Alpha / Beta);
```

The complete example would then be:

[Ada]

Listing 31: strong_typing.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Strong_Typing is
   Alpha  : constant Integer := 1;
   Beta   : constant Integer := 10;
   Result : Float;
begin
   Result := Float (Alpha / Beta);

   Put_Line (Float'Image (Result));
end Strong_Typing;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Strong_Typing_Ada_2
MD5: 50d6a6a3270b51880c43c07f077760b6
```

Runtime output

```
0.00000E+00
```

Floating Point Literals

In Ada, a floating point literal must be written with both an integral and decimal part. `10` is not a valid literal for a floating point value, while `10.0` is.

79.11.2 Language-Defined Types

The principal scalar types predefined by Ada are **`Integer`**, **`Float`**, **`Boolean`**, and **`Character`**. These correspond to **`int`**, **`float`**, **`int`** (when used for Booleans), and **`char`**, respectively. The names for these types are not reserved words; they are regular identifiers. There are other language-defined integer and floating-point types as well. All have implementation-defined ranges and precision.

79.11.3 Application-Defined Types

Ada's type system encourages programmers to think about data at a high level of abstraction. The compiler will at times output a simple efficient machine instruction for a full line of source code (and some instructions can be eliminated entirely). The careful programmer's concern that the operation really makes sense in the real world would be satisfied, and so would the programmer's concern about performance.

The next example below defines two different metrics: area and distance. Mixing these two metrics must be done with great care, as certain operations do not make sense, like adding an area to a distance. Others require knowledge of the expected semantics; for example, multiplying two distances. To help avoid errors, Ada requires that each of the binary operators +, -, *, and / for integer and floating-point types take operands of the same type and return a value of that type.

[Ada]

Listing 32: main.adb

```
procedure Main is
   type Distance is new Float;
   type Area is new Float;

   D1 : Distance := 2.0;
   D2 : Distance := 3.0;
   A  : Area;
begin
   D1 := D1 + D2; -- OK
   D1 := D1 + A;  -- NOT OK: incompatible types for "+"
   A  := D1 * D2; -- NOT OK: incompatible types for ":="
   A  := Area (D1 * D2); -- OK
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Application_Defined_Types
MD5: 6a21d6281cc529bbf8ce2216d7e4a770
```

Build output

```
main.adb:10:13: error: invalid operand types for operator "+"
main.adb:10:13: error: left operand has type "Distance" defined at line 2
main.adb:10:13: error: right operand has type "Area" defined at line 3
```

(continues on next page)

(continued from previous page)

```
main.adb:11:13: error: expected type "Area" defined at line 3
main.adb:11:13: error: found type "Distance" defined at line 2
gprbuild: *** compilation phase failed
```

Even though the `Distance` and `Area` types above are just **`Float`**, the compiler does not allow arbitrary mixing of values of these different types. An explicit conversion (which does not necessarily mean any additional object code) is necessary.

The predefined Ada rules are not perfect; they admit some problematic cases (for example multiplying two `Distance` yields a `Distance`) and prohibit some useful cases (for example multiplying two `Distances` should deliver an `Area`). These situations can be handled through other mechanisms. A predefined operation can be identified as abstract to make it unavailable; overloading can be used to give new interpretations to existing operator symbols, for example allowing an operator to return a value from a type different from its operands; and more generally, GNAT has introduced a facility that helps perform dimensionality checking.

Ada enumerations work similarly to C **`enum`**:

[Ada]

Listing 33: main.adb

```
procedure Main is
   type Day is
     (Monday,
      Tuesday,
      Wednesday,
      Thursday,
      Friday,
      Saturday,
      Sunday);

   D : Day := Monday;
begin
   null;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Enumeration_Ada
MD5: 51abd1863970e14ff86859c1aae11fe8
```

[C]

Listing 34: main.c

```
enum Day {
    Monday,
    Tuesday,
    Wednesday,
    Thursday,
    Friday,
    Saturday,
    Sunday
};

int main(int argc, const char * argv[])
{
    enum Day d = Monday;

```

(continues on next page)

(continued from previous page)

```
    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Enumeration_C
MD5: d9f6724759375a126a6b5d8dceea3f24
```

But even though such enumerations may be implemented by the compiler as numeric values, at the language level Ada will not confuse the fact that Monday is a Day and is not an **Integer**. You can compare a Day with another Day, though. To specify implementation details like the numeric values that correspond with enumeration values in C you include them in the original **enum** declaration:

[C]

Listing 35: main.c

```c
#include <stdio.h>

enum Day {
    Monday    = 10,
    Tuesday   = 11,
    Wednesday = 12,
    Thursday  = 13,
    Friday    = 14,
    Saturday  = 15,
    Sunday    = 16
};

int main(int argc, const char * argv[])
{
    enum Day d = Monday;

    printf("d = %d\n", d);

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Enumeration_Values_C
MD5: 48ae1c84dafabde7a16de5305e106a80
```

Runtime output

```
d = 10
```

But in Ada you must use both a type definition for Day as well as a separate representation clause for it like:

[Ada]

Listing 36: main.adb

```ada
with Ada.Text_IO;

procedure Main is
   type Day is
     (Monday,
      Tuesday,
```

(continues on next page)

(continued from previous page)

```
      Wednesday,
      Thursday,
      Friday,
      Saturday,
      Sunday);

   --  Representation clause for Day type:
   for Day use
     (Monday    => 10,
      Tuesday   => 11,
      Wednesday => 12,
      Thursday  => 13,
      Friday    => 14,
      Saturday  => 15,
      Sunday    => 16);

   D : Day := Monday;
   V : Integer;
begin
   V := Day'Enum_Rep (D);
   Ada.Text_IO.Put_Line (Integer'Image (V));
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Enumeration_Values
MD5: 9a4fa1a899cb8c240105bf8ad6dbfde3
```

Runtime output

```
 10
```

Note that however, unlike C, values for enumerations in Ada have to be unique.

79.11.4 Type Ranges

Contracts can be associated with types and variables, to refine values and define what are considered valid values. The most common kind of contract is a *range constraint* introduced with the **range** reserved word, for example:

[Ada]

Listing 37: main.adb

```
procedure Main is
   type Grade is range 0 .. 100;

   G1, G2  : Grade;
   N       : Integer;
begin
   --  ...               --  Initialization of N
   G1 := 80;             --  OK
   G1 := N;              --  Illegal (type mismatch)
   G1 := Grade (N);      --  Legal, run-time range check
   G2 := G1 + 10;        --  Legal, run-time range check
   G1 := (G1 + G2) / 2; --  Legal, run-time range check
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Range_Check
MD5: 0f249b06e373497ae94b6055a37187c8
```

Build output

```
main.adb:9:10: error: expected type "Grade" defined at line 2
main.adb:9:10: error: found type "Standard.Integer"
gprbuild: *** compilation phase failed
```

In the above example, Grade is a new integer type associated with a range check. Range checks are dynamic and are meant to enforce the property that no object of the given type can have a value outside the specified range. In this example, the first assignment to G1 is correct and will not raise a run-time exception. Assigning N to G1 is illegal since Grade is a different type than **Integer**. Converting N to Grade makes the assignment legal, and a range check on the conversion confirms that the value is within 0 .. 100. Assigning G1 + 10 to G2 is legal since + for Grade returns a Grade (note that the literal 10 is interpreted as a Grade value in this context), and again there is a range check.

The final assignment illustrates an interesting but subtle point. The subexpression G1 + G2 may be outside the range of Grade, but the final result will be in range. Nevertheless, depending on the representation chosen for Grade, the addition may overflow. If the compiler represents Grade values as signed 8-bit integers (i.e., machine numbers in the range -128 .. 127) then the sum G1 + G2 may exceed 127, resulting in an integer overflow. To prevent this, you can use explicit conversions and perform the computation in a sufficiently large integer type, for example:

[Ada]

Listing 38: main.adb

```ada
with Ada.Text_IO;

procedure Main is
   type Grade is range 0 .. 100;

   G1, G2 : Grade := 99;
begin
   G1 := Grade ((Integer (G1) + Integer (G2)) / 2);
   Ada.Text_IO.Put_Line (Grade'Image (G1));
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Range_And_Explicit_Conversion
MD5: d317fd95099e49017c4a4c1c52b7f8be
```

Runtime output

```
 99
```

Range checks are useful for detecting errors as early as possible. However, there may be some impact on performance. Modern compilers do know how to remove redundant checks, and you can deactivate these checks altogether if you have sufficient confidence that your code will function correctly.

Types can be derived from the representation of any other type. The new derived type can be associated with new constraints and operations. Going back to the Day example, one can write:

[Ada]

Listing 39: main.adb

```
procedure Main is
   type Day is
     (Monday,
      Tuesday,
      Wednesday,
      Thursday,
      Friday,
      Saturday,
      Sunday);

   type Business_Day is new Day range Monday .. Friday;
   type Weekend_Day is new Day range Saturday .. Sunday;
begin
   null;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Enum_Ranges_1
MD5: fd775ad4990d5636607d3a0d9b00044d
```

Since these are new types, implicit conversions are not allowed. In this case, it's more natural to create a new set of constraints for the same type, instead of making completely new ones. This is the idea behind *subtypes* in Ada. A subtype is a type with optional additional constraints. For example:

[Ada]

Listing 40: main.adb

```
procedure Main is
   type Day is
     (Monday,
      Tuesday,
      Wednesday,
      Thursday,
      Friday,
      Saturday,
      Sunday);

   subtype Business_Day is Day range Monday .. Friday;
   subtype Weekend_Day is Day range Saturday .. Sunday;
   subtype Dice_Throw is Integer range 1 .. 6;
begin
   null;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Enum_Ranges_2
MD5: 5bcbde5b9f1aea57ff172fcfc89e1c41
```

These declarations don't create new types, just new names for constrained ranges of their base types.

The purpose of numeric ranges is to express some application-specific constraint that we want the compiler to help us enforce. More importantly, we want the compiler to tell us when that constraint cannot be met — when the underlying hardware cannot support the range given. There are two things to consider:

- just a range constraint, such as `A : Integer range 0 .. 10;`, or

- a type declaration, such as `type Result is range 0 .. 1_000_000_000;`.

Both represent some sort of application-specific constraint, but in addition, the type declaration promotes portability because it won't compile on targets that do not have a sufficiently large hardware numeric type. That's a definition of portability that is preferable to having something compile anywhere but not run correctly, as in C.

79.11.5 Unsigned And Modular Types

Unsigned integer numbers are quite common in embedded applications. In C, you can use them by declaring `unsigned int` variables. In Ada, you have two options:

- declare custom *unsigned* range types;
  - In addition, you can declare custom range *subtypes* or use existing subtypes such as `Natural`.
- declare custom modular types.

The following table presents the main features of each type. We discuss these types right after.

Feature	[C] `unsigned int`	[Ada] Unsigned range	[Ada] Modular
Excludes negative value	✓	✓	✓
Wraparound	✓		✓

When declaring custom range types in Ada, you may use the full range in the same way as in C. For example, this is the declaration of a 32-bit unsigned integer type and the X variable in Ada:

[Ada]

Listing 41: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is
   type Unsigned_Int_32 is range 0 .. 2 ** 32 - 1;

   X : Unsigned_Int_32 := 42;
begin
   Put_Line ("X = " & Unsigned_Int_32'Image (X));
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Unsigned_32_Ada
MD5: 0a179ce327c022468f66b6814a981b62
```

Runtime output

```
X =  42
```

In C, when `unsigned int` has a size of 32 bits, this corresponds to the following declaration:

[C]

Listing 42: main.c

```
#include <stdio.h>
#include <limits.h>
```

(continues on next page)

(continued from previous page)

```c

int main(int argc, const char * argv[])
{
    unsigned int x = 42;
    printf("x = %u\n", x);

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Unsigned_32_C
MD5: 546068de216de96282490e81a0f7df26
```

Runtime output

```
x = 42
```

Another strategy is to declare subtypes for existing signed types and specify just the range that excludes negative numbers. For example, let's declare a custom 32-bit signed type and its unsigned subtype:

[Ada]

Listing 43: main.adb

```ada
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is
   type Signed_Int_32 is range -2 ** 31 .. 2 ** 31 - 1;

   subtype Unsigned_Int_31 is Signed_Int_32 range 0 .. Signed_Int_32'Last;
   --  Equivalent to:
   --  subtype Unsigned_Int_31 is Signed_Int_32 range 0 .. 2 ** 31 - 1;

   X : Unsigned_Int_31 := 42;
begin
   Put_Line ("X = " & Unsigned_Int_31'Image (X));
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Unsigned_31_Ada
MD5: 2ef2b5bfd54821ceb35faa222e649156
```

Runtime output

```
X =  42
```

In this case, we're just skipping the sign bit of the `Signed_Int_32` type. In other words, while `Signed_Int_32` has a size of 32 bits, `Unsigned_Int_31` has a range of 31 bits, even if the base type has 32 bits.

Note that the declaration above is actually similar to the existing **`Natural`** subtype. Ada provides the following standard subtypes:

```ada
subtype Natural  is Integer range 0..Integer'Last;
subtype Positive is Integer range 1..Integer'Last;
```

Since they're standard subtypes, you can declare variables of those subtypes directly in your implementation, in the same way as you can declare **`Integer`** variables.

As indicated in the table above, however, there is a difference in behavior for the variables we just declared, which occurs in case of overflow. Let's consider this C example:

[C]

Listing 44: main.c

```c
#include <stdio.h>
#include <limits.h>

int main(int argc, const char * argv[])
{
    unsigned int x = UINT_MAX + 1;
    /* Now: x == 0 */

    printf("x = %u\n", x);

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Overflow_Wraparound_C
MD5: 7d5dcf65471304ff8f303195359b4790
```

Runtime output

```
x = 0
```

The corresponding code in Ada raises an exception:

[Ada]

Listing 45: main.adb

```ada
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is
   type Unsigned_Int_32 is range 0 .. 2 ** 32 - 1;

   X : Unsigned_Int_32 := Unsigned_Int_32'Last + 1;
   --  Overflow: exception is raised!
begin
   Put_Line ("X = " & Unsigned_Int_32'Image (X));
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Overflow_Wraparound_Ada
MD5: ee4c3e905c59f5c8d87311e13d079836
```

Build output

```
main.adb:6:48: warning: value not in range of type "Unsigned_Int_32" defined at␣
 ↪line 4 [enabled by default]
main.adb:6:48: warning: Constraint_Error will be raised at run time [enabled by␣
 ↪default]
```

Runtime output

```

raised CONSTRAINT_ERROR : main.adb:6 range check failed
```

While the C uses modulo arithmetic for unsigned integer, Ada doesn't use it for the `Unsigned_Int_32` type. Ada does, however, support modular types via type definitions using the **mod** keyword. In this example, we declare a 32-bit modular type:

[Ada]

Listing 46: main.adb

```ada
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is
   type Unsigned_32 is mod 2**32;

   X : Unsigned_32 := Unsigned_32'Last + 1;
   --  Now: X = 0
begin
   Put_Line ("X = " & Unsigned_32'Image (X));
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Overflow_Wraparound_Ada
MD5: 4ed963ab372cafc8e7a19d9c3107276b
```

Runtime output

```
X =  0
```

In this case, the behavior is the same as in the C declaration above.

Modular types, unlike Ada's signed integers, also provide bit-wise operations, a typical application for unsigned integers in C. In Ada, you can use operators such as **and**, **or**, **xor** and **not**. You can also use typical bit-shifting operations, such as `Shift_Left`, `Shift_Right`, `Shift_Right_Arithmetic`, `Rotate_Left` and `Rotate_Right`.

79.11.6 Attributes

Attributes start with a single apostrophe ("tick"), and they allow you to query properties of, and perform certain actions on, declared entities such as types, objects, and subprograms. For example, you can determine the first and last bounds of scalar types, get the sizes of objects and types, and convert values to and from strings. This section provides an overview of how attributes work. For more information on the many attributes defined by the language, you can refer directly to the Ada Language Reference Manual.

The `'Image` and `'Value` attributes allow you to transform a scalar value into a **String** and vice-versa. For example:

[Ada]

Listing 47: main.adb

```ada
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is
   A : Integer := 10;
begin
   Put_Line (Integer'Image (A));
   A := Integer'Value ("99");
   Put_Line (Integer'Image (A));
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Image_Attribute
MD5: 1fcfc79ec599a26e21aef7eacffcf96e
```

Runtime output

```
 10
 99
```

Important

Semantically, attributes are equivalent to subprograms. For example, `Integer'Image` is defined as follows:

```
function Integer'Image(Arg : Integer'Base) return String;
```

Certain attributes are provided only for certain kinds of types. For example, the `'Val` and `'Pos` attributes for an enumeration type associates a discrete value with its position among its peers. One circuitous way of moving to the next character of the ASCII table is:

[Ada]

Listing 48: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is
   C : Character := 'a';
begin
   Put (C);
   C := Character'Val (Character'Pos (C) + 1);
   Put (C);
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Character_1
MD5: 742bbaeb74e5dd9fa73089c0d1aa0fde
```

Runtime output

```
ab
```

A more concise way to get the next value in Ada is to use the `'Succ` attribute:

[Ada]

Listing 49: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is
   C : Character := 'a';
begin
   Put (C);
   C := Character'Succ (C);
   Put (C);
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Character_1
MD5: 842eeff2b82dcdb8c73547a33d03995b
```

Runtime output

```
ab
```

You can get the previous value using the 'Pred attribute. Here is the equivalent in C:

[C]

Listing 50: main.c

```c
#include <stdio.h>

int main(int argc, const char * argv[])
{
    char c = 'a';
    printf("%c", c);
    c++;
    printf("%c", c);

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Loop_Reverse_C
MD5: 40bfbd6a672bc3fdb7e8f2f2d7101b19
```

Runtime output

```
ab
```

Other interesting examples are the 'First and 'Last attributes which, respectively, return the first and last values of a scalar type. Using 32-bit integers, for instance, **Integer**'First returns -2^{31} and **Integer**'Last returns 2^{31} - 1.

79.11.7 Arrays and Strings

C arrays are pointers with offsets, but the same is not the case for Ada. Arrays in Ada are not interchangeable with operations on pointers, and array types are considered first-class citizens. They have dedicated semantics such as the availability of the array's boundaries at run-time. Therefore, unhandled array overflows are impossible unless checks are suppressed. Any discrete type can serve as an array index, and you can specify both the starting and ending bounds — the lower bound doesn't necessarily have to be 0. Most of the time, array types need to be explicitly declared prior to the declaration of an object of that array type.

Here's an example of declaring an array of 26 characters, initializing the values from 'a' to 'z':

[Ada]

Listing 51: main.adb

```ada
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is
   type Arr_Type is array (Integer range <>) of Character;
   Arr : Arr_Type (1 .. 26);
```

(continues on next page)

(continued from previous page)

```
   C : Character := 'a';
begin
   for I in Arr'Range loop
      Arr (I) := C;
      C := Character'Succ (C);

      Put (Arr (I) & " ");

      if I mod 7 = 0 then
         New_Line;
      end if;
   end loop;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Array_Range_Ada
MD5: 8e0597f6c040c740b35c79bc4706829b
```

Runtime output

```
a b c d e f g
h i j k l m n
o p q r s t u
v w x y z
```

[C]

Listing 52: main.c

```
#include <stdio.h>

int main(int argc, const char * argv[])
{
    char Arr [26];
    char C = 'a';

    for (int I = 0; I < 26; ++I) {
        Arr [I] = C++;
        printf ("%c ", Arr [I]);

        if ((I + 1) % 7 == 0) {
            printf ("\n");
        }
    }

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Array_Range_C
MD5: 1182155f46a0b69f73cd5937c23ed67d
```

Runtime output

```
a b c d e f g
h i j k l m n
o p q r s t u
v w x y z
```

In C, only the size of the array is given during declaration. In Ada, array index ranges are

specified using two values of a discrete type. In this example, the array type declaration specifies the use of **Integer** as the index type, but does not provide any constraints (use <>, pronounced *box*, to specify "no constraints"). The constraints are defined in the object declaration to be 1 to 26, inclusive. Arrays have an attribute called 'Range. In our example, Arr'Range can also be expressed as Arr'First .. Arr'Last; both expressions will resolve to 1 .. 26. So the 'Range attribute supplies the bounds for our **for** loop. There is no risk of stating either of the bounds incorrectly, as one might do in C where I <= 26 may be specified as the end-of-loop condition.

As in C, Ada **String** is an array of **Character**. Ada strings, importantly, are not delimited with the special character '0' like they are in C. It is not necessary because Ada uses the array's bounds to determine where the string starts and stops.

Ada's predefined **String** type is very straightforward to use:

[Ada]

Listing 53: main.adb

```ada
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is
   My_String : String (1 .. 19) := "This is an example!";
begin
   Put_Line (My_String);
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Constrained_String
MD5: da2e88900c670f80b7380f87f2b89ec2
```

Runtime output

```
This is an example!
```

Unlike C, Ada does not offer escape sequences such as 'n'. Instead, explicit values from the ASCII package must be concatenated (via the concatenation operator, &). Here for example, is how to initialize a line of text ending with a new line:

[Ada]

Listing 54: main.adb

```ada
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is
   My_String : String := "This is a line" & ASCII.LF;
begin
   Put (My_String);
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Constrained_String
MD5: 684bbbdf99d48ed6fd5c257183a6609f
```

Runtime output

```
This is a line

```

You see here that no constraints are necessary for this variable definition. The initial value given allows the automatic determination of My_String's bounds.

Ada offers high-level operations for copying, slicing, and assigning values to arrays. We'll start with assignment. In C, the assignment operator doesn't make a copy of the value of an array, but only copies the address or reference to the target variable. In Ada, the actual array contents are duplicated. To get the above behavior, actual pointer types would have to be defined and used.

[Ada]

Listing 55: main.adb

```ada
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is
   type Arr_Type is array (Integer range <>) of Integer;
   A1 : Arr_Type (1 .. 2);
   A2 : Arr_Type (1 .. 2);
begin
   A1 (1) := 0;
   A1 (2) := 1;

   A2 := A1;

   for I in A2'Range loop
      Put_Line (Integer'Image (A2 (I)));
   end loop;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Array_Copy_Ada
MD5: 4d4e9aa063c1f488e7cefa90083d06c2
```

Runtime output

```
 0
 1
```

[C]

Listing 56: main.c

```c
#include <stdio.h>
#include <string.h>

int main(int argc, const char * argv[])
{
    int A1 [2];
    int A2 [2];

    A1 [0] = 0;
    A1 [1] = 1;

    memcpy (A2, A1, sizeof (int) * 2);

    for (int i = 0; i < 2; i++) {
        printf("%d\n", A2[i]);
    }

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Array_Copy_C
MD5: 0dade800452673b7a82afe1c656f07e6
```

Runtime output

```
0
1
```

In all of the examples above, the source and destination arrays must have precisely the same number of elements. Ada allows you to easily specify a portion, or slice, of an array. So you can write the following:

[Ada]

Listing 57: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is
   type Arr_Type is array (Integer range <>) of Integer;
   A1 : Arr_Type (1 .. 10) := (1, 2, 3, 4, 5, 6, 7, 8, 9, 10);
   A2 : Arr_Type (1 .. 5)  := (1, 2, 3, 4, 5);
begin
   A2 (1 .. 3) := A1 (4 .. 6);

   for I in A2'Range loop
      Put_Line (Integer'Image (A2 (I)));
   end loop;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Array_Slice
MD5: cb2a7de2cff8ea19025363886f8821e4
```

Runtime output

```
 4
 5
 6
 4
 5
```

This assigns the 4th, 5th, and 6th elements of A1 into the 1st, 2nd, and 3rd elements of A2. Note that only the length matters here: the values of the indexes don't have to be equal; they slide automatically.

Ada also offers high level comparison operations which compare the contents of arrays as opposed to their addresses:

[Ada]

Listing 58: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is
   type Arr_Type is array (Integer range <>) of Integer;
   A1 : Arr_Type (1 .. 2) := (10, 20);
   A2 : Arr_Type (1 .. 2) := (10, 20);
begin
   if A1 = A2 then
```

(continues on next page)

(continued from previous page)

```
     Put_Line ("A1 = A2");
   else
     Put_Line ("A1 /= A2");
   end if;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Array_Equal_Ada
MD5: 650a734875a02b2fb3678bbc3f8dd82a
```

Runtime output

```
A1 = A2
```

[C]

Listing 59: main.c

```c
#include <stdio.h>

int main(int argc, const char * argv[])
{
    int A1 [2] = { 10, 20 };
    int A2 [2] = { 10, 20 };

    int eq = 1;

    for (int i = 0; i < 2; ++i) {
        if (A1 [i] != A2 [i]) {
            eq = 0;
            break;
        }
    }

    if (eq) {
        printf("A1 == A2\n");
    }
    else {
        printf("A1 != A2\n");
    }

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Array_Equal_C
MD5: efe8717d931324bcbe8b70b03693c92e
```

Runtime output

```
A1 == A2
```

You can assign to all the elements of an array in each language in different ways. In Ada, the number of elements to assign can be determined by looking at the right-hand side, the left-hand side, or both sides of the assignment. When bounds are known on the left-hand side, it's possible to use the others expression to define a default value for all the unspecified array elements. Therefore, you can write:

[Ada]

Listing 60: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is
   type Arr_Type is array (Integer range <>) of Integer;
   A1 : Arr_Type (-2 .. 42) := (others => 0);
begin
   --  use a slice to assign A1 elements 11 .. 19 to 1
   A1 (11 .. 19) := (others => 1);

   Put_Line ("---- A1 ----");
   for I in A1'Range loop
      Put_Line (Integer'Image (I) & " => " &
                Integer'Image (A1 (I)));
   end loop;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Array_Assignment_Ada
MD5: 673d31f633a32b6bb1cce238150cfc80
```

Runtime output

```
---- A1 ----
-2 =>  0
-1 =>  0
 0 =>  0
 1 =>  0
 2 =>  0
 3 =>  0
 4 =>  0
 5 =>  0
 6 =>  0
 7 =>  0
 8 =>  0
 9 =>  0
 10 =>  0
 11 =>  1
 12 =>  1
 13 =>  1
 14 =>  1
 15 =>  1
 16 =>  1
 17 =>  1
 18 =>  1
 19 =>  1
 20 =>  0
 21 =>  0
 22 =>  0
 23 =>  0
 24 =>  0
 25 =>  0
 26 =>  0
 27 =>  0
 28 =>  0
 29 =>  0
 30 =>  0
 31 =>  0
 32 =>  0
 33 =>  0
```

(continues on next page)

(continued from previous page)

```
 34 =>  0
 35 =>  0
 36 =>  0
 37 =>  0
 38 =>  0
 39 =>  0
 40 =>  0
 41 =>  0
 42 =>  0
```

In this example, we're specifying that A1 has a range between -2 and 42. We use (**others** => 0) to initialize all array elements with zero. In the next example, the number of elements is determined by looking at the right-hand side:

[Ada]

Listing 61: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is
   type Arr_Type is array (Integer range <>) of Integer;
   A1 : Arr_Type := (1, 2, 3, 4, 5, 6, 7, 8, 9);
begin
   A1 := (1, 2, 3, others => 10);

   Put_Line ("---- A1 ----");
   for I in A1'Range loop
      Put_Line (Integer'Image (I) & " => " &
                Integer'Image (A1 (I)));
   end loop;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Array_Assignment_Ada
MD5: 3e3d69815373d1c61208df265903e89d
```

Runtime output

```
---- A1 ----
-2147483648 =>  1
-2147483647 =>  2
-2147483646 =>  3
-2147483645 =>  10
-2147483644 =>  10
-2147483643 =>  10
-2147483642 =>  10
-2147483641 =>  10
-2147483640 =>  10
```

Since A1 is initialized with an aggregate of 9 elements, A1 automatically has 9 elements. Also, we're not specifying any range in the declaration of A1. Therefore, the compiler uses the default range of the underlying array type Arr_Type, which has an unconstrained range based on the **Integer** type. The compiler selects the first element of that type (**Integer**'First) as the start index of A1. If you replaced **Integer range** <> in the declaration of the Arr_Type by **Positive range** <>, then A1's start index would be **Positive**'First — which corresponds to one.

79.11.8 Heterogeneous Data Structures

The structure corresponding to a C **struct** is an Ada **record**. Here are some simple records:

[Ada]

Listing 62: main.adb

```ada
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is
   type R is record
      A, B : Integer;
      C    : Float;
   end record;

   V : R;
begin
   V.A := 0;
   Put_Line ("V.A = " & Integer'Image (V.A));
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Struct_Ada
MD5: 013f27dfc827355f32bea37fb267df9b
```

Runtime output

```
V.A =  0
```

[C]

Listing 63: main.c

```c
#include <stdio.h>

struct R {
    int A, B;
    float C;
};

int main(int argc, const char * argv[])
{
    struct R V;
    V.A = 0;
    printf("V.A = %d\n", V.A);

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Struct_C
MD5: 653b65bbb6ea02a512e439d912e11d7f
```

Runtime output

```
V.A = 0
```

Ada allows specification of default values for fields just like C. The values specified can take the form of an ordered list of values, a named list of values, or an incomplete list followed by others => <> to specify that fields not listed will take their default values. For example:

[Ada]

Listing 64: main.adb

```ada
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is

   type R is record
      A, B : Integer := 0;
      C    : Float   := 0.0;
   end record;

   procedure Put_R (V : R; Name : String) is
   begin
      Put_Line (Name & " = ("
                & Integer'Image (V.A) & ", "
                & Integer'Image (V.B) & ", "
                & Float'Image (V.C) & ")");
   end Put_R;

   V1 : constant R := (1, 2, 1.0);
   V2 : constant R := (A => 1, B => 2, C => 1.0);
   V3 : constant R := (C => 1.0, A => 1, B => 2);
   V4 : constant R := (C => 1.0, others => <>);

begin
   Put_R (V1, "V1");
   Put_R (V2, "V2");
   Put_R (V3, "V3");
   Put_R (V4, "V4");
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Struct_Default_Ada
MD5: d0a9713e3bd9804c00ebf68cc7c196b7
```

Runtime output

```
V1 = ( 1,  2,  1.00000E+00)
V2 = ( 1,  2,  1.00000E+00)
V3 = ( 1,  2,  1.00000E+00)
V4 = ( 0,  0,  1.00000E+00)
```

79.11.9 Pointers

As a foreword to the topic of pointers, it's important to keep in mind the fact that most situations that would require a pointer in C do not in Ada. In the vast majority of cases, indirect memory management can be hidden from the developer and thus saves from many potential errors. However, there are situation that do require the use of pointers, or said differently that require to make memory indirection explicit. This section will present Ada access types, the equivalent of C pointers. A further section will provide more details as to how situations that require pointers in C can be done without access types in Ada.

We'll continue this section by explaining the difference between objects allocated on the stack and objects allocated on the heap using the following example:

[Ada]

Listing 65: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is
   type R is record
      A, B : Integer;
   end record;

   procedure Put_R (V : R; Name : String) is
   begin
      Put_Line (Name & " = ("
                & Integer'Image (V.A) & ", "
                & Integer'Image (V.B) & ")");
   end Put_R;

   V1, V2 : R;

begin
   V1.A := 0;
   V1.B := 0;
   V2 := V1;
   V2.A := 1;

   Put_R (V1, "V1");
   Put_R (V2, "V2");
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Pointers_Ada
MD5: 0a4ade5aa12de5b0760d149c8e319d5f
```

Runtime output

```
V1 = ( 0,  0)
V2 = ( 1,  0)
```

[C]

Listing 66: main.c

```
#include <stdio.h>

struct R {
    int A, B;
};

void print_r(const struct R *v,
             const char     *name)
{
    printf("%s = (%d, %d)\n", name, v->A, v->B);
}

int main(int argc, const char * argv[])
{
    struct R V1, V2;
    V1.A = 0;
    V1.B = 0;
    V2 = V1;
    V2.A = 1;

```

(continues on next page)

(continued from previous page)

```
    print_r(&V1, "V1");
    print_r(&V2, "V2");

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Pointers_C
MD5: e604bf19c98927151f3b4989dc50747a
```

Runtime output

```
V1 = (0, 0)
V2 = (1, 0)
```

There are many commonalities between the Ada and C semantics above. In Ada and C, objects are allocated on the stack and are directly accessed. V1 and V2 are two different objects and the assignment statement copies the value of V1 into V2. V1 and V2 are two distinct objects.

Here's now a similar example, but using heap allocation instead:

[Ada]

Listing 67: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is
   type R is record
      A, B : Integer;
   end record;

   type R_Access is access R;

   procedure Put_R (V : R; Name : String) is
   begin
      Put_Line (Name & " = ("
                & Integer'Image (V.A) & ", "
                & Integer'Image (V.B) & ")");
   end Put_R;

   V1 : R_Access;
   V2 : R_Access;
begin
   V1 := new R;
   V1.A := 0;
   V2 := V1;
   V2.A := 1;

   Put_R (V1.all, "V1");
   Put_R (V2.all, "V2");
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Heap_Alloc_Ada
MD5: 963b48bb0a8585a9941d8fb2d0eda390
```

Runtime output

```
V1 = ( 1,  0)
V2 = ( 1,  0)
```

[C]

Listing 68: main.c

```c
#include <stdio.h>
#include <stdlib.h>

struct R {
    int A, B;
};

void print_r(const struct R *v,
             const char     *name)
{
    printf("%s = (%d, %d)\n", name, v->A, v->B);
}

int main(int argc, const char * argv[])
{
    struct R * V1, * V2;
    V1 = malloc(sizeof(struct R));
    V1->A = 0;
    V2 = V1;
    V2->A = 1;

    print_r(V1, "V1");
    print_r(V2, "V2");

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Heap_Alloc_C
MD5: 5c832377403dfa8f00d70ef92bfeff65
```

Runtime output

```
V1 = (1, 0)
V2 = (1, 0)
```

In this example, an object of type R is allocated on the heap. The same object is then referred to through V1 and V2. As in C, there's no garbage collector in Ada, so objects allocated by the new operator need to be expressly freed (which is not the case here).

Dereferencing is performed automatically in certain situations, for instance when it is clear that the type required is the dereferenced object rather than the pointer itself, or when accessing record members via a pointer. To explicitly dereference an access variable, append `.all`. The equivalent of `V1->A` in C can be written either as `V1.A` or `V1.all.A`.

Pointers to scalar objects in Ada and C look like:

[Ada]

Listing 69: main.adb

```ada
procedure Main is
   type A_Int is access Integer;
   Var : A_Int := new Integer;
```

(continues on next page)

(continued from previous page)

```
begin
   Var.all := 0;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Access_To_Scalars
MD5: 2e2bf53a9b5dc1098921d811be73a7f0
```

[C]

Listing 70: main.c

```
#include <stdlib.h>

int main(int argc, const char * argv[])
{
    int * Var = malloc (sizeof(int));
    *Var = 0;
    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Pointers_To_Scalars
MD5: f22d7b6f8170587009b0f6bb1299c0a0
```

In Ada, an initializer can be specified with the allocation by appending `'(value)`:

[Ada]

Listing 71: main.adb

```
procedure Main is
   type A_Int is access Integer;

   Var : A_Int := new Integer'(0);
begin
   null;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Access_Initialization
MD5: 5789253068f77100eec34919b8de66ec
```

When using Ada pointers to reference objects on the stack, the referenced objects must be declared as being aliased. This directs the compiler to implement the object using a memory region, rather than using registers or eliminating it entirely via optimization. The access type needs to be declared as either **`access all`** (if the referenced object needs to be assigned to) or **`access constant`** (if the referenced object is a constant). The `'Access` attribute works like the C `&` operator to get a pointer to the object, but with a *scope accessibility* check to prevent references to objects that have gone out of scope. For example:

[Ada]

Listing 72: main.adb

```
procedure Main is
   type A_Int is access all Integer;
   Var : aliased Integer;
```

(continues on next page)

(continued from previous page)

```
   Ptr : A_Int := Var'Access;
begin
   null;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Access_All
MD5: 520df34083e3517876e10710530380be
```

[C]

Listing 73: main.c

```
int main(int argc, const char * argv[])
{
    int Var;
    int * Ptr = &Var;

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Access_All_C
MD5: a592fcf09dabe15f2aaf12fba047d74f
```

To deallocate objects from the heap in Ada, it is necessary to use a deallocation subprogram that accepts a specific access type. A generic procedure is provided that can be customized to fit your needs, it's called `Ada.Unchecked_Deallocation`. To create your customized deallocator (that is, to instantiate this generic), you must provide the object type as well as the access type as follows:

[Ada]

Listing 74: main.adb

```
with Ada.Unchecked_Deallocation;

procedure Main is
   type Integer_Access is access all Integer;
   procedure Free is new Ada.Unchecked_Deallocation (Integer, Integer_Access);
   My_Pointer : Integer_Access := new Integer;
begin
   Free (My_Pointer);
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Unchecked_Deallocation
MD5: ef6ee170fea1f6c6c01037a09809916f
```

[C]

Listing 75: main.c

```
#include <stdlib.h>

int main(int argc, const char * argv[])
{
    int * my_pointer = malloc (sizeof(int));
```

(continues on next page)

(continued from previous page)

```
    free (my_pointer);

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Free
MD5: 066046816dd1c4f9106b5e822cfe5e44
```

We'll discuss generics later *in this section* (page 1765).

79.12 Functions and Procedures

79.12.1 General Form

Subroutines in C are always expressed as functions which may or may not return a value. Ada explicitly differentiates between functions and procedures. Functions must return a value and procedures must not. Ada uses the more general term *subprogram* to refer to both functions and procedures.

Parameters can be passed in three distinct modes:

- **in**, which is the default, is for input parameters, whose value is provided by the caller and cannot be changed by the subprogram.
- **out** is for output parameters, with no initial value, to be assigned by the subprogram and returned to the caller.
- **in out** is a parameter with an initial value provided by the caller, which can be modified by the subprogram and returned to the caller (more or less the equivalent of a non-constant pointer in C).

Ada also provides **access** and **aliased** parameters, which are in effect explicit pass-by-reference indicators.

In Ada, the programmer specifies how the parameter will be used and in general the compiler decides how it will be passed (i.e., by copy or by reference). C has the programmer specify how to pass the parameter.

Important

There are some exceptions to the "general" rule in Ada. For example, parameters of scalar types are always passed by copy, for all three modes.

Here's a first example:

[Ada]

Listing 76: proc.ads

```
procedure Proc
 (Var1 : Integer;
  Var2 : out Integer;
  Var3 : in out Integer);
```

Listing 77: func.ads

```
function Func (Var : Integer) return Integer;
```

Listing 78: proc.adb

```
with Func;

procedure Proc
 (Var1 : Integer;
  Var2 : out Integer;
  Var3 : in out Integer)
is
begin
   Var2 := Func (Var1);
   Var3 := Var3 + 1;
end Proc;
```

Listing 79: func.adb

```
function Func (Var : Integer) return Integer
is
begin
   return Var + 1;
end Func;
```

Listing 80: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Proc;

procedure Main is
   V1, V2 : Integer;
begin
   V2 := 2;
   Proc (5, V1, V2);

   Put_Line ("V1: " & Integer'Image (V1));
   Put_Line ("V2: " & Integer'Image (V2));
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Subroutines_Ada
MD5: a35fb6ae1b37325c3f39b3316e4246a8
```

Runtime output

```
V1:  6
V2:  3
```

[C]

Listing 81: proc.h

```
void Proc
    (int   Var1,
     int * Var2,
     int * Var3);
```

Listing 82: func.h

```c
int Func (int Var);
```

Listing 83: proc.c

```c
#include "func.h"

void Proc
    (int   Var1,
     int * Var2,
     int * Var3)
{
    *Var2 = Func (Var1);
    *Var3 += 1;
}
```

Listing 84: func.c

```c
int Func (int Var)
{
    return Var + 1;
}
```

Listing 85: main.c

```c
#include <stdio.h>
#include "proc.h"

int main(int argc, const char * argv[])
{
    int v1, v2;

    v2 = 2;
    Proc (5, &v1, &v2);

    printf("v1: %d\n", v1);
    printf("v2: %d\n", v2);

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Subroutines_C
MD5: dd5645c832ef00b94061f204852084a3
```

Runtime output

```
v1: 6
v2: 3
```

The first two declarations for Proc and Func are specifications of the subprograms which are being provided later. Although optional here, it's still considered good practice to separately define specifications and implementations in order to make it easier to read the program. In Ada and C, a function that has not yet been seen cannot be used. Here, Proc can call Func because its specification has been declared.

Parameters in Ada subprogram declarations are separated with semicolons, because commas are reserved for listing multiple parameters of the same type. Parameter declaration syntax is the same as variable declaration syntax (except for the modes), including de-

fault values for parameters. If there are no parameters, the parentheses must be omitted entirely from both the declaration and invocation of the subprogram.

In Ada 202X

Ada 202X allows for using static expression functions, which are evaluated at compile time. To achieve this, we can use an aspect — we'll discuss aspects *later in this chapter* (page 1674).

An expression function is static when the `Static` aspect is specified. For example:

```
procedure Main is

   X1 : constant := (if True then 37 else 42);

   function If_Then_Else (Flag : Boolean; X, Y : Integer)
     return Integer is
      (if Flag then X else Y) with Static;

   X2 : constant := If_Then_Else (True, 37, 42);

begin
   null;
end Main;
```

In this example, we declare X1 using an expression. In the declaration of X2, we call the static expression function `If_Then_Else`. Both X1 and X2 have the same constant value.

79.12.2 Overloading

In C, function names must be unique. Ada allows overloading, in which multiple subprograms can share the same name as long as the subprogram signatures (the parameter types, and function return types) are different. The compiler will be able to resolve the calls to the proper routines or it will reject the calls. For example:

[Ada]

Listing 86: machine.ads

```
1  package Machine is
2     type Status is (Off, On);
3     type Code is new Integer range 0 .. 3;
4     type Threshold is new Float range 0.0 .. 10.0;
5
6     function Get (S : Status) return Code;
7     function Get (S : Status) return Threshold;
8
9  end Machine;
```

Listing 87: machine.adb

```
1  package body Machine is
2
3     function Get (S : Status) return Code is
4     begin
5        case S is
6           when Off => return 1;
7           when On  => return 3;
8        end case;
9     end Get;
```

(continues on next page)

(continued from previous page)

```
10
11    function Get (S : Status) return Threshold is
12    begin
13       case S is
14          when Off => return  2.0;
15          when On  => return 10.0;
16       end case;
17    end Get;
18
19 end Machine;
```

Listing 88: main.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2  with Machine;     use Machine;
3
4  procedure Main is
5     S : Status;
6     C : Code;
7     T : Threshold;
8  begin
9     S := On;
10    C := Get (S);
11    T := Get (S);
12
13    Put_Line ("S: " & Status'Image (S));
14    Put_Line ("C: " & Code'Image (C));
15    Put_Line ("T: " & Threshold'Image (T));
16 end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Overloading_Ada
MD5: 909cdf00b629917f7131489702cc26f1
```

Runtime output

```
S: ON
C:  3
T:  1.00000E+01
```

The Ada compiler knows that an assignment to C requires a Code value. So, it chooses the Get function that returns a Code to satisfy this requirement.

Operators in Ada are functions too. This allows you to define local operators that override operators defined at an outer scope, and provide overloaded operators that operate on and compare different types. To declare an operator as a function, enclose its "name" in quotes:

[Ada]

Listing 89: machine_2.ads

```
1  package Machine_2 is
2     type Status is (Off, Waiting, On);
3     type Input is new Float range 0.0 .. 10.0;
4
5     function Get (I : Input) return Status;
6
7     function "=" (Left : Input; Right : Status) return Boolean;
8
9  end Machine_2;
```

Listing 90: machine_2.adb

```
package body Machine_2 is

   function Get (I : Input) return Status is
   begin
      if I >= 0.0 and I < 3.0 then
         return Off;
      elsif I >= 3.0 and I < 6.5 then
         return Waiting;
      else
         return On;
      end if;
   end Get;

   function "=" (Left : Input; Right : Status) return Boolean is
   begin
      return Get (Left) = Right;
   end "=";

end Machine_2;
```

Listing 91: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Machine_2;   use Machine_2;

procedure Main is
   I : Input;
begin
   I := 3.0;
   if I = Off then
      Put_Line ("Machine is off.");
   else
      Put_Line ("Machine is not off.");
   end if;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Overloading_Eq
MD5: c5580f15c1b93f73fff3afc147cd15a1
```

Runtime output

```
Machine is not off.
```

79.12.3 Aspects

Aspect specifications allow you to define certain characteristics of a declaration using the **with** keyword after the declaration:

```
procedure Some_Procedure is <procedure_definition>
  with Some_Aspect => <aspect_specification>;

function Some_Function is <function_definition>
  with Some_Aspect => <aspect_specification>;

type Some_Type is <type_definition>
  with Some_Aspect => <aspect_specification>;
```

(continues on next page)

(continued from previous page)

```
Obj : Some_Type with Some_Aspect => <aspect_specification>;
```

For example, you can inline a subprogram by specifying the `Inline` aspect:

[Ada]

Listing 92: float_arrays.ads

```
package Float_Arrays is

   type Float_Array is array (Positive range <>) of Float;

   function Average (Data : Float_Array) return Float
     with Inline;

end Float_Arrays;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Inline_Aspect
MD5: 6e25e81e4015d907d50aa9cf4a0a3fab
```

We'll discuss inlining *later in this course* (page 1814).

Aspect specifications were introduced in Ada 2012. In previous versions of Ada, you had to use a **pragma** instead. The previous example would be written as follows:

[Ada]

Listing 93: float_arrays.ads

```
package Float_Arrays is

   type Float_Array is array (Positive range <>) of Float;

   function Average (Data : Float_Array) return Float;

   pragma Inline (Average);

end Float_Arrays;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Inline_Aspect
MD5: bd5df14dce9577a054f0ec612d5bbe40
```

Aspects and attributes might refer to the same kind of information. For example, we can use the `Size` aspect to define the expected minimum size of objects of a certain type:

[Ada]

Listing 94: my_device_types.ads

```
package My_Device_Types is

   type UInt10 is mod 2 ** 10
     with Size => 10;

end My_Device_Types;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Size_Aspect
MD5: 049be992b876dba42cf091afc256db35
```

In the same way, we can use the size attribute to retrieve the size of a type or of an object:

[Ada]

Listing 95: show_device_types.adb

```ada
with Ada.Text_IO;     use Ada.Text_IO;

with My_Device_Types; use My_Device_Types;

procedure Show_Device_Types is
   UInt10_Obj : constant UInt10 := 0;
begin
   Put_Line ("Size of UInt10 type:   " & Positive'Image (UInt10'Size));
   Put_Line ("Size of UInt10 object: " & Positive'Image (UInt10_Obj'Size));
end Show_Device_Types;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Size_Aspect
MD5: 4e46ad9cf54276b381b960672daa03b9
```

Runtime output

```
Size of UInt10 type:    10
Size of UInt10 object:  16
```

We'll explain both Size aspect and Size attribute *later in this course* (page 1705).

CHAPTER

EIGHTY

CONCURRENCY AND REAL-TIME

80.1 Understanding the various options

Concurrent and real-time programming are standard parts of the Ada language. As such, they have the same semantics, whether executing on a native target with an OS such as Linux, on a real-time operating system (RTOS) such as VxWorks, or on a bare metal target with no OS or RTOS at all.

For resource-constrained systems, two subsets of the Ada concurrency facilities are defined, known as the Ravenscar and Jorvik profiles. Though restricted, these subsets have highly desirable properties, including: efficiency, predictability, analyzability, absence of deadlock, bounded blocking, absence of priority inversion, a real-time scheduler, and a small memory footprint. On bare metal systems, this means in effect that Ada comes with its own real-time kernel.

For further information

We'll discuss the Ravenscar profile *later in this chapter* (page 1687). Details about the Jorvik profile can be found elsewhere [Jorvik].

Enhanced portability and expressive power are the primary advantages of using the standard concurrency facilities, potentially resulting in considerable cost savings. For example, with little effort, it is possible to migrate from Windows to Linux to a bare machine without requiring any changes to the code. Thread management and synchronization is all done by the implementation, transparently. However, in some situations, it's critical to be able to access directly the services provided by the platform. In this case, it's always possible to make direct system calls from Ada code. Several targets of the GNAT compiler provide this sort of API by default, for example win32ada for Windows and Florist for POSIX systems.

On native and RTOS-based platforms GNAT typically provides the full concurrency facilities. In contrast, on bare metal platforms GNAT typically provides the two standard subsets: Ravenscar and Jorvik.

80.2 Tasks

Ada offers a high level construct called a *task* which is an independent thread of execution. In GNAT, tasks are either mapped to the underlying OS threads, or use a dedicated kernel when not available.

The following example will display the 26 letters of the alphabet twice, using two concurrent tasks. Since there is no synchronization between the two threads of control in any of the examples, the output may be interspersed.

[Ada]

Listing 1: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is -- implicitly called by the environment task
   subtype A_To_Z is Character range 'A' .. 'Z';

   task My_Task;

   task body My_Task is
   begin
      for I in A_To_Z'Range loop
         Put (I);
      end loop;
      New_Line;
   end My_Task;
begin
   for I in A_To_Z'Range loop
      Put (I);
   end loop;
   New_Line;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Concurrency.My_Task
MD5: 154702197f0c02f5750838e51a99f548
```

Runtime output

```
ABCDEFGHIJKLMNOPQRSTUVWXYZ
ABCDEFGHIJKLMNOPQRSTUVWXYZ
```

Any number of Ada tasks may be declared in any declarative region. A task declaration is very similar to a procedure or package declaration. They all start automatically when control reaches the begin. A block will not exit until all sequences of statements defined within that scope, including those in tasks, have been completed.

A task type is a generalization of a task object; each object of a task type has the same behavior. A declared object of a task type is started within the scope where it is declared, and control does not leave that scope until the task has terminated.

Task types can be parameterized; the parameter serves the same purpose as an argument to a constructor in Java. The following example creates 10 tasks, each of which displays a subset of the alphabet contained between the parameter and the 'Z' Character. As with the earlier example, since there is no synchronization among the tasks, the output may be interspersed depending on the underlying implementation of the task scheduling algorithm.

[Ada]

Listing 2: my_tasks.ads

```
package My_Tasks is

   task type My_Task (First : Character);

end My_Tasks;
```

Listing 3: my_tasks.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body My_Tasks is

   task body My_Task is
   begin
      for I in First .. 'Z' loop
         Put (I);
      end loop;
      New_Line;
   end My_Task;

end My_Tasks;
```

Listing 4: main.adb

```
with My_Tasks; use My_Tasks;

procedure Main is
   Dummy_Tab : array (0 .. 3) of My_Task ('W');
begin
   null;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Concurrency.My_Task_Type
MD5: 81d88397b0548fdcc1ba31549a8de4fd
```

Runtime output

```
WXYZ
WXYZ
WXYZ
WXYZ
```

In Ada, a task may be dynamically allocated rather than declared statically. The task will then start as soon as it has been allocated, and terminates when its work is completed.

[Ada]

Listing 5: main.adb

```
with My_Tasks; use My_Tasks;

procedure Main is
   type Ptr_Task is access My_Task;

   T : Ptr_Task;
begin
   T := new My_Task ('W');
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Concurrency.My_Task_Type
MD5: d88a96eecf50ebbcdfe9cb870f232a09
```

Runtime output

```
WXYZ
```

80.3 Rendezvous

A rendezvous is a synchronization between two tasks, allowing them to exchange data and coordinate execution. Let's consider the following example:

[Ada]

Listing 6: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is

   task After is
      entry Go;
   end After;

   task body After is
   begin
      accept Go;
      Put_Line ("After");
   end After;

begin
   Put_Line ("Before");
   After.Go;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Concurrency.Rendezvous
MD5: b0a595b1eecac793e40b6d1d41171766
```

Runtime output

```
Before
After
```

The Go entry declared in `After` is the client interface to the task. In the task body, the **`accept`** statement causes the task to wait for a call on the entry. This particular **`entry`** and **`accept`** pair simply causes the task to wait until `Main` calls `After.Go`. So, even though the two tasks start simultaneously and execute independently, they can coordinate via Go. Then, they both continue execution independently after the rendezvous.

The **`entry`**/**`accept`** pair can take/pass parameters, and the **`accept`** statement can contain a sequence of statements; while these statements are executed, the caller is blocked.

Let's look at a more ambitious example. The rendezvous below accepts parameters and executes some code:

[Ada]

Listing 7: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is

```

(continues on next page)

(continued from previous page)

```
   task After is
      entry Go (Text : String);
   end After;

   task body After is
   begin
      accept Go (Text : String) do
         Put_Line ("After: " & Text);
      end Go;
   end After;

begin
   Put_Line ("Before");
   After.Go ("Main");
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Concurrency.Rendezvous_Params
MD5: 6430e88f5ae349128bb1f1d53f36251e
```

Runtime output

```
Before
After: Main
```

In the above example, the `Put_Line` is placed in the accept statement. Here's a possible execution trace, assuming a uniprocessor:

1. At the begin of `Main`, task `After` is started and the main procedure is suspended.
2. `After` reaches the **`accept`** statement and is suspended, since there is no pending call on the `Go` entry.
3. The main procedure is awakened and executes the `Put_Line` invocation, displaying the string `"Before"`.
4. The main procedure calls the `Go` entry. Since `After` is suspended on its **`accept`** statement for this entry, the call succeeds.
5. The main procedure is suspended, and the task `After` is awakened to execute the body of the **`accept`** statement. The actual parameter `"Main"` is passed to the **`accept`** statement, and the `Put_Line` invocation is executed. As a result, the string `"After: Main"` is displayed.
6. When the **`accept`** statement is completed, both the `After` task and the main procedure are ready to run. Suppose that the `Main` procedure is given the processor. It reaches its end, but the local task `After` has not yet terminated. The main procedure is suspended.
7. The `After` task continues, and terminates since it is at its end. The main procedure is resumed, and it too can terminate since its dependent task has terminated.

The above description is a conceptual model; in practice the implementation can perform various optimizations to avoid unnecessary context switches.

80.4 Selective Rendezvous

The **`accept`** statement by itself can only wait for a single event (call) at a time. The **`select`** statement allows a task to listen for multiple events simultaneously, and then to deal with the first event to occur. This feature is illustrated by the task below, which maintains an integer value that is modified by other tasks that call `Increment`, `Decrement`, and `Get`:

[Ada]

Listing 8: counters.ads

```
package Counters is

   task Counter is
      entry Get (Result : out Integer);
      entry Increment;
      entry Decrement;
   end Counter;

end Counters;
```

Listing 9: counters.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Counters is

   task body Counter is
      Value : Integer := 0;
   begin
      loop
         select
            accept Increment do
               Value := Value + 1;
            end Increment;
         or
            accept Decrement do
               Value := Value - 1;
            end Decrement;
         or
            accept Get (Result : out Integer) do
               Result := Value;
            end Get;
         or
            delay 5.0;
            Put_Line ("Exiting Counter task...");
            exit;
         end select;
      end loop;
   end Counter;

end Counters;
```

Listing 10: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Counters;    use Counters;

procedure Main is
   V : Integer;
begin
   Put_Line ("Main started.");

   Counter.Get (V);
   Put_Line ("Got value. Value = " & Integer'Image (V));

   Counter.Increment;
   Put_Line ("Incremented value.");

```

(continues on next page)

(continued from previous page)

```
15    Counter.Increment;
16    Put_Line ("Incremented value.");
17
18    Counter.Get (V);
19    Put_Line ("Got value. Value = " & Integer'Image (V));
20
21    Counter.Decrement;
22    Put_Line ("Decremented value.");
23
24    Counter.Get (V);
25    Put_Line ("Got value. Value = " & Integer'Image (V));
26
27    Put_Line ("Main finished.");
28 end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Concurrency.Selective_Rendezvous
MD5: 619d009bcfcd8053bc132b2e32a29249
```

Runtime output

```
Main started.
Got value. Value =  0
Incremented value.
Incremented value.
Got value. Value =  2
Decremented value.
Got value. Value =  1
Main finished.
Exiting Counter task...
```

When the task's statement flow reaches the select, it will wait for all four events — three entries and a delay — in parallel. If the delay of five seconds is exceeded, the task will execute the statements following the **delay** statement (and in this case will exit the loop, in effect terminating the task). The **accept** bodies for the `Increment`, `Decrement`, or `Get` entries will be otherwise executed as they're called. These four sections of the select statement are mutually exclusive: at each iteration of the loop, only one will be invoked. This is a critical point; if the task had been written as a package, with procedures for the various operations, then a *race condition* could occur where multiple tasks simultaneously calling, say, `Increment`, cause the value to only get incremented once. In the tasking version, if multiple tasks simultaneously call `Increment` then only one at a time will be accepted, and the value will be incremented by each of the tasks when it is accepted.

More specifically, each entry has an associated queue of pending callers. If a task calls one of the entries and Counter is not ready to accept the call (i.e., if `Counter` is not suspended at the **select** statement) then the calling task is suspended, and placed in the queue of the entry that it is calling. From the perspective of the `Counter` task, at any iteration of the loop there are several possibilities:

- There is no call pending on any of the entries. In this case `Counter` is suspended. It will be awakened by the first of two events: a call on one of its entries (which will then be immediately accepted), or the expiration of the five second delay (whose effect was noted above).
- There is a call pending on exactly one of the entries. In this case control passes to the **select** branch with an **accept** statement for that entry.
- There are calls pending on more than one entry. In this case one of the entries with pending callers is chosen, and then one of the callers is chosen to be de-queued. The choice of which caller to accept depends on the queuing policy, which can be specified

via a **pragma** defined in the Real-Time Systems Annex of the Ada standard; the default is *First-In First-Out*.

80.5 Protected Objects

Although the rendezvous may be used to implement mutually exclusive access to a shared data object, an alternative (and generally preferable) style is through a protected object, an efficiently implementable mechanism that makes the effect more explicit. A protected object has a public interface (its protected operations) for accessing and manipulating the object's components (its private part). Mutual exclusion is enforced through a conceptual lock on the object, and encapsulation ensures that the only external access to the components are through the protected operations.

Two kinds of operations can be performed on such objects: read-write operations by procedures or entries, and read-only operations by functions. The lock mechanism is implemented so that it's possible to perform concurrent read operations but not concurrent write or read/write operations.

Let's reimplement our earlier tasking example with a protected object called `Counter`:

[Ada]

Listing 11: counters.ads

```
package Counters is

   protected Counter is
      function Get return Integer;
      procedure Increment;
      procedure Decrement;
   private
      Value : Integer := 0;
   end Counter;

end Counters;
```

Listing 12: counters.adb

```
package body Counters is

   protected body Counter is
      function Get return Integer is
      begin
         return Value;
      end Get;

      procedure Increment is
      begin
         Value := Value + 1;
      end Increment;

      procedure Decrement is
      begin
         Value := Value - 1;
      end Decrement;
   end Counter;

end Counters;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Concurrency.Protected_Counter
MD5: f29f21621dfcf092580f6a130101788e
```

Having two completely different ways to implement the same paradigm might seem complicated. However, in practice the actual problem to solve usually drives the choice between an active structure (a task) or a passive structure (a protected object).

A protected object can be accessed through prefix notation:

[Ada]

Listing 13: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Counters;    use Counters;

procedure Main is
begin
   Counter.Increment;
   Counter.Decrement;
   Put_Line (Integer'Image (Counter.Get));
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Concurrency.Protected_Counter
MD5: 704e3a382fe38caa11ecd3d46fcd2beb
```

Runtime output

```
 0
```

A protected object may look like a package syntactically, since it contains declarations that can be accessed externally using prefix notation. However, the declaration of a protected object is extremely restricted; for example, no public data is allowed, no types can be declared inside, etc. And besides the syntactic differences, there is a critical semantic distinction: a protected object has a conceptual lock that guarantees mutual exclusion; there is no such lock for a package.

Like tasks, it's possible to declare protected types that can be instantiated several times:

```
declare
   protected type Counter is
      -- as above
   end Counter;

   protected body Counter is
      -- as above
   end Counter;

   C1 : Counter;
   C2 : Counter;
begin
   C1.Increment;
   C2.Decrement;
   .. .
end;
```

Protected objects and types can declare a procedure-like operation known as an *entry*. An entry is somewhat similar to a procedure but includes a so-called barrier condition that must be true in order for the entry invocation to succeed. Calling a protected entry is thus a two step process: first, acquire the lock on the object, and then evaluate the barrier condition. If the condition is true then the caller will execute the entry body. If the condition

is false, then the caller is placed in the queue for the entry, and relinquishes the lock. Barrier conditions (for entries with non-empty queues) are reevaluated upon completion of protected procedures and protected entries.

Here's an example illustrating protected entries: a protected type that models a binary semaphore / persistent signal.

[Ada]

Listing 14: binary_semaphores.ads

```
package Binary_Semaphores is

   protected type Binary_Semaphore is
      entry Wait;
      procedure Signal;
   private
      Signaled : Boolean := False;
   end Binary_Semaphore;

end Binary_Semaphores;
```

Listing 15: binary_semaphores.adb

```
package body Binary_Semaphores is

   protected body Binary_Semaphore is
      entry Wait when Signaled is
      begin
         Signaled := False;
      end Wait;

      procedure Signal is
      begin
         Signaled := True;
      end Signal;
   end Binary_Semaphore;

end Binary_Semaphores;
```

Listing 16: main.adb

```
with Ada.Text_IO;       use Ada.Text_IO;
with Binary_Semaphores; use Binary_Semaphores;

procedure Main is
   B : Binary_Semaphore;

   task T1;
   task T2;

   task body T1 is
   begin
      Put_Line ("Task T1 waiting...");
      B.Wait;

      Put_Line ("Task T1.");
      delay 1.0;

      Put_Line ("Task T1 will signal...");
      B.Signal;

```

(continues on next page)

(continued from previous page)

```
21       Put_Line ("Task T1 finished.");
22    end T1;
23
24    task body T2 is
25    begin
26       Put_Line ("Task T2 waiting...");
27       B.Wait;
28
29       Put_Line ("Task T2");
30       delay 1.0;
31
32       Put_Line ("Task T2 will signal...");
33       B.Signal;
34
35       Put_Line ("Task T2 finished.");
36    end T2;
37
38 begin
39    Put_Line ("Main started.");
40    B.Signal;
41    Put_Line ("Main finished.");
42 end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Concurrency.Protected_Binary_Semaphore
MD5: aa064a9ec056d44c4217e64cd05726a4
```

Runtime output

```
Task T2 waiting...
Main started.
Main finished.
Task T1 waiting...
Task T2
Task T2 will signal...
Task T2 finished.
Task T1.
Task T1 will signal...
Task T1 finished.
```

Ada concurrency features provide much further generality than what's been presented here. For additional information please consult one of the works cited in the *References* section.

80.6 Ravenscar

The Ravenscar profile is a subset of the Ada concurrency facilities that supports determinism, schedulability analysis, constrained memory utilization, and certification to the highest integrity levels. Four distinct application domains are intended:

- hard real-time applications requiring predictability,
- safety-critical systems requiring formal, stringent certification,
- high-integrity applications requiring formal static analysis and verification,
- embedded applications requiring both a small memory footprint and low execution overhead.

Tasking constructs that preclude analysis, either technically or economically, are disallowed. You can use the **pragma** *Profile* (Ravenscar) to indicate that the Ravenscar

restrictions must be observed in your program.

Some of the examples we've seen above will be rejected by the compiler when using the Ravenscar profile. For example:

[Ada]

Listing 17: my_tasks.ads

```
package My_Tasks is

   task type My_Task (First : Character);

end My_Tasks;
```

Listing 18: my_tasks.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body My_Tasks is

   task body My_Task is
   begin
      for C in First .. 'Z' loop
         Put (C);
      end loop;
      New_Line;
   end My_Task;

end My_Tasks;
```

Listing 19: main.adb

```
pragma Profile (Ravenscar);

with My_Tasks; use My_Tasks;

procedure Main is
   Tab : array (0 .. 3) of My_Task ('W');
begin
   null;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Concurrency.Ravenscar
MD5: b7518a039c2b4cecece1de63eeaa208f
```

Build output

```
main.adb:6:04: error: violation of restriction "No_Task_Hierarchy"
main.adb:6:04: error: from profile "Ravenscar" at line 1
gprbuild: *** compilation phase failed
```

This code violates the *No_Task_Hierarchy* restriction of the Ravenscar profile. This is due to the declaration of Tab in the Main procedure. Ravenscar requires task declarations to be done at the library level. Therefore, a simple solution is to create a separate package and reference it in the main application:

[Ada]

Listing 20: my_task_inst.ads

```
with My_Tasks; use My_Tasks;

package My_Task_Inst is

   Tab : array (0 .. 3) of My_Task ('W');

end My_Task_Inst;
```

Listing 21: main.adb

```
pragma Profile (Ravenscar);

with My_Task_Inst;

procedure Main is
begin
   null;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Concurrency.Ravenscar
MD5: b38943dc1c962b5e691f2b6d9933a3ec
```

Runtime output

```
WXYZ
WXYZ
WXYZ
WXYZ
```

Also, Ravenscar prohibits entries for tasks. For example, we're not allowed to write this declaration:

```
task type My_Task (First : Character) is
   entry Start;
end My_Task;
```

You can use, however, one entry per protected object. As an example, the declaration of the `Binary_Semaphore` type that we've discussed before compiles fine with Ravenscar:

```
protected type Binary_Semaphore is
   entry Wait;
   procedure Signal;
private
   Signaled : Boolean := False;
end Binary_Semaphore;
```

We could add more procedures and functions to the declaration of `Binary_Semaphore`, but we wouldn't be able to add another entry when using Ravenscar.

Similar to the previous example with the task array declaration, objects of `Binary_Semaphore` cannot be declared in the main application:

```
procedure Main is
   B : Binary_Semaphore;
begin
   null;
end Main;
```

This violates the *No_Local_Protected_Objects* restriction. Again, Ravenscar expects this declaration to be done on a library level, so a solution to make this code compile is to have this declaration in a separate package and reference it in the `Main` procedure.

Ravenscar offers many additional restrictions. Covering those would exceed the scope of this chapter. You can find more examples using the Ravenscar profile on this blog post[451].

[451] https://blog.adacore.com/theres-a-mini-rtos-in-my-language

CHAPTER

EIGHTYONE

WRITING ADA ON EMBEDDED SYSTEMS

81.1 Understanding the Ada Run-Time

Ada supports a high level of abstractness and expressiveness. In some cases, the compiler translates those constructs directly into machine code. However, there are many high-level constructs for which a direct compilation would be difficult. In those cases, the compiler links to a library containing an implementation of those high-level constructs: this is the so-called run-time library.

One typical example of high-level constructs that can be cumbersome for direct machine code generation is Ada source-code using tasking. In this case, linking to a low-level implementation of multithreading support — for example, an implementation using POSIX threads — is more straightforward than trying to make the compiler generate all the machine code.

In the case of GNAT, the run-time library is implemented using both C and Ada source-code. Also, depending on the operating system, the library will interface with low-level functionality from the target operating system.

There are basically two types of run-time libraries:

- the **standard** run-time library: in many cases, this is the run-time library available on desktop operating systems or on some embedded platforms (such as ARM-Linux on a Raspberry-Pi).
- the **configurable** run-time library: this is a capability that is used to create custom run-time libraries for specific target devices.

Configurable run-time libraries are usually used for constrained target devices where support for the full library would be difficult or even impossible. In this case, configurable run-time libraries may support just a subset of the full Ada language. There are many reasons that speak for this approach:

- Some aspects of the Ada language may not translate well to limited operating systems.
- Memory constraints may require reducing the size of the run-time library, so that developers may need to replace or even remove parts of the library.
- When certification is required, those parts of the library that would require too much certification effort can be removed.

When using a configurable run-time library, the compiler checks whether the library supports certain features of the language. If a feature isn't supported, the compiler will give an error message.

You can find further information about the run-time library on this chapter of the GNAT User's Guide Supplement for Cross Platforms[452]

[452] https://docs.adacore.com/gnat_ugx-docs/html/gnat_ugx/gnat_ugx/the_gnat_configurable_run_time_facility.html

81.2 Low Level Programming

81.2.1 Representation Clauses

We've seen in the previous chapters how Ada can be used to describe high level semantics and architecture. The beauty of the language, however, is that it can be used all the way down to the lowest levels of the development, including embedded assembly code or bit-level data management.

One very interesting feature of the language is that, unlike C, for example, there are no data representation constraints unless specified by the developer. This means that the compiler is free to choose the best trade-off in terms of representation vs. performance. Let's start with the following example:

[Ada]

```
type R is record
   V  : Integer range 0 .. 255;
   B1 : Boolean;
   B2 : Boolean;
end record
  with Pack;
```

[C]

```
struct R {
    unsigned int v:8;
    bool b1;
    bool b2;
};
```

The Ada and the C code above both represent efforts to create an object that's as small as possible. Controlling data size is not possible in Java, but the language does specify the size of values for the primitive types.

Although the C and Ada code are equivalent in this particular example, there's an interesting semantic difference. In C, the number of bits required by each field needs to be specified. Here, we're stating that v is only 8 bits, effectively representing values from 0 to 255. In Ada, it's the other way around: the developer specifies the range of values required and the compiler decides how to represent things, optimizing for speed or size. The Pack aspect declared at the end of the record specifies that the compiler should optimize for size even at the expense of decreased speed in accessing record components. We'll see more details about the Pack aspect in the sections about *bitwise operations* (page 1745) and *mapping structures to bit-fields* (page 1748) in chapter 6.

Other representation clauses can be specified as well, along with compile-time consistency checks between requirements in terms of available values and specified sizes. This is particularly useful when a specific layout is necessary; for example when interfacing with hardware, a driver, or a communication protocol. Here's how to specify a specific data layout based on the previous example:

[Ada]

```
type R is record
   V  : Integer range 0 .. 255;
   B1 : Boolean;
   B2 : Boolean;
end record;

for R use record
   --  Occupy the first bit of the first byte.
   B1 at 0 range 0 .. 0;
```

(continues on next page)

(continued from previous page)

```
   --  Occupy the last 7 bits of the first byte,
   --  as well as the first bit of the second byte.
   V  at 0 range 1 .. 8;

   --  Occupy the second bit of the second byte.
   B2 at 1 range 1 .. 1;
end record;
```

We omit the `with Pack` directive and instead use a record representation clause following the record declaration. The compiler is directed to spread objects of type R across two bytes. The layout we're specifying here is fairly inefficient to work with on any machine, but you can have the compiler construct the most efficient methods for access, rather than coding your own machine-dependent bit-level methods manually.

81.2.2 Embedded Assembly Code

When performing low-level development, such as at the kernel or hardware driver level, there can be times when it is necessary to implement functionality with assembly code.

Every Ada compiler has its own conventions for embedding assembly code, based on the hardware platform and the supported assembler(s). Our examples here will work with GNAT and GCC on the x86 architecture.

All x86 processors since the Intel Pentium offer the `rdtsc` instruction, which tells us the number of cycles since the last processor reset. It takes no inputs and places an unsigned 64-bit value split between the edx and eax registers.

GNAT provides a subprogram called `System.Machine_Code.Asm` that can be used for assembly code insertion. You can specify a string to pass to the assembler as well as source-level variables to be used for input and output:

[Ada]

Listing 1: get_processor_cycles.adb

```
with System.Machine_Code; use System.Machine_Code;
with Interfaces;          use Interfaces;

function Get_Processor_Cycles return Unsigned_64 is
   Low, High : Unsigned_32;
   Counter   : Unsigned_64;
begin
   Asm ("rdtsc",
        Outputs =>
          (Unsigned_32'Asm_Output ("=a", High),
           Unsigned_32'Asm_Output ("=d", Low)),
        Volatile => True);

   Counter :=
     Unsigned_64 (High) * 2 ** 32 +
     Unsigned_64 (Low);

   return Counter;
end Get_Processor_Cycles;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Embedded.Assembly_Code
MD5: 092be19e223946ebb9fb9f4786003b94
```

The `Unsigned_32'Asm_Output` clauses above provide associations between machine registers and source-level variables to be updated. `=a` and `=d` refer to the eax and edx machine registers, respectively. The use of the `Unsigned_32` and `Unsigned_64` types from package `Interfaces` ensures correct representation of the data. We assemble the two 32-bit values to form a single 64-bit value.

We set the `Volatile` parameter to **`True`** to tell the compiler that invoking this instruction multiple times with the same inputs can result in different outputs. This eliminates the possibility that the compiler will optimize multiple invocations into a single call.

With optimization turned on, the GNAT compiler is smart enough to use the eax and edx registers to implement the `High` and `Low` variables, resulting in zero overhead for the assembly interface.

The machine code insertion interface provides many features beyond what was shown here. More information can be found in the GNAT User's Guide, and the GNAT Reference manual.

81.3 Interrupt Handling

Handling interrupts is an important aspect when programming embedded devices. Interrupts are used, for example, to indicate that a hardware or software event has happened. Therefore, by handling interrupts, an application can react to external events.

Ada provides built-in support for handling interrupts. We can process interrupts by attaching a handler — which must be a protected procedure — to it. In the declaration of the protected procedure, we use the `Attach_Handler` aspect and indicate which interrupt we want to handle.

Let's look into a code example that *traps* the quit interrupt (`SIGQUIT`) on Linux:

[Ada]

Listing 2: signal_handlers.ads

```
with System.OS_Interface;

package Signal_Handlers is

   protected type Quit_Handler is
      function Requested return Boolean;
   private
      Quit_Request : Boolean := False;

      --
      --  Declaration of an interrupt handler for the "quit" interrupt:
      --
      procedure Handle_Quit_Signal
        with Attach_Handler => System.OS_Interface.SIGQUIT;
   end Quit_Handler;

end Signal_Handlers;
```

Listing 3: signal_handlers.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Signal_Handlers is

   protected body Quit_Handler is

      function Requested return Boolean is
```

(continues on next page)

(continued from previous page)

```
        (Quit_Request);

      procedure Handle_Quit_Signal is
      begin
         Put_Line ("Quit request detected!");
         Quit_Request := True;
      end Handle_Quit_Signal;

   end Quit_Handler;

end Signal_Handlers;
```

Listing 4: test_quit_handler.adb

```
with Ada.Text_IO;     use Ada.Text_IO;
with Signal_Handlers;

procedure Test_Quit_Handler is
   Quit : Signal_Handlers.Quit_Handler;

begin
   while True loop
      delay 1.0;
      exit when Quit.Requested;
   end loop;

   Put_Line ("Exiting application...");
end Test_Quit_Handler;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Embedded.Quit_Handler
MD5: d272c5bc59576444e09007a04a615ccf
```

The specification of the `Signal_Handlers` package from this example contains the declaration of `Quit_Handler`, which is a protected type. In the private part of this protected type, we declare the `Handle_Quit_Signal` procedure. By using the `Attach_Handler` aspect in the declaration of `Handle_Quit_Signal` and indicating the quit interrupt (`System.OS_Interface.SIGQUIT`), we're instructing the operating system to call this procedure for any quit request. So when the user presses CTRL+\ on their keyboard, for example, the application will behave as follows:

- the operating system calls the `Handle_Quit_Signal` procedure , which displays a message to the user ("Quit request detected!") and sets a Boolean variable — `Quit_Request`, which is declared in the `Quit_Handler` type;
- the main application checks the status of the quit handler by calling the `Requested` function as part of the **`while True`** loop;
  - This call is in the **`exit when`** `Quit.Requested` line.
  - The `Requested` function returns **`True`** in this case because the `Quit_Request` flag was set by the `Handle_Quit_Signal` procedure.
- the main applications exits the loop, displays a message and finishes.

Note that the code example above isn't portable because it makes use of interrupts from the Linux operating system. When programming embedded devices, we would use instead the interrupts available on those specific devices.

Also note that, in the example above, we're declaring a static handler at compilation time. If you need to make use of dynamic handlers, which can be configured at runtime, you can

use the subprograms from the `Ada.Interrupts` package. This package includes not only a version of `Attach_Handler` as a procedure, but also other procedures such as:

- `Exchange_Handler`, which lets us exchange, at runtime, the current handler associated with a specific interrupt by a different handler;
- `Detach_Handler`, which we can use to remove the handler currently associated with a given interrupt.

Details about the `Ada.Interrupts` package are out of scope for this course. We'll discuss them in a separate, more advanced course in the future. You can find some information about it in the Interrupts appendix of the Ada Reference Manual[453].

81.4 Dealing with Absence of FPU with Fixed Point

Many numerical applications typically use floating-point types to compute values. However, in some platforms, a floating-point unit may not be available. Other platforms may have a floating-point unit, but using it in certain numerical algorithms can be prohibitive in terms of performance. For those cases, fixed-point arithmetic can be a good alternative.

The difference between fixed-point and floating-point types might not be so obvious when looking at this code snippet:

[Ada]

Listing 5: fixed_definitions.ads

```
package Fixed_Definitions is

   D : constant := 2.0 ** (-31);

   type Fixed is delta D range -1.0 .. 1.0 - D;

end Fixed_Definitions;
```

Listing 6: show_float_and_fixed_point.adb

```
with Ada.Text_IO;       use Ada.Text_IO;

with Fixed_Definitions; use Fixed_Definitions;

procedure Show_Float_And_Fixed_Point is
   Float_Value : Float := 0.25;
   Fixed_Value : Fixed := 0.25;
begin

   Float_Value := Float_Value + 0.25;
   Fixed_Value := Fixed_Value + 0.25;

   Put_Line ("Float_Value = " & Float'Image (Float_Value));
   Put_Line ("Fixed_Value = " & Fixed'Image (Fixed_Value));
end Show_Float_And_Fixed_Point;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Embedded.Fixed_Point
MD5: 881817bb310304bc285f01454ab446f7
```

Runtime output

[453] http://www.ada-auth.org/standards/12aarm/html/AA-C-3-2.html

```
Float_Value =  5.00000E-01
Fixed_Value =  0.5000000000
```

In this example, the application will show the value 0.5 for both `Float_Value` and `Fixed_Value`.

The major difference between floating-point and fixed-point types is in the way the values are stored. Values of ordinary fixed-point types are, in effect, scaled integers. The scaling used for ordinary fixed-point types is defined by the type's `small`, which is derived from the specified **`delta`** and, by default, is a power of two. Therefore, ordinary fixed-point types are sometimes called binary fixed-point types. In that sense, ordinary fixed-point types can be thought of being close to the actual representation on the machine. In fact, ordinary fixed-point types make use of the available integer shift instructions, for example.

Another difference between floating-point and fixed-point types is that Ada doesn't provide standard fixed-point types — except for the **`Duration`** type, which is used to represent an interval of time in seconds. While the Ada standard specifies floating-point types such as **`Float`** and **`Long_Float`**, we have to declare our own fixed-point types. Note that, in the previous example, we have used a fixed-point type named `Fixed`: this type isn't part of the standard, but must be declared somewhere in the source-code of our application.

The syntax for an ordinary fixed-point type is

```
type <type_name> is delta <delta_value> range <lower_bound> .. <upper_bound>;
```

By default, the compiler will choose a scale factor, or `small`, that is a power of 2 no greater than `<delta_value>`.

For example, we may define a normalized range between -1.0 and 1.0 as following:

[Ada]

Listing 7: normalized_fixed_point_type.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Normalized_Fixed_Point_Type is
   D : constant := 2.0 ** (-31);
   type TQ31 is delta D range -1.0 .. 1.0 - D;
begin
   Put_Line ("TQ31 requires " & Integer'Image (TQ31'Size) & " bits");
   Put_Line ("The delta    value of TQ31 is " & TQ31'Image (TQ31'Delta));
   Put_Line ("The minimum  value of TQ31 is " & TQ31'Image (TQ31'First));
   Put_Line ("The maximum  value of TQ31 is " & TQ31'Image (TQ31'Last));
end Normalized_Fixed_Point_Type;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Embedded.Normalized_Fixed_Point_Type
MD5: 2fe6e9f9bd20d2cfab959d1c0273280b
```

Runtime output

```
TQ31 requires  32 bits
The delta    value of TQ31 is  0.0000000005
The minimum  value of TQ31 is -1.0000000000
The maximum  value of TQ31 is  0.9999999995
```

In this example, we are defining a 32-bit fixed-point data type for our normalized range. When running the application, we notice that the upper bound is close to one, but not exactly one. This is a typical effect of fixed-point data types — you can find more details

in this discussion about the Q format[454]. We may also rewrite this code with an exact type definition:

[Ada]

Listing 8: normalized_adapted_fixed_point_type.ads

```
package Normalized_Adapted_Fixed_Point_Type is

   type TQ31 is delta 2.0 ** (-31) range -1.0 .. 1.0 - 2.0 ** (-31);

end Normalized_Adapted_Fixed_Point_Type;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Embedded.Normalized_Adapted_Fixed_Point_
 ↪Type
MD5: abe5f4e029c7c3c7a069890882b17f50
```

We may also use any other range. For example:

[Ada]

Listing 9: custom_fixed_point_range.adb

```
with Ada.Text_IO;  use Ada.Text_IO;
with Ada.Numerics; use Ada.Numerics;

procedure Custom_Fixed_Point_Range is
   type Inv_Trig is delta 2.0 ** (-15) * Pi range -Pi / 2.0 .. Pi / 2.0;
begin
   Put_Line ("Inv_Trig requires " & Integer'Image (Inv_Trig'Size)
             & " bits");
   Put_Line ("The delta    value of Inv_Trig is "
             & Inv_Trig'Image (Inv_Trig'Delta));
   Put_Line ("The minimum  value of Inv_Trig is "
             & Inv_Trig'Image (Inv_Trig'First));
   Put_Line ("The maximum  value of Inv_Trig is "
             & Inv_Trig'Image (Inv_Trig'Last));
end Custom_Fixed_Point_Range;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Embedded.Custom_Fixed_Point_Range
MD5: 0d9a4bc96191d1341bbb1c081555b613
```

Runtime output

```
Inv_Trig requires  16 bits
The delta    value of Inv_Trig is  0.00006
The minimum  value of Inv_Trig is -1.57080
The maximum  value of Inv_Trig is  1.57080
```

In this example, we are defining a 16-bit type called `Inv_Trig`, which has a range from -π/2 to π/2.

All standard operations are available for fixed-point types. For example:

[Ada]

[454] https://en.wikipedia.org/wiki/Q_(number_format)

Listing 10: fixed_point_op.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Fixed_Point_Op is
   type TQ31 is delta 2.0 ** (-31) range -1.0 .. 1.0 - 2.0 ** (-31);

   A, B, R : TQ31;
begin
   A := 0.25;
   B := 0.50;
   R := A + B;
   Put_Line ("R is " & TQ31'Image (R));
end Fixed_Point_Op;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Embedded.Fixed_Point_Op
MD5: 78bafd93b25da898c00cc38c9d518e2a
```

Runtime output

```
R is  0.7500000000
```

As expected, R contains 0.75 after the addition of A and B.

In the case of C, since the language doesn't support fixed-point arithmetic, we need to emulate it using integer types and custom operations via functions. Let's look at this very rudimentary example:

[C]

Listing 11: main.c

```
#include <stdio.h>
#include <math.h>

#define SHIFT_FACTOR  32

#define TO_FIXED(x)     ((int)   ((x) * pow (2.0, SHIFT_FACTOR - 1)))
#define TO_FLOAT(x)     ((float) ((double)(x) * (double)pow (2.0, -(SHIFT_FACTOR - 1))))

typedef int fixed;

fixed add (fixed a, fixed b)
{
    return a + b;
}

fixed mult (fixed a, fixed b)
{
    return (fixed)(((long)a * (long)b) >> (SHIFT_FACTOR - 1));
}

void display_fixed (fixed x)
{
    printf("value (integer) = %d\n",    x);
    printf("value (float)   = %3.5f\n\n", TO_FLOAT (x));
}

int main(int argc, const char * argv[])
```

(continues on next page)

(continued from previous page)

```c
{
    int fixed_value = TO_FIXED(0.25);

    printf("Original value\n");
    display_fixed(fixed_value);

    printf("... + 0.25\n");
    fixed_value = add(fixed_value, TO_FIXED(0.25));
    display_fixed(fixed_value);

    printf("... * 0.5\n");
    fixed_value = mult(fixed_value, TO_FIXED(0.5));
    display_fixed(fixed_value);

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Embedded.Fixed_Point_C
MD5: 61016e8fc0dbc4d0eefd2c86915489e5
```

Runtime output

```
Original value
value (integer) = 536870912
value (float)   = 0.25000

... + 0.25
value (integer) = 1073741824
value (float)   = 0.50000

... * 0.5
value (integer) = 536870912
value (float)   = 0.25000
```

Here, we declare the fixed-point type `fixed` based on **`int`** and two operations for it: addition (via the add function) and multiplication (via the `mult` function). Note that, while fixed-point addition is quite straightforward, multiplication requires right-shifting to match the correct internal representation. In Ada, since fixed-point operations are part of the language specification, they don't need to be emulated. Therefore, no extra effort is required from the programmer.

Also note that the example above is very rudimentary, so it doesn't take some of the side-effects of fixed-point arithmetic into account. In C, you have to manually take all side-effects deriving from fixed-point arithmetic into account, while in Ada, the compiler takes care of selecting the right operations for you.

81.5 Volatile and Atomic data

Ada has built-in support for handling both volatile and atomic data. Let's start by discussing volatile objects.

81.5.1 Volatile

A volatile[455] object can be described as an object in memory whose value may change between two consecutive memory accesses of a process A — even if process A itself hasn't changed the value. This situation may arise when an object in memory is being shared by multiple threads. For example, a thread *B* may modify the value of that object between two read accesses of a thread *A*. Another typical example is the one of memory-mapped I/O[456], where the hardware might be constantly changing the value of an object in memory.

Because the value of a volatile object may be constantly changing, a compiler cannot generate code that stores the value of that object into a register and use the value from the register in subsequent operations. Storing into a register is avoided because, if the value is stored there, it would be outdated if another process had changed the volatile object in the meantime. Instead, the compiler generates code in such a way that the process must read the value of the volatile object from memory for each access.

Let's look at a simple example of a volatile variable in C:

[C]

Listing 12: main.c

```c
#include <stdio.h>

int main(int argc, const char * argv[])
{
    volatile double val = 0.0;
    int i;

    for (i = 0; i < 1000; i++)
    {
        val += i * 2.0;
    }
    printf ("val: %5.3f\n", val);

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Embedded.Volatile_Object_C
MD5: 863c7dda4acb3286976a1edab29bab08
```

Runtime output

```
val: 999000.000
```

In this example, `val` has the modifier **`volatile`**, which indicates that the compiler must handle `val` as a volatile object. Therefore, each read and write access in the loop is performed by accessing the value of `val` in then memory.

This is the corresponding implementation in Ada:

[Ada]

Listing 13: show_volatile_object.adb

```ada
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Volatile_Object is
   Val : Long_Float with Volatile;
```

(continues on next page)

[455] https://en.wikipedia.org/wiki/Volatile_(computer_programming)
[456] https://en.wikipedia.org/wiki/Memory-mapped_I/O

(continued from previous page)

```
begin
   Val := 0.0;
   for I in 0 .. 999 loop
      Val := Val + 2.0 * Long_Float (I);
   end loop;

   Put_Line ("Val: " & Long_Float'Image (Val));
end Show_Volatile_Object;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Embedded.Volatile_Object_Ada
MD5: aa1e276e64e69813bfc3e3ef39f3dd47
```

Runtime output

```
Val:  9.99000000000000E+05
```

In this example, `Val` has the `Volatile` aspect, which makes the object volatile. We can also use the `Volatile` aspect in type declarations. For example:

[Ada]

Listing 14: show_volatile_type.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Volatile_Type is
   type Volatile_Long_Float is new Long_Float with Volatile;

   Val : Volatile_Long_Float;
begin
   Val := 0.0;
   for I in 0 .. 999 loop
      Val := Val + 2.0 * Volatile_Long_Float (I);
   end loop;

   Put_Line ("Val: " & Volatile_Long_Float'Image (Val));
end Show_Volatile_Type;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Embedded.Volatile_Type
MD5: 41ecf028803a58ce244c421eaeb118e4
```

Runtime output

```
Val:  9.99000000000000E+05
```

Here, we're declaring a new type `Volatile_Long_Float` based on the **`Long_Float`** type and using the `Volatile` aspect. Any object of this type is automatically volatile.

In addition to that, we can declare components of an array to be volatile. In this case, we can use the `Volatile_Components` aspect in the array declaration. For example:

[Ada]

Listing 15: show_volatile_array_components.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Volatile_Array_Components is
```

(continues on next page)

(continued from previous page)

```
   Arr : array (1 .. 2) of Long_Float with Volatile_Components;
begin
   Arr := (others => 0.0);

   for I in 0 .. 999 loop
      Arr (1) := Arr (1) +  2.0 * Long_Float (I);
      Arr (2) := Arr (2) + 10.0 * Long_Float (I);
   end loop;

   Put_Line ("Arr (1): " & Long_Float'Image (Arr (1)));
   Put_Line ("Arr (2): " & Long_Float'Image (Arr (2)));
end Show_Volatile_Array_Components;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Embedded.Volatile_Array_Components
MD5: 601d61dd01888c60ae1a51ec513138d5
```

Runtime output

```
Arr (1):  9.99000000000000E+05
Arr (2):  4.99500000000000E+06
```

Note that it's possible to use the `Volatile` aspect for the array declaration as well:

[Ada]

```
Arr : array (1 .. 2) of Long_Float with Volatile;
```

81.5.2 Atomic

An atomic object is an object that only accepts atomic reads and updates. The Ada standard specifies that "for an atomic object (including an atomic component), all reads and updates of the object as a whole are indivisible." In this case, the compiler must generate Assembly code in such a way that reads and updates of an atomic object must be done in a single instruction, so that no other instruction could execute on that same object before the read or update completes.

In other contexts

Generally, we can say that operations are said to be atomic when they can be completed without interruptions. This is an important requirement when we're performing operations on objects in memory that are shared between multiple processes.

This definition of atomicity above is used, for example, when implementing databases. However, for this section, we're using the term "atomic" differently. Here, it really means that reads and updates must be performed with a single Assembly instruction.

For example, if we have a 32-bit object composed of four 8-bit bytes, the compiler cannot generate code to read or update the object using four 8-bit store / load instructions, or even two 16-bit store / load instructions. In this case, in order to maintain atomicity, the compiler must generate code using one 32-bit store / load instruction.

Because of this strict definition, we might have objects for which the `Atomic` aspect cannot be specified. Lots of machines support integer types that are larger than the native word-sized integer. For example, a 16-bit machine probably supports both 16-bit and 32-bit integers, but only 16-bit integer objects can be marked as atomic — or, more generally, only objects that fit into at most 16 bits.

Atomicity may be important, for example, when dealing with shared hardware registers. In fact, for certain architectures, the hardware may require that memory-mapped registers are handled atomically. In Ada, we can use the `Atomic` aspect to indicate that an object is atomic. This is how we can use the aspect to declare a shared hardware register:

[Ada]

Listing 16: show_shared_hw_register.adb

```
with System;

procedure Show_Shared_HW_Register is
   R   : Integer
     with Atomic, Address => System'To_Address (16#FFFF00A0#);
begin
   null;
end Show_Shared_HW_Register;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Embedded.Atomic_Object
MD5: 7ef148adf393819fc3fbc25eb45afe46
```

Note that the **Address** aspect allows for assigning a variable to a specific location in the memory. In this example, we're using this aspect to specify the address of the memory-mapped register. We'll discuss more about the **Address** aspect later in the section about *mapping structures to bit-fields* (page 1748) (in chapter 6).

In addition to atomic objects, we can declare atomic types and atomic array components — similarly to what we've seen before for volatile objects. For example:

[Ada]

Listing 17: show_shared_hw_register.adb

```
with System;

procedure Show_Shared_HW_Register is
   type Atomic_Integer is new Integer with Atomic;

   R : Atomic_Integer with Address => System'To_Address (16#FFFF00A0#);

   Arr : array (1 .. 2) of Integer with Atomic_Components;
begin
   null;
end Show_Shared_HW_Register;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Embedded.Atomic_Types_Arrays
MD5: 11475b5152087eff7f36abfe2c5ae9a1
```

In this example, we're declaring the `Atomic_Integer` type, which is an atomic type. Objects of this type — such as R in this example — are automatically atomic. This example also includes the declaration of the `Arr` array, which has atomic components.

81.6 Interfacing with Devices

Previously, we've seen that we can use *representation clauses* (page 1692) to specify a particular layout for a record type. As mentioned before, this is useful when interfacing with hardware, drivers, or communication protocols. In this section, we'll extend this concept

for two specific use-cases: register overlays and data streams. Before we discuss those use-cases, though, we'll first explain the Size aspect and the Size attribute.

81.6.1 Size aspect and attribute

The Size aspect indicates the minimum number of bits required to represent an object. When applied to a type, the Size aspect is telling the compiler to not make record or array components of a type T any smaller than X bits. Therefore, a common usage for this aspect is to just confirm expectations: developers specify 'Size to tell the compiler that T should fit X bits, and the compiler will tell them if they are right (or wrong).

When the specified size value is larger than necessary, it can cause objects to be bigger in memory than they would be otherwise. For example, for some enumeration types, we could say `for type Enum'Size use 32;` when the number of literals would otherwise have required only a byte. That's useful for unchecked conversions because the sizes of the two types need to be the same. Likewise, it's useful for interfacing with C, where `enum` types are just mapped to the `int` type, and thus larger than Ada might otherwise require. We'll discuss unchecked conversions *later in the course* (page 1761).

Let's look at an example from an earlier chapter:

[Ada]

Listing 18: my_device_types.ads

```
package My_Device_Types is

   type UInt10 is mod 2 ** 10
     with Size => 10;

end My_Device_Types;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Size_Aspect
MD5: 049be992b876dba42cf091afc256db35
```

Here, we're saying that objects of type UInt10 must have at least 10 bits. In this case, if the code compiles, it is a confirmation that such values can be represented in 10 bits when packed into an enclosing record or array type.

If the size specified was larger than what the compiler would use by default, then it could affect the size of objects. For example, for UInt10, anything up to and including 16 would make no difference on a typical machine. However, anything over 16 would then push the compiler to use a larger object representation. That would be important for unchecked conversions, for example.

The Size attribute indicates the number of bits required to represent a type or an object. We can use the size attribute to retrieve the size of a type or of an object:

[Ada]

Listing 19: show_device_types.adb

```
with Ada.Text_IO;     use Ada.Text_IO;

with My_Device_Types; use My_Device_Types;

procedure Show_Device_Types is
   UInt10_Obj : constant UInt10 := 0;
begin
   Put_Line ("Size of UInt10 type:   " & Positive'Image (UInt10'Size));
```

(continues on next page)

(continued from previous page)

```
   Put_Line ("Size of UInt10 object: " & Positive'Image (UInt10_Obj'Size));
end Show_Device_Types;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Perspective.Size_Aspect
MD5: 4e46ad9cf54276b381b960672daa03b9
```

Runtime output

```
Size of UInt10 type:    10
Size of UInt10 object:  16
```

Here, we're retrieving the actual sizes of the `UInt10` type and an object of that type. Note that the sizes don't necessarily need to match. For example, although the size of `UInt10` type is expected to be 10 bits, the size of `UInt10_Obj` may be 16 bits, depending on the platform. Also, components of this type within composite types (arrays, records) will probably be 16 bits as well unless they are packed.

81.6.2 Register overlays

Register overlays make use of representation clauses to create a structure that facilitates manipulating bits from registers. Let's look at a simplified example of a power management controller containing registers such as a system clock enable register. Note that this example is based on an actual architecture:

[Ada]

Listing 20: registers.ads

```
with System;

package Registers is

   type Bit    is mod 2 ** 1
     with Size => 1;
   type UInt5  is mod 2 ** 5
     with Size => 5;
   type UInt10 is mod 2 ** 10
     with Size => 10;

   subtype USB_Clock_Enable is Bit;

   --  System Clock Enable Register
   type PMC_SCER_Register is record
      --  Reserved bits
      Reserved_0_4   : UInt5           := 16#0#;
      --  Write-only. Enable USB FS Clock
      USBCLK         : USB_Clock_Enable := 16#0#;
      --  Reserved bits
      Reserved_6_15  : UInt10          := 16#0#;
   end record
     with
       Volatile,
       Size      => 16,
       Bit_Order => System.Low_Order_First;

   for PMC_SCER_Register use record
      Reserved_0_4   at 0 range 0 .. 4;
      USBCLK         at 0 range 5 .. 5;
```

(continues on next page)

(continued from previous page)

```
31       Reserved_6_15  at 0 range 6 .. 15;
32    end record;
33
34    --  Power Management Controller
35    type PMC_Peripheral is record
36       --  System Clock Enable Register
37       PMC_SCER       : aliased PMC_SCER_Register;
38       --  System Clock Disable Register
39       PMC_SCDR       : aliased PMC_SCER_Register;
40    end record
41      with Volatile;
42
43    for PMC_Peripheral use record
44       --  16-bit register at byte 0
45       PMC_SCER       at 16#0# range 0 .. 15;
46       --  16-bit register at byte 2
47       PMC_SCDR       at 16#2# range 0 .. 15;
48    end record;
49
50    --  Power Management Controller
51    PMC_Periph : aliased PMC_Peripheral
52      with Import, Address => System'To_Address (16#400E0600#);
53
54 end Registers;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Embedded.PMC_Peripheral
MD5: d6f37976ca653d65d71ee5ea463df81c
```

First, we declare the system clock enable register — this is `PMC_SCER_Register` type in the code example. Most of the bits in that register are reserved. However, we're interested in bit #5, which is used to activate or deactivate the system clock. To achieve a correct representation of this bit, we do the following:

- We declare the `USBCLK` component of this record using the `USB_Clock_Enable` type, which has a size of one bit; and
- we use a representation clause to indicate that the `USBCLK` component is specifically at bit #5 of byte #0.

After declaring the system clock enable register and specifying its individual bits as components of a record type, we declare the power management controller type — `PMC_Peripheral` record type in the code example. Here, we declare two 16-bit registers as record components of `PMC_Peripheral`. These registers are used to enable or disable the system clock. The strategy we use in the declaration is similar to the one we've just seen above:

- We declare these registers as components of the `PMC_Peripheral` record type;
- we use a representation clause to specify that the `PMC_SCER` register is at byte #0 and the `PMC_SCDR` register is at byte #2.
  - Since these registers have 16 bits, we use a range of bits from 0 to 15.

The actual power management controller becomes accessible by the declaration of the `PMC_Periph` object of `PMC_Peripheral` type. Here, we specify the actual address of the memory-mapped registers (*400E0600* in hexadecimal) using the **`Address`** aspect in the declaration. When we use the **`Address`** aspect in an object declaration, we're indicating the address in memory of that object.

Because we specify the address of the memory-mapped registers in the declaration of `PMC_Periph`, this object is now an overlay for those registers. This also means that any

operation on this object corresponds to an actual operation on the registers of the power management controller. We'll discuss more details about overlays in the section about *mapping structures to bit-fields* (page 1748) (in chapter 6).

Finally, in a test application, we can access any bit of any register of the power management controller with simple record component selection. For example, we can set the USBCLK bit of the PMC_SCER register by using PMC_Periph.PMC_SCER.USBCLK:

[Ada]

Listing 21: enable_usb_clock.adb

```
with Registers;

procedure Enable_USB_Clock is
begin
   Registers.PMC_Periph.PMC_SCER.USBCLK := 1;
end Enable_USB_Clock;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Embedded.PMC_Peripheral
MD5: b8f35a80d5f04cd362e5309aef33a100
```

This code example makes use of many aspects and keywords of the Ada language. One of them is the Volatile aspect, which we've discussed in the section about *volatile and atomic objects* (page 1700). Using the Volatile aspect for the PMC_SCER_Register type ensures that objects of this type won't be stored in a register.

In the declaration of the PMC_SCER_Register record type of the example, we use the Bit_Order aspect to specify the bit ordering of the record type. Here, we can select one of these options:

- High_Order_First: first bit of the record is the most significant bit;
- Low_Order_First: first bit of the record is the least significant bit.

The declarations from the Registers package also makes use of the Import, which is sometimes necessary when creating overlays. When used in the context of object declarations, it avoids default initialization (for data types that have it.). Aspect Import will be discussed in the section that explains how to *map structures to bit-fields* (page 1748) in chapter 6. Please refer to that chapter for more details.

Details about 'Size

In the example above, we're using the Size aspect in the declaration of the PMC_SCER_Register type. In this case, the effect is that it has the compiler confirm that the record type will fit into the expected 16 bits.

That's what the aspect does for type PMC_SCER_Register in the example above, as well as for the types Bit, UInt5 and UInt10. For example, we may declare a stand-alone object of type Bit:

Listing 22: show_bit_declaration.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Bit_Declaration is

   type Bit    is mod 2 ** 1
     with Size => 1;

   B : constant Bit := 0;
   --  ^ Although Bit'Size is 1, B'Size is almost certainly 8
begin
   Put_Line ("Bit'Size = " & Positive'Image (Bit'Size));
   Put_Line ("B'Size   = " & Positive'Image (B'Size));
end Show_Bit_Declaration;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Embedded.Bit_Declaration
MD5: 1778bb96b4bf77292885bdedfee7c596
```

Runtime output

```
Bit'Size =  1
B'Size   =  8
```

In this case, B is almost certainly going to be 8-bits wide on a typical machine, even though the language requires that `Bit'Size` is 1 by default.

In the declaration of the components of the `PMC_Peripheral` record type, we use the **`aliased`** keyword to specify that those record components are accessible via other paths besides the component name. Therefore, the compiler won't store them in registers. This makes sense because we want to ensure that we're accessing specific memory-mapped registers, and not registers assigned by the compiler. Note that, for the same reason, we also use the **`aliased`** keyword in the declaration of the `PMC_Periph` object.

81.6.3 Data streams

Creating data streams — in the context of interfacing with devices — means the serialization of arbitrary information and its transmission over a communication channel. For example, we might want to transmit the content of memory-mapped registers as byte streams using a serial port. To do this, we first need to get a serialized representation of those registers as an array of bytes, which we can then transmit over the serial port.

Serialization of arbitrary record types — including register overlays — can be achieved by declaring an array of bytes as an overlay. By doing this, we're basically interpreting the information from those record types as bytes while ignoring their actual structure — i.e. their components and representation clause. We'll discuss details about overlays in the section about *mapping structures to bit-fields* (page 1748) (in chapter 6).

Let's look at a simple example of serialization of an arbitrary record type:

[Ada]

Listing 23: arbitrary_types.ads

```
package Arbitrary_Types is

   type Arbitrary_Record is record
      A : Integer;
      B : Integer;
      C : Integer;
   end record;

end Arbitrary_Types;
```

Listing 24: serialize_data.ads

```
with Arbitrary_Types;

procedure Serialize_Data (Some_Object : Arbitrary_Types.Arbitrary_Record);
```

Listing 25: serialize_data.adb

```
with Arbitrary_Types;

procedure Serialize_Data (Some_Object : Arbitrary_Types.Arbitrary_Record) is
```

(continues on next page)

(continued from previous page)

```
   type UByte is new Natural range 0 .. 255
     with Size => 8;

   type UByte_Array is array (Positive range <>) of UByte;

   --
   --  We can access the serialized data in Raw_TX, which is our overlay
   --
   Raw_TX : UByte_Array (1 .. Some_Object'Size / 8)
     with Address => Some_Object'Address;
begin
   null;
   --
   --  Now, we could stream the data from Some_Object.
   --
   --  For example, we could send the bytes (from Raw_TX) via the
   --  serial port.
   --
end Serialize_Data;
```

Listing 26: data_stream_declaration.adb

```
with Arbitrary_Types;
with Serialize_Data;

procedure Data_Stream_Declaration is
   Dummy_Object : Arbitrary_Types.Arbitrary_Record;

begin
    Serialize_Data (Dummy_Object);
end Data_Stream_Declaration;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Embedded.Data_Stream_Declaration
MD5: 1de6f518520010c28fd8deb29a2bf209
```

The most important part of this example is the implementation of the `Serialize_Data` procedure, where we declare `Raw_TX` as an overlay for our arbitrary object (`Some_Object` of `Arbitrary_Record` type). In simple terms, by writing `with Address => Some_Object'Address;` in the declaration of `Raw_TX`, we're specifying that `Raw_TX` and `Some_Object` have the same address in memory. Here, we are:

- taking the address of `Some_Object` — using the **`Address`** attribute —, and then
- using it as the address of `Raw_TX` — which is specified with the **`Address`** aspect.

By doing this, we're essentially saying that both `Raw_TX` and `Some_Object` are different representations of the same object in memory.

Because the `Raw_TX` overlay is completely agnostic about the actual structure of the record type, the `Arbitrary_Record` type could really be anything. By declaring `Raw_TX`, we create an array of bytes that we can use to stream the information from `Some_Object`.

We can use this approach and create a data stream for the register overlay example that we've seen before. This is the corresponding implementation:

[Ada]

Listing 27: registers.ads

```
with System;

package Registers is

   type Bit is mod 2 ** 1
     with Size => 1;
   type UInt5 is mod 2 ** 5
     with Size => 5;
   type UInt10 is mod 2 ** 10
     with Size => 10;

   subtype USB_Clock_Enable is Bit;

   --  System Clock Register
   type PMC_SCER_Register is record
      --  Reserved bits
      Reserved_0_4   : UInt5 := 16#0#;
      --  Write-only. Enable USB FS Clock
      USBCLK         : USB_Clock_Enable := 16#0#;
      --  Reserved bits
      Reserved_6_15  : UInt10 := 16#0#;
   end record
     with
       Volatile,
       Size      => 16,
       Bit_Order => System.Low_Order_First;

   for PMC_SCER_Register use record
      Reserved_0_4   at 0 range 0 .. 4;
      USBCLK         at 0 range 5 .. 5;
      Reserved_6_15  at 0 range 6 .. 15;
   end record;

   --  Power Management Controller
   type PMC_Peripheral is record
      --  System Clock Enable Register
      PMC_SCER       : aliased PMC_SCER_Register;
      --  System Clock Disable Register
      PMC_SCDR       : aliased PMC_SCER_Register;
   end record
     with Volatile;

   for PMC_Peripheral use record
      --  16-bit register at byte 0
      PMC_SCER       at 16#0# range 0 .. 15;
      --  16-bit register at byte 2
      PMC_SCDR       at 16#2# range 0 .. 15;
   end record;

   --  Power Management Controller
   PMC_Periph : aliased PMC_Peripheral;
--     with Import, Address => System'To_Address (16#400E0600#);

end Registers;
```

Listing 28: serial_ports.ads

```
package Serial_Ports is

```

(continues on next page)

(continued from previous page)

```
   type UByte is new Natural range 0 .. 255
     with Size => 8;

   type UByte_Array is array (Positive range <>) of UByte;

   type Serial_Port is null record;

   procedure Read (Port : in out Serial_Port;
                   Data :    out UByte_Array);

   procedure Write (Port : in out Serial_Port;
                    Data :        UByte_Array);

end Serial_Ports;
```

Listing 29: serial_ports.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Serial_Ports is

   procedure Display (Data : UByte_Array) is
   begin
      Put_Line ("---- Data ----");
      for E of Data loop
         Put_Line (UByte'Image (E));
      end loop;
      Put_Line ("--------------");
   end Display;

   procedure Read (Port : in out Serial_Port;
                   Data :    out UByte_Array) is
      pragma Unreferenced (Port);
   begin
      Put_Line ("Reading data...");
      Data := (0, 0, 32, 0);
   end Read;

   procedure Write (Port : in out Serial_Port;
                    Data :        UByte_Array) is
      pragma Unreferenced (Port);
   begin
      Put_Line ("Writing data...");
      Display (Data);
   end Write;

end Serial_Ports;
```

Listing 30: data_stream.ads

```
with Serial_Ports; use Serial_Ports;
with Registers;    use Registers;

package Data_Stream is

   procedure Send (Port : in out Serial_Port;
                   PMC  :        PMC_Peripheral);

   procedure Receive (Port : in out Serial_Port;
                      PMC  :    out PMC_Peripheral);
```

(continues on next page)

(continued from previous page)

```
11
12 end Data_Stream;
```

Listing 31: data_stream.adb

```
1  package body Data_Stream is
2
3     procedure Send (Port : in out Serial_Port;
4                     PMC  :        PMC_Peripheral)
5     is
6        Raw_TX : UByte_Array (1 .. PMC'Size / 8)
7          with Address => PMC'Address;
8     begin
9        Write (Port => Port,
10              Data => Raw_TX);
11    end Send;
12
13    procedure Receive (Port : in out Serial_Port;
14                       PMC  :    out PMC_Peripheral)
15    is
16       Raw_TX : UByte_Array (1 .. PMC'Size / 8)
17         with Address => PMC'Address;
18    begin
19       Read (Port => Port,
20             Data => Raw_TX);
21    end Receive;
22
23 end Data_Stream;
```

Listing 32: test_data_stream.adb

```
1  with Ada.Text_IO;
2
3  with Registers;
4  with Data_Stream;
5  with Serial_Ports;
6
7  procedure Test_Data_Stream is
8
9     procedure Display_Registers is
10       use Ada.Text_IO;
11    begin
12       Put_Line ("---- Registers ----");
13       Put_Line ("PMC_SCER.USBCLK: "
14                 & Registers.PMC_Periph.PMC_SCER.USBCLK'Image);
15       Put_Line ("PMC_SCDR.USBCLK: "
16                 & Registers.PMC_Periph.PMC_SCDR.USBCLK'Image);
17       Put_Line ("-------------- ----");
18    end Display_Registers;
19
20    Port : Serial_Ports.Serial_Port;
21 begin
22    Registers.PMC_Periph.PMC_SCER.USBCLK := 1;
23    Registers.PMC_Periph.PMC_SCDR.USBCLK := 1;
24
25    Display_Registers;
26
27    Data_Stream.Send (Port => Port,
28                      PMC  => Registers.PMC_Periph);
29
```

(continues on next page)

(continued from previous page)

```
30    Data_Stream.Receive (Port => Port,
31                         PMC  => Registers.PMC_Periph);
32
33    Display_Registers;
34 end Test_Data_Stream;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Embedded.Data_Stream
MD5: 3f4e1a184e52a83b1b9de9e3d5cb43bf
```

Runtime output

```
---- Registers ----
PMC_SCER.USBCLK:  1
PMC_SCDR.USBCLK:  1
-------------- ----
Writing data...
---- Data ----
 32
 0
 32
 0
--------------
Reading data...
---- Registers ----
PMC_SCER.USBCLK:  0
PMC_SCDR.USBCLK:  1
-------------- ----
```

In this example, we can find the overlay in the implementation of the Send and Receive procedures from the `Data_Stream` package. Because the overlay doesn't need to know the internals of the `PMC_Peripheral` type, we're declaring it in the same way as in the previous example (where we created an overlay for `Some_Object`). In this case, we're creating an overlay for the PMC parameter.

Note that, for this section, we're not really interested in the details about the serial port. Thus, package `Serial_Ports` in this example is just a stub. However, because the `Serial_Port` type in that package only *sees* arrays of bytes, after implementing an actual serial port interface for a specific device, we could create data streams for any type.

81.7 ARM and svd2ada

As we've seen in the previous section about *interfacing with devices* (page 1704), Ada offers powerful features to describe low-level details about the hardware architecture without giving up its strong typing capabilities. However, it can be cumbersome to create a specification for all those low-level details when you have a complex architecture. Fortunately, for ARM Cortex-M devices, the GNAT toolchain offers an Ada binding generator called **svd2ada**, which takes CMSIS-SVD descriptions for those devices and creates Ada specifications that match the architecture. CMSIS-SVD description files are based on the Cortex Microcontroller Software Interface Standard (CMSIS), which is a hardware abstraction layer for ARM Cortex microcontrollers.

Please refer to the svd2ada project page[457] for details about this tool.

[457] https://github.com/AdaCore/svd2ada

CHAPTER

EIGHTYTWO

ENHANCING VERIFICATION WITH SPARK AND ADA

82.1 Understanding Exceptions and Dynamic Checks

In Ada, several common programming errors that are not already detected at compile-time are detected instead at run-time, triggering "exceptions" that interrupt the normal flow of execution. For example, an exception is raised by an attempt to access an array component via an index that is out of bounds. This simple check precludes exploits based on buffer overflow. Several other cases also raise language-defined exceptions, such as scalar range constraint violations and null pointer dereferences. Developers may declare and raise their own application-specific exceptions too. (Exceptions are software artifacts, although an implementation may map hardware events to exceptions.)

Exceptions are raised during execution of what we will loosely define as a "frame." A frame is a language construct that has a call stack entry when called, for example a procedure or function body. There are a few other constructs that are also pertinent but this definition will suffice for now.

Frames have a sequence of statements implementing their functionality. They can also have optional "exception handlers" that specify the response when exceptions are "raised" by those statements. These exceptions could be raised directly within the statements, or indirectly via calls to other procedures and functions.

For example, the frame below is a procedure including three exceptions handlers:

Listing 1: p.adb

```
1  procedure P is
2  begin
3     Statements_That_Might_Raise_Exceptions;
4  exception
5     when A =>
6        Handle_A;
7     when B =>
8        Handle_B;
9     when C =>
10       Handle_C;
11 end P;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.SPARK.Exceptions
MD5: bf7a8740dfca9f3da993f054e22ca97d
```

The three exception handlers each start with the word **when** (lines 5, 7, and 9). Next comes one or more exception identifiers, followed by the so-called "arrow." In Ada, the arrow always associates something on the left side with something on the right side. In this case, the left side is the exception name and the right side is the handler's code for that exception.

Each handler's code consists of an arbitrary sequence of statements, in this case specific procedures called in response to those specific exceptions. If exception A is raised we call procedure `Handle_A` (line 6), dedicated to doing the actual work of handling that exception. The other two exceptions are dealt with similarly, on lines 8 and 10.

Structurally, the exception handlers are grouped together and textually separated from the rest of the code in a frame. As a result, the sequence of statements representing the normal flow of execution is distinct from the section representing the error handling. The reserved word **`exception`** separates these two sections (line 4 above). This separation helps simplify the overall flow, increasing understandability. In particular, status result codes are not required so there is no mixture of error checking and normal processing. If no exception is raised the exception handler section is automatically skipped when the frame exits.

Note how the syntactic structure of the exception handling section resembles that of an Ada case statement. The resemblance is intentional, to suggest similar behavior. When something in the statements of the normal execution raises an exception, the corresponding exception handler for that specific exception is executed. After that, the routine completes. The handlers do not "fall through" to the handlers below. For example, if exception B is raised, procedure `Handle_B` is called but `Handle_C` is not called. There's no need for a **`break`** statement, just as there is no need for it in a case statement. (There's no break statement in Ada anyway.)

So far, we've seen a frame with three specific exceptions handled. What happens if a frame has no handler for the actual exception raised? In that case the run-time library code goes "looking" for one.

Specifically, the active exception is propagated up the dynamic call chain. At each point in the chain, normal execution in that caller is abandoned and the handlers are examined. If that caller has a handler for the exception, the handler is executed. That caller then returns normally to its caller and execution continues from there. Otherwise, propagation goes up one level in the call chain and the process repeats. The search continues until a matching handler is found or no callers remain. If a handler is never found the application terminates abnormally. If the search reaches the main procedure and it has a matching handler it will execute the handler, but, as always, the routine completes so once again the application terminates.

For a concrete example, consider the following:

Listing 2: arrays.ads

```
1  package Arrays is
2
3     type List is array (Natural range <>) of Integer;
4
5     function Value (A : List; X, Y : Integer) return Integer;
6
7  end Arrays;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.SPARK.Exceptions
MD5: a2dfa05b56144e21d5796d39c88ceac2
```

Listing 3: arrays.adb

```
1  package body Arrays is
2
3     function Value (A : List; X, Y : Integer) return Integer is
4     begin
5        return A (X + Y * 10);
```

(continues on next page)

(continued from previous page)

```
6     end Value;
7
8  end Arrays;
```

Listing 4: some_process.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2  with Arrays;      use Arrays;
3
4  procedure Some_Process is
5     L : constant List (1 .. 100) := (others => 42);
6  begin
7     Put_Line (Integer'Image (Value (L, 1, 10)));
8  exception
9     when Constraint_Error =>
10       Put_Line ("Constraint_Error caught in Some_Process");
11       Put_Line ("Some_Process completes normally");
12 end Some_Process;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.SPARK.Exceptions
MD5: 7733854601db37eb53f4c4094fe5ca0d
```

Listing 5: main.adb

```
1  with Some_Process;
2  with Ada.Text_IO; use Ada.Text_IO;
3
4  procedure Main is
5  begin
6     Some_Process;
7     Put_Line ("Main completes normally");
8  end Main;
```

Procedure Main calls Some_Process, which in turn calls function Value (line 7). Some_Process declares the array object L of type List on line 5, with bounds 1 through 100. The call to Value has arguments, including variable L, leading to an attempt to access an array component via an out-of-bounds index (1 + 10 * 10 = 101, beyond the last index of L). This attempt will trigger an exception in Value prior to actually accessing the array object's memory. Function Value doesn't have any exception handlers so the exception is propagated up to the caller Some_Process. Procedure Some_Process has an exception handler for Constraint_Error and it so happens that Constraint_Error is the exception raised in this case. As a result, the code for that handler will be executed, printing some messages on the screen. Then procedure Some_Process will return to Main normally. Main then continues to execute normally after the call to Some_Process and prints its completion message.

If procedure Some_Process had also not had a handler for Constraint_Error, that procedure call would also have returned abnormally and the exception would have been propagated further up the call chain to procedure Main. Normal execution in Main would likewise be abandoned in search of a handler. But Main does not have any handlers so Main would have completed abnormally, immediately, without printing its closing message.

This semantic model is the same as with many other programming languages, in which the execution of a frame's sequence of statements is unavoidably abandoned when an exception becomes active. The model is a direct reaction to the use of status codes returned from functions as in C, where it is all too easy to forget (intentionally or otherwise) to check the status values returned. With the exception model errors cannot be ignored.

However, full exception propagation as described above is not the norm for embedded applications when the highest levels of integrity are required. The run-time library code implementing exception propagation can be rather complex and expensive to certify. Those problems apply to the application code too, because exception propagation is a form of control flow without any explicit construct in the source. Instead of the full exception model, designers of high-integrity applications often take alternative approaches.

One alternative consists of deactivating exceptions altogether, or more precisely, deactivating language-defined checks, which means that the compiler will not generate code checking for conditions giving rise to exceptions. Of course, this makes the code vulnerable to attacks, such as buffer overflow, unless otherwise verified (e.g. through static analysis). Deactivation can be applied at the unit level, through the `-gnatp` compiler switch, or locally within a unit via the pragma `Suppress`. (Refer to the GNAT User's Guide for Native Platforms[458] for more details about the switch.)

For example, we can write the following. Note the pragma on line 4 of `arrays.adb` within function `Value`:

Listing 6: arrays.ads

```
1  package Arrays is
2
3     type List is array (Natural range <>) of Integer;
4
5     function Value (A : List; X, Y : Integer) return Integer;
6
7  end Arrays;
```

Listing 7: arrays.adb

```
1  package body Arrays is
2
3     function Value (A : List; X, Y : Integer) return Integer is
4        pragma Suppress (All_Checks);
5     begin
6        return A (X + Y * 10);
7     end Value;
8
9  end Arrays;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.SPARK.Exception_Suppress
MD5: 62c37774cbcd5f167858d3b5268006aa
```

Listing 8: some_process.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2  with Arrays;      use Arrays;
3
4  procedure Some_Process is
5     L : constant List (1 .. 100) := (others => 42);
6  begin
7     Put_Line (Integer'Image (Value (L, 1, 10)));
8  exception
9     when Constraint_Error =>
10       Put_Line ("FAILURE");
11 end Some_Process;
```

This placement of the pragma will only suppress checks in the function body. However,

[458] https://docs.adacore.com/gnat_ugn-docs/html/gnat_ugn/gnat_ugn/building_executable_programs_with_gnat.html

that is where the exception would otherwise have been raised, leading to incorrect and unpredictable execution. (Run the program more than once. If it prints the right answer (42), or even the same value each time, it's just a coincidence.) As you can see, suppressing checks negates the guarantee of errors being detected and addressed at run-time.

Another alternative is to leave checks enabled but not retain the dynamic call-chain propagation. There are a couple of approaches available in this alternative.

The first approach is for the run-time library to invoke a global "last chance handler" (LCH) when any exception is raised. Instead of the sequence of statements of an ordinary exception handler, the LCH is actually a procedure intended to perform "last-wishes" before the program terminates. No exception handlers are allowed. In this scheme "propagation" is simply a direct call to the LCH procedure. The default LCH implementation provided by GNAT does nothing other than loop infinitely. Users may define their own replacement implementation.

The availability of this approach depends on the run-time library. Typically, *Zero Footprint* and *Ravenscar SFP* run-times will provide this mechanism because they are intended for certification.

A user-defined LCH handler can be provided either in C or in Ada, with the following profiles:

[Ada]

```
procedure Last_Chance_Handler (Source_Location : System.Address; Line : Integer);
pragma Export (C,
               Last_Chance_Handler,
               "__gnat_last_chance_handler");
```

[C]

```
void __gnat_last_chance_handler (char *source_location,
                                 int line);
```

We'll go into the details of the pragma `Export` in a further section on language interfacing. For now, just know that the symbol `__gnat_last_chance_handler` is what the run-time uses to branch immediately to the last-chance handler. Pragma `Export` associates that symbol with this replacement procedure so it will be invoked instead of the default routine. As a consequence, the actual procedure name in Ada is immaterial.

Here is an example implementation that simply blinks an LED forever on the target:

```
procedure Last_Chance_Handler (Msg : System.Address; Line : Integer) is
   pragma Unreferenced (Msg, Line);

   Next_Release : Time := Clock;
   Period       : constant Time_Span := Milliseconds (500);
begin
   Initialize_LEDs;
   All_LEDs_Off;

   loop
      Toggle (LCH_LED);
      Next_Release := Next_Release + Period;
      delay until Next_Release;
   end loop;
end Last_Chance_Handler;
```

The `LCH_LED` is a constant referencing the LED used by the last-chance handler, declared elsewhere. The infinite loop is necessary because a last-chance handler must never return to the caller (hence the term "last-chance"). The LED changes state every half-second.

Unlike the approach in which there is only the last-chance handler routine, the other approach allows exception handlers, but in a specific, restricted manner. Whenever an ex-

ception is raised, the only handler that can apply is a matching handler located in the same frame in which the exception is raised. Propagation in this context is simply an immediate branch instruction issued by the compiler, going directly to the matching handler's sequence of statements. If there is no matching local handler the last chance handler is invoked. For example consider the body of function `Value` in the body of package `Arrays`:

Listing 9: arrays.ads

```
package Arrays is

   type List is array (Natural range <>) of Integer;

   function Value (A : List; X, Y : Integer) return Integer;

end Arrays;
```

Listing 10: arrays.adb

```
package body Arrays is

   function Value (A : List; X, Y : Integer) return Integer is
   begin
      return A (X + Y * 10);
   exception
      when Constraint_Error =>
         return 0;
   end Value;

end Arrays;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.SPARK.Exception_Return
MD5: 1f63b92739deb03529884ab0d25dadb8
```

Listing 11: some_process.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Arrays;      use Arrays;

procedure Some_Process is
   L : constant List (1 .. 100) := (others => 42);
begin
   Put_Line (Integer'Image (Value (L, 1, 10)));
exception
   when Constraint_Error =>
      Put_Line ("FAILURE");
end Some_Process;
```

In both procedure `Some_Process` and function `Value` we have an exception handler for `Constraint_Error`. In this example the exception is raised in `Value` because the index check fails there. A local handler for that exception is present so the handler applies and the function returns zero, normally. Because the call to the function returns normally, the execution of `Some_Process` prints zero and then completes normally.

Let's imagine, however, that function `Value` did *not* have a handler for `Constraint_Error`. In the context of full exception propagation, the function call would return to the caller, i.e., `Some_Process`, and would be handled in that procedure's handler. But only local handlers are allowed under the second alternative so the lack of a local handler in `Value` would result in the last-chance handler being invoked. The handler for `Constraint_Error` in `Some_Process` under this alternative approach.

So far we've only illustrated handling the Constraint_Error exception. It's possible to handle other language-defined and user-defined exceptions as well, of course. It is even possible to define a single handler for all other exceptions that might be encountered in the handled sequence of statements, beyond those explicitly named. The "name" for this otherwise anonymous exception is the Ada reserved word **others**. As in case statements, it covers all other choices not explicitly mentioned, and so must come last. For example:

Listing 12: arrays.ads

```
1  package Arrays is
2
3     type List is array (Natural range <>) of Integer;
4
5     function Value (A : List; X, Y : Integer) return Integer;
6
7  end Arrays;
```

Listing 13: arrays.adb

```
1  package body Arrays is
2
3     function Value (A : List; X, Y : Integer) return Integer is
4     begin
5        return A (X + Y * 10);
6     exception
7        when Constraint_Error =>
8           return 0;
9        when others =>
10          return -1;
11    end Value;
12
13 end Arrays;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.SPARK.Exception_Return_Others
MD5: 7c2ed7efa23242f502a6cf4767da0192
```

Listing 14: some_process.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2  with Arrays;      use Arrays;
3
4  procedure Some_Process is
5     L : constant List (1 .. 100) := (others => 42);
6  begin
7     Put_Line (Integer'Image (Value (L, 1, 10)));
8  exception
9     when Constraint_Error =>
10       Put_Line ("FAILURE");
11 end Some_Process;
```

In the code above, the Value function has a handler specifically for Constraint_Error as before, but also now has a handler for all other exceptions. For any exception other than Constraint_Error, function Value returns -1. If you remove the function's handler for Constraint_Error (lines 7 and 8) then the other "anonymous" handler will catch the exception and -1 will be returned instead of zero.

There are additional capabilities for exceptions, but for now you have a good basic understanding of how exceptions work, especially their dynamic nature at run-time.

82.2 Understanding Dynamic Checks versus Formal Proof

So far, we have discussed language-defined checks inserted by the compiler for verification at run-time, leading to exceptions being raised. We saw that these dynamic checks verified semantic conditions ensuring proper execution, such as preventing writing past the end of a buffer, or exceeding an application-specific integer range constraint, and so on. These checks are defined by the language because they apply generally and can be expressed in language-defined terms.

Developers can also define dynamic checks. These checks specify component-specific or application-specific conditions, expressed in terms defined by the component or application. We will refer to these checks as "user-defined" for convenience. (Be sure you understand that we are not talking about user-defined *exceptions* here.)

Like the language-defined checks, user-defined checks must be true at run-time. All checks consist of Boolean conditions, which is why we can refer to them as assertions: their conditions are asserted to be true by the compiler or developer.

Assertions come in several forms, some relatively low-level, such as a simple pragma `Assert`, and some high-level, such as type invariants and contracts. These forms will be presented in detail in a later section, but we will illustrate some of them here.

User-defined checks can be enabled at run-time in GNAT with the `-gnata` switch, as well as with pragma `Assertion_Policy`. The switch enables all forms of these assertions, whereas the pragma can be used to control specific forms. The switch is typically used but there are reasonable use-cases in which some user-defined checks are enabled, and others, although defined, are disabled.

By default in GNAT, language-defined checks are enabled but user-defined checks are disabled. Here's an example of a simple program employing a low-level assertion. We can use it to show the effects of the switches, including the defaults:

Listing 15: main.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  procedure Main is
4     X : Positive := 10;
5  begin
6     X := X * 5;
7     pragma Assert (X > 99);
8     X := X - 99;
9     Put_Line (Integer'Image (X));
10 end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.SPARK.Low_Level_Assertion
MD5: 2eb5e1879740cc3914acb8a362995b31
```

If we compiled this code we would get a warning about the assignment on line 8 after the pragma `Assert`, but not one about the `Assert` itself on line 7.

```
gprbuild -q -P main.gpr
main.adb:8:11: warning: value not in range of type "Standard.Positive"
main.adb:8:11: warning: "Constraint_Error" will be raised at run time
```

No code is generated for the user-defined check expressed via pragma `Assert` but the language-defined check is emitted. In this case the range constraint on X excludes zero and negative numbers, but `X * 5 = 50`, `X - 99 = -49`. As a result, the check for the last

assignment would fail, raising `Constraint_Error` when the program runs. These results are the expected behavior for the default switch settings.

But now let's enable user-defined checks and build it. Different compiler output will appear.

Listing 16: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is
   X : Positive := 10;
begin
   X := X * 5;
   pragma Assert (X > 99);
   X := X - 99;
   Put_Line (Integer'Image (X));
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.SPARK.Assert
MD5: 2eb5e1879740cc3914acb8a362995b31
```

Build output

```
main.adb:7:19: warning: assertion will fail at run time [-gnatw.a]
main.adb:8:11: warning: value not in range of type "Standard.Positive" [enabled by␣
 ↪default]
main.adb:8:11: warning: Constraint_Error will be raised at run time [enabled by␣
 ↪default]
```

Runtime output

```

raised ADA.ASSERTIONS.ASSERTION_ERROR : main.adb:7
```

Now we also get the compiler warning about the pragma `Assert` condition. When run, the failure of pragma `Assert` on line 7 raises the exception `Ada.Assertions.Assertion_Error`. According to the expression in the assertion, X is expected (incorrectly) to be above 99 after the multiplication. (The exception name in the error message, SYSTEM.ASSERTIONS.ASSERT_FAILURE, is a GNAT-specific alias for `Ada.Assertions.Assertion_Error`.)

It's interesting to see in the output that the compiler can detect some violations at compile-time:

```
main.adb:7:19: warning: assertion will fail at run time
main.adb:7:21: warning: condition can only be True if invalid values present
main.adb:8:11: warning: value not in range of type "Standard.Positive"
```

Generally speaking, a complete analysis is beyond the scope of compilers and they may not find all errors prior to execution, even those we might detect ourselves by inspection. More errors can be found by tools dedicated to that purpose, known as static analyzers. But even an automated static analysis tool cannot guarantee it will find all potential problems.

A much more powerful alternative is formal proof, a form of static analysis that can (when possible) give strong guarantees about the checks, for all possible conditions and all possible inputs. Proof can be applied to both language-defined and user-defined checks.

Be sure you understand that formal proof, as a form of static analysis, verifies conditions prior to execution, even prior to compilation. That earliness provides significant cost benefits. Removing bugs earlier is far less expensive than doing so later because the cost to fix bugs increases exponentially over the phases of the project life cycle, especially after

deployment. Preventing bug introduction into the deployed system is the least expensive approach of all. Furthermore, cost savings during the initial development will be possible as well, for reasons specific to proof. We will revisit this topic later in this section.

Formal analysis for proof can be achieved through the SPARK subset of the Ada language combined with the **gnatprove** verification tool. SPARK is a subset encompassing most of the Ada language, except for features that preclude proof. As a disclaimer, this course is not aimed at providing a full introduction to proof and the SPARK language, but rather to present in a few examples what it is about and what it can do for us.

As it turns out, our procedure `Main` is already SPARK compliant so we can start verifying it.

Listing 17: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

 procedure Main is
    X : Positive := 10;
 begin
    X := X * 5;
    pragma Assert (X > 99);
    X := X - 99;
    Put_Line (Integer'Image (X));
 end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.SPARK.Assert
MD5: 98cad2c7e7b7a12740db013727f01d45
```

Build output

```
main.adb:7:20: warning: assertion will fail at run time [-gnatw.a]
main.adb:8:12: warning: value not in range of type "Standard.Positive" [enabled by␣
 ↪default]
main.adb:8:12: warning: Constraint_Error will be raised at run time [enabled by␣
 ↪default]
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
generation of data representation information failed
continuing analysis with partial data representation
for details, see log file gnatprove/data_representation_generation.log
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
main.adb:7:20: medium: assertion might fail
gnatprove: unproved check messages considered as errors
```

Runtime output

```

raised ADA.ASSERTIONS.ASSERTION_ERROR : main.adb:7
```

The "Prove" button invokes **gnatprove** on `main.adb`. You can ignore the parameters to the invocation. For the purpose of this demonstration, the interesting output is this message:

```
main.adb:7:19: medium: assertion might fail, cannot prove X > 99 (e.g. when X = 50)
```

gnatprove can tell that the assertion `X > 99` may have a problem. There's indeed a bug here, and **gnatprove** even gives us the counterexample (when X is 50). As a result the code is not proven and we know we have an error to correct.

Notice that the message says the assertion "might fail" even though clearly **gnatprove** has an example for when failure is certain. That wording is a reflection of the fact that SPARK gives strong guarantees when the assertions are proven to hold, but does not guarantee that flagged problems are indeed problems. In other words, **gnatprove** does not give false positives but false negatives are possible. The result is that if **gnatprove** does not indicate a problem for the code under analysis we can be sure there is no problem, but if **gnatprove** does indicate a problem the tool may be wrong.

82.3 Initialization and Correct Data Flow

An immediate benefit from having our code compatible with the SPARK subset is that we can ask **gnatprove** to verify initialization and correct data flow, as indicated by the absence of messages during SPARK "flow analysis." Flow analysis detects programming errors such as reading uninitialized data, problematic aliasing between formal parameters, and data races between concurrent tasks.

In addition, **gnatprove** checks unit specifications for the actual data read or written, and the flow of information from inputs to outputs. As you can imagine, this verification provides significant benefits, and it can be reached with comparatively low cost.

For example, the following illustrates an initialization failure:

Listing 18: main.adb

```
with Increment;
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is
   B : Integer;
begin
   Increment (B);
   Put_Line (B'Image);
end Main;
```

Listing 19: increment.adb

```
procedure Increment (Value : in out Integer) is
begin
    Value := Value + 1;
end Increment;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.SPARK.Contracts_0
MD5: 06d432a84d94635bb7bddafd9574a748
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
main.adb:7:15: high: "B" is not initialized
gnatprove: unproved check messages considered as errors
```

Granted, `Increment` is a silly procedure as-is, but imagine it did useful things, and, as part of that, incremented the argument. **gnatprove** tells us that the caller has not assigned a value to the argument passed to `Increment`.

Consider this next routine, which contains a serious coding error. Flow analysis will find it for us.

Listing 20: compute_offset.adb

```
with Ada.Numerics.Elementary_Functions;  use Ada.Numerics.Elementary_Functions;

procedure Compute_Offset (K : Float; Z : out Integer; Flag : out Boolean) is
   X : constant Float := Sin (K);
begin
   if X < 0.0 then
      Z := 0;
      Flag := True;
   elsif X > 0.0 then
      Z := 1;
      Flag := True;
   else
      Flag := False;
   end if;
end Compute_Offset;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.SPARK.Contracts_1
MD5: af7f16a9c83359c49fde44ed4796c8ec
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
compute_offset.adb:3:38: medium: "Z" might not be initialized in "Compute_Offset"␣
 ↪[reason for check: OUT parameter should be initialized on return] [possible fix:␣
 ↪initialize "Z" on all paths or make "Z" an IN OUT parameter]
gnatprove: unproved check messages considered as errors
```

gnatprove tells us that Z might not be initialized (assigned a value) in `Compute_Offset`, and indeed that is correct. Z is a mode **out** parameter so the routine should assign a value to it: Z is an output, after all. The fact that `Compute_Offset` does not do so is a significant and nasty bug. Why is it so nasty? In this case, formal parameter Z is of the scalar type **Integer**, and scalar parameters are always passed by copy in Ada and SPARK. That means that, when returning to the caller, an integer value is copied to the caller's argument passed to Z. But this procedure doesn't always assign the value to be copied back, and in that case an arbitrary value — whatever is on the stack — is copied to the caller's argument. The poor programmer must debug the code to find the problem, yet the effect could appear well downstream from the call to `Compute_Offset`. That's not only painful, it is expensive. Better to find the problem before we even compile the code.

82.4 Contract-Based Programming

So far, we've seen assertions in a routine's sequence of statements, either through implicit language-defined checks (is the index in the right range?) or explicit user-defined checks. These checks are already useful by themselves but they have an important limitation: the assertions are in the implementation, hidden from the callers of the routine. For example, a call's success or failure may depend upon certain input values but the caller doesn't have that information.

Generally speaking, Ada and SPARK put a lot of emphasis on strong, complete specifications for the sake of abstraction and analysis. Callers need not examine the implementations to determine whether the arguments passed to it are changed, for example. It is possible to go beyond that, however, to specify implementation constraints and functional requirements. We use contracts to do so.

At the language level, contracts are higher-level forms of assertions associated with specifications and declarations rather than sequences of statements. Like other assertions they can be activated or deactivated at run-time, and can be statically proven. We'll concentrate here on two kinds of contracts, both associated especially (but not exclusively) with procedures and functions:

- *Preconditions*, those Boolean conditions required to be true *prior* to a call of the corresponding subprogram
- *Postconditions*, those Boolean conditions required to be true *after* a call, as a result of the corresponding subprogram's execution

In particular, preconditions specify the initial conditions, if any, required for the called routine to correctly execute. Postconditions, on the other hand, specify what the called routine's execution must have done, at least, on normal completion. Therefore, preconditions are obligations on callers (referred to as "clients") and postconditions are obligations on implementers. By the same token, preconditions are guarantees to the implementers, and postconditions are guarantees to clients.

Contract-based programming, then, is the specification and rigorous enforcement of these obligations and guarantees. Enforcement is rigorous because it is not manual, but tool-based: dynamically at run-time with exceptions, or, with SPARK, statically, prior to build.

Preconditions are specified via the "Pre" aspect. Postconditions are specified via the "Post" aspect. Usually subprograms have separate declarations and these aspects appear with those declarations, even though they are *about* the bodies. Placement on the declarations allows the obligations and guarantees to be visible to all parties. For example:

Listing 21: mid.ads

```
1 function Mid (X, Y : Integer) return Integer with
2    Pre  => X + Y /= 0,
3    Post => Mid'Result > X;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.SPARK.Contracts_2
MD5: 0fb78847a167d9318b00667c59a7038d
```

The precondition on line 2 specifies that, for any given call, the sum of the values passed to parameters X and Y must not be zero. (Perhaps we're dividing by X + Y in the body.) The declaration also provides a guarantee about the function call's result, via the postcondition on line 3: for any given call, the value returned will be greater than the value passed to X.

Consider a client calling this function:

Listing 22: demo.adb

```
1  with Mid;
2  with Ada.Text_IO; use Ada.Text_IO;
3
4  procedure Demo is
5     A, B, C : Integer;
6  begin
7     A := Mid (1, 2);
8     B := Mid (1, -1);
9     C := Mid (A, B);
10    Put_Line (C'Image);
11 end Demo;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.SPARK.Contracts_2
MD5: 3e0617d4b1c14b37a81377456bf73eb5
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
generation of data representation information failed
continuing analysis with partial data representation
for details, see log file gnatprove/data_representation_generation.log
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
demo.adb:8:09: medium: precondition might fail
gnatprove: unproved check messages considered as errors
```

gnatprove indicates that the assignment to B (line 8) might fail because of the precondition, i.e., the sum of the inputs shouldn't be 0, yet `-1 + 1 = 0`. (We will address the other output message elsewhere.)

Let's change the argument passed to Y in the second call (line 8). Instead of -1 we will pass -2:

Listing 23: demo.adb

```
1  with Mid;
2  with Ada.Text_IO; use Ada.Text_IO;
3
4  procedure Demo is
5     A, B, C : Integer;
6  begin
7     A := Mid (1, 2);
8     B := Mid (1, -2);
9     C := Mid (A, B);
10    Put_Line (C'Image);
11 end Demo;
```

Listing 24: mid.ads

```
1  function Mid (X, Y : Integer) return Integer with
2     Pre  => X + Y /= 0,
3     Post => Mid'Result > X;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.SPARK.Contracts_3
MD5: 496937d76e16ba524f98f5a94398e929
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
generation of data representation information failed
continuing analysis with partial data representation
for details, see log file gnatprove/data_representation_generation.log
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
```

The second call will no longer be flagged for the precondition. In addition, **gnatprove** will know from the postcondition that A has to be greater than 1, as does B, because in both calls 1 was passed to X. Therefore, **gnatprove** can deduce that the precondition will hold for the third call `C := Mid (A, B);` because the sum of two numbers greater than 1 will never be zero.

Postconditions can also compare the state prior to a call with the state after a call, using

the 'Old attribute. For example:

Listing 25: increment.ads

```
procedure Increment (Value : in out Integer) with
  Pre  => Value < Integer'Last,
  Post => Value = Value'Old + 1;
```

Listing 26: increment.adb

```
procedure Increment (Value : in out Integer) is
begin
   Value := Value + 1;
end Increment;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.SPARK.Contracts_4
MD5: b879dcff91cb4fbce5501474b7f2e732
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
```

The postcondition specifies that, on return, the argument passed to the parameter Value will be one greater than it was immediately prior to the call (Value'Old).

82.5 Replacing Defensive Code

One typical benefit of contract-based programming is the removal of defensive code in subprogram implementations. For example, the *Push* operation for a stack type would need to ensure that the given stack is not already full. The body of the routine would first check that, explicitly, and perhaps raise an exception or set a status code. With preconditions we can make the requirement explicit and **gnatprove** will verify that the requirement holds at all call sites.

This reduction has a number of advantages:

- The implementation is simpler, removing validation code that is often difficult to test, makes the code more complex and leads to behaviors that are difficult to define.
- The precondition documents the conditions under which it's correct to call the subprogram, moving from an implementer responsibility to mitigate invalid input to a user responsibility to fulfill the expected interface.
- Provides the means to verify that this interface is properly respected, through code review, dynamic checking at run-time, or formal static proof.

As an example, consider a procedure Read that returns a component value from an array. Both the Data and Index are objects visible to the procedure so they are not formal parameters.

Listing 27: p.ads

```
package P is

   type List is array (Integer range <>) of Character;

   Data  : List (1 .. 100);
```

(continues on next page)

(continued from previous page)

```
6     Index : Integer := Data'First;
7
8     procedure Read (V : out Character);
9
10 end P;
```

Listing 28: p.adb

```
1  package body P is
2
3     procedure Read (V : out Character) is
4     begin
5        if Index not in Data'Range then
6           V := Character'First;
7           return;
8        end if;
9
10       V := Data (Index);
11       Index := Index + 1;
12    end Read;
13 end P;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.SPARK.Defensive
MD5: 4b4767100079b228f4f3c630d267ec53
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
```

In addition to procedure Read we would also have a way to load the array components in the first place, but we can ignore that for the purpose of this discussion.

Procedure Read is responsible for reading an element of the array and then incrementing the index. What should it do in case of an invalid index? In this implementation there is defensive code that returns a value arbitrarily chosen. We could also redesign the code to return a status in this case, or — better — raise an exception.

An even more robust approach would be instead to ensure that this subprogram is only called when Index is within the indexing boundaries of Data. We can express that requirement with a precondition (line 9).

Listing 29: p.ads

```
1  package P is
2
3     type List is array (Integer range <>) of Character;
4
5     Data : List (1 .. 100);
6     Index : Integer := 1;
7
8     procedure Read (V : out Character)
9       with Pre => Index in Data'Range;
10
11 end P;
```

Listing 30: p.adb

```
package body P is

   procedure Read (V : out Character) is
   begin
      V := Data (Index);
      Index := Index + 1;
   end Read;

end P;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.SPARK.Defensive
MD5: 9646614c34d191be51b4522c972538aa
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
```

Now we don't need the defensive code in the procedure body. That's safe because SPARK will attempt to prove statically that the check will not fail at the point of each call.

Assuming that procedure Read is intended to be the only way to get values from the array, in a real application (where the principles of software engineering apply) we would take advantage of the compile-time visibility controls that packages offer. Specifically, we would move all the variables' declarations to the private part of the package, or even the package body, so that client code could not possibly access the array directly. Only procedure Read would remain visible to clients, thus remaining the only means of accessing the array. However, that change would entail others, and in this chapter we are only concerned with introducing the capabilities of SPARK. Therefore, we keep the examples as simple as possible.

82.6 Proving Absence of Run-Time Errors

Earlier we said that **gnatprove** will verify both language-defined and user-defined checks. Proving that the language-defined checks will not raise exceptions at run-time is known as proving "Absence of Run-Time Errors" or AoRTE for short. Successful proof of these checks is highly significant in itself.

One of the major resulting benefits is that we can deploy the final executable with checks disabled. That has obvious performance benefits, but it is also a safety issue. If we disable the checks we also disable the run-time library support for them, but in that case the language does not define what happens if indeed an exception is raised. Formally speaking, anything could happen. We must have good reason for thinking that exceptions cannot be raised.

This is such an important issue that proof of AoRTE can be used to comply with the objectives of certification standards in various high-integrity domains (for example, DO-178B/C in avionics, EN 50128 in railway, IEC 61508 in many safety-related industries, ECSS-Q-ST-80C in space, IEC 60880 in nuclear, IEC 62304 in medical, and ISO 26262 in automotive).

As a result, the quality of the program can be guaranteed to achieve higher levels of integrity than would be possible in other programming languages.

However, successful proof of AoRTE may require additional assertions, especially preconditions. We can see that with procedure `Increment`, the procedure that takes an Integer

argument and increments it by one. But of course, if the incoming value of the argument is the largest possible positive value, the attempt to increment it would overflow, raising `Constraint_Error`. (As you have likely already concluded, `Constraint_Error` is the most common exception you will have to deal with.) We added a precondition to allow only the integer values up to, but not including, the largest positive value:

Listing 31: increment.ads

```
procedure Increment (Value : in out Integer) with
  Pre  => Value < Integer'Last,
  Post => Value = Value'Old + 1;
```

Listing 32: increment.adb

```
procedure Increment (Value : in out Integer) is
begin
   Value := Value + 1;
end Increment;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.SPARK.Contracts_5
MD5: b879dcff91cb4fbce5501474b7f2e732
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
```

Prove it, then comment-out the precondition and try proving it again. Not only will **gnatprove** tell us what is wrong, it will suggest a solution as well.

Without the precondition the check it provides would have to be implemented as defensive code in the body. One or the other is critical here, but note that we should never need both.

82.7 Proving Abstract Properties

The postcondition on `Increment` expresses what is, in fact, a unit-level requirement. Successfully proving such requirements is another significant robustness and cost benefit. Together with the proofs for initialization and AoRTE, these proofs ensure program integrity, that is, the program executes within safe boundaries: the control flow of the program is correctly programmed and cannot be circumvented through run-time errors, and data cannot be corrupted.

We can go even further. We can use contracts to express arbitrary abstract properties when such exist. Safety and security properties, for instance, could be expressed as postconditions and then proven by **gnatprove**.

For example, imagine we have a procedure to move a train to a new position on the track, and we want to do so safely, without leading to a collision with another train. Procedure `Move`, therefore, takes two inputs: a train identifier specifying which train to move, and the intended new position. The procedure's output is a value indicating a motion command to be given to the train in order to go to that new position. If the train cannot go to that new position safely the output command is to stop the train. Otherwise the command is for the train to continue at an indicated speed:

```
type Move_Result is (Full_Speed, Slow_Down, Keep_Going, Stop);

procedure Move
```

(continues on next page)

(continued from previous page)

```
   (Train        : in  Train_Id;
    New_Position : in  Train_Position;
    Result       : out Move_Result)
with
   Pre  => Valid_Id (Train) and
           Valid_Move (Trains (Train), New_Position) and
           At_Most_One_Train_Per_Track and
           Safe_Signaling,
   Post => At_Most_One_Train_Per_Track and
           Safe_Signaling;

function At_Most_One_Train_Per_Track return Boolean;

function Safe_Signaling return Boolean;
```

The preconditions specify that, given a safe initial state and a valid move, the result of the call will also be a safe state: there will be at most one train per track section and the track signaling system will not allow any unsafe movements.

82.8 Final Comments

Make sure you understand that **gnatprove** does not attempt to prove the program correct as a whole. It attempts to prove language-defined and user-defined assertions about parts of the program, especially individual routines and calls to those routines. Furthermore, **gnatprove** proves the routines correct only to the extent that the user-defined assertions correctly and sufficiently describe and constrain the implementation of the corresponding routines.

Although we are not proving whole program correctness, as you will have seen — and done — we can prove properties than make our software far more robust and bug-free than is possible otherwise. But in addition, consider what proving the unit-level requirements for your procedures and functions would do for the cost of unit testing and system integration. The tests would pass the first time.

However, within the scope of what SPARK can do, not everything can be proven. In some cases that is because the software behavior is not amenable to expression as boolean conditions (for example, a mouse driver). In other cases the source code is beyond the capabilities of the analyzers that actually do the mathematical proof. In these cases the combination of proof and actual test is appropriate, and still less expensive that testing alone.

There is, of course, much more to be said about what can be done with SPARK and **gnatprove**. Those topics are reserved for the *Introduction to SPARK* (page 1243) course.

CHAPTER

EIGHTYTHREE

C TO ADA TRANSLATION PATTERNS

83.1 Naming conventions and casing considerations

One question that may arise relatively soon when converting from C to Ada is the style of source code presentation. The Ada language doesn't impose any particular style and for many reasons, it may seem attractive to keep a C-like style — for example, camel casing — to the Ada program.

However, the code in the Ada language standard, most third-party code, and the libraries provided by GNAT follow a specific style for identifiers and reserved words. Using a different style for the rest of the program leads to inconsistencies, thereby decreasing readability and confusing automatic style checkers. For those reasons, it's usually advisable to adopt the Ada style — in which each identifier starts with an upper case letter, followed by lower case letters (or digits), with an underscore separating two "distinct" words within the identifier. Acronyms within identifiers are in upper case. For example, there is a language-defined package named `Ada.Text_IO`. Reserved words are all lower case.

Following this scheme doesn't preclude adding additional, project-specific rules.

83.2 Manually interfacing C and Ada

Before even considering translating code from C to Ada, it's worthwhile to evaluate the possibility of keeping a portion of the C code intact, and only translating selected modules to Ada. This is a necessary evil when introducing Ada to an existing large C codebase, where re-writing the entire code upfront is not practical nor cost-effective.

Fortunately, Ada has a dedicated set of features for interfacing with other languages. The `Interfaces` package hierarchy and the pragmas `Convention`, `Import`, and `Export` allow you to make inter-language calls while observing proper data representation for each language.

Let's start with the following C code:

[C]

Listing 1: call.c

```c
#include <stdio.h>

struct my_struct {
    int A, B;
};

void call (struct my_struct *p) {
    printf ("%d", p->A);
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.My_Struct_C
MD5: 67053ec329fa4dfcbd8d6125589b9fcb
```

To call that function from Ada, the Ada compiler requires a description of the data structure to pass as well as a description of the function itself. To capture how the C **struct my_struct** is represented, we can use the following record along with a **pragma** *Convention*. The pragma directs the compiler to lay out the data in memory the way a C compiler would.

[Ada]

Listing 2: use_my_struct.adb

```
with Ada.Text_IO;  use Ada.Text_IO;
with Interfaces.C;

procedure Use_My_Struct is

   type my_struct is record
     A : Interfaces.C.int;
     B : Interfaces.C.int;
   end record;
   pragma Convention (C, my_struct);

   V : my_struct := (A => 1, B => 2);
begin
   Put_Line ("V = ("
             & Interfaces.C.int'Image (V.A)
             & Interfaces.C.int'Image (V.B)
             & ")");
end Use_My_Struct;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.My_Struct_Ada
MD5: d19942018679df6fbab99f1c6bfdebc8
```

Runtime output

```
V = ( 1 2)
```

Describing a foreign subprogram call to Ada code is called *binding* and it is performed in two stages. First, an Ada subprogram specification equivalent to the C function is coded. A C function returning a value maps to an Ada function, and a void function maps to an Ada procedure. Then, rather than implementing the subprogram using Ada code, we use a **pragma** *Import*:

```
procedure Call (V : my_struct);
pragma Import (C, Call, "call"); -- Third argument optional
```

The `Import` pragma specifies that whenever `Call` is invoked by Ada code, it should invoke the `Call` function with the C calling convention.

And that's all that's necessary. Here's an example of a call to `Call`:

[Ada]

Listing 3: use_my_struct.adb

```
with Interfaces.C;

procedure Use_My_Struct is
```

(continues on next page)

(continued from previous page)

```
4
5     type my_struct is record
6       A : Interfaces.C.int;
7       B : Interfaces.C.int;
8     end record;
9     pragma Convention (C, my_struct);
10
11    procedure Call (V : my_struct);
12    pragma Import (C, Call, "call"); -- Third argument optional
13
14    V : my_struct := (A => 1, B => 2);
15 begin
16    Call (V);
17 end Use_My_Struct;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.My_Struct
MD5: 9b54edadd406c7f5a2b9f8b8f82a4a88
```

83.3 Building and Debugging mixed language code

The easiest way to build an application using mixed C / Ada code is to create a simple project file for **gprbuild** and specify C as an additional language. By default, when using **gprbuild** we only compile Ada source files. To compile C code files as well, we use the Languages attribute and specify c as an option, as in the following example of a project file named *default.gpr*:

```
project Default is

   for Languages use ("ada", "c");
   for Main use ("main.adb");

end Default;
```

Then, we use this project file to build the application by simply calling `gprbuild`. Alternatively, we can specify the project file on the command-line with the `-P` option — for example, `gprbuild -P default.gpr`. In both cases, `gprbuild` compiles all C source-code file found in the directory and links the corresponding object files to build the executable.

In order to include debug information, you can use `gprbuild -cargs -g`. This option adds debug information based on both C and Ada code to the executable. Alternatively, you can specify a `Builder` package in the project file and include global compilation switches for each language using the `Global_Compilation_Switches` attribute. For example:

```
project Default is

   for Languages use ("ada", "c");
   for Main use ("main.adb");

   package Builder is
      for Global_Compilation_Switches ("Ada") use ("-g");
      for Global_Compilation_Switches ("C") use ("-g");
   end Builder;

end Default;
```

In this case, you can simply run `gprbuild -P default.gpr` to build the executable.

To debug the executable, you can use programs such as **gdb** or **ddd**, which are suitable for debugging both C and Ada source-code. If you prefer a complete IDE, you may want to look into **GNAT Studio**, which supports building and debugging an application within a single environment, and remotely running applications loaded to various embedded devices. You can find more information about **gprbuild** and **GNAT Studio** in the *Introduction to GNAT Toolchain* (page 1939) course.

83.4 Automatic interfacing

It may be useful to start interfacing Ada and C by using automatic binding generators. These can be done either by invoking **gcc** `-fdump-ada-spec` option (to generate an Ada binding to a C header file) or `-gnatceg` option (to generate a C binding to an Ada specification file). For example:

```
gcc -c -fdump-ada-spec my_header.h
gcc -c -gnatceg spec.ads
```

The level of interfacing is very low level and typically requires either massaging (changing the generated files) or wrapping (calling the generated files from a higher level interface). For example, numbers bound from C to Ada are only standard numbers where user-defined types may be desirable. C uses a lot of by-pointer parameters which may be better replaced by other parameter modes, etc.

However, the automatic binding generator helps having a starting point which ensures compatibility of the Ada and the C code.

83.5 Using Arrays in C interfaces

It is relatively straightforward to pass an array from Ada to C. In particular, with the GNAT compiler, passing an array is equivalent to passing a pointer to its first element. Of course, as there's no notion of boundaries in C, the length of the array needs to be passed explicitly. For example:

[C]

Listing 4: p.h

```
1 void p (int * a, int length);
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Arr_1
MD5: 123353e301a3d43016d2799855e6732a
```

[Ada]

Listing 5: main.adb

```
1  procedure Main is
2     type Arr is array (Integer range <>) of Integer;
3
4     procedure P (V : Arr; Length : Integer);
5     pragma Import (C, P);
6
7     X : Arr (5 .. 15);
8  begin
9     P (X, X'Length);
10 end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Arr_1
MD5: 9bfbc0f31da4554a1e1dea1ba2b1d305
```

The other way around — that is, retrieving an array that has been creating on the C side — is more difficult. Because C doesn't explicitly carry boundaries, they need to be recreated in some way.

The first option is to actually create an Ada array without boundaries. This is the most flexible, but also the least safe option. It involves creating an array with indices over the full range of `Integer` without ever creating it from Ada, but instead retrieving it as an access from C. For example:

[C]

Listing 6: f.h

```c
int * f ();
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Arr_2
MD5: 19e33efb6d7d46778b88baa2709111e5
```

[Ada]

Listing 7: main.adb

```ada
procedure Main is
   type Arr is array (Integer) of Integer;
   type Arr_A is access all Arr;

   function F return Arr_A;
   pragma Import (C, F);
begin
   null;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Arr_2
MD5: b52213bcdd8db5e8abfcb8effabb84df
```

Note that `Arr` is a constrained type (it doesn't have the `range <>` notation for indices). For that reason, as it would be for C, it's possible to iterate over the whole range of integer, beyond the memory actually allocated for the array.

A somewhat safer way is to overlay an Ada array over the C one. This requires having access to the length of the array. This time, let's consider two cases, one with an array and its size accessible through functions, another one on global variables. This time, as we're using an overlay, the function will be directly mapped to an Ada function returning an address:

[C]

Listing 8: fg.h

```c
int * f_arr (void);
int f_size (void);

int * g_arr;
int g_size;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Arr_3
MD5: b315ec2e5d9fdd297ba295ccbae910bc
```

[Ada]

Listing 9: fg.ads

```ada
with System;

package Fg is

   type Arr is array (Integer range <>) of Integer;

   function F_Arr return System.Address;
   pragma Import (C, F_Arr, "f_arr");

   function F_Size return Integer;
   pragma Import (C, F_Size, "f_size");

   F : Arr (0 .. F_Size - 1) with Address => F_Arr;

   G_Size : Integer;
   pragma Import (C, G_Size, "g_size");

   G_Arr : Arr (0 .. G_Size - 1);
   pragma Import (C, G_Arr, "g_arr");

end Fg;
```

Listing 10: main.adb

```ada
with Fg;

procedure Main is
begin
   null;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Arr_3
MD5: 5c74f9bca93520ecf85a2010760cc2f8
```

With all solutions though, importing an array from C is a relatively unsafe pattern, as there's only so much information on the array as there would be on the C side in the first place. These are good places for careful peer reviews.

83.6 By-value vs. by-reference types

When interfacing Ada and C, the rules of parameter passing are a bit different with regards to what's a reference and what's a copy. Scalar types and pointers are passed by value, whereas record and arrays are (almost) always passed by reference. However, there may be cases where the C interface also passes values and not pointers to objects. Here's a slightly modified version of a previous example to illustrate this point:

[C]

Listing 11: call.c

```c
#include <stdio.h>

struct my_struct {
    int A, B;
};

void call (struct my_struct p) {
    printf ("%d", p.A);
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Param_By_Value_C
MD5: 42b6e329c5dbfcae368078ca7635341f
```

In Ada, a type can be modified so that parameters of this type can always be passed by copy.

[Ada]

Listing 12: main.adb

```ada
with Interfaces.C;

procedure Main is
   type my_struct is record
      A : Interfaces.C.int;
      B : Interfaces.C.int;
   end record
     with Convention => C_Pass_By_Copy;

   procedure Call (V : my_struct);
   pragma Import (C, Call, "call");
begin
   null;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Param_By_Value_Ada
MD5: 16e97033bdffb2bacc0cf3322c019a94
```

Note that this cannot be done at the subprogram declaration level, so if there is a mix of by-copy and by-reference calls, two different types need to be used on the Ada side.

83.7 Naming and prefixes

Because of the absence of namespaces, any global name in C tends to be very long. And because of the absence of overloading, they can even encode type names in their type.

In Ada, the package is a namespace — two entities declared in two different packages are clearly identified and can always be specifically designated. The C names are usually a good indication of the names of the future packages and should be stripped — it is possible to use the full name if useful. For example, here's how the following declaration and call could be translated:

[C]

Listing 13: reg_interface.h

```
void registerInterface_Initialize (int size);
```

Listing 14: reg_interface_test.c

```
#include "reg_interface.h"

int main(int argc, const char * argv[])
{
    registerInterface_Initialize(15);

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Namespaces
MD5: e8c25da648a2e8662d97a9a5b863a5bc
```

[Ada]

Listing 15: register_interface.ads

```
package Register_Interface is
   procedure Initialize (Size : Integer)
     with Import     => True,
          Convention => C,
          External_Name => "registerInterface_Initialize";

end Register_Interface;
```

Listing 16: main.adb

```
with Register_Interface;

procedure Main is
begin
   Register_Interface.Initialize (15);
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Namespaces
MD5: 934edd7d3c74d058f862a786582a32c0
```

Note that in the above example, a **use** clause on Register_Interface could allow us to omit the prefix.

83.8 Pointers

The first thing to ask when translating pointers from C to Ada is: are they needed in the first place? In Ada, pointers (or access types) should only be used with complex structures that cannot be allocated at run-time — think of a linked list or a graph for example. There are many other situations that would need a pointer in C, but do not in Ada, in particular:

- Arrays, even when dynamically allocated
- Results of functions
- Passing large structures as parameters

- Access to registers
- ... others

This is not to say that pointers aren't used in these cases but, more often than not, the pointer is hidden from the user and automatically handled by the code generated by the compiler; thus avoiding possible mistakes from being made. Generally speaking, when looking at C code, it's good practice to start by analyzing how many pointers are used and to translate as many as possible into *pointerless* Ada structures.

Here are a few examples of such patterns — additional examples can be found throughout this document.

Dynamically allocated arrays can be directly allocated on the stack:

[C]

Listing 17: array_decl.c

```c
#include <stdlib.h>

int main() {
    int *a = malloc(sizeof(int) * 10);

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Array_Stack_Alloc_C
MD5: a922c3e163494339d6773c6ab1256549
```

[Ada]

Listing 18: main.adb

```ada
procedure Main is
   type Arr is array (Integer range <>) of Integer;
   A : Arr (0 .. 9);
begin
   null;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Array_Stack_Alloc_Ada
MD5: 2e4196c2a2016244a48de153beaa2b49
```

It's even possible to create a such an array within a structure, provided that the size of the array is known when instantiating this object, using a type discriminant:

[C]

Listing 19: array_decl.c

```c
#include <stdlib.h>

typedef struct {
    int * a;
} S;

int main(int argc, const char * argv[])
{
    S v;
```

(continues on next page)

(continued from previous page)

```
10
11      v.a = malloc(sizeof(int) * 10);
12
13      return 0;
14  }
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Struct_Array_Stack_Alloc_C
MD5: f8e5a877977387986b3e2353834a2989
```

[Ada]

Listing 20: main.adb

```
1  procedure Main is
2     type Arr is array (Integer range <>) of Integer;
3
4     type S (Last : Integer) is record
5        A : Arr (0 .. Last);
6     end record;
7
8     V : S (9);
9  begin
10    null;
11 end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Struct_Array_Stack_Alloc_Ada
MD5: 955c704bdbe4b2b788e4a790ade12df7
```

With regards to parameter passing, usage mode (input / output) should be preferred to implementation mode (by copy or by reference). The Ada compiler will automatically pass a reference when needed. This works also for smaller objects, so that the compiler will copy in an out when needed. One of the advantages of this approach is that it clarifies the nature of the object: in particular, it differentiates between arrays and scalars. For example:

[C]

Listing 21: p.h

```
1  void p (int * a, int * b);
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Array_In_Out_C
MD5: c2c936dd3afc4850c5869e4db73bb36b
```

[Ada]

Listing 22: array_types.ads

```
1  package Array_Types is
2     type Arr is array (Integer range <>) of Integer;
3
4     procedure P (A : in out Integer; B : in out Arr);
5  end Array_Types;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Array_In_Out_Ada
MD5: cf8e51391c9fd8608183c9dae2aa2802
```

Most of the time, access to registers end up in some specific structures being mapped onto a specific location in memory. In Ada, this can be achieved through an **Address** clause associated to a variable, for example:

[C]

Listing 23: test_c.c

```c
int main(int argc, const char * argv[])
{
    int * r = (int *)0xFFFF00A0;

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Address_C
MD5: e810538d72d835a04736fcaf732f1930
```

[Ada]

Listing 24: test.adb

```ada
with System;

procedure Test is
   R : Integer with Address => System'To_Address (16#FFFF00A0#);
begin
   null;
end Test;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Address_Ada
MD5: 1263f7289cec6673f19d88bffbeead48
```

These are some of the most common misuse of pointers in Ada. Previous sections of the document deal with specifically using access types if absolutely necessary.

83.9 Bitwise Operations

Bitwise operations such as masks and shifts in Ada should be relatively rarely needed, and, when translating C code, it's good practice to consider alternatives. In a lot of cases, these operations are used to insert several pieces of data into a larger structure. In Ada, this can be done by describing the structure layout at the type level through representation clauses, and then accessing this structure as any other.

Consider the case of using a C primitive type as a container for single bit boolean flags. In C, this would be done through masks, e.g.:

[C]

Listing 25: flags.c

```c
#define FLAG_1 0b0001
#define FLAG_2 0b0010
```

(continues on next page)

(continued from previous page)

```c
#define FLAG_3 0b0100
#define FLAG_4 0b1000

int main(int argc, const char * argv[])
{
    int value = 0;

    value |= FLAG_2 | FLAG_4;

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Flags_C
MD5: cf903dee1fb1d78d74dc42b66adcdbd5
```

In Ada, the above can be represented through a Boolean array of enumerate values:

[Ada]

Listing 26: main.adb

```ada
procedure Main is
   type Values is (Flag_1, Flag_2, Flag_3, Flag_4);
   type Value_Array is array (Values) of Boolean
     with Pack;

   Value : Value_Array :=
      (Flag_2 => True,
       Flag_4 => True,
       others => False);
begin
   null;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Flags_Ada
MD5: c92c8532763469f5e4d1027df2bd6a6b
```

Note the Pack directive for the array, which requests that the array takes as little space as possible.

It is also possible to map records on memory when additional control over the representation is needed or more complex data are used:

[C]

Listing 27: struct_map.c

```c
int main(int argc, const char * argv[])
{
    int value = 0;

    value = (2 << 1) | 1;

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Rec_Map_C
MD5: 16606f11ab3e9c86d3e1d88ac9c3f37f
```

[Ada]

Listing 28: main.adb

```ada
procedure Main is
   type Value_Rec is record
     V1 : Boolean;
     V2 : Integer range 0 .. 3;
   end record;

   for Value_Rec use record
      V1 at 0 range 0 .. 0;
      V2 at 0 range 1 .. 2;
   end record;

   Value : Value_Rec := (V1 => True, V2 => 2);
begin
   null;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Rec_Map_Ada
MD5: 52078824814b0d83789dd837ac2e86bf
```

The benefit of using Ada structure instead of bitwise operations is threefold:

- The code is simpler to read / write and less error-prone
- Individual fields are named
- The compiler can run consistency checks (for example, check that the value indeed fit in the expected size).

Note that, in cases where bitwise operators are needed, Ada provides modular types with **and**, **or** and **xor** operators. Further shift operators can also be provided upon request through a **pragma**. So the above could also be literally translated to:

[Ada]

Listing 29: main.adb

```ada
with Ada.Text_IO; use Ada.Text_IO;

 procedure Main is
    type Value_Type is mod 2 ** 32;
    pragma Provide_Shift_Operators (Value_Type);

    Value : Value_Type;
 begin
    Value := Shift_Left (2, 1) or 1;
    Put_Line ("Value = " & Value_Type'Image (Value));
 end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Bitwise_Ops_Ada
MD5: 22cb824a0c99bd1a9092dc5f90e9d7fc
```

Runtime output

```
Value =  5
```

83.10 Mapping Structures to Bit-Fields

In the previous section, we've seen how to perform bitwise operations. In this section, we look at how to interpret a data type as a bit-field and perform low-level operations on it.

In general, you can create a bit-field from any arbitrary data type. First, we declare a bit-field type like this:

[Ada]

```
type Bit_Field is array (Natural range <>) of Boolean with Pack;
```

As we've seen previously, the Pack aspect declared at the end of the type declaration indicates that the compiler should optimize for size. We must use this aspect to be able to interpret data types as a bit-field.

Then, we can use the Size and the **Address** attributes of an object of any type to declare a bit-field for this object. We've discussed the Size attribute *earlier in this course* (page 1705).

The **Address** attribute indicates the address in memory of that object. For example, assuming we've declare a variable V, we can declare an actual bit-field object by referring to the **Address** attribute of V and using it in the declaration of the bit-field, as shown here:

[Ada]

```
B : Bit_Field (0 .. V'Size - 1) with Address => V'Address;
```

Note that, in this declaration, we're using the **Address** attribute of V for the **Address** aspect of B.

This technique is called overlays for serialization. Now, any operation that we perform on B will have a direct impact on V, since both are using the same memory location.

The approach that we use in this section relies on the **Address** aspect. Another approach would be to use unchecked conversions, which we'll discuss in the *next section* (page 1761).

We should add the Volatile aspect to the declaration to cover the case when both objects can still be changed independently — they need to be volatile, otherwise one change might be missed. This is the updated declaration:

[Ada]

```
B : Bit_Field (0 .. V'Size - 1) with Address => V'Address, Volatile;
```

Using the Volatile aspect is important at high level of optimizations. You can find further details about this aspect in the section about the *Volatile and Atomic aspects* (page 1700).

Another important aspect that should be added is Import. When used in the context of object declarations, it'll avoid default initialization which could overwrite the existing content while creating the overlay — see an example in the admonition below. The declaration now becomes:

```
B : Bit_Field (0 .. V'Size - 1)
  with
    Address => V'Address, Import, Volatile;
```

Let's look at a simple example:

[Ada]

Listing 30: simple_bitfield.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Simple_Bitfield is
   type Bit_Field is array (Natural range <>) of Boolean with Pack;

   V : Integer := 0;
   B : Bit_Field (0 .. V'Size - 1)
     with Address => V'Address, Import, Volatile;
begin
   B (2) := True;
   Put_Line ("V = " & Integer'Image (V));
end Simple_Bitfield;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Bitfield_Ada
MD5: 193a2db91619426a145cd267f873145f
```

Runtime output

```
V =  4
```

In this example, we first initialize V with zero. Then, we use the bit-field B and set the third element (`B (2)`) to **`True`**. This automatically sets bit #3 of V to 1. Therefore, as expected, the application displays the message `V = 4`, which corresponds to $2^2 = 4$.

Note that, in the declaration of the bit-field type above, we could also have used a positive range. For example:

```
type Bit_Field is array (Positive range <>) of Boolean with Pack;

B : Bit_Field (1 .. V'Size)
  with Address => V'Address, Import, Volatile;
```

The only difference in this case is that the first bit is `B (1)` instead of `B (0)`.

In C, we would rely on bit-shifting and masking to set that specific bit:

[C]

Listing 31: bitfield.c

```
#include <stdio.h>

int main(int argc, const char * argv[])
{
    int v = 0;

    v = v | (1 << 2);

    printf("v = %d\n", v);

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Bitfield_C
MD5: 98557f80ea3bc1b081ae2688f844cbe1
```

Runtime output

```
v = 4
```

Important

Ada has the concept of default initialization. For example, you may set the default value of record components:

[Ada]

Listing 32: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is

   type Rec is record
      X : Integer := 10;
      Y : Integer := 11;
   end record;

   R : Rec;
begin
   Put_Line ("R.X = " & Integer'Image (R.X));
   Put_Line ("R.Y = " & Integer'Image (R.Y));
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Default_Record_Type
MD5: 010877f4d20302a1abcb9562c9e36a38
```

Runtime output

```
R.X =  10
R.Y =  11
```

In the code above, we don't explicitly initialize the components of R, so they still have the default values 10 and 11, which are displayed by the application.

Likewise, the `Default_Value` aspect can be used to specify the default value in other kinds of type declarations. For example:

[Ada]

Listing 33: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is

   type Percentage is range 0 .. 100
     with Default_Value => 10;

   P : Percentage;
begin
   Put_Line ("P = " & Percentage'Image (P));
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Default_Value_Type
MD5: b3715f7cba0cbefa433bac529d95e395
```

Runtime output

```
P =  10
```

When declaring an object whose type has a default value, the object will automatically be initialized with the default value. In the example above, P is automatically initialized with 10, which is the default value of the Percentage type.

Some types have an implicit default value. For example, access types have a default value of **null**.

As we've just seen, when declaring objects for types with associated default values, automatic initialization will happen. This can also happens when creating an overlay with the **Address** aspect. The default value is then used to overwrite the content at the memory location indicated by the address. However, in most situations, this isn't the behavior we expect, since overlays are usually created to analyze and manipulate existing values. Let's look at an example where this happens:

[Ada]

Listing 34: p.ads

```
package P is

   type Unsigned_8 is mod 2 ** 8 with Default_Value => 0;

   type Byte_Field is array (Natural range <>) of Unsigned_8;

   procedure Display_Bytes_Increment (V : in out Integer);
end P;
```

Listing 35: p.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body P is

   procedure Display_Bytes_Increment (V : in out Integer) is
      BF  : Byte_Field (1 .. V'Size / 8)
        with Address => V'Address, Volatile;
   begin
      for B of BF loop
         Put_Line ("Byte = " & Unsigned_8'Image (B));
      end loop;
      Put_Line ("Now incrementing...");
      V := V + 1;
   end Display_Bytes_Increment;

end P;
```

Listing 36: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with P; use P;

procedure Main is
   V : Integer := 10;
begin
   Put_Line ("V = " & Integer'Image (V));
   Display_Bytes_Increment (V);
   Put_Line ("V = " & Integer'Image (V));
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Overlay_Default_Init_
 ↪Overwrite
MD5: 04994b2b4c98e9232a155515dc0c365a
```

Build output

```
p.adb:7:14: warning: default initialization of "Bf" may modify "V" [-gnatwo]
p.adb:7:14: warning: use pragma Import for "Bf" to suppress initialization (RM␣
 ↪B.1(24)) [-gnatwo]
```

Runtime output

```
V =  10
Byte =  0
Byte =  0
Byte =  0
Byte =  0
Now incrementing...
V =  1
```

In this example, we expect `Display_Bytes_Increment` to display each byte of the `V` parameter and then increment it by one. Initially, `V` is set to 10, and the call to `Display_Bytes_Increment` should change it to 11. However, due to the default value associated to the `Unsigned_8` type — which is set to 0 — the value of `V` is overwritten in the declaration of `BF` (in `Display_Bytes_Increment`). Therefore, the value of `V` is 1 after the call to `Display_Bytes_Increment`. Of course, this is not the behavior that we originally intended.

Using the `Import` aspect solves this problem. This aspect tells the compiler to not apply default initialization in the declaration because the object is imported. Let's look at the corrected example:

[Ada]

Listing 37: p.ads

```
package P is

   type Unsigned_8 is mod 2 ** 8 with Default_Value => 0;

   type Byte_Field is array (Natural range <>) of Unsigned_8;

   procedure Display_Bytes_Increment (V : in out Integer);
end P;
```

Listing 38: p.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body P is

   procedure Display_Bytes_Increment (V : in out Integer) is
      BF  : Byte_Field (1 .. V'Size / 8)
        with Address => V'Address, Import, Volatile;
   begin
      for B of BF loop
         Put_Line ("Byte = " & Unsigned_8'Image (B));
      end loop;
      Put_Line ("Now incrementing...");
      V := V + 1;
   end Display_Bytes_Increment;

end P;
```

Listing 39: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with P; use P;

procedure Main is
   V : Integer := 10;
begin
   Put_Line ("V = " & Integer'Image (V));
   Display_Bytes_Increment (V);
   Put_Line ("V = " & Integer'Image (V));
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Overlay_Default_Init_Import
MD5: e269d9d3c06c0f6c69ead16e7d2ba70b
```

Runtime output

```
V =  10
Byte =  10
Byte =  0
Byte =  0
Byte =  0
Now incrementing...
V =  11
```

This unwanted side-effect of the initialization by the `Default_Value` aspect that we've just seen can also happen in these cases:

- when we set a default value for components of a record type declaration,
- when we use the `Default_Component_Value` aspect for array types, or
- when we set use the `Initialize_Scalars` pragma for a package.

Again, using the `Import` aspect when declaring the overlay eliminates this side-effect.

We can use this pattern for objects of more complex data types like arrays or records. For example:

[Ada]

Listing 40: int_array_bitfield.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Int_Array_Bitfield is
   type Bit_Field is array (Natural range <>) of Boolean with Pack;

   A : array (1 .. 2) of Integer := (others => 0);
   B : Bit_Field (0 .. A'Size - 1)
     with Address => A'Address, Import, Volatile;
begin
   B (2) := True;
   for I in A'Range loop
      Put_Line ("A (" & Integer'Image (I)
                & ")= " & Integer'Image (A (I)));
   end loop;
end Int_Array_Bitfield;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Bitfield_Int_Array_Ada
MD5: 478ba4ce4f5886566556bddb58245eb9
```

Runtime output

```
A ( 1)=  4
A ( 2)=  0
```

In the Ada example above, we're using the bit-field to set bit #3 of the first element of the array (`A (1)`). We could set bit #4 of the second element by using the size of the data type (in this case, `Integer'Size`):

[Ada]

```
B (Integer'Size + 3) := True;
```

In C, we would select the specific array position and, again, rely on bit-shifting and masking to set that specific bit:

[C]

Listing 41: bitfield_int_array.c

```c
#include <stdio.h>

int main(int argc, const char * argv[])
{
    int i;
    int a[2] = {0, 0};

    a[0] = a[0] | (1 << 2);

    for (i = 0; i < 2; i++)
    {
        printf("a[%d] = %d\n", i, a[i]);
    }

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Bitfield_Int_Array_C
MD5: 4dc3fe77e8260ff3b449c8779745a63c
```

Runtime output

```
a[0] = 4
a[1] = 0
```

Since we can use this pattern for any arbitrary data type, this allows us to easily create a subprogram to serialize data types and, for example, transmit complex data structures as a bitstream. For example:

[Ada]

Listing 42: serializer.ads

```
package Serializer is

   type Bit_Field is array (Natural range <>) of Boolean with Pack;

```

(continues on next page)

(continued from previous page)

```
   procedure Transmit (B : Bit_Field);

end Serializer;
```

Listing 43: serializer.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Serializer is

   procedure Transmit (B : Bit_Field) is

      procedure Show_Bit (V : Boolean) is
      begin
         case V is
            when False => Put ("0");
            when True  => Put ("1");
         end case;
      end Show_Bit;

   begin
      Put ("Bits: ");
      for E of B loop
         Show_Bit (E);
      end loop;
      New_Line;
   end Transmit;

end Serializer;
```

Listing 44: my_recs.ads

```
package My_Recs is

   type Rec is record
      V : Integer;
      S : String (1 .. 3);
   end record;

end My_Recs;
```

Listing 45: main.adb

```
with Serializer;  use Serializer;
with My_Recs;     use My_Recs;

procedure Main is
   R : Rec := (5, "abc");
   B : Bit_Field (0 .. R'Size - 1)
     with Address => R'Address, Import, Volatile;
begin
   Transmit (B);
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Bitfield_Serialization_ada
MD5: 5c9c2d18bab7c78456d1d795c6334cd9
```

Build output

```
main.adb:9:14: warning: volatile actual passed by copy (RM C.6(19)) [enabled by␣
↪default]
```

Runtime output

```
Bits: 10100000000000000000000000000001000011001000110110001100000000
```

In this example, the `Transmit` procedure from `Serializer` package displays the individual bits of a bit-field. We could have used this strategy to actually transmit the information as a bitstream. In the main application, we call `Transmit` for the object R of record type Rec. Since `Transmit` has the bit-field type as a parameter, we can use it for any type, as long as we have a corresponding bit-field representation.

In C, we interpret the input pointer as an array of bytes, and then use shifting and masking to access the bits of that byte. Here, we use the **char** type because it has a size of one byte in most platforms.

[C]

Listing 46: my_recs.h

```c
typedef struct {
    int v;
    char s[4];
} rec;
```

Listing 47: serializer.h

```c
void transmit (void *bits, int len);
```

Listing 48: serializer.c

```c
#include "serializer.h"

#include <stdio.h>
#include <assert.h>

void transmit (void *bits, int len)
{
    int i, j;
    char *c = (char *)bits;

    assert(sizeof(char) == 1);

    printf("Bits: ");
    for (i = 0; i < len / (sizeof(char) * 8); i++)
    {
        for (j = 0; j < sizeof(char) * 8; j++)
        {
            printf("%d", c[i] >> j & 1);
        }
    }
    printf("\n");
}
```

Listing 49: bitfield_serialization.c

```c
#include <stdio.h>

#include "my_recs.h"
#include "serializer.h"
```

(continues on next page)

(continued from previous page)

```
5
6  int main(int argc, const char * argv[])
7  {
8      rec r = {5, "abc"};
9
10     transmit(&r, sizeof(r) * 8);
11
12     return 0;
13 }
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Bitfield_Serialization_C
MD5: 47f0a4efcbec9303f44d535064e5d6ce
```

Runtime output

```
Bits: 10100000000000000000000000000001000011001000110110001100000000
```

Similarly, we can write a subprogram that converts a bit-field — which may have been received as a bitstream — to a specific type. We can add a To_Rec subprogram to the My_Recs package to convert a bit-field to the Rec type. This can be used to convert a bitstream that we received into the actual data type representation.

As you know, we may write the To_Rec subprogram as a procedure or as a function. Since we need to use slightly different strategies for the implementation, the following example has both versions of To_Rec.

This is the updated code for the My_Recs package and the Main procedure:

[Ada]

Listing 50: serializer.ads

```
1  package Serializer is
2
3     type Bit_Field is array (Natural range <>) of Boolean with Pack;
4
5     procedure Transmit (B : Bit_Field);
6
7  end Serializer;
```

Listing 51: serializer.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  package body Serializer is
4
5     procedure Transmit (B : Bit_Field) is
6
7        procedure Show_Bit (V : Boolean) is
8        begin
9           case V is
10             when False => Put ("0");
11             when True  => Put ("1");
12          end case;
13       end Show_Bit;
14
15    begin
16       Put ("Bits: ");
17       for E of B loop
```

(continues on next page)

(continued from previous page)

```
         Show_Bit (E);
      end loop;
      New_Line;
   end Transmit;

end Serializer;
```

Listing 52: my_recs.ads

```
with Serializer;  use Serializer;

package My_Recs is

   type Rec is record
      V : Integer;
      S : String (1 .. 3);
   end record;

   procedure To_Rec (B :     Bit_Field;
                     R : out Rec);

   function To_Rec (B : Bit_Field) return Rec;

   procedure Display (R : Rec);

end My_Recs;
```

Listing 53: my_recs.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body My_Recs is

   procedure To_Rec (B :     Bit_Field;
                     R : out Rec) is
      B_R : Rec
        with Address => B'Address, Import, Volatile;
   begin
      --  Assigning data from overlayed record B_R to output parameter R.
      R := B_R;
   end To_Rec;

   function To_Rec (B : Bit_Field) return Rec is
      R   : Rec;
      B_R : Rec
        with Address => B'Address, Import, Volatile;
   begin
      --  Assigning data from overlayed record B_R to local record R.
      R := B_R;

      return R;
   end To_Rec;

   procedure Display (R : Rec) is
   begin
      Put ("("  & Integer'Image (R.V) & ", "
           & (R.S) & ")");
   end Display;

end My_Recs;
```

Listing 54: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Serializer;  use Serializer;
with My_Recs;     use My_Recs;

procedure Main is
   R1 : Rec := (5, "abc");
   R2 : Rec := (0, "zzz");

   B1 : Bit_Field (0 .. R1'Size - 1)
     with Address => R1'Address, Import, Volatile;
begin
   Put ("R2 = ");
   Display (R2);
   New_Line;

   --  Getting Rec type using data from B1, which is a bit-field
   --  representation of R1.
   To_Rec (B1, R2);

   --  We could use the function version of To_Rec:
   --  R2 := To_Rec (B1);

   Put_Line ("New bitstream received!");
   Put ("R2 = ");
   Display (R2);
   New_Line;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Bitfield_Deserialization_Ada
MD5: bf5cb5ef048ed1f95dba8e85275f6e32
```

Build output

```
main.adb:18:12: warning: volatile actual passed by copy (RM C.6(19)) [enabled by␣
↪default]
```

Runtime output

```
R2 = ( 0, zzz)
New bitstream received!
R2 = ( 5, abc)
```

In both versions of To_Rec, we declare the record object B_R as an overlay of the input bit-field. In the procedure version of To_Rec, we then simply copy the data from B_R to the output parameter R. In the function version of To_Rec, however, we need to declare a local record object R, which we return after the assignment.

In C, we can interpret the input pointer as an array of bytes, and copy the individual bytes. For example:

[C]

Listing 55: my_recs.h

```
typedef struct {
    int v;
    char s[3];
} rec;
```

(continues on next page)

(continued from previous page)

```

void to_r (void *bits, int len, rec *r);

void display_r (rec *r);
```

Listing 56: my_recs.c

```c
#include "my_recs.h"

#include <stdio.h>
#include <assert.h>

void to_r (void *bits, int len, rec *r)
{
    int i;
    char *c1 = (char *)bits;
    char *c2 = (char *)r;

    assert(len == sizeof(rec) * 8);

    for (i = 0; i < len / (sizeof(char) * 8); i++)
    {
        c2[i] = c1[i];
    }
}

void display_r (rec *r)
{
    printf("{%d, %c%c%c}", r->v, r->s[0], r->s[1], r->s[2]);
}
```

Listing 57: bitfield_serialization.c

```c
#include <stdio.h>
#include "my_recs.h"

int main(int argc, const char * argv[])
{
    rec r1 = {5, "abc"};
    rec r2 = {0, "zzz"};

    printf("r2 = ");
    display_r (&r2);
    printf("\n");

    to_r(&r1, sizeof(r1) * 8, &r2);

    printf("New bitstream received!\n");
    printf("r2 = ");
    display_r (&r2);
    printf("\n");

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Bitfield_Deserialization_C
MD5: 1c0fda773b0b681d0a4e9a57cf67d997
```

Runtime output

```
r2 = {0, zzz}
New bitstream received!
r2 = {5, abc}
```

Here, `to_r` casts both pointer parameters to pointers to **`char`** to get a byte-aligned pointer. Then, it simply copies the data byte-by-byte.

83.10.1 Overlays vs. Unchecked Conversions

Unchecked conversions are another way of converting between unrelated data types. This conversion is done by instantiating the generic `Unchecked_Conversions` function for the types you want to convert. Let's look at a simple example:

[Ada]

Listing 58: simple_unchecked_conversion.adb

```
with Ada.Text_IO;              use Ada.Text_IO;
with Ada.Unchecked_Conversion;

procedure Simple_Unchecked_Conversion is
   type State is (Off, State_1, State_2)
     with Size => Integer'Size;

   for State use (Off => 0, State_1 => 32, State_2 => 64);

   function As_Integer is new Ada.Unchecked_Conversion (Source => State,
                                                        Target => Integer);

   I : Integer;
begin
   I := As_Integer (State_2);
   Put_Line ("I = " & Integer'Image (I));
end Simple_Unchecked_Conversion;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Simple_Unchecked_Conversion
MD5: 1b6058ef1919879a7d2d86be41f3b269
```

Runtime output

```
I =  64
```

In this example, `As_Integer` is an instantiation of `Unchecked_Conversion` to convert between the `State` enumeration and the **`Integer`** type. Note that, in order to ensure safe conversion, we're declaring `State` to have the same size as the **`Integer`** type we want to convert to.

This is the corresponding implementation using overlays:

[Ada]

Listing 59: simple_overlay.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Simple_Overlay is
   type State is (Off, State_1, State_2)
     with Size => Integer'Size;

   for State use (Off => 0, State_1 => 32, State_2 => 64);
```

(continues on next page)

(continued from previous page)

```
8
9     S : State;
10    I : Integer
11      with Address => S'Address, Import, Volatile;
12 begin
13    S := State_2;
14    Put_Line ("I = " & Integer'Image (I));
15 end Simple_Overlay;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Simple_Overlay
MD5: 932135a47c36c406e70b22e075afeaf2
```

Runtime output

```
I =  64
```

Let's look at another example of converting between different numeric formats. In this case, we want to convert between a 16-bit fixed-point and a 16-bit integer data type. This is how we can do it using Unchecked_Conversion:

[Ada]

Listing 60: fixed_int_unchecked_conversion.adb

```
1  with Ada.Text_IO;              use Ada.Text_IO;
2  with Ada.Unchecked_Conversion;
3
4  procedure Fixed_Int_Unchecked_Conversion is
5     Delta_16 : constant := 1.0 / 2.0 ** (16 - 1);
6     Max_16   : constant := 2 ** 15;
7
8     type Fixed_16 is delta Delta_16 range -1.0 .. 1.0 - Delta_16
9       with Size => 16;
10    type Int_16   is range -Max_16 .. Max_16 - 1
11      with Size => 16;
12
13    function As_Int_16 is new Ada.Unchecked_Conversion (Source => Fixed_16,
14                                                        Target => Int_16);
15    function As_Fixed_16 is new Ada.Unchecked_Conversion (Source => Int_16,
16                                                          Target => Fixed_16);
17
18    I : Int_16   := 0;
19    F : Fixed_16 := 0.0;
20 begin
21    F := Fixed_16'Last;
22    I := As_Int_16 (F);
23
24    Put_Line ("F = " & Fixed_16'Image (F));
25    Put_Line ("I = " & Int_16'Image (I));
26 end Fixed_Int_Unchecked_Conversion;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Fixed_Int_Unchecked_Conversion
MD5: 53b59ca56a5c25408d8b6e5fcb06f37a
```

Runtime output

```
F =  0.99997
I =  32767
```

Here, we instantiate Unchecked_Conversion for the Int_16 and Fixed_16 types, and we call the instantiated functions explicitly. In this case, we call As_Int_16 to get the integer value corresponding to Fixed_16'Last.

This is how we can rewrite the implementation above using overlays:

[Ada]

Listing 61: fixed_int_overlay.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Fixed_Int_Overlay is
   Delta_16 : constant := 1.0 / 2.0 ** (16 - 1);
   Max_16   : constant := 2 ** 15;

   type Fixed_16 is delta Delta_16 range -1.0 .. 1.0 - Delta_16
     with Size => 16;
   type Int_16   is range -Max_16 .. Max_16 - 1
     with Size => 16;

   I : Int_16   := 0;
   F : Fixed_16
     with Address => I'Address, Import, Volatile;
begin
   F := Fixed_16'Last;

   Put_Line ("F = " & Fixed_16'Image (F));
   Put_Line ("I = " & Int_16'Image (I));
end Fixed_Int_Overlay;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Fixed_Int_Overlay
MD5: ee86e3d10266f8c8c96311595b6624ec
```

Runtime output

```
F =  0.99997
I =  32767
```

Here, the conversion to the integer value is implicit, so we don't need to call a conversion function.

Using Unchecked_Conversion has the advantage of making it clear that a conversion is happening, since the conversion is written explicitly in the code. With overlays, that conversion is automatic and therefore implicit. In that sense, using an unchecked conversion is a cleaner and safer approach. On the other hand, an unchecked conversion requires a copy, so it's less efficient than overlays, where no copy is performed — because one change in the source object is automatically reflected in the target object (and vice-versa). In the end, the choice between unchecked conversions and overlays depends on the level of performance that you want to achieve.

Also note that an unchecked conversion only has defined behavior when instantiated for constrained types. For example, we shouldn't use this kind of conversion:

```
Ada.Unchecked_Conversion (Source => String,
                          Target => Integer);
```

Although this compiles, the behavior will only be well-defined in those cases when Source'Size = Target'Size. Therefore, instead of using an unconstrained type for Source, we should use a subtype that matches this expectation:

```
subtype Integer_String is String (1 .. Integer'Size / Character'Size);

function As_Integer is new
  Ada.Unchecked_Conversion (Source => Integer_String,
                            Target => Integer);
```

Similarly, in order to rewrite the examples using bit-fields that we've seen in the previous section, we cannot simply instantiate `Unchecked_Conversion` with the `Target` indicating the *unconstrained* bit-field, such as:

```
Ada.Unchecked_Conversion (Source => Integer,
                          Target => Bit_Field);
```

Instead, we have to declare a subtype for the specific range we're interested in. This is how we can rewrite one of the previous examples:

[Ada]

Listing 62: simple_bitfield_conversion.adb

```
with Ada.Text_IO;              use Ada.Text_IO;
with Ada.Unchecked_Conversion;

procedure Simple_Bitfield_Conversion is
   type Bit_Field is array (Natural range <>) of Boolean with Pack;

   V : Integer := 4;

   --  Declaring subtype that takes the size of V into account.
   --
   subtype Integer_Bit_Field is Bit_Field (0 .. V'Size - 1);

   --  NOTE: we could also use the Integer type in the declaration:
   --
   --    subtype Integer_Bit_Field is Bit_Field (0 .. Integer'Size - 1);
   --

   --  Using the Integer_Bit_Field subtype as the target
   function As_Bit_Field is new
     Ada.Unchecked_Conversion (Source => Integer,
                               Target => Integer_Bit_Field);

   B : Integer_Bit_Field;
begin
   B := As_Bit_Field (V);

   Put_Line ("V = " & Integer'Image (V));
end Simple_Bitfield_Conversion;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Translation.Bitfield_Conversion
MD5: 46ead7e5f3da8f261770811d450453e7
```

Runtime output

```
V =  4
```

In this example, we first declare the subtype `Integer_Bit_Field` as a bit-field with a length that fits the `V` variable we want to convert to. Then, we can use that subtype in the instantiation of `Unchecked_Conversion`.

CHAPTER

EIGHTYFOUR

HANDLING VARIABILITY AND RE-USABILITY

84.1 Understanding static and dynamic variability

It is common to see embedded software being used in a variety of configurations that require small changes to the code for each instance. For example, the same application may need to be portable between two different architectures (ARM and x86), or two different platforms with different set of devices available. Maybe the same application is used for two different generations of the product, so it needs to account for absence or presence of new features, or it's used for different projects which may select different components or configurations. All these cases, and many others, require variability in the software in order to ensure its reusability.

In C, variability is usually achieved through macros and function pointers, the former being tied to static variability (variability in different builds) the latter to dynamic variability (variability within the same build decided at run-time).

Ada offers many alternatives for both techniques, which aim at structuring possible variations of the software. When Ada isn't enough, the GNAT compilation system also provides a layer of capabilities, in particular selection of alternate bodies.

If you're familiar with object-oriented programming (OOP) — supported in languages such as C++ and Java —, you might also be interested in knowing that OOP is supported by Ada and can be used to implement variability. This should, however, be used with care, as OOP brings its own set of problems, such as loss of efficiency — dispatching calls can't be inlined and require one level of indirection — or loss of analyzability — the target of a dispatching call isn't known at run time. As a rule of thumb, OOP should be considered only for cases of dynamic variability, where several versions of the same object need to exist concurrently in the same application.

84.2 Handling variability & reusability statically

84.2.1 Genericity

One usage of C macros involves the creation of functions that works regardless of the type they're being called upon. For example, a swap macro may look like:

[C]

Listing 1: main.c

```
#include <stdio.h>
#include <stdlib.h>

#define SWAP(t, a, b) ({\
                            t tmp = a; \
                            a = b; \
```

(continues on next page)

(continued from previous page)

```
                            b = tmp; \
                        })

int main()
{
    int a = 10;
    int b = 42;

    printf("a = %d, b = %d\n", a, b);

    SWAP (int, a, b);

    printf("a = %d, b = %d\n", a, b);

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Swap_C
MD5: 96d0e8ce9ae985e4de9ed64a0f0961f5
```

Runtime output

```
a = 10, b = 42
a = 42, b = 10
```

Ada offers a way to declare this kind of functions as a generic, that is, a function that is written after static arguments, such as a parameter:

[Ada]

Listing 2: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is

   generic
      type A_Type is private;
   procedure Swap (Left, Right : in out A_Type);

   procedure Swap (Left, Right : in out A_Type) is
      Temp : constant A_Type := Left;
   begin
      Left  := Right;
      Right := Temp;
   end Swap;

   procedure Swap_I is new Swap (Integer);

   A : Integer := 10;
   B : Integer := 42;

begin
   Put_Line ("A = "
             & Integer'Image (A)
             & ", B = "
             & Integer'Image (B));

   Swap_I (A, B);
```

(continues on next page)

(continued from previous page)

```
28
29    Put_Line ("A = "
30              & Integer'Image (A)
31              & ", B = "
32              & Integer'Image (B));
33 end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Swap_Ada
MD5: 13f3527b4e3258ebd43be827ad0fcd14
```

Runtime output

```
A =  10, B =  42
A =  42, B =  10
```

There are a few key differences between the C and the Ada version here. In C, the macro can be used directly and essentially get expanded by the preprocessor without any kind of checks. In Ada, the generic will first be checked for internal consistency. It then needs to be explicitly instantiated for a concrete type. From there, it's exactly as if there was an actual version of this Swap function, which is going to be called as any other function. All rules for parameter modes and control will apply to this instance.

In many respects, an Ada generic is a way to provide a safe specification and implementation of such macros, through both the validation of the generic itself and its usage.

Subprograms aren't the only entities that can me made generic. As a matter of fact, it's much more common to render an entire package generic. In this case the instantiation creates a new version of all the entities present in the generic, including global variables. For example:

[Ada]

Listing 3: gen.ads

```
1 generic
2    type T is private;
3 package Gen is
4    type C is tagged record
5       V : T;
6    end record;
7
8    G : Integer;
9 end Gen;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Gen_Pkg_1
MD5: 721f9954561b7e0d2964ba0d226c748b
```

The above can be instantiated and used the following way:

Listing 4: main.adb

```
1 with Gen;
2
3 procedure Main is
4    package I1 is new Gen (Integer);
5    package I2 is new Gen (Integer);
6    subtype Str10 is String (1 .. 10);
```

(continues on next page)

(continued from previous page)

```
   package I3 is new Gen (Str10);
begin
   I1.G := 0;
   I2.G := 1;
   I3.G := 2;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Gen_Pkg_1
MD5: ab0e99dedf40fff1bced048a96a0fbb6
```

Here, `I1.G`, `I2.G` and `I3.G` are three distinct variables.

So far, we've only looked at generics with one kind of parameter: a so-called private type. There's actually much more that can be described in this section, such as variables, subprograms or package instantiations with certain properties. For example, the following provides a sort algorithm for any kind of structurally compatible array type:

[Ada]

Listing 5: sort.ads

```
generic
   type Component is private;
   type Index is (<>);
   with function "<" (Left, Right : Component) return Boolean;
   type Array_Type is array (Index range <>) of Component;
procedure Sort (A : in out Array_Type);
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Gen_Pkg_2
MD5: 5781f53f4fd4453ecc1313d05ab76f81
```

The declaration above states that we need a type (`Component`), a discrete type (`Index`), a comparison subprogram (`"<"`), and an array definition (`Array_Type`). Given these, it's possible to write an algorithm that can sort any `Array_Type`. Note the usage of the with reserved word in front of the function name: it exists to differentiate between the generic parameter and the beginning of the generic subprogram.

Here is a non-exhaustive overview of the kind of constraints that can be put on types:

```
type T is private; -- T is a constrained type, such as Integer
type T (<>) is private; -- T can be an unconstrained type e.g. String
type T is tagged private; -- T is a tagged type
type T is new T2 with private; -- T is an extension of T2
type T is (<>); -- T is a discrete type
type T is range <>; -- T is an integer type
type T is digits <>; -- T is a floating point type
type T is access T2; -- T is an access type to T2
```

For a more complete list please reference the Generic Formal Types in the *Appendix of the Introduction to Ada course* (page 269).

84.2.2 Simple derivation

Let's take a case where a codebase needs to handle small variations of a given device, or maybe different generations of a device, depending on the platform it's running on. In this example, we're assuming that each platform will lead to a different binary, so the code can statically resolve which set of services are available. However, we want an easy way to

implement a new device based on a previous one, saying "this new device is the same as this previous device, with these new services and these changes in existing services".

We can implement such patterns using Ada's simple derivation — as opposed to tagged derivation, which is OOP-related and discussed in a later section.

Let's start from the following example:

[Ada]

Listing 6: drivers_1.ads

```ada
package Drivers_1 is

   type Device_1 is null record;
   procedure Startup (Device : Device_1);
   procedure Send (Device : Device_1; Data : Integer);
   procedure Send_Fast (Device : Device_1; Data : Integer);
   procedure Receive (Device : Device_1; Data : out Integer);

end Drivers_1;
```

Listing 7: drivers_1.adb

```ada
package body Drivers_1 is

   --  NOTE: unimplemented procedures: Startup, Send, Send_Fast
   --        mock-up implementation: Receive

   procedure Startup (Device : Device_1) is null;

   procedure Send (Device : Device_1; Data : Integer) is null;

   procedure Send_Fast (Device : Device_1; Data : Integer) is null;

   procedure Receive (Device : Device_1; Data : out Integer) is
   begin
      Data := 42;
   end Receive;

end Drivers_1;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Derived_Drivers
MD5: 4f9d7e29b64cda8664438a1d7eed9049
```

In the above example, `Device_1` is an empty record type. It may also have some fields if required, or be a different type such as a scalar. Then the four procedures `Startup`, `Send`, `Send_Fast` and `Receive` are primitives of this type. A primitive is essentially a subprogram that has a parameter or return type directly referencing this type and declared in the same scope. At this stage, there's nothing special with this type: we're using it as we would use any other type. For example:

[Ada]

Listing 8: main.adb

```ada
with Ada.Text_IO; use Ada.Text_IO;
with Drivers_1;   use Drivers_1;

procedure Main is
   D : Device_1;
```

(continues on next page)

(continued from previous page)

```
   I : Integer;
begin
   Startup (D);
   Send_Fast (D, 999);
   Receive (D, I);
   Put_Line (Integer'Image (I));
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Derived_Drivers
MD5: 1b28f2c8ca92498cbcda582f092b9912
```

Runtime output

```
 42
```

Let's now assume that we need to implement a new generation of device, `Device_2`. This new device works exactly like the first one, except for the startup code that has to be done differently. We can create a new type that operates exactly like the previous one, but modifies only the behavior of `Startup`:

[Ada]

Listing 9: drivers_2.ads

```
with Drivers_1; use Drivers_1;

package Drivers_2 is

   type Device_2 is new Device_1;

   overriding
   procedure Startup (Device : Device_2);

end Drivers_2;
```

Listing 10: drivers_2.adb

```
package body Drivers_2 is

   overriding
   procedure Startup (Device : Device_2) is null;

end Drivers_2;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Derived_Drivers
MD5: 276c9da0b7c9ad61d679531e16fdd9cb
```

Here, `Device_2` is derived from `Device_1`. It contains all the exact same properties and primitives, in particular, `Startup`, `Send`, `Send_Fast` and `Receive`. However, here, we decided to change the `Startup` function and to provide a different implementation. We override this function. The main subprogram doesn't change much, except for the fact that it now relies on a different type:

[Ada]

Listing 11: main.adb

```ada
with Ada.Text_IO; use Ada.Text_IO;
with Drivers_2;   use Drivers_2;

procedure Main is
   D : Device_2;
   I : Integer;
begin
   Startup (D);
   Send_Fast (D, 999);
   Receive (D, I);
   Put_Line (Integer'Image (I));
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Derived_Drivers
MD5: 31e7105a99771ce6c1602af117e2e8a6
```

Runtime output

```
 42
```

We can continue with this approach and introduce a new generation of devices. This new device doesn't implement the Send_Fast service so we want to remove it from the list of available services. Furthermore, for the purpose of our example, let's assume that the hardware team went back to the Device_1 way of implementing Startup. We can write this new device the following way:

[Ada]

Listing 12: drivers_3.ads

```ada
with Drivers_1; use Drivers_1;

package Drivers_3 is

   type Device_3 is new Device_1;

   overriding
   procedure Startup (Device : Device_3);

   procedure Send_Fast (Device : Device_3; Data : Integer)
   is abstract;

end Drivers_3;
```

Listing 13: drivers_3.adb

```ada
package body Drivers_3 is

   overriding
   procedure Startup (Device : Device_3) is null;

end Drivers_3;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Derived_Drivers
MD5: 779579532c81b672d8a641c0b8594ed5
```

The `is abstract` definition makes illegal any call to a function, so calls to Send_Fast on Device_3 will be flagged as being illegal. To then implement Startup of Device_3 as being the same as the Startup of Device_1, we can convert the type in the implementation:

[Ada]

Listing 14: drivers_3.adb

```
package body Drivers_3 is

   overriding
   procedure Startup (Device : Device_3) is
   begin
      Drivers_1.Startup (Device_1 (Device));
   end Startup;

end Drivers_3;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Derived_Drivers
MD5: 5db9596c276a7a4521914f4108f61d28
```

Our Main now looks like:

[Ada]

Listing 15: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Drivers_3;   use Drivers_3;

procedure Main is
   D : Device_3;
   I : Integer;
begin
   Startup (D);
   Send_Fast (D, 999);
   Receive (D, I);
   Put_Line (Integer'Image (I));
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Derived_Drivers
MD5: 8b6af16d21c2f8a1f0e4866e6ddffd1f
```

Build output

```
main.adb:9:04: error: cannot call abstract operation "Send_Fast" declared at␣
 ↪drivers_3.ads:10
gprbuild: *** compilation phase failed
```

Here, the call to Send_Fast will get flagged by the compiler.

Note that the fact that the code of Main has to be changed for every implementation isn't necessarily satisfactory. We may want to go one step further, and isolate the selection of the device kind to be used for the whole application in one unique file. One way to do this is to use the same name for all types, and use a renaming to select which package to use. Here's a simplified example to illustrate that:

[Ada]

Listing 16: drivers_1.ads

```
package Drivers_1 is

   type Transceiver is null record;
   procedure Send (Device : Transceiver; Data : Integer);
   procedure Receive (Device : Transceiver; Data : out Integer);

end Drivers_1;
```

Listing 17: drivers_1.adb

```
package body Drivers_1 is

   procedure Send (Device : Transceiver; Data : Integer) is null;

   procedure Receive (Device : Transceiver; Data : out Integer) is
      pragma Unreferenced (Device);
   begin
      Data := 42;
   end Receive;

end Drivers_1;
```

Listing 18: drivers_2.ads

```
with Drivers_1;

package Drivers_2 is

   type Transceiver is new Drivers_1.Transceiver;
   procedure Send (Device : Transceiver; Data : Integer);
   procedure Receive (Device : Transceiver; Data : out Integer);

end Drivers_2;
```

Listing 19: drivers_2.adb

```
package body Drivers_2 is

   procedure Send (Device : Transceiver; Data : Integer) is null;

   procedure Receive (Device : Transceiver; Data : out Integer) is
      pragma Unreferenced (Device);
   begin
      Data := 42;
   end Receive;

end Drivers_2;
```

Listing 20: drivers.ads

```
with Drivers_1;

package Drivers renames Drivers_1;
```

Listing 21: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Drivers;     use Drivers;
```

(continues on next page)

(continued from previous page)

```
3
4  procedure Main is
5     D : Transceiver;
6     I : Integer;
7  begin
8     Send (D, 999);
9     Receive (D, I);
10    Put_Line (Integer'Image (I));
11 end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Derived_Drivers
MD5: e92590e4b91fef33f4fec23362a52873
```

Runtime output

```
 42
```

In the above example, the whole code can rely on `drivers.ads`, instead of relying on the specific driver. Here, `Drivers` is another name for `Driver_1`. In order to switch to `Driver_2`, the project only has to replace that one `drivers.ads` file.

In the following section, we'll go one step further and demonstrate that this selection can be done through a configuration switch selected at build time instead of a manual code modification.

84.2.3 Configuration pragma files

Configuration pragmas are a set of pragmas that modify the compilation of source-code files. You may use them to either relax or strengthen requirements. For example:

```
pragma Suppress (Overflow_Check);
```

In this example, we're suppressing the overflow check, thereby relaxing a requirement. Normally, the following program would raise a constraint error due to a failed overflow check:

[Ada]

Listing 22: p.ads

```
1  package P is
2     function Add_Max (A : Integer) return Integer;
3  end P;
```

Listing 23: p.adb

```
1  package body P is
2     function Add_Max (A : Integer) return Integer is
3     begin
4        return A + Integer'Last;
5     end Add_Max;
6  end P;
```

Listing 24: main.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2  with P;           use P;
3
```

(continues on next page)

(continued from previous page)

```
4  procedure Main is
5     I : Integer := Integer'Last;
6  begin
7     I := Add_Max (I);
8     Put_Line ("I = " & Integer'Image (I));
9  end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Constraint_Error_Detection
MD5: d6960fe8ae2af1d66b617bb92d3d47b6
```

Runtime output

```
raised CONSTRAINT_ERROR : p.adb:4 overflow check failed
```

When suppressing the overflow check, however, the program doesn't raise an exception, and the value that `Add_Max` returns is `-2`, which is a wraparound of the sum of the maximum integer values (`Integer'Last + Integer'Last`).

We could also strengthen requirements, as in this example:

```
pragma Restrictions (No_Floating_Point);
```

Here, the restriction forbids the use of floating-point types and objects. The following program would violate this restriction, so the compiler isn't able to compile the program when the restriction is used:

```
procedure Main is
   F : Float := 0.0;
   --  Declaration is not possible with No_Floating_Point restriction.
begin
   null;
end Main;
```

Restrictions are especially useful for high-integrity applications. In fact, the Ada Reference Manual has a separate section for them[459].

When creating a project, it is practical to list all configuration pragmas in a separate file. This is called a configuration pragma file, and it usually has an *.adc* file extension. If you use **GPRbuild** for building Ada applications, you can specify the configuration pragma file in the corresponding project file. For example, here we indicate that `gnat.adc` is the configuration pragma file for our project:

```
project Default is

   for Source_Dirs use ("src");
   for Object_Dir use "obj";
   for Main use ("main.adb");

   package Compiler is
      for Local_Configuration_Pragmas use "gnat.adc";
   end Compiler;

end Default;
```

[459] http://www.ada-auth.org/standards/12rm/html/RM-H-4.html

84.2.4 Configuration packages

In C, preprocessing flags are used to create blocks of code that are only compiled under certain circumstances. For example, we could have a block that is only used for debugging:

[C]

Listing 25: main.c

```c
#include <stdio.h>
#include <stdlib.h>

int func(int x)
{
    return x % 4;
}

int main()
{
    int a, b;

    a = 10;
    b = func(a);

#ifdef DEBUG
    printf("func(%d) => %d\n", a, b);
#endif

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Debug_Code_C
MD5: 4daa8123f7112e7487ab54f16f80d34b
```

Here, the block indicated by the DEBUG flag is only included in the build if we define this preprocessing flag, which is what we expect for a debug version of the build. In the release version, however, we want to keep debug information out of the build, so we don't use this flag during the build process.

Ada doesn't define a preprocessor as part of the language. Some Ada toolchains — like the GNAT toolchain — do have a preprocessor that could create code similar to the one we've just seen. When programming in Ada, however, the recommendation is to use configuration packages to select code blocks that are meant to be included in the application.

When using a configuration package, the example above can be written as:

[Ada]

Listing 26: config.ads

```ada
package Config is

   Debug : constant Boolean := False;

end Config;
```

Listing 27: func.ads

```ada
function Func (X : Integer) return Integer;
```

Listing 28: func.adb

```
function Func (X : Integer) return Integer is
begin
    return X mod 4;
end Func;
```

Listing 29: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Config;
with Func;

procedure Main is
   A, B : Integer;
begin
   A := 10;
   B := Func (A);

   if Config.Debug then
      Put_Line ("Func(" & Integer'Image (A) & ") => "
                & Integer'Image (B));
   end if;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Debug_Code_Ada
MD5: b643b683098fa7ad5568a69c9f2c000f
```

In this example, `Config` is a configuration package. The version of `Config` we're seeing here is the release version. The debug version of the `Config` package looks like this:

```
package Config is

   Debug : constant Boolean := True;

end Config;
```

The compiler makes sure to remove dead code. In the case of the release version, since `Config.Debug` is constant and set to **`False`**, the compiler is smart enough to remove the call to `Put_Line` from the build.

As you can see, both versions of `Config` are very similar to each other. The general idea is to create packages that declare the same constants, but using different values.

In C, we differentiate between the debug and release versions by selecting the appropriate preprocessing flags, but in Ada, we select the appropriate configuration package during the build process. Since the file name is usually the same (`config.ads` for the example above), we may want to store them in distinct directories. For the example above, we could have:

- `src/debug/config.ads` for the debug version, and
- `src/release/config.ads` for the release version.

Then, we simply select the appropriate configuration package for each version of the build by indicating the correct path to it. When using **`GPRbuild`**, we can select the appropriate directory where the `config.ads` file is located. We can use scenario variables in our project, which allow for creating different versions of a build. For example:

```
project Default is
```

(continues on next page)

(continued from previous page)

```
   type Mode_Type is ("debug", "release");

   Mode : Mode_Type := external ("mode", "debug");

   for Source_Dirs use ("src", "src/" & Mode);
   for Object_Dir use "obj";
   for Main use ("main.adb");

end Default;
```

In this example, we're defining a scenario type called `Mode_Type`. Then, we're declaring the scenario variable `Mode` and using it in the `Source_Dirs` declaration to complete the path to the subdirectory containing the `config.ads` file. The expression `"src/" & Mode` concatenates the user-specified mode to select the appropriate subdirectory.

We can then set the mode on the command-line. For example:

```
gprbuild -P default.gpr -Xmode=release
```

In addition to selecting code blocks for the build, we could also specify values that depend on the target build. For our example above, we may want to create two versions of the application, each one having a different version of a `MOD_VALUE` that is used in the implementation of `func()`. In C, we can achieve this by using preprocessing flags and defining the corresponding version in `APP_VERSION`. Then, depending on the value of `APP_VERSION`, we define the corresponding value of `MOD_VALUE`.

[C]

Listing 30: defs.h

```
#ifndef APP_VERSION
#define APP_VERSION     1
#endif

#if APP_VERSION == 1
#define MOD_VALUE       4
#endif

#if APP_VERSION == 2
#define MOD_VALUE       5
#endif
```

Listing 31: main.c

```
#include <stdio.h>
#include <stdlib.h>

#include "defs.h"

int func(int x)
{
    return x % MOD_VALUE;
}

int main()
{
    int a, b;

    a = 10;
    b = func(a);

```

(continues on next page)

(continued from previous page)

```
18      return 0;
19  }
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.App_Version_C
MD5: 9f204dcc65b70618324c48be0dbdffbe
```

If not defined outside, the code above will compile version #1 of the application. We can change this by specifying a value for APP_VERSION during the build (e.g. as a Makefile switch).

For the Ada version of this code, we can create two configuration packages for each version of the application. For example:

[Ada]

Listing 32: app_defs.ads

```
1  --  ./src/app_1/app_defs.ads
2
3  package App_Defs is
4
5     Mod_Value : constant Integer := 4;
6
7  end App_Defs;
```

Listing 33: func.ads

```
1  function Func (X : Integer) return Integer;
```

Listing 34: func.adb

```
1  with App_Defs;
2
3  function Func (X : Integer) return Integer is
4  begin
5      return X mod App_Defs.Mod_Value;
6  end Func;
```

Listing 35: main.adb

```
1  with Func;
2
3  procedure Main is
4     A, B : Integer;
5  begin
6     A := 10;
7     B := Func (A);
8  end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.App_Version_Ada
MD5: 7c8e4280e74c04ab51073b25e8f53995
```

The code above shows the version #1 of the configuration package. The corresponding implementation for version #2 looks like this:

```ada
--  ./src/app_2/app_defs.ads

package App_Defs is

   Mod_Value : constant Integer := 5;

end App_Defs;
```

Again, we just need to select the appropriate configuration package for each version of the build, which we can easily do when using **GPRbuild**.

84.3 Handling variability & reusability dynamically

84.3.1 Records with discriminants

In basic terms, records with discriminants are records that include "parameters" in their type definitions. This allows for adding more flexibility to the type definition. In the section about *pointers* (page 1742), we've seen this example:

[Ada]

Listing 36: main.adb

```ada
procedure Main is
   type Arr is array (Integer range <>) of Integer;

   type S (Last : Positive) is record
      A : Arr (0 .. Last);
   end record;

   V : S (9);
begin
   null;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Rec_Disc_Ada
MD5: 02fa8fa7832a262b99aee139a1b5b7a6
```

Here, `Last` is the discriminant for type `S`. When declaring the variable `V` as `S (9)`, we specify the actual index of the last position of the array component `A` by setting the `Last` discriminant to 9.

We can create an equivalent implementation in C by declaring a **`struct`** with a pointer to an array:

[C]

Listing 37: main.c

```c
#include <stdio.h>
#include <stdlib.h>

typedef struct {
    int       * a;
    const int   last;
} S;

S init_s (int last)
{
```

(continues on next page)

(continued from previous page)

```
    S v = { malloc (sizeof(int) * last + 1), last };
    return v;
}

int main(int argc, const char * argv[])
{
    S v = init_s (9);

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Rec_Disc_C
MD5: 8f8b53c38c2ef8c1624208a2d8fd13ef
```

Here, we need to explicitly allocate the a array of the S struct via a call to `malloc()`, which allocates memory space on the heap. In the Ada version, in contrast, the array (`V.A`) is allocated on the stack and we don't need to explicitly allocate it.

Note that the information that we provide as the discriminant to the record type (in the Ada code) is constant, so we cannot assign a value to it. For example, we cannot write:

[Ada]

```
V.Last := 10;        --  COMPILATION ERROR!
```

In the C version, we declare the `last` field constant to get the same behavior.

[C]

```
v.last = 10;         //  COMPILATION ERROR!
```

Note that the information provided as discriminants is visible. In the example above, we could display `Last` by writing:

[Ada]

```
Put_Line ("Last : " & Integer'Image (V.Last));
```

Also note that, even if a type is private, we can still access the information of the discriminants if they are visible in the *public* part of the type declaration. Let's rewrite the example above:

[Ada]

Listing 38: array_definition.ads

```
package Array_Definition is
   type Arr is array (Integer range <>) of Integer;

   type S (Last : Integer) is private;

private
   type S (Last : Integer) is record
      A : Arr (0 .. Last);
   end record;

end Array_Definition;
```

Listing 39: main.adb

```
with Ada.Text_IO;      use Ada.Text_IO;
with Array_Definition; use Array_Definition;

procedure Main is
   V : S (9);
begin
   Put_Line ("Last : " & Integer'Image (V.Last));
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Rec_Disc_Ada_Private
MD5: fa0158c3c61dd9ec7e4000416672f9e9
```

Build output

```
main.adb:5:04: warning: variable "V" is read but never assigned [-gnatwv]
```

Runtime output

```
Last :  9
```

Even though the S type is now private, we can still display `Last` because this discriminant is visible in the *non-private* part of package `Array_Definition`.

84.3.2 Variant records

In simple terms, a variant record is a record with discriminants that allows for changing its structure. Basically, it's a record containing a **case**. This is the general structure:

[Ada]

```
type Var_Rec (V : F) is record

   case V is
     when Opt_1 => F1 : Type_1;
     when Opt_2 => F2 : Type_2;
   end case;

end record;
```

Let's look at this example:

[Ada]

Listing 40: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is

   type Float_Int (Use_Float : Boolean) is record
      case Use_Float is
        when True  => F : Float;
        when False => I : Integer;
      end case;
   end record;

   procedure Display (V : Float_Int) is
```

(continues on next page)

(continued from previous page)

```
   begin
      if V.Use_Float then
         Put_Line ("Float value:   " & Float'Image (V.F));
      else
         Put_Line ("Integer value: " & Integer'Image (V.I));
      end if;
   end Display;

   F : constant Float_Int := (Use_Float => True,  F => 10.0);
   I : constant Float_Int := (Use_Float => False, I => 9);

begin
   Display (F);
   Display (I);
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Var_Rec_Ada
MD5: 72dd64c22d65fc527af0c3de73ff7966
```

Runtime output

```
Float value:    1.00000E+01
Integer value:  9
```

Here, we declare F containing a floating-point value, and I containing an integer value. In the Display procedure, we present the correct information to the user according to the Use_Float discriminant of the Float_Int type.

We can implement this example in C by using unions:

[C]

Listing 41: main.c

```
#include <stdio.h>
#include <stdlib.h>

typedef struct {
    int use_float;
    union {
        float f;
        int   i;
    };
} float_int;

float_int init_float (float f)
{
    float_int v;

    v.use_float = 1;
    v.f         = f;
    return v;
}

float_int init_int (int i)
{
    float_int v;

    v.use_float = 0;
    v.i         = i;
```

(continues on next page)

(continued from previous page)

```
    return v;
}

void display (float_int v)
{
    if (v.use_float) {
        printf("Float value   : %f\n", v.f);
    }
    else {
        printf("Integer value : %d\n", v.i);
    }
}

int main(int argc, const char * argv[])
{
    float_int f = init_float (10.0);
    float_int i = init_int (9);

    display (f);
    display (i);

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Var_Rec_C
MD5: ac0ad1e6ff7f2154e9dbb6838999a62e
```

Runtime output

```
Float value   : 10.000000
Integer value : 9
```

Similar to the Ada code, we declare `f` containing a floating-point value, and `i` containing an integer value. One difference is that we use the `init_float()` and `init_int()` functions to initialize the `float_int` struct. These functions initialize the correct field of the union and set the `use_float` field accordingly.

Variant records and unions

There is, however, a difference in accessibility between variant records in Ada and unions in C. In C, we're allowed to access any field of the union regardless of the initialization:

[C]

```
float_int v = init_float (10.0);

printf("Integer value : %d\n", v.i);
```

This feature is useful to create overlays. In this specific example, however, the information displayed to the user doesn't make sense, since the union was initialized with a floating-point value (`v.f`) and, by accessing the integer field (`v.i`), we're displaying it as if it was an integer value.

In Ada, accessing the wrong component would raise an exception at run-time ("discriminant check failed"), since the component is checked before being accessed:

[Ada]

```
   V : constant Float_Int := (Use_Float => True,  F => 10.0);
begin
   Put_Line ("Integer value: " & Integer'Image (V.I));
   --                                          ^ Constraint_Error is raised!
```

Using this method prevents wrong information being used in other parts of the program.

To get the same behavior in Ada as we do in C, we need to explicitly use the Unchecked_Union aspect in the type declaration. This is the modified example:

[Ada]

Listing 42: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is

   type Float_Int_Union (Use_Float : Boolean) is record
      case Use_Float is
        when True  => F : Float;
        when False => I : Integer;
      end case;
   end record
     with Unchecked_Union;

   V : constant Float_Int_Union := (Use_Float => True,  F => 10.0);

begin
   Put_Line ("Integer value: " & Integer'Image (V.I));
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Unchecked_Union_Ada
MD5: f6c5eacbd96c23531d02bb47a9668ac5
```

Runtime output

```
Integer value:  1092616192
```

Now, we can display the integer component (`V.I`) even though we initialized the floating-point component (`V.F`). As expected, the information displayed by the test application in this case doesn't make sense.

Note that, when using the `Unchecked_Union` aspect in the declaration of a variant record, the reference discriminant is not available anymore, since it isn't stored as part of the record. Therefore, we cannot access the `Use_Float` discriminant as in the following code:

[Ada]

```
   V : constant Float_Int_Union := (Use_Float => True,  F => 10.0);
begin
   if V.Use_Float then       --  COMPILATION ERROR!
      --  Do something...
   end if;
```

Unchecked unions are particularly useful in Ada when creating bindings for C code.

Optional components

We can also use variant records to specify optional components of a record. For example:

[Ada]

Listing 43: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is
   type Arr is array (Integer range <>) of Integer;

   type Extra_Info is (No, Yes);

   type S_Var (Last : Integer; Has_Extra_Info : Extra_Info) is record
      A : Arr (0 .. Last);

      case Has_Extra_Info is
        when No   => null;
        when Yes  => B : Arr (0 .. Last);
      end case;
   end record;

   V1 : S_Var (Last => 9, Has_Extra_Info => Yes);
   V2 : S_Var (Last => 9, Has_Extra_Info => No);
begin
   Put_Line ("Size of V1 is: " & Integer'Image (V1'Size));
   Put_Line ("Size of V2 is: " & Integer'Image (V2'Size));
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Var_Rec_Null_Ada
MD5: 548235fa8458302ba025c8fa49e61777
```

Build output

```
main.adb:17:04: warning: variable "V1" is read but never assigned [-gnatwv]
main.adb:18:04: warning: variable "V2" is read but never assigned [-gnatwv]
```

Runtime output

```
Size of V1 is:  704
Size of V2 is:  384
```

Here, in the declaration of `S_Var`, we don't have any component in case `Has_Extra_Info` is false. The component is simply set to **`null`** in this case.

When running the example above, we see that the size of `V1` is greater than the size of `V2` due to the extra `B` component — which is only included when `Has_Extra_Info` is true.

Optional output information

We can use optional components to prevent subprograms from generating invalid information that could be misused by the caller. Consider the following example:

[C]

Listing 44: main.c

```
#include <stdio.h>
#include <stdlib.h>
```

(continues on next page)

(continued from previous page)

```c

float calculate (float  f1,
                 float  f2,
                 int   *success)
{
    if (f1 < f2) {
        *success = 1;
        return f2 - f1;
    }
    else {
        *success = 0;
        return 0.0;
    }
}

void display (float v,
              int   success)
{
    if (success) {
        printf("Value = %f\n", v);
    }
    else {
        printf("Calculation error!\n");
    }
}

int main(int argc, const char * argv[])
{
    float f;
    int success;

    f = calculate (1.0, 0.5, &success);
    display (f, success);

    f = calculate (0.5, 1.0, &success);
    display (f, success);

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Non_Opt_C
MD5: 56f8a72782c4a54d8a6026aa39ce421a
```

Runtime output

```
Calculation error!
Value = 0.500000
```

In this code, we're using the output parameter `success` of the `calculate()` function to indicate whether the calculation was successful or not. This approach has a major problem: there's no way to prevent that the invalid value returned by `calculate()` in case of an error is misused in another computation. For example:

[C]

```c
int main(int argc, const char * argv[])
{
    float f;
    int success;
```

(continues on next page)

(continued from previous page)

```
    f = calculate (1.0, 0.5, &success);

    f = f * 0.25;   // Using f in another computation even though
                    // calculate() returned a dummy value due to error!
                    // We should have evaluated "success", but we didn't.

    return 0;
}
```

We cannot prevent access to the returned value or, at least, force the caller to evaluate success before using the returned value.

This is the corresponding code in Ada:

[Ada]

Listing 45: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is

   function Calculate (F1, F2  : Float;
                       Success : out Boolean) return Float is
   begin
      if F1 < F2 then
         Success := True;
         return F2 - F1;
      else
        Success := False;
        return 0.0;
      end if;
   end Calculate;

   procedure Display (V : Float; Success : Boolean) is
   begin
      if Success then
         Put_Line ("Value = " & Float'Image (V));
      else
         Put_Line ("Calculation error!");
      end if;
   end Display;

   F       : Float;
   Success : Boolean;
begin
   F := Calculate (1.0, 0.5, Success);
   Display (F, Success);

   F := Calculate (0.5, 1.0, Success);
   Display (F, Success);
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Non_Opt_Ada
MD5: bb27fd31660ad604487f908934a3d3cb
```

Runtime output

```
Calculation error!
Value =  5.00000E-01
```

The Ada code above suffers from the same drawbacks as the C code. Again, there's no way to prevent misuse of the invalid value returned by `Calculate` in case of errors.

However, in Ada, we can use variant records to make the component unavailable and therefore prevent misuse of this information. Let's rewrite the original example and *wrap* the returned value in a variant record:

[Ada]

Listing 46: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is

   type Opt_Float (Success : Boolean) is record
      case Success is
        when False => null;
        when True  => F : Float;
      end case;
   end record;

   function Calculate (F1, F2 : Float) return Opt_Float is
   begin
      if F1 < F2 then
         return (Success => True, F => F2 - F1);
      else
         return (Success => False);
      end if;
   end Calculate;

   procedure Display (V : Opt_Float) is
   begin
      if V.Success then
         Put_Line ("Value = " & Float'Image (V.F));
      else
         Put_Line ("Calculation error!");
      end if;
   end Display;

begin
   Display (Calculate (1.0, 0.5));
   Display (Calculate (0.5, 1.0));
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Opt_Ada
MD5: 8b70cd16d5ff13611567fa71059d6891
```

Runtime output

```
Calculation error!
Value =  5.00000E-01
```

In this example, we can determine whether the calculation was successful or not by evaluating the `Success` component of the `Opt_Float`. If the calculation wasn't successful, we won't be able to access the F component of the `Opt_Float`. As mentioned before, trying to access the component in this case would raise an exception. Therefore, in case of errors, we can ensure that no information is misused after the call to `Calculate`.

84.3.3 Object orientation

In the *previous section* (page 1780), we've seen that we can add variability to records by using discriminants. Another approach is to use *tagged* records, which are the base for object-oriented programming in Ada.

Type extension

A tagged record type is declared by adding the **tagged** keyword. For example:

[Ada]

Listing 47: main.adb

```
procedure Main is

   type Rec is record
      V : Integer;
   end record;

   type Tagged_Rec is tagged record
      V : Integer;
   end record;

   R1 : Rec;
   R2 : Tagged_Rec;

   pragma Unreferenced (R1, R2);
begin
   R1 := (V => 0);
   R2 := (V => 0);
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Tagged_Type_Decl
MD5: 53810d3bb5aa7e7b1483270d974eb025
```

In this simple example, there isn't much difference between the Rec and Tagged_Rec type. However, tagged types can be derived and extended. For example:

[Ada]

Listing 48: main.adb

```
procedure Main is

   type Rec is record
      V : Integer;
   end record;

   --  We cannot declare this:
   --
   --  type Ext_Rec is new Rec with record
   --     V : Integer;
   --  end record;

   type Tagged_Rec is tagged record
      V : Integer;
   end record;

   --  But we can declare this:
   --
```

(continues on next page)

(continued from previous page)

```
19    type Ext_Tagged_Rec is new Tagged_Rec with record
20       V2 : Integer;
21    end record;
22
23    R1 : Rec;
24    R2 : Tagged_Rec;
25    R3 : Ext_Tagged_Rec;
26
27    pragma Unreferenced (R1, R2, R3);
28 begin
29    R1 := (V => 0);
30    R2 := (V => 0);
31    R3 := (V => 0, V2 => 0);
32 end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Tagged_Type_Extension_Decl
MD5: 707a3e6b220357f50f6792190b000c91
```

As indicated in the example, a type derived from an untagged type cannot have an extension. The compiler indicates this error if you uncomment the declaration of the Ext_Rec type above. In contrast, we can extend a tagged type, as we did in the declaration of Ext_Tagged_Rec. In this case, Ext_Tagged_Rec has all the components of the Tagged_Rec type (V, in this case) plus the additional components from its own type declaration (V2, in this case).

Overriding subprograms

Previously, we've seen that subprograms can be overriden. For example, if we had implemented a Reset and a Display procedure for the Rec type that we declared above, these procedures would be available for an Ext_Rec type derived from Rec. Also, we could override these procedures for the Ext_Rec type. In Ada, we don't need object-oriented programming features to do that: simple (untagged) records can be used to derive types, inherit operations and override them. However, in applications where the actual subprogram to be called is determined dynamically at run-time, we need dispatching calls. In this case, we must use tagged types to implement this.

Comparing untagged and tagged types

Let's discuss the similarities and differences between untagged and tagged types based on this example:

[Ada]

Listing 49: p.ads

```
1  package P is
2
3     type Rec is record
4        V : Integer;
5     end record;
6
7     procedure Display (R : Rec);
8     procedure Reset (R : out Rec);
9
10    type New_Rec is new Rec;
11
12    overriding procedure Display (R : New_Rec);
```

(continues on next page)

(continued from previous page)

```
   not overriding procedure New_Op (R : in out New_Rec);

   type Tagged_Rec is tagged record
      V : Integer;
   end record;

   procedure Display (R : Tagged_Rec);
   procedure Reset (R : out Tagged_Rec);

   type Ext_Tagged_Rec is new Tagged_Rec with record
      V2 : Integer;
   end record;

   overriding procedure Display (R : Ext_Tagged_Rec);
   overriding procedure Reset (R : out Ext_Tagged_Rec);
   not overriding procedure New_Op (R : in out Ext_Tagged_Rec);

end P;
```

Listing 50: p.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body P is

   procedure Display (R : Rec) is
   begin
      Put_Line ("TYPE: REC");
      Put_Line ("Rec.V = " & Integer'Image (R.V));
      New_Line;
   end Display;

   procedure Reset (R : out Rec) is
   begin
      R.V := 0;
   end Reset;

   procedure Display (R : New_Rec) is
   begin
      Put_Line ("TYPE: NEW_REC");
      Put_Line ("New_Rec.V = " & Integer'Image (R.V));
      New_Line;
   end Display;

   procedure New_Op (R : in out New_Rec) is
   begin
      R.V := R.V + 1;
   end New_Op;

   procedure Display (R : Tagged_Rec) is
   begin
      --  Using External_Tag attribute to retrieve the tag as a string
      Put_Line ("TYPE: " & Tagged_Rec'External_Tag);
      Put_Line ("Tagged_Rec.V = " & Integer'Image (R.V));
      New_Line;
   end Display;

   procedure Reset (R : out Tagged_Rec) is
   begin
      R.V := 0;
   end Reset;
```

(continues on next page)

(continued from previous page)

```
41
42    procedure Display (R : Ext_Tagged_Rec) is
43    begin
44       --  Using External_Tag attribute to retrieve the tag as a string
45       Put_Line ("TYPE: " & Ext_Tagged_Rec'External_Tag);
46       Put_Line ("Ext_Tagged_Rec.V  = " & Integer'Image (R.V));
47       Put_Line ("Ext_Tagged_Rec.V2 = " & Integer'Image (R.V2));
48       New_Line;
49    end Display;
50
51    procedure Reset (R : out Ext_Tagged_Rec) is
52    begin
53       Tagged_Rec (R).Reset;
54       R.V2 := 0;
55    end Reset;
56
57    procedure New_Op (R : in out Ext_Tagged_Rec) is
58    begin
59       R.V := R.V + 1;
60    end New_Op;
61
62 end P;
```

Listing 51: main.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2  with P;           use P;
3
4  procedure Main is
5     X_Rec              : Rec;
6     X_New_Rec          : New_Rec;
7
8     X_Tagged_Rec       : aliased Tagged_Rec;
9     X_Ext_Tagged_Rec   : aliased Ext_Tagged_Rec;
10
11    X_Tagged_Rec_Array : constant array (1 .. 2) of access Tagged_Rec'Class
12                         := (X_Tagged_Rec'Access, X_Ext_Tagged_Rec'Access);
13 begin
14    --
15    --  Reset all objects
16    --
17    Reset (X_Rec);
18    Reset (X_New_Rec);
19    X_Tagged_Rec.Reset;    --  we could write "Reset (X_Tagged_Rec)" as well
20    X_Ext_Tagged_Rec.Reset;
21
22    --
23    --  Use new operations when available
24    --
25    New_Op (X_New_Rec);
26    X_Ext_Tagged_Rec.New_Op;
27
28    --
29    --  Display all objects
30    --
31    Display (X_Rec);
32    Display (X_New_Rec);
33    X_Tagged_Rec.Display;  --  we could write "Display (X_Tagged_Rec)" as well
34    X_Ext_Tagged_Rec.Display;
35
36    --
```

(continues on next page)

(continued from previous page)

```
37    --  Resetting and display objects of Tagged_Rec'Class
38    --
39    Put_Line ("Operations on Tagged_Rec'Class");
40    Put_Line ("------------------------------");
41    for E of X_Tagged_Rec_Array loop
42       E.Reset;
43       E.Display;
44    end loop;
45 end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Tagged_Type_Extension_Decl
MD5: 29412b74db6680f0a0986b62e5284cf7
```

Runtime output

```
TYPE: REC
Rec.V =  0

TYPE: NEW_REC
New_Rec.V =  1

TYPE: P.TAGGED_REC
Tagged_Rec.V =  0

TYPE: P.EXT_TAGGED_REC
Ext_Tagged_Rec.V  =  1
Ext_Tagged_Rec.V2 =  0

Operations on Tagged_Rec'Class
------------------------------
TYPE: P.TAGGED_REC
Tagged_Rec.V =  0

TYPE: P.EXT_TAGGED_REC
Ext_Tagged_Rec.V  =  0
Ext_Tagged_Rec.V2 =  0
```

These are the similarities between untagged and tagged types:

- We can derive types and inherit operations in both cases.
  - Both `X_New_Rec` and `X_Ext_Tagged_Rec` inherit the `Display` and `Reset` procedures from their respective ancestors.
- We can override operations in both cases.
- We can implement new operations in both cases.
  - Both `X_New_Rec` and `X_Ext_Tagged_Rec` implement a procedure called `New_Op`, which is not available for their respective ancestors.

Now, let's look at the differences between untagged and tagged types:

- We can dispatch calls for a given type class.
  - This is what we do when we iterate over objects of the `Tagged_Rec` class — in the loop over `X_Tagged_Rec_Array` at the last part of the `Main` procedure.
- We can use the dot notation.
  - We can write both `E.Reset` or `Reset (E)` forms: they're equivalent.

Dispatching calls

Let's look more closely at the dispatching calls implemented above. First, we declare the X_Tagged_Rec_Array array and initialize it with the access to objects of both parent and derived tagged types:

[Ada]

```
X_Tagged_Rec       : aliased Tagged_Rec;
X_Ext_Tagged_Rec   : aliased Ext_Tagged_Rec;

X_Tagged_Rec_Array : constant array (1 .. 2) of access Tagged_Rec'Class
                       := (X_Tagged_Rec'Access, X_Ext_Tagged_Rec'Access);
```

Here, we use the **aliased** keyword to be able to get access to the objects (via the 'Access attribute).

Then, we loop over this array and call the Reset and Display procedures:

[Ada]

```
for E of X_Tagged_Rec_Array loop
   E.Reset;
   E.Display;
end loop;
```

Since we're using dispatching calls, the actual procedure that is selected depends on the type of the object. For the first element (X_Tagged_Rec_Array (1)), this is Tagged_Rec, while for the second element (X_Tagged_Rec_Array (2)), this is Ext_Tagged_Rec.

Dispatching calls are only possible for a type class — for example, the Tagged_Rec'Class. When the type of an object is known at compile time, the calls won't dispatch at runtime. For example, the call to the Reset procedure of the X_Ext_Tagged_Rec object (X_Ext_Tagged_Rec.Reset) will always take the overriden Reset procedure of the Ext_Tagged_Rec type. Similarly, if we perform a view conversion by writing Tagged_Rec (A_Ext_Tagged_Rec).Display, we're instructing the compiler to interpret A_Ext_Tagged_Rec as an object of type Tagged_Rec, so that the compiler selects the Display procedure of the Tagged_Rec type.

Interfaces

Another useful feature of object-oriented programming is the use of interfaces. In this case, we can define abstract operations, and implement them in the derived tagged types. We declare an interface by simply writing **type T is interface**. For example:

[Ada]

```
type My_Interface is interface;

procedure Op (Obj : My_Interface) is abstract;

--  We cannot declare actual objects of an interface:
--
--  Obj : My_Interface;  --   ERROR!
```

All operations on an interface type are abstract, so we need to write **is abstract** in the signature — as we did in the declaration of Op above. Also, since interfaces are abstract types and don't have an actual implementation, we cannot declare objects for it.

We can derive tagged types from an interface and implement the actual operations of that interface:

[Ada]

```
type My_Derived is new My_Interface with null record;

procedure Op (Obj : My_Derived);
```

Note that we're not using the **tagged** keyword in the declaration because any type derived from an interface is automatically tagged.

Let's look at an example with an interface and two derived tagged types:

[Ada]

Listing 52: p.ads

```
package P is

   type Display_Interface is interface;
   procedure Display (D : Display_Interface) is abstract;

   type Small_Display_Type is new Display_Interface with null record;
   procedure Display (D : Small_Display_Type);

   type Big_Display_Type is new Display_Interface with null record;
   procedure Display (D : Big_Display_Type);

end P;
```

Listing 53: p.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body P is

   procedure Display (D : Small_Display_Type) is
      pragma Unreferenced (D);
   begin
      Put_Line ("Using Small_Display_Type");
   end Display;

   procedure Display (D : Big_Display_Type) is
      pragma Unreferenced (D);
   begin
      Put_Line ("Using Big_Display_Type");
   end Display;

end P;
```

Listing 54: main.adb

```
with P; use P;

procedure Main is
   D_Small : Small_Display_Type;
   D_Big   : Big_Display_Type;

   procedure Dispatching_Display (D : Display_Interface'Class) is
   begin
      D.Display;
   end Dispatching_Display;

begin
   Dispatching_Display (D_Small);
   Dispatching_Display (D_Big);
```

(continues on next page)

(continued from previous page)

```
15 end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Interfaces_1
MD5: 564eba158b2f8fc3efea9e892a21caa9
```

Runtime output

```
Using Small_Display_Type
Using Big_Display_Type
```

In this example, we have an interface type `Display_Interface` and two tagged types that are derived from `Display_Interface`: `Small_Display_Type` and `Big_Display_Type`.

Both types (`Small_Display_Type` and `Big_Display_Type`) implement the interface by overriding the `Display` procedure. Then, in the inner procedure `Dispatching_Display` of the `Main` procedure, we perform a dispatching call depending on the actual type of `D`.

Deriving from multiple interfaces

We may derive a type from multiple interfaces by simply writing **`type Derived_T is new`** T1 **`and`** T2 **`with null record`**. For example:

[Ada]

Listing 55: transceivers.ads

```
1  package Transceivers is
2
3     type Send_Interface is interface;
4
5     procedure Send (Obj : in out Send_Interface) is abstract;
6
7     type Receive_Interface is interface;
8
9     procedure Receive (Obj : in out Receive_Interface) is abstract;
10
11    type Transceiver is new Send_Interface and Receive_Interface
12      with null record;
13
14    procedure Send (D : in out Transceiver);
15    procedure Receive (D : in out Transceiver);
16
17 end Transceivers;
```

Listing 56: transceivers.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  package body Transceivers is
4
5     procedure Send (D : in out Transceiver) is
6        pragma Unreferenced (D);
7     begin
8        Put_Line ("Sending data...");
9     end Send;
10
11    procedure Receive (D : in out Transceiver) is
12       pragma Unreferenced (D);
```

(continues on next page)

(continued from previous page)

```
   begin
      Put_Line ("Receiving data...");
   end Receive;

end Transceivers;
```

Listing 57: main.adb

```
with Transceivers; use Transceivers;

procedure Main is
   D : Transceiver;
begin
   D.Send;
   D.Receive;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Multiple_Interfaces
MD5: c81813941bd3458eaf7b1fd39b010a03
```

Runtime output

```
Sending data...
Receiving data...
```

In this example, we're declaring two interfaces (`Send_Interface` and `Receive_Interface`) and the tagged type `Transceiver` that derives from both interfaces. Since we need to implement the interfaces, we implement both `Send` and `Receive` for `Transceiver`.

Abstract tagged types

We may also declare abstract tagged types. Note that, because the type is abstract, we cannot use it to declare objects for it — this is the same as for interfaces. We can only use it to derive other types. Let's look at the abstract tagged type declared in the `Abstract_Transceivers` package:

[Ada]

Listing 58: abstract_transceivers.ads

```
with Transceivers; use Transceivers;

 package Abstract_Transceivers is

    type Abstract_Transceiver is abstract new Send_Interface and
      Receive_Interface with null record;

    procedure Send (D : in out Abstract_Transceiver);
    --  We don't implement Receive for Abstract_Transceiver!

 end Abstract_Transceivers;
```

Listing 59: abstract_transceivers.adb

```
with Ada.Text_IO; use Ada.Text_IO;

 package body Abstract_Transceivers is

```

(continues on next page)

(continued from previous page)

```
    procedure Send (D : in out Abstract_Transceiver) is
       pragma Unreferenced (D);
    begin
       Put_Line ("Sending data...");
    end Send;

end Abstract_Transceivers;
```

Listing 60: main.adb

```
with Abstract_Transceivers; use Abstract_Transceivers;

procedure Main is
   D : Abstract_Transceiver;
begin
   D.Send;
   D.Receive;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Multiple_Interfaces
MD5: c2b0b3aab1ffc9c3b9a0749bf6721088
```

Build output

```
main.adb:4:09: error: type of object cannot be abstract
main.adb:7:06: error: call to abstract procedure must be dispatching
gprbuild: *** compilation phase failed
```

In this example, we declare the abstract tagged type `Abstract_Transceiver`. Here, we're only partially implementing the interfaces from which this type is derived: we're implementing Send, but we're skipping the implementation of `Receive`. Therefore, `Receive` is an abstract operation of `Abstract_Transceiver`. Since any tagged type that has abstract operations is abstract, we must indicate this by adding the **`abstract`** keyword in type declaration.

Also, when compiling this example, we get an error because we're trying to declare an object of `Abstract_Transceiver` (in the `Main` procedure), which is not possible. Naturally, if we derive another type from `Abstract_Transceiver` and implement `Receive` as well, then we can declare objects of this derived type. This is what we do in the `Full_Transceivers` below:

[Ada]

Listing 61: full_transceivers.ads

```
with Abstract_Transceivers; use Abstract_Transceivers;

package Full_Transceivers is

   type Full_Transceiver is new Abstract_Transceiver with null record;
   procedure Receive (D : in out Full_Transceiver);

end Full_Transceivers;
```

Listing 62: full_transceivers.adb

```
with Ada.Text_IO; use Ada.Text_IO;

```

(continues on next page)

(continued from previous page)

```
package body Full_Transceivers is

   procedure Receive (D : in out Full_Transceiver) is
      pragma Unreferenced (D);
   begin
      Put_Line ("Receiving data...");
   end Receive;

end Full_Transceivers;
```

Listing 63: main.adb

```
with Full_Transceivers; use Full_Transceivers;

procedure Main is
   D : Full_Transceiver;
begin
   D.Send;
   D.Receive;
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Multiple_Interfaces
MD5: 77a86a6d917547d306a89422e7522111
```

Runtime output

```
Sending data...
Receiving data...
```

Here, we implement the Receive procedure for the `Full_Transceiver`. Therefore, the type doesn't have any abstract operation, so we can use it to declare objects.

From simple derivation to OOP

In the *section about simple derivation* (page 1768), we've seen an example where the actual selection was done at *implementation* time by renaming one of the packages:

[Ada]

```
with Drivers_1;

package Drivers renames Drivers_1;
```

Although this approach is useful in many cases, there might be situations where we need to select the actual driver dynamically at runtime. Let's look at how we could rewrite that example using interfaces, tagged types and dispatching calls:

[Ada]

Listing 64: drivers_base.ads

```
package Drivers_Base is

   type Transceiver is interface;

   procedure Send (Device : Transceiver; Data : Integer) is abstract;
   procedure Receive (Device : Transceiver; Data : out Integer) is abstract;
   procedure Display (Device : Transceiver) is abstract;
```

(continues on next page)

(continued from previous page)

```
8
9  end Drivers_Base;
```

Listing 65: drivers_1.ads

```
1  with Drivers_Base;
2
3  package Drivers_1 is
4
5     type Transceiver is new Drivers_Base.Transceiver with null record;
6
7     procedure Send (Device : Transceiver; Data : Integer);
8     procedure Receive (Device : Transceiver; Data : out Integer);
9     procedure Display (Device : Transceiver);
10
11 end Drivers_1;
```

Listing 66: drivers_1.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  package body Drivers_1 is
4
5     procedure Send (Device : Transceiver; Data : Integer) is null;
6
7     procedure Receive (Device : Transceiver; Data : out Integer) is
8        pragma Unreferenced (Device);
9     begin
10       Data := 42;
11    end Receive;
12
13    procedure Display (Device : Transceiver) is
14       pragma Unreferenced (Device);
15    begin
16       Put_Line ("Using Drivers_1");
17    end Display;
18
19 end Drivers_1;
```

Listing 67: drivers_2.ads

```
1  with Drivers_Base;
2
3  package Drivers_2 is
4
5     type Transceiver is new Drivers_Base.Transceiver with null record;
6
7     procedure Send (Device : Transceiver; Data : Integer);
8     procedure Receive (Device : Transceiver; Data : out Integer);
9     procedure Display (Device : Transceiver);
10
11 end Drivers_2;
```

Listing 68: drivers_2.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  package body Drivers_2 is
4
5     procedure Send (Device : Transceiver; Data : Integer) is null;
```

(continues on next page)

(continued from previous page)

```
6
7     procedure Receive (Device : Transceiver; Data : out Integer) is
8        pragma Unreferenced (Device);
9     begin
10       Data := 7;
11    end Receive;
12
13    procedure Display (Device : Transceiver) is
14       pragma Unreferenced (Device);
15    begin
16       Put_Line ("Using Drivers_2");
17    end Display;
18
19 end Drivers_2;
```

Listing 69: main.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  with Drivers_Base;
4  with Drivers_1;
5  with Drivers_2;
6
7  procedure Main is
8     D1 : aliased Drivers_1.Transceiver;
9     D2 : aliased Drivers_2.Transceiver;
10    D  : access Drivers_Base.Transceiver'Class;
11
12    I  : Integer;
13
14    type Driver_Number is range 1 .. 2;
15
16    procedure Select_Driver (N : Driver_Number) is
17    begin
18       if N = 1 then
19          D := D1'Access;
20       else
21          D := D2'Access;
22       end if;
23       D.Display;
24    end Select_Driver;
25
26 begin
27    Select_Driver (1);
28    D.Send (999);
29    D.Receive (I);
30    Put_Line (Integer'Image (I));
31
32    Select_Driver (2);
33    D.Send (999);
34    D.Receive (I);
35    Put_Line (Integer'Image (I));
36 end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Tagged_Drivers
MD5: d823b7231f1adf003fb6f545cb482308
```

Runtime output

```
Using Drivers_1
 42
Using Drivers_2
 7
```

In this example, we declare the `Transceiver` interface in the `Drivers_Base` package. This interface is then used to derive the tagged types `Transceiver` from both `Drivers_1` and `Drivers_2` packages.

In the `Main` procedure, we use the access to `Transceiver'Class` — from the interface declared in the `Drivers_Base` package — to declare `D`. This object `D` contains the access to the actual driver loaded at any specific time. We select the driver at runtime in the inner `Select_Driver` procedure, which initializes `D` (with the access to the selected driver). Then, any operation on `D` triggers a dispatching call to the selected driver.

Further resources

In the appendices, we have a step-by-step *hands-on overview of object-oriented programming* (page 1835) that discusses how to translate a simple system written in C to an equivalent system in Ada using object-oriented programming.

84.3.4 Pointer to subprograms

Pointers to subprograms allow us to dynamically select an appropriate subprogram at runtime. This selection might be triggered by an external event, or simply by the user. This can be useful when multiple versions of a routine exist, and the decision about which one to use cannot be made at compilation time.

This is an example on how to declare and use pointers to functions in C:

[C]

Listing 70: main.c

```c
#include <stdio.h>
#include <stdlib.h>

void show_msg_v1 (char *msg)
{
    printf("Using version #1: %s\n", msg);
}

void show_msg_v2 (char *msg)
{
    printf("Using version #2:\n %s\n", msg);
}

int main()
{
    int selection = 1;
    void (*current_show_msg) (char *);

    switch (selection)
    {
        case 1:  current_show_msg = &show_msg_v1;    break;
        case 2:  current_show_msg = &show_msg_v2;    break;
        default: current_show_msg = NULL;            break;
    }

    if (current_show_msg != NULL)
    {
```

(continues on next page)

(continued from previous page)

```
        current_show_msg ("Hello there!");
    }
    else
    {
        printf("ERROR: no version of show_msg() selected!\n");
    }

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Selecting_Subprogram_C
MD5: 414c99fca2490611d20d031f8549ff59
```

Runtime output

```
Using version #1: Hello there!
```

The example above contains two versions of the `show_msg()` function: `show_msg_v1()` and `show_msg_v2()`. The function is selected depending on the value of `selection`, which initializes the function pointer `current_show_msg`. If there's no corresponding value, `current_show_msg` is set to `null` — alternatively, we could have selected a default version of `show_msg()` function. By calling `current_show_msg ("Hello there!")`, we're calling the function that `current_show_msg` is pointing to.

This is the corresponding implementation in Ada:

[Ada]

Listing 71: show_subprogram_selection.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Subprogram_Selection is

   procedure Show_Msg_V1 (Msg : String) is
   begin
      Put_Line ("Using version #1: " & Msg);
   end Show_Msg_V1;

   procedure Show_Msg_V2 (Msg : String) is
   begin
      Put_Line ("Using version #2: ");
      Put_Line (Msg);
   end Show_Msg_V2;

   type Show_Msg_Proc is access procedure (Msg : String);

   Current_Show_Msg : Show_Msg_Proc;
   Selection        : Natural;

begin
   Selection := 1;

   case Selection is
      when 1      => Current_Show_Msg := Show_Msg_V1'Access;
      when 2      => Current_Show_Msg := Show_Msg_V2'Access;
      when others => Current_Show_Msg := null;
   end case;

```

(continues on next page)

(continued from previous page)

```
30    if Current_Show_Msg /= null then
31       Current_Show_Msg ("Hello there!");
32    else
33       Put_Line ("ERROR: no version of Show_Msg selected!");
34    end if;
35
36 end Show_Subprogram_Selection;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Selecting_Subprogram_Ada
MD5: ee41e042e3b879b4a2671bfe6d8072aa
```

Runtime output

```
Using version #1: Hello there!
```

The structure of the code above is very similar to the one used in the C code. Again, we have two version of Show_Msg: Show_Msg_V1 and Show_Msg_V2. We set `Current_Show_Msg` according to the value of `Selection`. Here, we use `'Access` to get access to the corresponding procedure. If no version of Show_Msg is available, we set `Current_Show_Msg` to **`null`**.

Pointers to subprograms are also typically used as callback functions. This approach is extensively used in systems that process events, for example. Here, we could have a two-layered system:

- A layer of the system (an event manager) triggers events depending on information from sensors.
  - For each event, callback functions can be registered.
  - The event manager calls registered callback functions when an event is triggered.
- Another layer of the system registers callback functions for specific events and decides what to do when those events are triggered.

This approach promotes information hiding and component decoupling because:

- the layer of the system responsible for managing events doesn't need to know what the callback function actually does, while
- the layer of the system that implements callback functions remains agnostic to implementation details of the event manager — for example, how events are implemented in the event manager.

Let's see an example in C where we have a `process_values()` function that calls a callback function (`process_one`) to process a list of values:

[C]

Listing 72: process_values.h

```
1 typedef int (*process_one_callback) (int);
2
3 void process_values (int                  *values,
4                      int                   len,
5                      process_one_callback  process_one);
```

Listing 73: process_values.c

```
1 #include "process_values.h"
2
```

(continues on next page)

(continued from previous page)

```c
#include <assert.h>
#include <stdio.h>

void process_values (int                   *values,
                     int                    len,
                     process_one_callback   process_one)
{
    int i;

    assert (process_one != NULL);

    for (i = 0; i < len; i++)
    {
        values[i] = process_one (values[i]);
    }
}
```

Listing 74: main.c

```c
#include <stdio.h>
#include <stdlib.h>

#include "process_values.h"

int proc_10 (int val)
{
    return val + 10;
}

# define LEN_VALUES     5

int main()
{

    int values[LEN_VALUES] = { 1, 2, 3, 4, 5 };
    int i;

    process_values (values, LEN_VALUES, &proc_10);

    for (i = 0; i < LEN_VALUES; i++)
    {
        printf("Value [%d] = %d\n", i, values[i]);
    }

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Callback_C
MD5: ff5c8611d0901f40b6c4a9effeb0a323
```

Runtime output

```
Value [0] = 11
Value [1] = 12
Value [2] = 13
Value [3] = 14
Value [4] = 15
```

As mentioned previously, `process_values()` doesn't have any knowledge about what `pro-`

cess_one() does with the integer value it receives as a parameter. Also, we could replace proc_10() by another function without having to change the implementation of process_values().

Note that process_values() calls an assert() for the function pointer to compare it against null. Here, instead of checking the validity of the function pointer, we're expecting the caller of process_values() to provide a valid pointer.

This is the corresponding implementation in Ada:

[Ada]

Listing 75: values_processing.ads

```
package Values_Processing is

   type Integer_Array is array (Positive range <>) of Integer;

   type Process_One_Callback is not null access
     function (Value : Integer) return Integer;

   procedure Process_Values (Values      : in out Integer_Array;
                             Process_One :        Process_One_Callback);

end Values_Processing;
```

Listing 76: values_processing.adb

```
package body Values_Processing is

   procedure Process_Values (Values      : in out Integer_Array;
                             Process_One :        Process_One_Callback) is
   begin
      for I in Values'Range loop
         Values (I) := Process_One (Values (I));
      end loop;
   end Process_Values;

end Values_Processing;
```

Listing 77: proc_10.ads

```
function Proc_10 (Value : Integer) return Integer;
```

Listing 78: proc_10.adb

```
function Proc_10 (Value : Integer) return Integer is
begin
   return Value + 10;
end Proc_10;
```

Listing 79: show_callback.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Values_Processing; use Values_Processing;
with Proc_10;

procedure Show_Callback is
   Values : Integer_Array := (1, 2, 3, 4, 5);
begin
   Process_Values (Values, Proc_10'Access);
```

(continues on next page)

(continued from previous page)

```
10
11    for I in Values'Range loop
12       Put_Line ("Value ["
13                 & Positive'Image (I)
14                 & "] = "
15                 & Integer'Image (Values (I)));
16    end loop;
17 end Show_Callback;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.Callback_Ada
MD5: f49c54f0d14193d305c0e962a392ab67
```

Runtime output

```
Value [ 1] =  11
Value [ 2] =  12
Value [ 3] =  13
Value [ 4] =  14
Value [ 5] =  15
```

Similar to the implementation in C, the `Process_Values` procedure receives the access to a callback routine, which is then called for each value of the `Values` array.

Note that the declaration of `Process_One_Callback` makes use of the **`not null access`** declaration. By using this approach, we ensure that any parameter of this type has a valid value, so we can always call the callback routine.

84.4 Design by components using dynamic libraries

In the previous sections, we have shown how to use packages to create separate components of a system. As we know, when designing a complex system, it is advisable to separate concerns into distinct units, so we can use Ada packages to represent each unit of a system. In this section, we go one step further and create separate dynamic libraries for each component, which we'll then link to the main application.

Let's suppose we have a main system (`Main_System`) and a component *A* (`Component_A`) that we want to use in the main system. For example:

[Ada]

Listing 80: component_a.ads

```
1  --
2  --  File: component_a.ads
3  --
4  package Component_A is
5
6     type Float_Array is array (Positive range <>) of Float;
7
8     function Average (Data : Float_Array) return Float;
9
10 end Component_A;
```

Listing 81: component_a.adb

```
1  --
2  --  File: component_a.adb
```

(continues on next page)

(continued from previous page)

```
--
package body Component_A is

   function Average (Data : Float_Array) return Float is
      Total : Float := 0.0;
   begin
      for Value of Data loop
         Total := Total + Value;
      end loop;
      return Total / Float (Data'Length);
   end Average;

end Component_A;
```

Listing 82: main_system.adb

```
--
--  File: main_system.adb
--
with Ada.Text_IO; use Ada.Text_IO;

with Component_A; use Component_A;

procedure Main_System is
   Values        : constant Float_Array := (10.0, 11.0, 12.0, 13.0);
   Average_Value : Float;
begin
   Average_Value := Average (Values);
   Put_Line ("Average = " & Float'Image (Average_Value));
end Main_System;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Reusability.System_For_Dyn_Lib
MD5: d759132b787e636d4bcd5f8cd6393f2a
```

Runtime output

```
Average =  1.15000E+01
```

Note that, in the source-code example above, we're indicating the name of each file. We'll now see how to organize those files in a structure that is suitable for the GNAT build system (**GPRbuild**).

In order to discuss how to create dynamic libraries, we need to dig into some details about the build system. With GNAT, we can use project files for **GPRbuild** to easily design dynamic libraries. Let's say we use the following directory structure for the code above:

```
|- component_a
|    | component_a.gpr
|    |- src
|    |    | component_a.adb
|    |    | component_a.ads
|- main_system
|    | main_system.gpr
|    |- src
|    |    | main_system.adb
```

Here, we have two directories: *component_a* and *main_system*. Each directory contains a project file (with the *.gpr* file extension) and a source-code directory (*src*).

In the source-code example above, we've seen the content of files `component_a.ads`,

component_a.adb and main_system.adb. Now, let's discuss how to write the project file for Component_A (component_a.gpr), which will build the dynamic library for this component:

```
library project Component_A is

   for Source_Dirs use ("src");
   for Object_Dir use "obj";
   for Create_Missing_Dirs use "True";
   for Library_Name use "component_a";
   for Library_Kind use "dynamic";
   for Library_Dir use "lib";

end Component_A;
```

The project is defined as a *library project* instead of *project*. This tells **GPRbuild** to build a library instead of an executable binary. We then specify the library name using the *Library_Name* attribute, which is required, so it must appear in a library project. The next two library-related attributes are optional, but important for our use-case. We use:

- *Library_Kind* to specify that we want to create a dynamic library — by default, this attribute is set to *static*;
- *Library_Dir* to specify the directory where the library is stored.

In the project file of our main system (main_system.gpr), we just need to reference the project of Component_A using a *with* clause and indicating the correct path to that project file:

```
with "../component_a/component_a.gpr";

project Main_System is
    for Source_Dirs use ("src");
    for Object_Dir use "obj";
    for Create_Missing_Dirs use "True";
    for Main use ("main_system.adb");
end Main_System;
```

GPRbuild takes care of selecting the correct settings to link the dynamic library created for Component_A with the main application (Main_System) and build an executable.

We can use the same strategy to create a Component_B and dynamically link to it in the Main_System. We just need to create the separate structure for this component — with the appropriate Ada packages and project file — and include it in the project file of the main system using a *with* clause:

```
with "../component_a/component_a.gpr";
with "../component_b/component_b.gpr";

...
```

Again, **GPRbuild** takes care of selecting the correct settings to link both dynamic libraries together with the main application.

You can find more details and special setting for library projects in the GPRbuild documentation[460].

In the GNAT toolchain

The GNAT toolchain includes a more advanced example focusing on how to load dynamic libraries at runtime. You can find it in the share/examples/gnat/plugins directory of the GNAT toolchain installation. As described in the README file from that directory, this

[460] https://docs.adacore.com/gprbuild-docs/html/gprbuild_ug/gnat_project_manager.html#library-projects

example "comprises a main program which probes regularly for the existence of shared libraries in a known location. If such libraries are present, it uses them to implement features initially not present in the main program."

CHAPTER

EIGHTYFIVE

PERFORMANCE CONSIDERATIONS

85.1 Overall expectations

All in all, there should not be significant performance differences between code written in Ada and code written in C, provided that they are semantically equivalent. Taking the current GNAT implementation and its GCC C counterpart for example, most of the code generation and optimization phases are shared between C and Ada — so there's not one compiler more efficient than the other. Furthermore, the two languages are fairly similar in the way they implement imperative semantics, in particular with regards to memory management or control flow. They should be equivalent on average.

When comparing the performance of C and Ada code, differences might be observed. This usually comes from the fact that, while the two piece *appear* semantically equivalent, they happen to be actually quite different; C code semantics do not implicitly apply the same run-time checks that Ada does. This section will present common ways for improving Ada code performance.

85.2 Switches and optimizations

Clever use of compilation switches might optimize the performance of an application significantly. In this section, we'll briefly look into some of the switches available in the GNAT toolchain.

85.2.1 Optimizations levels

Optimization levels can be found in many compilers for multiple languages. On the lowest level, the GNAT compiler doesn't optimize the code at all, while at the higher levels, the compiler analyses the code and optimizes it by removing unnecessary operations and making the most use of the target processor's capabilities.

By being part of GCC, GNAT offers the same `-0_` switches as GCC:

Switc	Description
`-00`	No optimization: the generated code is completely unoptimized. This is the default optimization level.
`-01`	Moderate optimization.
`-02`	Full optimization.
`-03`	Same optimization level as for `-02`. In addition, further optimization strategies, such as aggressive automatic inlining and vectorization.

Note that the higher the level, the longer the compilation time. For fast compilation during development phase, unless you're working on benchmarking algorithms, using `-00` is probably a good idea.

In addition to the levels presented above, GNAT also has the `-0s` switch, which allows for optimizing code and data usage.

85.2.2 Inlining

As we've seen in the previous section, automatic inlining depends on the optimization level. The highest optimization level (`-03`), for example, performs aggressive automatic inlining. This could mean that this level inlines too much rather than not enough. As a result, the cache may become an issue and the overall performance may be worse than the one we would achieve by compiling the same code with optimization level 2 (`-02`). Therefore, the general recommendation is to not *just* select `-03` for the optimized version of an application, but instead compare it the optimized version built with `-02`.

In some cases, it's better to reduce the optimization level and perform manual inlining instead of automatic inlining. We do that by using the `Inline` aspect. Let's reuse an example from a previous chapter and inline the `Average` function:

[Ada]

Listing 1: float_arrays.ads

```
package Float_Arrays is

   type Float_Array is array (Positive range <>) of Float;

   function Average (Data : Float_Array) return Float
     with Inline;

end Float_Arrays;
```

Listing 2: float_arrays.adb

```
package body Float_Arrays is

   function Average (Data : Float_Array) return Float is
      Total : Float := 0.0;
   begin
      for Value of Data loop
         Total := Total + Value;
      end loop;
      return Total / Float (Data'Length);
   end Average;

end Float_Arrays;
```

Listing 3: compute_average.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Float_Arrays; use Float_Arrays;

procedure Compute_Average is
   Values        : constant Float_Array := (10.0, 11.0, 12.0, 13.0);
   Average_Value : Float;
begin
   Average_Value := Average (Values);
   Put_Line ("Average = " & Float'Image (Average_Value));
end Compute_Average;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Performance.Inlining
MD5: faf9d0d8cd5aefd7a48bcd950b1256fa
```

Runtime output

```
Average =  1.15000E+01
```

When compiling this example, GNAT will inline `Average` in the `Compute_Average` procedure.

In order to effectively use this aspect, however, we need to set the optimization level to at least `-O1` and use the `-gnatn` switch, which instructs the compiler to take the `Inline` aspect into account.

Note, however, that the `Inline` aspect is just a *recommendation* to the compiler. Sometimes, the compiler might not be able to follow this recommendation, so it won't inline the subprogram. In this case, we get a compilation warning from GNAT.

These are some examples of situations where the compiler might not be able to inline a subprogram:

- when the code is too large,
- when it's too complicated — for example, when it involves exception handling —, or
- when it contains tasks, etc.

In addition to the `Inline` aspect, we also have the `Inline_Always` aspect. In contrast to the former aspect, however, the `Inline_Always` aspect isn't primarily related to performance. Instead, it should be used when the functionality would be incorrect if inlining was not performed by the compiler. Examples of this are procedures that insert Assembly instructions that only make sense when the procedure is inlined, such as memory barriers.

Similar to the `Inline` aspect, there might be situations where a subprogram has the `Inline_Always` aspect, but the compiler is unable to inline it. In this case, we get a compilation error from GNAT.

85.3 Checks and assertions

85.3.1 Checks

Ada provides many runtime checks to ensure that the implementation is working as expected. For example, when accessing an array, we would like to make sure that we're not accessing a memory position that is not allocated for that array. This is achieved by an index check.

Another example of runtime check is the verification of valid ranges. For example, when adding two integer numbers, we would like to ensure that the result is still in the valid range — that the value is neither too large nor too small. This is achieved by an range check. Likewise, arithmetic operations shouldn't overflow or underflow. This is achieved by an overflow check.

Although runtime checks are very useful and should be used as much as possible, they can also increase the overhead of implementations at certain hot-spots. For example, checking the index of an array in a sorting algorithm may significantly decrease its performance. In those cases, suppressing the check may be an option. We can achieve this suppression by using `pragma Suppress (Index_Check)`. For example:

[Ada]

```
procedure Sort (A : in out Integer_Array) is
   pragma Suppress (Index_Check);
begin
```

(continues on next page)

(continued from previous page)

```
   --  (implementation removed...)
   null;
end Sort;
```

In case of overflow checks, we can use **pragma** *Suppress* (Overflow_Check) to suppress them:

```
function Some_Computation (A, B : Int32) return Int32 is
   pragma Suppress (Overflow_Check);
begin
   --  (implementation removed...)
   null;
end Sort;
```

We can also deactivate overflow checks for integer types using the -gnato switch when compiling a source-code file with GNAT. In this case, overflow checks in the whole file are deactivated.

It is also possible to suppress all checks at once using **pragma** *Suppress* (All_Checks). In addition, GNAT offers a compilation switch called -gnatp, which has the same effect on the whole file.

Note, however, that this kind of suppression is just a recommendation to the compiler. There's no guarantee that the compiler will actually suppress any of the checks because the compiler may not be able to do so — typically because the hardware happens to do it. For example, if the machine traps on any access via address zero, requesting the removal of null access value checks in the generated code won't prevent the checks from happening.

It is important to differentiate between required and redundant checks. Let's consider the following example in C:

[C]

Listing 4: main.c

```
#include <stdio.h>

int main(int argc, const char * argv[])
{
    int a = 8, b = 0, res;

    res = a / b;

    // printing the result
    printf("res = %d\n", res);

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Performance.Division_By_Zero_C
MD5: c8d95cbdd76618108119886c27ce7eb6
```

Because C doesn't have language-defined checks, as soon as the application tries to divide a value by zero in res = a / b, it'll break — on Linux, for example, you may get the following error message by the operating system: Floating point exception (core dumped). Therefore, we need to manually introduce a check for zero before this operation. For example:

[C]

Listing 5: main.c

```c
#include <stdio.h>

int main(int argc, const char * argv[])
{
    int a = 8, b = 0, res;

    if (b != 0) {
        res = a / b;

        // printing the result
        printf("res = %d\n", res);
    }
    else
    {
        // printing error message
        printf("Error: cannot calculate value (division by zero)\n");
    }

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Performance.Division_By_Zero_Check_C
MD5: 67ea0140d8248674b4aac06825c7cdbe
```

Runtime output

```
Error: cannot calculate value (division by zero)
```

This is the corresponding code in Ada:

[Ada]

Listing 6: show_division_by_zero.adb

```ada
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Division_By_Zero is
   A   : Integer := 8;
   B   : Integer := 0;
   Res : Integer;
begin
   Res := A / B;

   Put_Line ("Res = " & Integer'Image (Res));
end Show_Division_By_Zero;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Performance.Division_By_Zero_Ada
MD5: 2af6690eb977203ef7ce2178d15255af
```

Build output

```
show_division_by_zero.adb:8:15: warning: division by zero [enabled by default]
show_division_by_zero.adb:8:15: warning: Constraint_Error will be raised at run␣
 ↪time [enabled by default]
```

Runtime output

```
raised CONSTRAINT_ERROR : show_division_by_zero.adb:8 divide by zero
```

Similar to the first version of the C code, we're not explicitly checking for a potential division by zero here. In Ada, however, this check is *automatically inserted* by the language itself. When running the application above, an exception is raised when the application tries to divide the value in A by zero. We could introduce exception handling in our example, so that we get the same message as we did in the second version of the C code:

[Ada]

Listing 7: show_division_by_zero.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Show_Division_By_Zero is
   A   : Integer := 8;
   B   : Integer := 0;
   Res : Integer;
begin
   Res := A / B;

   Put_Line ("Res = " & Integer'Image (Res));
exception
   when Constraint_Error =>
      Put_Line ("Error: cannot calculate value (division by zero)");
   when others =>
      null;
end Show_Division_By_Zero;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Performance.Division_By_Zero_Check_Ada
MD5: a96a94c15fda5f6c5feb232d615b1ea3
```

Build output

```
show_division_by_zero.adb:8:15: warning: division by zero [enabled by default]
show_division_by_zero.adb:8:15: warning: Constraint_Error will be raised at run␣
 ↪time [enabled by default]
```

Runtime output

```
Error: cannot calculate value (division by zero)
```

This example demonstrates that the division check for `Res := A / B` is required and shouldn't be suppressed. In contrast, a check is redundant — and therefore not required — when we know that the condition that leads to a failure can never happen. In many cases, the compiler itself detects redundant checks and eliminates them (for higher optimization levels). Therefore, when improving the performance of your application, you should:

1. keep all checks active for most parts of the application;
2. identify the hot-spots of your application;
3. identify which checks haven't been eliminated by the optimizer on these hot-spots;
4. identify which of those checks are redundant;
5. only suppress those checks that are redundant, and keep the required ones.

85.3.2 Assertions

We've already discussed assertions in *this section of the SPARK chapter* (page 1722). Assertions are user-defined checks that you can add to your code using the **pragma** *Assert*. For example:

[Ada]

```
function Some_Computation (A, B : Int32) return Int32 is
   Res : Int32;
begin
   --  (implementation removed...)

   pragma Assert (Res >= 0);

   return Res;
end Sort;
```

Assertions that are specified with **pragma** *Assert* are not enabled by default. You can enable them by setting the assertion policy to *check* — using **pragma** *Assertion_Policy* (Check) — or by using the `-gnata` switch when compiling with GNAT.

Similar to the checks discussed previously, assertions can generate significant overhead when used at hot-spots. Restricting those assertions to development (e.g. debug version) and turning them off on the release version may be an option. In this case, formal proof — as discussed in the *SPARK chapter* (page 1715) — can help you. By formally proving that assertions will never fail at run-time, you can safely deactivate them.

85.4 Dynamic vs. static structures

Ada generally speaking provides more ways than C or C++ to write simple dynamic structures, that is to say structures that have constraints computed after variables. For example, it's quite typical to have initial values in record types:

[Ada]

```
type R is record
   F : Some_Field := Call_To_Some_Function;
end record;
```

However, the consequences of the above is that any declaration of a instance of this type without an explicit value for F will issue a call to `Call_To_Some_Function`. More subtle issue may arise with elaboration. For example, it's possible to write:

Listing 8: some_functions.ads

```
1  package Some_Functions is
2
3     function Some_Function_Call return Integer is (2);
4
5     function Some_Other_Function_Call return Integer is (10);
6
7  end Some_Functions;
```

Listing 9: values.ads

```
1  with Some_Functions; use Some_Functions;
2
3  package Values is
4     A_Start : Integer := Some_Function_Call;
```

(continues on next page)

(continued from previous page)

```
   A_End   : Integer := Some_Other_Function_Call;
end Values;
```

Listing 10: arr_def.ads

```
with Values; use Values;

package Arr_Def is
   type Arr is array (Integer range A_Start .. A_End) of Integer;
end Arr_Def;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Performance.Dynamic_Array
MD5: 0c97cecb64d27e935724c8b5f941fb4f
```

It may indeed be appealing to be able to change the values of `A_Start` and `A_End` at startup so as to align a series of arrays dynamically. The consequence, however, is that these values will not be known statically, so any code that needs to access to boundaries of the array will need to read data from memory. While it's perfectly fine most of the time, there may be situations where performances are so critical that static values for array boundaries must be enforced.

Here's a last case which may also be surprising:

[Ada]

Listing 11: arr_def.ads

```
package Arr_Def is
   type Arr is array (Integer range <>) of Integer;

   type R (D1, D2 : Integer) is record
      F1 : Arr (1 .. D1);
      F2 : Arr (1 .. D2);
   end record;
end Arr_Def;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Performance.Record_With_Arrays
MD5: e7b2656433279d36db87506276b68398
```

In the code above, R contains two arrays, F1 and F2, respectively constrained by the discriminant D1 and D2. The consequence is, however, that to access F2, the run-time needs to know how large F1 is, which is dynamically constrained when creating an instance. Therefore, accessing to F2 requires a computation involving D1 which is slower than, let's say, two pointers in an C array that would point to two different arrays.

Generally speaking, when values are used in data structures, it's useful to always consider where they're coming from, and if their value is static (computed by the compiler) or dynamic (only known at run-time). There's nothing fundamentally wrong with dynamically constrained types, unless they appear in performance-critical pieces of the application.

85.5 Pointers vs. data copies

In the section about *pointers* (page 1742), we mentioned that the Ada compiler will automatically pass parameters by reference when needed. Let's look into what "when needed" means. The fundamental point to understand is that the parameter types determine how

the parameters are passed in and/or out. The parameter modes do not control how parameters are passed.

Specifically, the language standards specifies that scalar types are always passed by value, and that some other types are always passed by reference. It would not make sense to make a copy of a task when passing it as a parameter, for example. So parameters that can be passed reasonably by value will be, and those that must be passed by reference will be. That's the safest approach.

But the language also specifies that when the parameter is an array type or a record type, and the record/array components are all by-value types, then the compiler decides: it can pass the parameter using either mechanism. The critical case is when such a parameter is large, e.g., a large matrix. We don't want the compiler to pass it by value because that would entail a large copy, and indeed the compiler will not do so. But if the array or record parameter is small, say the same size as an address, then it doesn't matter how it is passed and by copy is just as fast as by reference. That's why the language gives the choice to the compiler. Although the language does not mandate that large parameters be passed by reference, any reasonable compiler will do the right thing.

The modes do have an effect, but not in determining how the parameters are passed. Their effect, for parameters passed by value, is to determine how many times the value is copied. For `mode in` and `mode out` there is just one copy. For `mode in out` there will be two copies, one in each direction.

Therefore, unlike C, you don't have to use access types in Ada to get better performance when passing arrays or records to subprograms. The compiler will almost certainly do the right thing for you.

Let's look at this example:

[C]

Listing 12: main.c

```c
#include <stdio.h>

struct Data {
    int prev, curr;
};

void update(struct Data *d,
            int          v)
{
    d->prev = d->curr;
    d->curr = v;
}

void display(const struct Data *d)
{
    printf("Prev : %d\n", d->prev);
    printf("Curr : %d\n", d->curr);
}

int main(int argc, const char * argv[])
{
    struct Data D1 = { 0, 1 };

    update (&D1, 3);
    display (&D1);

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Performance.Passing_Rec_By_Reference_C
MD5: 9087e26168e49d095b5e0776d6330d69
```

Runtime output

```
Prev : 1
Curr : 3
```

In this C code example, we're using pointers to pass D1 as a reference to update and display. In contrast, the equivalent code in Ada simply uses the parameter modes to specify the data flow directions. The mechanisms used to pass the values do not appear in the source code.

[Ada]

Listing 13: update_record.adb

```ada
with Ada.Text_IO; use Ada.Text_IO;

procedure Update_Record is

   type Data is record
      Prev : Integer;
      Curr : Integer;
   end record;

   procedure Update (D : in out Data;
                     V :        Integer) is
   begin
      D.Prev := D.Curr;
      D.Curr := V;
   end Update;

   procedure Display (D : Data) is
   begin
      Put_Line ("Prev: " & Integer'Image (D.Prev));
      Put_Line ("Curr: " & Integer'Image (D.Curr));
   end Display;

   D1 : Data := (0, 1);

begin
   Update (D1, 3);
   Display (D1);
end Update_Record;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Performance.Passing_Rec_By_Reference_Ada
MD5: 6c64fb73e2cf490c0a129f0cd73c190b
```

Runtime output

```
Prev:  1
Curr:  3
```

In the calls to Update and Display, D1 is always be passed by reference. Because no extra copy takes place, we get a performance that is equivalent to the C version. If we had used arrays in the example above, D1 would have been passed by reference as well:

[Ada]

Listing 14: update_array.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Update_Array is

   type Data_State is (Prev, Curr);
   type Data is array (Data_State) of Integer;

   procedure Update (D : in out Data;
                     V :        Integer) is
   begin
      D (Prev) := D (Curr);
      D (Curr) := V;
   end Update;

   procedure Display (D : Data) is
   begin
      Put_Line ("Prev: " & Integer'Image (D (Prev)));
      Put_Line ("Curr: " & Integer'Image (D (Curr)));
   end Display;

   D1 : Data := (0, 1);

begin
   Update (D1, 3);
   Display (D1);
end Update_Array;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Performance.Passing_Array_By_Reference_Ada
MD5: 5fb27811f34543fc4150eb4fddbe7034
```

Runtime output

```
Prev:  1
Curr:  3
```

Again, no extra copy is performed in the calls to `Update` and `Display`, which gives us optimal performance when dealing with arrays and avoids the need to use access types to optimize the code.

85.5.1 Function returns

Previously, we've discussed the cost of passing complex records as arguments to subprograms. We've seen that we don't have to use explicit access type parameters to get better performance in Ada. In this section, we'll briefly discuss the cost of function returns.

In general, we can use either procedures or functions to initialize a data structure. Let's look at this example in C:

[C]

Listing 15: main.c

```
#include <stdio.h>

struct Data {
    int prev, curr;
};
```

(continues on next page)

(continued from previous page)

```c

void init_data(struct Data *d)
{
    d->prev = 0;
    d->curr = 1;
}

struct Data get_init_data()
{
    struct Data d  = { 0, 1 };

    return d;
}

int main(int argc, const char * argv[])
{
    struct Data D1;

    D1 = get_init_data();

    init_data(&D1);

    return 0;
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Performance.Init_Rec_Proc_And_Func_C
MD5: 0586636d5e25c0d6bec2257af75ae998
```

This code example contains two subprograms that initialize the Data structure:

- `init_data()`, which receives the data structure as a reference (using a pointer) and initializes it, and
- `get_init_data()`, which returns the initialized structure.

In C, we generally avoid implementing functions such as `get_init_data()` because of the extra copy that is needed for the function return.

This is the corresponding implementation in Ada:

[Ada]

Listing 16: init_record.adb

```ada
procedure Init_Record is

   type Data is record
      Prev : Integer;
      Curr : Integer;
   end record;

   procedure Init (D : out Data) is
   begin
      D := (Prev => 0, Curr => 1);
   end Init;

   function Init return Data is
      D : constant Data := (Prev => 0, Curr => 1);
   begin
      return D;
   end Init;
```

(continues on next page)

(continued from previous page)

```
18
19    D1 : Data;
20
21    pragma Unreferenced (D1);
22 begin
23    D1 := Init;
24
25    Init (D1);
26 end Init_Record;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Performance.Init_Rec_Proc_And_Func_Ada
MD5: 0f930eea432a82d78840b72c0714b283
```

Build output

```
init_record.adb:25:10: warning: aspect Unreferenced specified for "D1" [enabled by␣
↪default]
```

In this example, we have two versions of `Init`: one using a procedural form, and the other one using a functional form. Note that, because of Ada's support for subprogram overloading, we can use the same name for both subprograms.

The issue is that assignment of a function result entails a copy, just as if we assigned one variable to another. For example, when assigning a function result to a constant, the function result is copied into the memory for the constant. That's what is happening in the above examples for the initialized variables.

Therefore, in terms of performance, the same recommendations apply: for large types we should avoid writing functions like the `Init` function above. Instead, we should use the procedural form of `Init`. The reason is that the compiler necessarily generates a copy for the `Init` function, while the `Init` procedure uses a reference for the output parameter, so that the actual record initialization is performed in place in the caller's argument.

An exception to this is when we use functions returning values of limited types, which by definition do not allow assignment. Here, to avoid allowing something that would otherwise look suspiciously like an assignment, the compiler generates the function body so that it builds the result directly into the object being assigned. No copy takes place.

We could, for example, rewrite the example above using limited types:

[Ada]

Listing 17: init_limited_record.adb

```
1  procedure Init_Limited_Record is
2
3     type Data is limited record
4        Prev : Integer;
5        Curr : Integer;
6     end record;
7
8     function Init return Data is
9     begin
10       return D : Data do
11          D.Prev := 0;
12          D.Curr := 1;
13       end return;
14    end Init;
15
16    D1 : Data := Init;
```

(continues on next page)

(continued from previous page)

```
17
18    pragma Unreferenced (D1);
19 begin
20    null;
21 end Init_Limited_Record;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.Performance.Init_Lim_Rec_Proc_And_Func_Ada
MD5: 57fc1b3f69b42dd4633b0c67e252c2d2
```

In this example, `D1 : Data := Init;` has the same cost as the call to the procedural form — `Init (D1);` — that we've seen in the previous example. This is because the assignment is done in place.

Note that limited types require the use of the extended return statements (`return ... do ... end return`) in function implementations. Also note that, because the `Data` type is limited, we can only use the `Init` function in the declaration of `D1`; a statement in the code such as `D1 := Init;` is therefore forbidden.

CHAPTER

EIGHTYSIX

ARGUMENTATION AND BUSINESS PERSPECTIVES

The technical benefits of a migration from C to Ada are usually relatively straightforward to demonstrate. Hopefully, this course provides a good basis for it. However, when faced with an actual business decision to make, additional considerations need to be taken into account, such as return on investment, perennity of the solution, tool support, etc. This section will cover a number of usual questions and provide elements of answers.

86.1 What's the expected ROI of a C to Ada transition?

Switching from one technology to another is a cost, may that be in terms of training, transition of the existing environment or acquisition of new tools. This investment needs to be matched with an expected return on investment, or ROI, to be consistent. Of course, it's incredibly difficult to provide a firm answer to how much money can be saved by transitioning, as this is highly dependent on specific project objectives and constraints. We're going to provide qualitative and quantitative arguments here, from the perspective of a project that has to reach a relatively high level of integrity, that is to say a system where the occurrence of a software failure is a relatively costly event.

From a qualitative standpoint, there are various times in the software development life cycle where defects can be found:

1. on the developer's desk
2. during component testing
3. during integration testing
4. after deployment
5. during maintenance

Numbers from studies vary greatly on the relative costs of defects found at each of these phases, but there's a clear ordering between them. For example, a defect found while developing is orders of magnitude less expensive to fix than a defect found e.g. at integration time, which may involve costly debugging sessions and slow down the entire system acceptance. The whole purpose of Ada and SPARK is to push defect detection to the developer's desk as much as possible; at least for all of these defects that can be identified at that level. While the strict act of writing software may be taking more effort because of all of the additional safeguards, this should have a significant and positive impact down the line and help to control costs overall. The exact value this may translate into is highly business dependent.

From a quantitative standpoint, two studies have been done almost 25 years apart and provide similar insights:

- Rational Software in 1995 found that the cost of developing software in Ada was overall half as much as the cost of developing software in C.
- VDC ran a study in 2018, finding that the cost savings of developing with Ada over C ranged from 6% to 38% in savings.

From a qualitative standpoint, in particular with regards to Ada and C from a formal proof perspective, an interesting presentation was made in 2017 by two researchers. They tried to apply formal proof on the same piece of code, developed in Ada/SPARK on one end and C/Frama-C on the other. Their results indicate that the Ada/SPARK technology is indeed more conducive to formal proof methodologies.

Although all of these studies have their own biases, they provide a good idea of what to expect in terms of savings once the initial investment in switching to Ada is made. This is assuming everything else is equal, in particular that the level of integrity is the same. In many situations, the migration to Ada is justified by an increase in terms of integrity expectations, in which case it's expected that development costs will rise (it's more expensive to develop better software) and Ada is viewed as a means to mitigate this rise in development costs.

That being said, the point of this argument is not to say that it's not possible to write very safe and secure software with languages different than Ada. With the right expertise, the right processes and the right tools, it's done every day. The point is that Ada overall reduces the level of processes, expertise and tools necessary and will allow to reach the same target at a lower cost.

86.2 Who is using Ada today?

Ada was initially born as a DoD project, and thus got its initial customer base in aerospace and defence (A&D). At the time these lines are written and from the perspective of AdaCore, A&D is still the largest consumer of Ada today and covers about 70% of the market. This creates a consistent and long lasting set of established users as these project last often for decades, using the same codebase migrating from platform to platform.

More recently however, there has been an emerging interest for Ada in new communities of users such as automotive, medical device, industrial automation and overall cyber-security. This can probably be explained by a rise of safety, reliability and cyber-security requirements. The market is moving relatively rapidly today and we're anticipating an increase of the Ada footprint in these domains, while still remaining a technology of choice for the development of mission critical software.

86.3 What is the future of the Ada technology?

The first piece of the answer lies in the user base of the Ada language, as seen in the previous question. Projects using Ada in the aerospace and defence domain maintain source code over decades, providing healthy funding foundation for Ada-based technologies.

AdaCore being the author of this course, it's difficult for us to be fair in our description of other Ada compilation technologies. We will leave to the readers the responsibility of forging their own opinion. If they present a credible alternative to the GNAT compiler, then this whole section can be considered as void.

Assuming GNAT is the only option available, and acknowledging that this is an argument that we're hearing from a number of Ada adopters, let's discuss the "sole source" issue.

First of all, it's worth noting that industries are using a lot of software that is provided by only one source, so while non-ideal, these situations are also quite common.

In the case of the GNAT compiler however, while AdaCore is the main maintainer, this maintenance is done as part of an open-source community. This means that nothing prevents a third party to start selling a competing set of products based on the same compiler, provided that it too adopts the open-source approach. Our job is to be more cost-effective than the alternative, and indeed for the vast part this has prevented a competing offering to emerge. However, should AdaCore disappear or switch focus, Ada users would not be prevented from carrying on using its software (there is no lock) and a third party could take

over maintenance. This is not a theoretical case, this has been done in the past either by companies looking at supporting their own version of GNAT, vendors occupying a specific niche that was left uncovered , or hobbyists developing their own builds.

With that in mind, it's clear that the "sole source" provider issue is a circumstantial — nothing is preventing other vendors from emerging if the conditions are met.

86.4 Is the Ada toolset complete?

A language by itself is of little use for the development of safety-critical software. Instead, a complete toolset is needed to accompany the development process, in particular tools for edition, testing, static analysis, etc.

AdaCore provides a number of these tools either in through its core or add-on package. These include (as of 2019):

- An IDE (GNAT Studio)
- An Eclipse plug-in (GNATbench)
- A debugger (GDB)
- A testing tool (GNATtest)
- A structural code coverage tool (GNATcoverage)
- A metric computation tool (GNATmetric)
- A coding standard checker (GNATcheck)
- Static analysis tools (CodePeer, SPARK Pro)
- A Simulink code generator (QGen)
- An Ada parser to develop custom tools (libadalang)

Ada is, however, an internationally standardized language, and many companies are providing third party solutions to complete the toolset. Overall, the language can be and is used with tools on par with their equivalent C counterparts.

86.5 Where can I find Ada or SPARK developers?

A common question from teams on the verge of selecting Ada and SPARK is how to manage the developer team growth and turnover. While Ada and SPARK are taught by a growing number of universities worldwide, it may still be challenging to hire new staff with prior Ada experience.

Fortunately, Ada's base semantics are very close to those of C/C++, so that a good embedded software developer should be able to learn it relatively easily. This course is definitely a resource available to get started. Online training material is also available, together with on-site in person training.

In general, getting an engineer operational in Ada and SPARK shouldn't take more than a few weeks worth of time.

86.6 How to introduce Ada and SPARK in an existing code base?

The most common scenario when introducing Ada and SPARK to a project or a team is to do it within a pre-existing C codebase, which can already spread over hundreds of thousands if

not millions lines of code. Re-writing this software to Ada or SPARK is of course not practical and counterproductive.

Most teams select either a small piece of existing code which deserves particular attention, or new modules to develop, and concentrate on this. Developing this module or part of the application will also help in developing the coding patterns to be used for the particular project and company. This typically concentrates an effort of a few people on a few thousands lines of code. The resulting code can be linked to the rest of the C application. From there, the newly established practices and their benefit can slowly spread through the rest of the environment.

Establishing this initial core in Ada and SPARK is critical, and while learning the language isn't a particularly difficult task, applying it to its full capacity may require some expertise. One possibility to accelerate this initial process is to use AdaCore mentorship services.

CHAPTER

EIGHTYSEVEN

CONCLUSION

Although Ada's syntax might seem peculiar to C developers at first glance, it was designed to increase readability and maintainability, rather than making it faster to write in a condensed manner — as it is often the case in C.

Especially in the embedded domain, C developers are used to working at a very low level, which includes mathematical operations on pointers, complex bit shifts, and logical bitwise operations. C is well designed for such operations because it was designed to replace Assembly language for faster, more efficient programming.

Ada can be used to describe high level semantics and architectures. The beauty of the language, however, is that it can be used all the way down to the lowest levels of the development, including embedded Assembly code or bit-level data management. However, although Ada supports bitwise operations such as masks and shifts, they should be relatively rarely needed. When translating C code to Ada, it's good practice to consider alternatives. In a lot of cases, these operations are used to insert several pieces of data into a larger structure. In Ada, this can be done by describing the structure layout at the type level through representation clauses, and then accessing this structure as any other. For example, we can interpret an arbitrary data type as a bit-field and perform low-level operations on it.

Because Ada is a strongly typed language, it doesn't define any implicit type conversions like C. If we try to compile Ada code that contains type mismatches, we'll get a compilation error. Because the compiler prevents mixing variables of different types without explicit type conversion, we can't accidentally end up in a situation where we assume something will happen implicitly when, in fact, our assumption is incorrect. In this sense, Ada's type system encourages programmers to think about data at a high level of abstraction. Ada supports overlays and unchecked conversions as a way of converting between unrelated data type, which are typically used for interfacing with low-level elements such as registers.

In Ada, arrays aren't interchangeable with operations on pointers like in C. Also, array types are considered first-class citizens and have dedicated semantics such as the availability of the array's boundaries at run-time. Therefore, unhandled array overflows are impossible unless checks are suppressed. Any discrete type can serve as an array index, and we can specify both the starting and ending bounds. In addition, Ada offers high-level operations for copying, slicing, and assigning values to arrays.

Although Ada supports pointers, most situations that would require a pointer in C do not in Ada. In the vast majority of the cases, indirect memory management can be hidden from the developer and thus prevent many potential errors. In C, pointers are typically used to pass references to subprograms, for example. In contrast, Ada parameter modes indicate the flow of information to the reader, leaving the means of passing that information to the compiler.

When translating pointers from C code to Ada, we need to assess whether they are needed in the first place. Ada pointers (access types) should only be used with complex structures that cannot be allocated at run-time. There are many situations that would require a pointer in C, but do not in Ada. For example, arrays — even when dynamically allocated —, results of functions, passing of large structures as parameters, access to registers, etc.

Because of the absence of namespaces, global names in C tend to be very long. Also, because of the absence of overloading, they can even encode type names in their name. In Ada, a package is a namespace. Also, we can use the private part of a package to declare private types and private subprograms. In fact, private types are useful for preventing the users of those types from depending on the implementation details. Another use-case is the prevention of package users from accessing the package state/data arbitrarily.

Ada has a dedicated set of features for interfacing with other languages, so we can easily interface with our existing C code before translating it to Ada. Also, GNAT includes automatic binding generators. Therefore, instead of re-writing the entire C code upfront, which isn't practical or cost-effective, we can selectively translate modules from C to Ada.

When it comes to implementing concurrency and real time, Ada offers several options. Ada provides high level constructs such as tasks and protected objects to express concurrency and synchronization, which can be used when running on top of an operating system such as Linux. On more constrained systems, such as bare metal or some real-time operating systems, a subset of the Ada tasking capabilities — known as the Ravenscar and Jorvik profiles — is available. Though restricted, this subset also has nice properties, in particular the absence of deadlock,the absence of priority inversion, schedulability and very small footprint. On bare metal systems, this also essentially means that Ada comes with its own real-time kernel. The advantage of using the full Ada tasking model or the restricted profiles is to enhance portability.

Ada includes many features typically used for embedded programming:

- Built-in support for handling interrupts, so we can process interrupts by attaching a handler — as a protected procedure — to it.
- Built-in support for handling both volatile and atomic data.
- Support for register overlays, which we can use to create a structure that facilitates manipulating bits from registers.
- Support for creating data streams for serialization of arbitrary information and transmission over a communication channel, such as a serial port.
- Built-in support for fixed-point arithmetic, which is an option when our target device doesn't have a floating-point unit or the result of calculations needs to be bit-exact.

Also, Ada compilers such as GNAT have built-in support for directly mixing Ada and Assembly code.

Ada also supports contracts, which can be associated with types and variables to refine values and define valid and invalid values. The most common kind of contract is a *range constraint* — using the **range** reserved word. Ada also supports contract-based programming in the form of preconditions and postconditions. One typical benefit of contract-based programming is the removal of defensive code in subprogram implementations.

It is common to see embedded software being used in a variety of configurations that require small changes to the code for each instance. In C, variability is usually achieved through macros and function pointers, the former being tied to static variability and the latter to dynamic variability. Ada offers many alternatives for both techniques, which aim at structuring possible variations of the software. Examples of static variability in Ada are: genericity, simple derivation, configuration pragma files, and configuration packages. Examples of dynamic variability in Ada are: records with discriminants, variant records — which may include the use of unions —, object orientation, pointers to subprograms, and design by components using dynamic libraries.

There shouldn't be significant performance differences between code written in Ada and code written in C — provided that they are semantically equivalent. One reason is that the two languages are fairly similar in the way they implement imperative semantics, in particular with regards to memory management or control flow. Therefore, they should be equivalent on average. However, when a piece of code in Ada is significantly slower than its counterpart in C, this usually comes from the fact that, while the two pieces of code appear

to be semantically equivalent, they happen to be actually quite different. Fortunately, there are strategies that we can use to improve the performance and make it equivalent to the C version. These are some examples:

- Clever use of compilation switches, which might optimize the performance of an application significantly.
- Suppression of checks at specific parts of the implementation.
  - Although runtime checks are very useful and should be used as much as possible, they can also increase the overhead of implementations at certain hot-spots.
- Restriction of assertions to development code.
  - For example, we may use assertions in the debug version of the code and turn them off in the release version.
  - Also, we may use formal proof to decide which assertions we turn off in the release version. By formally proving that assertions will never fail at run-time, we can safely deactivate them.

Formal proof — a form of static analysis — can give strong guarantees about checks, for all possible conditions and all possible inputs. It verifies conditions prior to execution, even prior to compilation, so we can remove bugs earlier in the development phase. This is far less expensive than doing so later because the cost to fix bugs increases exponentially over the phases of the project life cycle, especially after deployment. Preventing bug introduction into the deployed system is the least expensive approach of all.

Formal analysis for proof can be achieved through the SPARK subset of the Ada language combined with the **`gnatprove`** verification tool. SPARK is a subset encompassing most of the Ada language, except for features that preclude proof.

In Ada, several common programming errors that are not already detected at compile-time are detected instead at run-time, triggering *exceptions* that interrupt the normal flow of execution. However, we may be able to prove that the language-defined checks won't raise exceptions at run-time. This is known as proving *Absence of Run-Time Errors*. Successful proof of these checks is highly significant in itself. One of the major resulting benefits is that we can deploy the final executable with checks disabled.

In many situations, the migration of C code to Ada is justified by an increase in terms of integrity expectations, in which case it's expected that development costs will raise. However, Ada is a more expressive, powerful language, designed to reduce errors earlier in the life-cycle, thus reducing costs. Therefore, Ada makes it possible to write very safe and secure software at a lower cost than languages such as C.

CHAPTER

EIGHTYEIGHT

APPENDIX A: HANDS-ON OBJECT-ORIENTED PROGRAMMING

The goal of this appendix is to present a hands-on view on how to translate a system from C to Ada and improve it with object-oriented programming.

88.1 System Overview

Let's start with an overview of a simple system that we'll implement and use below. The main system is called AB and it combines two systems A and B. System AB is not supposed to do anything useful. However, it can serve as a good model for the hands-on we're about to start.

This is a list of requirements for the individual systems A and B, and the combined system AB:

- System A:
  - The system can be activated and deactivated.
    - During activation, the system's values are reset.
  - Its current value (in floating-point) can be retrieved.
    - This value is the average of the two internal floating-point values.
  - Its current state (activated or deactivated) can be retrieved.
- System B:
  - The system can be activated and deactivated.
    - During activation, the system's value is reset.
  - Its current value (in floating-point) can be retrieved.
  - Its current state (activated or deactivated) can be retrieved.
- System AB
  - The system contains an instance of system A and an instance of system B.
  - The system can be activated and deactivated.
    - System AB activates both systems A and B during its own activation.
    - System AB deactivates both systems A and B during its own deactivation.
  - Its current value (in floating-point) can be retrieved.
    - This value is the average of the current values of systems A and B.
  - Its current state (activated or deactivated) can be retrieved.
    - AB is only considered activated when both systems A and B are activated.

- The system's health can be checked.
  - This check consists in calculating the absolute difference D between the current values of systems A and B and checking whether D is below a threshold of 0.1.

The source-code in the following section contains an implementation of these requirements.

88.2 Non Object-Oriented Approach

In this section, we look into implementations (in both C and Ada) of system AB that don't make use of object-oriented programming.

88.2.1 Starting point in C

Let's start with an implementation in C for the system described above:

[C]

Listing 1: system_a.h

```c
typedef struct {
    float val[2];
    int   active;
} A;

void A_activate (A *a);

int A_is_active (A *a);

float A_value (A *a);

void A_deactivate (A *a);
```

Listing 2: system_a.c

```c
#include "system_a.h"

void A_activate (A *a)
{
    int i;

    for (i = 0; i < 2; i++)
    {
        a->val[i] = 0.0;
    }
    a->active = 1;
}

int A_is_active (A *a)
{
    return a->active == 1;
}

float A_value (A *a)
{
    return (a->val[0] + a->val[1]) / 2.0;
}

void A_deactivate (A *a)
{
```

(continues on next page)

(continued from previous page)

```
    a->active = 0;
}
```

Listing 3: system_b.h

```
typedef struct {
    float val;
    int   active;
} B;

void B_activate (B *b);

int B_is_active (B *b);

float B_value (B *b);

void B_deactivate (B *b);
```

Listing 4: system_b.c

```
#include "system_b.h"

void B_activate (B *b)
{
    b->val    = 0.0;
    b->active = 1;
}

int B_is_active (B *b)
{
    return b->active == 1;
}

float B_value (B *b)
{
    return b->val;
}

void B_deactivate (B *b)
{
    b->active = 0;
}
```

Listing 5: system_ab.h

```
#include "system_a.h"
#include "system_b.h"

typedef struct {
    A a;
    B b;
} AB;

void AB_activate (AB *ab);

int AB_is_active (AB *ab);

float AB_value (AB *ab);

int AB_check (AB *ab);
```

(continues on next page)

(continued from previous page)

```

void AB_deactivate (AB *ab);
```

Listing 6: system_ab.c

```
#include <math.h>
#include "system_ab.h"

void AB_activate (AB *ab)
{
    A_activate (&ab->a);
    B_activate (&ab->b);
}

int AB_is_active (AB *ab)
{
    return A_is_active(&ab->a) && B_is_active(&ab->b);
}

float AB_value (AB *ab)
{
    return (A_value (&ab->a) + B_value (&ab->b)) / 2;
}

int AB_check (AB *ab)
{
    const float threshold = 0.1;

    return fabs (A_value (&ab->a) - B_value (&ab->b)) < threshold;
}

void AB_deactivate (AB *ab)
{
    A_deactivate (&ab->a);
    B_deactivate (&ab->b);
}
```

Listing 7: main.c

```
#include <stdio.h>
#include "system_ab.h"

void display_active (AB *ab)
{
    if (AB_is_active (ab))
        printf ("System AB is active.\n");
    else
        printf ("System AB is not active.\n");
}

void display_check (AB *ab)
{
    if (AB_check (ab))
        printf ("System AB check: PASSED.\n");
    else
        printf ("System AB check: FAILED.\n");
}

int main()
{
```

(continues on next page)

(continued from previous page)

```
    AB s;

    printf ("Activating system AB...\n");
    AB_activate (&s);

    display_active (&s);
    display_check (&s);

    printf ("Deactivating system AB...\n");
    AB_deactivate (&s);

    display_active (&s);
}
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.HandsOnOOP.System_AB_C
MD5: 649bcfe39504c853a0c3f43e1e048f34
```

Runtime output

```
Activating system AB...
System AB is active.
System AB check: PASSED.
Deactivating system AB...
System AB is not active.
```

Here, each system is implemented in a separate set of header and source-code files. For example, the API of system AB is in `system_ab.h` and its implementation in `system_ab.c`.

In the main application, we instantiate system AB and activate it. Then, we proceed to display the activation state and the result of the system's health check. Finally, we deactivate the system and display the activation state again.

88.2.2 Initial translation to Ada

The direct implementation in Ada is:

[Ada]

Listing 8: system_a.ads

```ada
package System_A is

   type Val_Array is array (Positive range <>) of Float;

   type A is record
      Val    : Val_Array (1 .. 2);
      Active : Boolean;
   end record;

   procedure A_Activate (E : in out A);

   function A_Is_Active (E : A) return Boolean;

   function A_Value (E : A) return Float;

   procedure A_Deactivate (E : in out A);

end System_A;
```

Listing 9: system_a.adb

```
package body System_A is

   procedure A_Activate (E : in out A) is
   begin
      E.Val    := (others => 0.0);
      E.Active := True;
   end A_Activate;

   function A_Is_Active (E : A) return Boolean is
   begin
      return E.Active;
   end A_Is_Active;

   function A_Value (E : A) return Float is
   begin
      return (E.Val (1) + E.Val (2)) / 2.0;
   end A_Value;

   procedure A_Deactivate (E : in out A) is
   begin
      E.Active := False;
   end A_Deactivate;

end System_A;
```

Listing 10: system_b.ads

```
package System_B is

   type B is record
      Val    : Float;
      Active : Boolean;
   end record;

   procedure B_Activate (E : in out B);

   function B_Is_Active (E : B) return Boolean;

   function B_Value (E : B) return Float;

   procedure B_Deactivate (E : in out B);

end System_B;
```

Listing 11: system_b.adb

```
package body System_B is

   procedure B_Activate (E : in out B) is
   begin
      E.Val    := 0.0;
      E.Active := True;
   end B_Activate;

   function B_Is_Active (E : B) return Boolean is
   begin
      return E.Active;
   end B_Is_Active;

```

(continues on next page)

(continued from previous page)

```
   function B_Value (E : B) return Float is
   begin
      return E.Val;
   end B_Value;

   procedure B_Deactivate (E : in out B) is
   begin
      E.Active := False;
   end B_Deactivate;

end System_B;
```

Listing 12: system_ab.ads

```
with System_A; use System_A;
with System_B; use System_B;

package System_AB is

   type AB is record
      SA : A;
      SB : B;
   end record;

   procedure AB_Activate (E : in out AB);

   function AB_Is_Active (E : AB) return Boolean;

   function AB_Value (E : AB) return Float;

   function AB_Check (E : AB) return Boolean;

   procedure AB_Deactivate (E : in out AB);

end System_AB;
```

Listing 13: system_ab.adb

```
package body System_AB is

   procedure AB_Activate (E : in out AB) is
   begin
      A_Activate (E.SA);
      B_Activate (E.SB);
   end AB_Activate;

   function AB_Is_Active (E : AB) return Boolean is
   begin
      return A_Is_Active (E.SA) and B_Is_Active (E.SB);
   end AB_Is_Active;

   function AB_Value (E : AB) return Float is
   begin
      return (A_Value (E.SA) + B_Value (E.SB)) / 2.0;
   end AB_Value;

   function AB_Check (E : AB) return Boolean is
      Threshold : constant := 0.1;
   begin
      return abs (A_Value (E.SA) - B_Value (E.SB)) < Threshold;
```

(continues on next page)

(continued from previous page)

```
   end AB_Check;

   procedure AB_Deactivate (E : in out AB) is
   begin
      A_Deactivate (E.SA);
      B_Deactivate (E.SB);
   end AB_Deactivate;

end System_AB;
```

Listing 14: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with System_AB;   use System_AB;

procedure Main is

   procedure Display_Active (E : AB) is
   begin
      if AB_Is_Active (E) then
         Put_Line ("System AB is active");
      else
         Put_Line ("System AB is not active");
      end if;
   end Display_Active;

   procedure Display_Check (E : AB) is
   begin
      if AB_Check (E) then
         Put_Line ("System AB check: PASSED");
      else
         Put_Line ("System AB check: FAILED");
      end if;
   end Display_Check;

   S : AB;
begin
   Put_Line ("Activating system AB...");
   AB_Activate (S);

   Display_Active (S);
   Display_Check (S);

   Put_Line ("Deactivating system AB...");
   AB_Deactivate (S);

   Display_Active (S);
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.HandsOnOOP.System_AB_Ada
MD5: f2e3df0b3874e5edc5ea90c01961cf64
```

Runtime output

```
Activating system AB...
System AB is active
System AB check: PASSED
Deactivating system AB...
```

(continues on next page)

(continued from previous page)

```
System AB is not active
```

As you can see, this is a direct translation that doesn't change much of the structure of the original C code. Here, the goal was to simply translate the system from one language to another and make sure that the behavior remains the same.

88.2.3 Improved Ada implementation

By analyzing this direct implementation, we may notice the following points:

- Packages `System_A`, `System_B` and `System_AB` are used to describe aspects of the same system. Instead of having three distinct packages, we could group them as child packages of a common parent package — let's call it `Simple`, since this system is supposed to be simple. This approach has the advantage of allowing us to later use the parent package to implement functionality that is common for all parts of the system.
- Since we have subprograms that operate on types `A`, `B` and `AB`, we should avoid exposing the record components by moving the type declarations to the private part of the corresponding packages.
- Since Ada supports subprogram overloading — as discussed in *this section from chapter 2* (page 1672) —, we don't need to have different names for subprograms with similar functionality. For example, instead of having `A_Is_Active` and `B_Is_Active`, we can simply name these functions `Is_Active` for both types `A` and `B`.
- Some of the functions — such as `A_Is_Active` and `A_Value` — are very simple, so we could simplify them with expression functions.

This is an update to the implementation that addresses all the points above:

[Ada]

Listing 15: simple.ads

```
package Simple
  with Pure
is
end Simple;
```

Listing 16: simple-system_a.ads

```
package Simple.System_A is

   type A is private;

   procedure Activate (E : in out A);

   function Is_Active (E : A) return Boolean;

   function Value (E : A) return Float;

   procedure Finalize (E : in out A);

private

   type Val_Array is array (Positive range <>) of Float;

   type A is record
      Val    : Val_Array (1 .. 2);
      Active : Boolean;
```

(continues on next page)

(continued from previous page)

```
   end record;

end Simple.System_A;
```

Listing 17: simple-system_a.adb

```
package body Simple.System_A is

   procedure Activate (E : in out A) is
   begin
      E.Val    := (others => 0.0);
      E.Active := True;
   end Activate;

   function Is_Active (E : A) return Boolean is
      (E.Active);

   function Value (E : A) return Float is
   begin
      return (E.Val (1) + E.Val (2)) / 2.0;
   end Value;

   procedure Finalize (E : in out A) is
   begin
      E.Active := False;
   end Finalize;

end Simple.System_A;
```

Listing 18: simple-system_b.ads

```
package Simple.System_B is

   type B is private;

   procedure Activate (E : in out B);

   function Is_Active (E : B) return Boolean;

   function Value (E : B) return Float;

   procedure Finalize (E : in out B);

private

   type B is record
      Val    : Float;
      Active : Boolean;
   end record;

end Simple.System_B;
```

Listing 19: simple-system_b.adb

```
package body Simple.System_B is

   procedure Activate (E : in out B) is
   begin
      E.Val    := 0.0;
      E.Active := True;
```

(continues on next page)

(continued from previous page)

```
   end Activate;

   function Is_Active (E : B) return Boolean is
   begin
      return E.Active;
   end Is_Active;

   function Value (E : B) return Float is
     (E.Val);

   procedure Finalize (E : in out B) is
   begin
      E.Active := False;
   end Finalize;

end Simple.System_B;
```

Listing 20: simple-system_ab.ads

```
with Simple.System_A; use Simple.System_A;
with Simple.System_B; use Simple.System_B;

package Simple.System_AB is

   type AB is private;

   procedure Activate (E : in out AB);

   function Is_Active (E : AB) return Boolean;

   function Value (E : AB) return Float;

   function Check (E : AB) return Boolean;

   procedure Finalize (E : in out AB);

private

   type AB is record
      SA : A;
      SB : B;
   end record;

end Simple.System_AB;
```

Listing 21: simple-system_ab.adb

```
package body Simple.System_AB is

   procedure Activate (E : in out AB) is
   begin
      Activate (E.SA);
      Activate (E.SB);
   end Activate;

   function Is_Active (E : AB) return Boolean is
      (Is_Active (E.SA) and Is_Active (E.SB));

   function Value (E : AB) return Float is
      ((Value (E.SA) + Value (E.SB)) / 2.0);
```

(continues on next page)

(continued from previous page)

```

   function Check (E : AB) return Boolean is
      Threshold : constant := 0.1;
   begin
      return abs (Value (E.SA) - Value (E.SB)) < Threshold;
   end Check;

   procedure Finalize (E : in out AB) is
   begin
      Finalize (E.SA);
      Finalize (E.SB);
   end Finalize;

end Simple.System_AB;
```

Listing 22: main.adb

```
with Ada.Text_IO;      use Ada.Text_IO;

with Simple.System_AB; use Simple.System_AB;

procedure Main is

   procedure Display_Active (E : AB) is
   begin
      if Is_Active (E) then
         Put_Line ("System AB is active");
      else
         Put_Line ("System AB is not active");
      end if;
   end Display_Active;

   procedure Display_Check (E : AB) is
   begin
      if Check (E) then
         Put_Line ("System AB check: PASSED");
      else
         Put_Line ("System AB check: FAILED");
      end if;
   end Display_Check;

   S : AB;
begin
   Put_Line ("Activating system AB...");
   Activate (S);

   Display_Active (S);
   Display_Check (S);

   Put_Line ("Deactivating system AB...");
   Finalize (S);

   Display_Active (S);
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.HandsOnOOP.System_AB_Ada_Enhanced
MD5: 5019a7088ab4160f5e3b33c73db2b03b
```

Runtime output

```
Activating system AB...
System AB is active
System AB check: PASSED
Deactivating system AB...
System AB is not active
```

88.3 First Object-Oriented Approach

Until now, we haven't used any of the object-oriented programming features of the Ada language. So we can start by analyzing the API of systems A and B and deciding how to best abstract some of its elements using object-oriented programming.

88.3.1 Interfaces

The first thing we may notice is that we actually have two distinct sets of APIs there:

- one API for activating and deactivating the system.
- one API for retrieving the value of the system.

We can use this distinction to declare two interface types:

- `Activation_IF` for the `Activate` and `Deactivate` procedures and the `Is_Active` function;
- `Value_Retrieval_IF` for the `Value` function.

This is how the declaration could look like:

```
type Activation_IF is interface;

procedure Activate (E : in out Activation_IF) is abstract;
function Is_Active (E : Activation_IF) return Boolean is abstract;
procedure Deactivate (E : in out Activation_IF) is abstract;

type Value_Retrieval_IF is interface;

function Value (E : Value_Retrieval_IF) return Float is abstract;
```

Note that, because we are declaring interface types, all operations on those types must be abstract or, in the case of procedures, they can also be declared `null`. For example, we could change the declaration of the procedures above to this:

```
procedure Activate (E : in out Activation_IF) is null;
procedure Deactivate (E : in out Activation_IF) is null;
```

When an operation is declared abstract, we must override it for the type that derives from the interface. When a procedure is declared `null`, it acts as a do-nothing default. In this case, overriding the operation is optional for the type that derives from this interface.

88.3.2 Base type

Since the original system needs both interfaces we've just described, we have to declare another type that combines those interfaces. We can do this by declaring the interface type Sys_Base, which serves as the base type for systems A and B. This is the declaration:

```
type Sys_Base is interface and Activation_IF and Value_Retrieval_IF;
```

Since the system activation functionality is common for both systems A and B, we could implement it as part of Sys_Base. That would require changing the declaration from a simple interface to an abstract record:

```
type Sys_Base is abstract new Activation_IF and Value_Retrieval_IF
  with null record;
```

Now, we can add the Boolean component to the record (as a private component) and override the subprograms of the Activation_IF interface. This is the adapted declaration:

```
   type Sys_Base is abstract new Activation_IF and Value_Retrieval_IF with private;

   overriding procedure Activate (E : in out Sys_Base);
   overriding function Is_Active (E : Sys_Base) return Boolean;
   overriding procedure Deactivate (E : in out Sys_Base);

private

   type Sys_Base is abstract new Activation_IF and Value_Retrieval_IF with record
      Active : Boolean;
   end record;
```

88.3.3 Derived types

In the declaration of the Sys_Base type we've just seen, we're not overriding the Value function — from the Value_Retrieval_IF interface — for the Sys_Base type, so it remains an abstract function for Sys_Base. Therefore, the Sys_Base type itself remains abstract and needs be explicitly declared as such.

We use this strategy to ensure that all types derived from Sys_Base need to implement their own version of the Value function. For example:

```
type A is new Sys_Base with private;

overriding function Value (E : A) return Float;
```

Here, the A type is derived from the Sys_Base and it includes its own version of the Value function by overriding it. Therefore, A is not an abstract type anymore and can be used to declare objects:

```
procedure Main is
   Obj : A;
   V   : Float;
begin
   Obj.Activate;
   V := Obj.Value;
end Main;
```

Important

Note that the use of the **overriding** keyword in the subprogram declaration is not strictly necessary. In fact, we could leave this keyword out, and the code would still compile. However, if provided, the compiler will check whether the information is correct.

Using the **overriding** keyword can help to avoid bad surprises — when you *may think* that you're overriding a subprogram, but you're actually not. Similarly, you can also write **not overriding** to be explicit about subprograms that are new primitives of a derived type. For example:

```
not overriding function Check (E : AB) return Boolean;
```

We also need to declare the values that are used internally in systems A and B. For system A, this is the declaration:

```
   type A is new Sys_Base with private;

   overriding function Value (E : A) return Float;

private

   type Val_Array is array (Positive range <>) of Float;

   type A is new Sys_Base with record
      Val : Val_Array (1 .. 2);
   end record;
```

88.3.4 Subprograms from parent

In the previous implementation, we've seen that the `A_Activate` and `B_Activate` procedures perform the following steps:

- initialize internal values;
- indicate that the system is active (by setting the `Active` flag to **`True`**).

In the implementation of the `Activate` procedure for the `Sys_Base` type, however, we're only dealing with the second step. Therefore, we need to override the `Activate` procedure and make sure that we initialize internal values as well. First, we need to declare this procedure for type A:

```
type A is new Sys_Base with private;

overriding procedure Activate (E : in out A);
```

In the implementation of `Activate`, we should call the `Activate` procedure from the parent (`Sys_Base`) to ensure that whatever was performed for the parent will be performed in the derived type as well. For example:

```
overriding procedure Activate (E : in out A) is
begin
   E.Val := (others => 0.0);
   Sys_Base (E).Activate;     --  Calling Activate for Sys_Base type:
                              --  this call initializes the Active flag.
end;
```

Here, by writing `Sys_Base (E)`, we're performing a view conversion. Basically, we're telling the compiler to view E not as an object of type A, but of type `Sys_Base`. When we do this, any operation performed on this object will be done as if it was an object of `Sys_Base` type, which includes calling the `Activate` procedure of the `Sys_Base` type.

Important

If we write `T (Obj).Proc`, we're telling the compiler to call the `Proc` procedure of type T and apply it on `Obj`.

If we write `T'Class (Obj).Proc`, however, we're telling the compiler to dispatch the call. For example, if `Obj` is of derived type T2 and there's an overridden `Proc` procedure for type T2, then this procedure will be called instead of the `Proc` procedure for type T.

88.3.5 Type AB

While the implementation of systems A and B is almost straightforward, it gets more interesting in the case of system AB. Here, we have a similar API, but we don't need the activation mechanism implemented in the abstract type Sys_Base. Therefore, deriving from Sys_Base is not the best option. Instead, when declaring the AB type, we can simply use the same interfaces as we did for Sys_Base, but keep it independent from Sys_Base. For example:

```
   type AB is new Activation_IF and Value_Retrieval_IF with private;

private

   type AB is new Activation_IF and Value_Retrieval_IF with record
      SA : A;
      SB : B;
   end record;
```

Naturally, we still need to override all the subprograms that are part of the `Activation_IF` and `Value_Retrieval_IF` interfaces. Also, we need to implement the additional `Check` function that was originally only available on system AB. Therefore, we declare these subprograms:

```
overriding procedure Activate (E : in out AB);
overriding function Is_Active (E : AB) return Boolean;
overriding procedure Deactivate (E : in out AB);

overriding function Value (E : AB) return Float;

not overriding function Check (E : AB) return Boolean;
```

88.3.6 Updated source-code

Finally, this is the complete source-code example:

[Ada]

Listing 23: simple.ads

```
1  package Simple is
2
3     type Activation_IF is interface;
4
5     procedure Activate (E : in out Activation_IF) is abstract;
6     function Is_Active (E : Activation_IF) return Boolean is abstract;
7     procedure Deactivate (E : in out Activation_IF) is abstract;
8
9     type Value_Retrieval_IF is interface;
10
11    function Value (E : Value_Retrieval_IF) return Float is abstract;
12
13    type Sys_Base is abstract new Activation_IF and Value_Retrieval_IF
14      with private;
15
16    overriding procedure Activate (E : in out Sys_Base);
17    overriding function Is_Active (E : Sys_Base) return Boolean;
18    overriding procedure Deactivate (E : in out Sys_Base);
19
20 private
21
22    type Sys_Base is abstract new Activation_IF and Value_Retrieval_IF
```

(continues on next page)

(continued from previous page)

```
      with record
        Active : Boolean;
   end record;

end Simple;
```

Listing 24: simple.adb

```
package body Simple is

   overriding procedure Activate (E : in out Sys_Base) is
   begin
      E.Active := True;
   end Activate;

   overriding function Is_Active (E : Sys_Base) return Boolean is
      (E.Active);

   overriding procedure Deactivate (E : in out Sys_Base) is
   begin
      E.Active := False;
   end Deactivate;

end Simple;
```

Listing 25: simple-system_a.ads

```
package Simple.System_A is

   type A is new Sys_Base with private;

   overriding procedure Activate (E : in out A);

   overriding function Value (E : A) return Float;

private

   type Val_Array is array (Positive range <>) of Float;

   type A is new Sys_Base with record
      Val : Val_Array (1 .. 2);
   end record;

end Simple.System_A;
```

Listing 26: simple-system_a.adb

```
package body Simple.System_A is

   procedure Activate (E : in out A) is
   begin
      E.Val := (others => 0.0);
      Sys_Base (E).Activate;
   end Activate;

   function Value (E : A) return Float is
      pragma Assert (E.Val'Length = 2);
   begin
      return (E.Val (1) + E.Val (2)) / 2.0;
   end Value;
```

(continues on next page)

(continued from previous page)

```
14
15 end Simple.System_A;
```

Listing 27: simple-system_b.ads

```
1  package Simple.System_B is
2
3     type B is new Sys_Base with private;
4
5     overriding procedure Activate (E : in out B);
6
7     overriding function Value (E : B) return Float;
8
9  private
10
11    type B is new Sys_Base with record
12       Val : Float;
13    end record;
14
15 end Simple.System_B;
```

Listing 28: simple-system_b.adb

```
1  package body Simple.System_B is
2
3     procedure Activate (E : in out B) is
4     begin
5        E.Val := 0.0;
6        Sys_Base (E).Activate;
7     end Activate;
8
9     function Value (E : B) return Float is
10      (E.Val);
11
12 end Simple.System_B;
```

Listing 29: simple-system_ab.ads

```
1  with Simple.System_A; use Simple.System_A;
2  with Simple.System_B; use Simple.System_B;
3
4  package Simple.System_AB is
5
6     type AB is new Activation_IF and Value_Retrieval_IF with private;
7
8     overriding procedure Activate (E : in out AB);
9     overriding function Is_Active (E : AB) return Boolean;
10    overriding procedure Deactivate (E : in out AB);
11
12    overriding function Value (E : AB) return Float;
13
14    not overriding function Check (E : AB) return Boolean;
15
16 private
17
18    type AB is new Activation_IF and Value_Retrieval_IF with record
19       SA : A;
20       SB : B;
21    end record;
22
```

(continues on next page)

(continued from previous page)

```
end Simple.System_AB;
```

Listing 30: simple-system_ab.adb

```
package body Simple.System_AB is

   procedure Activate (E : in out AB) is
   begin
      E.SA.Activate;
      E.SB.Activate;
   end Activate;

   function Is_Active (E : AB) return Boolean is
     (E.SA.Is_Active and E.SB.Is_Active);

   procedure Deactivate (E : in out AB) is
   begin
      E.SA.Deactivate;
      E.SB.Deactivate;
   end Deactivate;

   function Value (E : AB) return Float is
     ((E.SA.Value + E.SB.Value) / 2.0);

   function Check (E : AB) return Boolean is
      Threshold : constant := 0.1;
   begin
      return abs (E.SA.Value - E.SB.Value) < Threshold;
   end Check;

end Simple.System_AB;
```

Listing 31: main.adb

```
with Ada.Text_IO;      use Ada.Text_IO;

with Simple.System_AB; use Simple.System_AB;

procedure Main is

   procedure Display_Active (E : AB) is
   begin
      if Is_Active (E) then
         Put_Line ("System AB is active");
      else
         Put_Line ("System AB is not active");
      end if;
   end Display_Active;

   procedure Display_Check (E : AB) is
   begin
      if Check (E) then
         Put_Line ("System AB check: PASSED");
      else
         Put_Line ("System AB check: FAILED");
      end if;
   end Display_Check;

   S : AB;
begin
```

(continues on next page)

(continued from previous page)

```
27    Put_Line ("Activating system AB...");
28    Activate (S);
29
30    Display_Active (S);
31    Display_Check (S);
32
33    Put_Line ("Deactivating system AB...");
34    Deactivate (S);
35
36    Display_Active (S);
37 end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.HandsOnOOP.System_AB_Ada_OOP_1
MD5: 02adee1f81b025007244bd6d13e8b5a3
```

Runtime output

```
Activating system AB...
System AB is active
System AB check: PASSED
Deactivating system AB...
System AB is not active
```

88.4 Further Improvements

When analyzing the complete source-code, we see that there are at least two areas that we could still improve.

88.4.1 Dispatching calls

The first issue concerns the implementation of the `Activate` procedure for types derived from `Sys_Base`. For those derived types, we're expecting that the `Activate` procedure of the parent must be called in the implementation of the overriding `Activate` procedure. For example:

```
package body Simple.System_A is

   procedure Activate (E : in out A) is
   begin
      E.Val := (others => 0.0);
      Activate (Sys_Base (E));
   end;
```

If a developer forgets to call that specific `Activate` procedure, however, the system won't work as expected. A better strategy could be the following:

- Declare a new `Activation_Reset` procedure for `Sys_Base` type.
- Make a dispatching call to the `Activation_Reset` procedure in the body of the `Activate` procedure (of the `Sys_Base` type).
- Let the derived types implement their own version of the `Activation_Reset` procedure.

This is a simplified view of the implementation using the points described above:

```
package Simple is

   type Sys_Base is abstract new Activation_IF and Value_Retrieval_IF with
     private;

   not overriding procedure Activation_Reset (E : in out Sys_Base) is abstract;

end Simple;

package body Simple is

   procedure Activate (E : in out Sys_Base) is
   begin
      --  NOTE: calling "E.Activation_Reset" does NOT dispatch!
      --        We need to use the 'Class attribute here --- not using this
      --        attribute is an error that will be caught by the compiler.
      Sys_Base'Class (E).Activation_Reset;

      E.Active := True;
   end Activate;

end Simple;

package Simple.System_A is

   type A is new Sys_Base with private;

private

   type Val_Array is array (Positive range <>) of Float;

   type A is new Sys_Base with record
      Val : Val_Array (1 .. 2);
   end record;

   overriding procedure Activation_Reset (E : in out A);

end Simple.System_A;

package body Simple.System_A is

   procedure Activation_Reset (E : in out A) is
   begin
      E.Val    := (others => 0.0);
   end Activation_Reset;

end Simple.System_A;
```

An important detail is that, in the implementation of `Activate`, we use `Sys_Base'Class` to ensure that the call to `Activation_Reset` will dispatch. If we had just written `E.Activation_Reset` instead, then we would be calling the `Activation_Reset` procedure of `Sys_Base` itself, which is not what we actually want here. The compiler will catch the error if you don't do the conversion to the class-wide type, because it would otherwise be a statically-bound call to an abstract procedure, which is illegal at compile-time.

88.4.2 Dynamic allocation

The next area that we could improve is in the declaration of the system AB. In the previous implementation, we were explicitly describing the two components of that system, namely a component of type A and a component of type B:

```
type AB is new Activation_IF and Value_Retrieval_IF with record
   SA : A;
   SB : B;
end record;
```

Of course, this declaration matches the system requirements that we presented in the beginning. However, we could use strategies that make it easier to incorporate requirement changes later on. For example, we could hide this information about systems A and B by simply declaring an array of components of type **access** Sys_Base'Class and allocate them dynamically in the body of the package. Naturally, this approach might not be suitable for certain platforms. However, the advantage would be that, if we wanted to replace the component of type B by a new component of type C, for example, we wouldn't need to change the interface. This is how the updated declaration could look like:

```
type Sys_Base_Class_Access is access Sys_Base'Class;
type Sys_Base_Array is array (Positive range <>) of Sys_Base_Class_Access;

type AB is limited new Activation_IF and Value_Retrieval_IF with record
   S_Array : Sys_Base_Array (1 .. 2);
end record;
```

Important

Note that we're now using the **limited** keyword in the declaration of type AB. That is necessary because we want to prevent objects of type AB being copied by assignment, which would lead to two objects having the same (dynamically allocated) subsystems A and B internally. This change requires that both Activation_IF and Value_Retrieval_IF are declared limited as well.

The body of Activate could then allocate those components:

```
procedure Activate (E : in out AB) is
begin
   E.S_Array := (new A, new B);
   for S of E.S_Array loop
      S.Activate;
   end loop;
end Activate;
```

And the body of Deactivate could deallocate them:

```
procedure Deactivate (E : in out AB) is
   procedure Free is
     new Ada.Unchecked_Deallocation (Sys_Base'Class, Sys_Base_Class_Access);
begin
   for S of E.S_Array loop
      S.Deactivate;
      Free (S);
   end loop;
end Deactivate;
```

88.4.3 Limited controlled types

Another approach that we could use to implement the dynamic allocation of systems A and B is to declare AB as a limited controlled type — based on the Limited_Controlled type of the Ada.Finalization package.

The Limited_Controlled type includes the following operations:

- `Initialize`, which is called when objects of a type derived from the `Limited_Controlled` type are being created — by declaring an object of the derived type, for example —, and
- `Finalize`, which is called when objects are being destroyed — for example, when an object gets out of scope at the end of a subprogram where it was created.

In this case, we must override those procedures, so we can use them for dynamic memory allocation. This is a simplified view of the update implementation:

```
package Simple.System_AB is

   type AB is limited new Ada.Finalization.Limited_Controlled and
     Activation_IF and Value_Retrieval_IF with private;

   overriding procedure Initialize (E : in out AB);
   overriding procedure Finalize   (E : in out AB);

end Simple.System_AB;

package body Simple.System_AB is

   overriding procedure Initialize (E : in out AB) is
   begin
      E.S_Array := (new A, new B);
   end Initialize;

   overriding procedure Finalize   (E : in out AB) is
      procedure Free is
        new Ada.Unchecked_Deallocation (Sys_Base'Class, Sys_Base_Class_Access);
   begin
      for S of E.S_Array loop
         Free (S);
      end loop;
   end Finalize;

end Simple.System_AB;
```

88.4.4 Updated source-code

Finally, this is the complete updated source-code example:

[Ada]

Listing 32: simple.ads

```
1  package Simple is
2
3     type Activation_IF is limited interface;
4
5     procedure Activate (E : in out Activation_IF) is abstract;
6     function Is_Active (E : Activation_IF) return Boolean is abstract;
7     procedure Deactivate (E : in out Activation_IF) is abstract;
8
9     type Value_Retrieval_IF is limited interface;
10
11    function Value (E : Value_Retrieval_IF) return Float is abstract;
12
13    type Sys_Base is abstract new Activation_IF and Value_Retrieval_IF with
14      private;
15
16    overriding procedure Activate (E : in out Sys_Base);
```

(continues on next page)

(continued from previous page)

```
   overriding function Is_Active (E : Sys_Base) return Boolean;
   overriding procedure Deactivate (E : in out Sys_Base);

   not overriding procedure Activation_Reset (E : in out Sys_Base) is abstract;

private

   type Sys_Base is abstract new Activation_IF and Value_Retrieval_IF with
      record
         Active : Boolean;
      end record;

end Simple;
```

Listing 33: simple.adb

```
package body Simple is

   procedure Activate (E : in out Sys_Base) is
   begin
      --  NOTE: calling "E.Activation_Reset" does NOT dispatch!
      --        We need to use the 'Class attribute:
      Sys_Base'Class (E).Activation_Reset;

      E.Active := True;
   end Activate;

   function Is_Active (E : Sys_Base) return Boolean is
      (E.Active);

   procedure Deactivate (E : in out Sys_Base) is
   begin
      E.Active := False;
   end Deactivate;

end Simple;
```

Listing 34: simple-system_a.ads

```
package Simple.System_A is

   type A is new Sys_Base with private;

   overriding function Value (E : A) return Float;

private

   type Val_Array is array (Positive range <>) of Float;

   type A is new Sys_Base with record
      Val : Val_Array (1 .. 2);
   end record;

   overriding procedure Activation_Reset (E : in out A);

end Simple.System_A;
```

Listing 35: simple-system_a.adb

```
package body Simple.System_A is

   procedure Activation_Reset (E : in out A) is
   begin
      E.Val := (others => 0.0);
   end Activation_Reset;

   function Value (E : A) return Float is
      pragma Assert (E.Val'Length = 2);
   begin
      return (E.Val (1) + E.Val (2)) / 2.0;
   end Value;

end Simple.System_A;
```

Listing 36: simple-system_b.ads

```
package Simple.System_B is

   type B is new Sys_Base with private;

   overriding function Value (E : B) return Float;

private

   type B is new Sys_Base with record
      Val : Float;
   end record;

   overriding procedure Activation_Reset (E : in out B);

end Simple.System_B;
```

Listing 37: simple-system_b.adb

```
package body Simple.System_B is

   procedure Activation_Reset (E : in out B) is
   begin
      E.Val := 0.0;
   end Activation_Reset;

   function Value (E : B) return Float is
     (E.Val);

end Simple.System_B;
```

Listing 38: simple-system_ab.ads

```
with Ada.Finalization;

package Simple.System_AB is

   type AB is limited new Ada.Finalization.Limited_Controlled and
     Activation_IF and Value_Retrieval_IF with private;

   overriding procedure Activate (E : in out AB);
   overriding function Is_Active (E : AB) return Boolean;
```

(continues on next page)

(continued from previous page)

```
   overriding procedure Deactivate (E : in out AB);

   overriding function Value (E : AB) return Float;

   not overriding function Check (E : AB) return Boolean;

private

   type Sys_Base_Class_Access is access Sys_Base'Class;
   type Sys_Base_Array is array (Positive range <>) of Sys_Base_Class_Access;

   type AB is limited new Ada.Finalization.Limited_Controlled and
     Activation_IF and Value_Retrieval_IF with record
      S_Array : Sys_Base_Array (1 .. 2);
   end record;

   overriding procedure Initialize (E : in out AB);
   overriding procedure Finalize   (E : in out AB);

end Simple.System_AB;
```

Listing 39: simple-system_ab.adb

```
with Ada.Unchecked_Deallocation;

with Simple.System_A; use Simple.System_A;
with Simple.System_B; use Simple.System_B;

package body Simple.System_AB is

   overriding procedure Initialize (E : in out AB) is
   begin
      E.S_Array := (new A, new B);
   end Initialize;

   overriding procedure Finalize   (E : in out AB) is
      procedure Free is
        new Ada.Unchecked_Deallocation (Sys_Base'Class, Sys_Base_Class_Access);
   begin
      for S of E.S_Array loop
         Free (S);
      end loop;
   end Finalize;

   procedure Activate (E : in out AB) is
   begin
      for S of E.S_Array loop
         S.Activate;
      end loop;
   end Activate;

   function Is_Active (E : AB) return Boolean is
     (for all S of E.S_Array => S.Is_Active);

   procedure Deactivate (E : in out AB) is
   begin
      for S of E.S_Array loop
         S.Deactivate;
      end loop;
   end Deactivate;

```

(continues on next page)

(continued from previous page)

```
   function Value (E : AB) return Float is
     ((E.S_Array (1).Value + E.S_Array (2).Value) / 2.0);

   function Check (E : AB) return Boolean is
      Threshold : constant := 0.1;
   begin
      return abs (E.S_Array (1).Value - E.S_Array (2).Value) < Threshold;
   end Check;

end Simple.System_AB;
```

Listing 40: main.adb

```
with Ada.Text_IO;      use Ada.Text_IO;

with Simple.System_AB; use Simple.System_AB;

procedure Main is

   procedure Display_Active (E : AB) is
   begin
      if Is_Active (E) then
         Put_Line ("System AB is active");
      else
         Put_Line ("System AB is not active");
      end if;
   end Display_Active;

   procedure Display_Check (E : AB) is
   begin
      if Check (E) then
         Put_Line ("System AB check: PASSED");
      else
         Put_Line ("System AB check: FAILED");
      end if;
   end Display_Check;

   S : AB;
begin
   Put_Line ("Activating system AB...");
   Activate (S);

   Display_Active (S);
   Display_Check (S);

   Put_Line ("Deactivating system AB...");
   Deactivate (S);

   Display_Active (S);
end Main;
```

Code block metadata

```
Project: Courses.Ada_For_Embedded_C_Dev.HandsOnOOP.System_AB_Ada_OOP_2
MD5: f8d0d4a07aaa045cb30bddc88db2215a
```

Runtime output

```
Activating system AB...
System AB is active
System AB check: PASSED
```

(continues on next page)

(continued from previous page)

```
Deactivating system AB...
System AB is not active
```

Naturally, this is by no means the best possible implementation of system AB. By applying other software design strategies that we haven't covered here, we could most probably think of different ways to use object-oriented programming to improve this implementation. Also, in comparison to the *original implementation* (page 1839), we recognize that the amount of source-code has grown. On the other hand, we now have a system that is factored nicely, and also more extensible.

Part IX

SPARK Ada for the MISRA C Developer

Copyright © 2018 – 2024, AdaCore

This book is published under a CC BY-SA license, which means that you can copy, redistribute, remix, transform, and build upon the content for any purpose, even commercially, as long as you give appropriate credit, provide a link to the license, and indicate if changes were made. If you remix, transform, or build upon the material, you must distribute your contributions under the same license as the original. You can find license details on this page[461]



This book presents the SPARK technology — the SPARK subset of Ada and its supporting static analysis tools — through an example-driven comparison with the rules in the widely known MISRA C subset of the C language.

This document was prepared by Yannick Moy, with contributions and review from Ben Brosgol.

Note

The code examples in this course use an 80-column limit, which is a typical limit for Ada code. Note that, on devices with a small screen size, some code examples might be difficult to read.

Note

Each code example from this book has an associated "code block metadata", which contains the name of the "project" and an MD5 hash value. This information is used to identify a single code example.

You can find all code examples in a zip file, which you can download from the learn website[462]. The directory structure in the zip file is based on the code block metadata. For example, if you're searching for a code example with this metadata:

- Project: Courses.Intro_To_Ada.Imperative_Language.Greet
- MD5: cba89a34b87c9dfa71533d982d05e6ab

you will find it in this directory:

```
projects/Courses/Intro_To_Ada/Imperative_Language/Greet/
cba89a34b87c9dfa71533d982d05e6ab/
```

In order to use this code example, just follow these steps:

1. Unpack the zip file;
2. Go to target directory;
3. Start GNAT Studio on this directory;
4. Build (or compile) the project;
5. Run the application (if a main procedure is available in the project).

[461] http://creativecommons.org/licenses/by-sa/4.0

[462] https://learn.adacore.com/zip/learning-ada_code.zip

CHAPTER

EIGHTYNINE

PREFACE

MISRA C appeared in 1998 as a coding standard for C; it focused on avoiding error-prone programming features of the C programming language rather than on enforcing a particular programming style. A study of coding standards for C by Les Hatton[463] found that, compared to ten typical coding standards for C, MISRA C was the only one to focus exclusively on error avoidance rather than style enforcement, and by a very large margin.

The popularity of the C programming language, as well as its many traps and pitfalls, have led to the huge success of MISRA C in domains where C is used for high-integrity sofware. This success has driven tool vendors to propose many competing implementations of MISRA C[464] checkers. Tools compete in particular on the coverage of MISRA C guidelines that they help enforce, as it is impossible to enforce the 16 directives and 143 rules (collectively referred to as guidelines) of MISRA C.

The 16 directives are broad guidelines, and it is not possible to define compliance in a unique and automated way. For example, "*all code should be traceable to documented requirements*" (Directive 3.1). Thus no tool is expected to enforce directives, as the MISRA C:2012 states in introduction to the guidelines: "*different tools may place widely different interpretations on what constitutes a non-compliance.*"

The 143 rules on the contrary are completely and precisely defined, and "*static analysis tools should be capable of checking compliance with rules*". But the same sentence continues with "*subject to the limitations described in Section 6.5*", which addresses "decidability of rules". It turns out that 27 rules out of 143 are not decidable, so no tool can always detect all violations of these rules without at the same time reporting "false alarms" on code that does not constitute a violation.

An example of an undecidable rule is rule 1.3: "*There shall be no occurrence of undefined or critical unspecified behaviour.*" Appendix H of MISRA:C 2012 lists hundreds of cases of undefined and critical unspecified behavior in the C programming language standard, a majority of which are not individually decidable. For the most part, MISRA C checkers ignore undecidable rules such as rule 1.3 and instead focus on the 116 rules for which detection of violations can be automated. It is telling in that respect that the MISRA C:2012 document and its accompanying set of examples (which can be downloaded from the MISRA website[465]) does not provide any example for rule 1.3.

However, violations of undecidable rules such as rule 1.3 are known to have dramatic impact on software quality. Violations of rule 1.3 in particular are commonly amplified by compilers using the permission in the C standard to optimize aggressively without looking at the consequences for programs with undefined or critical unspecified behavior. It would be valid to ignore these rules if violations did not occur in practice, but on the contrary even experienced programmers write C code with undefined or critical unspecified behavior. An example comes from the MISRA C Committee itself in its "Appendix I: Example deviation record" of the MISRA C:2012 document, repeated in "Appendix A: Example deviation record" of the MISRA C: Compliance 2016 document[466], where the following code is proposed as

[463] https://www.leshatton.org/Documents/MISRAC.pdf
[464] https://en.wikipedia.org/wiki/MISRA_C
[465] https://www.misra.org.uk
[466] https://www.misra.org.uk/LinkClick.aspx?fileticket=w_Syhpkf7xA%3d&tabid=57

a deviation of rule 10.6 "*The value of a composite expression shall not be assigned to an object with wider essential type*":

```
uint32_t prod = qty * time_step;
```

Here, the multiplication of two unsigned 16-bit values and assignment of the result to an unsigned 32-bit variable constitutes a violation of the aforementioned rule, which gets justified for efficiency reasons. What the authors seem to have missed is that the multiplication is then performed with the signed integer type **`int`** instead of the target unsigned type **`uint32_t`**. Thus the multiplication of two unsigned 16-bit values may lead to an overflow of the 32-bit intermediate signed result, which is an occurrence of an undefined behavior. In such a case, a compiler is free to assume that the value of `prod` cannot exceed 2^{31} - 1 (the maximal value of a signed 32-bit integer) as otherwise an undefined behavior would have been triggered. For example, the undefined behavior with values 65535 for `qty` and `time_step` is reported when running the code compiled by either the GCC or LLVM compiler with option `-fsanitize=undefined`.

The MISRA C checkers that detect violations of undecidable rules are either unsound tools that can detect only some of the violations, or sound tools that guarantee to detect all such violations at the cost of possibly many false reports of violations. This is a direct consequence of undecidability. However, static analysis technology is available that can achieve soundness without inundating users with false alarms. One example is the SPARK toolset developed by AdaCore, Altran and Inria, which is based on four principles:

- The base language Ada provides a solid foundation for static analysis through a well-defined language standard, strong typing and rich specification features.
- The SPARK subset of Ada restricts the base language in essential ways to support static analysis, by controlling sources of ambiguity such as side-effects and aliasing.
- The static analysis tools work mostly at the granularity of an individual function, making the analysis more precise and minimizing the possibility of false alarms.
- The static analysis tools are interactive, allowing users to guide the analysis if necessary or desired.

In this document, we show how SPARK can be used to achieve high code quality with guarantees that go beyond what would be feasible with MISRA C.

An on-line and interactive version of this document is available at AdaCore's learn.adacore.com site[467].

[467] https://learn.adacore.com/courses/SPARK_for_the_MISRA_C_Developer

CHAPTER

NINETY

ENFORCING BASIC PROGRAM CONSISTENCY

Many consistency properties that are taken for granted in other languages are not enforced in C. The basic property that all uses of a variable or function are consistent with its type is not enforced by the language and is also very difficult to enforce by a tool. Three features of C contribute to that situation:

- the textual-based inclusion of files means that every included declaration is subject to a possibly different reinterpretation depending on context.
- the lack of consistency requirements across translation units means that type inconsistencies can only be detected at link time, something linkers are ill-equipped to do.
- the default of making a declaration externally visible means that declarations that should be local will be visible to the rest of the program, increasing the chances for inconsistencies.

MISRA C contains guidelines on all three fronts to enforce basic program consistency.

90.1 Taming Text-Based Inclusion

The text-based inclusion of files is one of the dated idiosyncracies of the C programming language that was inherited by C++ and that is known to cause quality problems, especially during maintenance. Although multiple inclusion of a file in the same translation unit can be used to emulate template programming, it is generally undesirable. Indeed, MISRA C defines Directive 4.10 precisely to forbid it for header files: "*Precautions shall be taken in order to prevent the contents of a header file being included more than once*".

The subsequent section on "Preprocessing Directives" contains 14 rules restricting the use of text-based inclusion through preprocessing. Among other things these rules forbid the use of the *#undef* directive (which works around conflicts in macro definitions introduced by text-based inclusion) and enforces the well-known practice of enclosing macro arguments in parentheses (to avoid syntactic reinterpretations in the context of the macro use).

SPARK (and more generally Ada) does not suffer from these problems, as it relies on semantic inclusion of context instead of textual inclusion of content, using **with** clauses:

Listing 1: hello_world.adb

```
with Ada.Text_IO;

procedure Hello_World is
begin
   Ada.Text_IO.Put_Line ("hello, world!");
end Hello_World;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Program_Consistency.Hello_World
MD5: 5ed9609dd61bbcee252bb8529a6d3479
```

Runtime output

```
hello, world!
```

Note that **with** clauses are only allowed at the beginning of files; the compiler issues an error if they are used elsewhere:

Listing 2: hello_world.adb

```
procedure Hello_World is
   with Ada.Text_IO; -- Illegal
begin
   Ada.Text_IO.Put_Line ("hello, world!");
end Hello_World;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Program_Consistency.Hello_World
MD5: afa19e8e2c114a5832b49e9efcbe675e
```

Importing a unit (i.e., specifying it in a **with** clause) multiple times is harmless, as it is equivalent to importing it once, but a compiler warning lets us know about the redundancy:

Listing 3: hello_world.adb

```
with Ada.Text_IO;
with Ada.Text_IO; -- Legal but useless

procedure Hello_World is
begin
   Ada.Text_IO.Put_Line ("hello, world!");
end Hello_World;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Program_Consistency.Hello_World
MD5: 270928968d7beb4809af9e62df530722
```

Runtime output

```
hello, world!
```

The order in which units are imported is irrelevant. All orders are valid and have the same semantics.

No conflict arises from importing multiple units, even if the same name is defined in several, since each unit serves as namespace for the entities which it defines. So we can define our own version of `Put_Line` in some `Helper` unit and import it together with the standard version defined in `Ada.Text_IO`:

Listing 4: helper.ads

```
package Helper is
   procedure Put_Line (S : String);
end Helper;
```

Listing 5: helper.adb

```
with Ada.Text_IO;

package body Helper is
   procedure Put_Line (S : String) is
```

(continues on next page)

(continued from previous page)

```
   begin
      Ada.Text_IO.Put_Line ("Start helper version");
      Ada.Text_IO.Put_Line (S);
      Ada.Text_IO.Put_Line ("End helper version");
   end Put_Line;
end Helper;
```

Listing 6: hello_world.adb

```
with Ada.Text_IO;
with Helper;

procedure Hello_World is
begin
   Ada.Text_IO.Put_Line ("hello, world!");
   Helper.Put_Line ("hello, world!");
end Hello_World;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Program_Consistency.Hello_World
MD5: 5fa012cc996e24e3b1f604e35bbba44f
```

Runtime output

```
hello, world!
Start helper version
hello, world!
End helper version
```

The only way a conflict can arise is if we want to be able to reference Put_Line directly, without using the qualified name Ada.Text_IO.Put_Line or Helper.Put_Line. The **use** clause makes public declarations from a unit available directly:

Listing 7: helper.ads

```
package Helper is
   procedure Put_Line (S : String);
end Helper;
```

Listing 8: helper.adb

```
with Ada.Text_IO;

package body Helper is
   procedure Put_Line (S : String) is
   begin
      Ada.Text_IO.Put_Line ("Start helper version");
      Ada.Text_IO.Put_Line (S);
      Ada.Text_IO.Put_Line ("End helper version");
   end Put_Line;
end Helper;
```

Listing 9: hello_world.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Helper; use Helper;

procedure Hello_World is
begin
```

(continues on next page)

(continued from previous page)

```
   Ada.Text_IO.Put_Line ("hello, world!");
   Helper.Put_Line ("hello, world!");
   Put_Line ("hello, world!");  --  ERROR
end Hello_World;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Program_Consistency.Hello_World
MD5: 405e138d78e0dc869e8a340681d87e61
```

Build output

```
hello_world.adb:8:04: error: ambiguous expression (cannot resolve "Put_Line")
hello_world.adb:8:04: error: possible interpretation at helper.ads:2
hello_world.adb:8:04: error: possible interpretation at a-textio.ads:565
gprbuild: *** compilation phase failed
```

Here, both units `Ada.Text_IO` and `Helper` define a procedure `Put_Line` taking a `String` as argument, so the compiler cannot disambiguate the direct call to `Put_Line` and issues an error.

Note that it helpfully points to candidate declarations, so that the user can decide which qualified name to use as in the previous two calls.

Issues arising in C as a result of text-based inclusion of files are thus completely prevented in SPARK (and Ada) thanks to semantic import of units. Note that the C++ committee identified this weakness some time ago and has approved[468] the addition of *modules* to C++20, which provide a mechanism for semantic import of units.

90.2 Hardening Link-Time Checking

An issue related to text-based inclusion of files is that there is no single source for declaring the type of a variable or function. If a file `origin.c` defines a variable `var` and functions `fun` and `print`:

Listing 10: origin.c

```
#include <stdio.h>

int var = 0;
int fun() {
   return 1;
}
void print() {
   printf("var = %d\n", var);
}
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Program_Consistency.Origin
MD5: 3395f1e43408d5bc5c1e6b8431c959d6
```

and the corresponding header file `origin.h` declares `var`, `fun` and `print` as having external linkage:

[468] http://www.open-std.org/jtc1/sc22/wg21/docs/papers/2018/n4720.pdf

Listing 11: origin.h

```
extern int var;
extern int fun();
extern void print();
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Program_Consistency.Origin
MD5: e8e880a16f5099dc1e0a75ffeeeb9468
```

then client code can include `origin.h` with declarations for `var` and `fun`:

Listing 12: main.c

```
#include "origin.h"

int main() {
   var = fun();
   print();
   return 0;
}
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Program_Consistency.Origin
MD5: 3d4582d3956897b657778ae355d0ef1b
```

Runtime output

```
var = 1
```

or, equivalently, repeat these declarations directly:

Listing 13: main.c

```
extern int var;
extern int fun();
extern void print();

int main() {
   var = fun();
   print();
   return 0;
}
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Program_Consistency.Origin
MD5: 4b25aa011b580f92f2831a48008fbef6
```

Runtime output

```
var = 1
```

Then, if an inconsistency is introduced in the type of `var` of `fun` between these alternative declarations and their actual type, the compiler cannot detect it. Only the linker, which has access to the set of object files for a program, can detect such inconsistencies. However, a linker's main task is to link, not to detect inconsistencies, and so inconsistencies in the type of variables and functions in most cases cannot be detected. For example, most linkers cannot detect if the type of `var` or the return type of `fun` is changed to **`float`** in the declarations above. With the declaration of `var` changed to **`float`**, the above program compiles

and runs without errors, producing the erroneous output `var = 1065353216` instead of `var =1`. With the return type of `fun` changed to **`float`** instead, the program still compiles and runs without errors, producing this time the erroneous output `var = 0`.

The inconsistency just discussed is prevented by MISRA C Rule 8.3 "*All declarations of an object or function shall use the same names and type qualifiers*". This is a decidable rule, but it must be enforced at system level, looking at all translation units of the complete program. MISRA C Rule 8.6 also requires a unique definition for a given identifier across translation units, and Rule 8.5 requires that an external declaration shared between translation units comes from the same file. There is even a specific section on "Identifiers" containing 9 rules requiring uniqueness of various categories of identifiers.

SPARK (and more generally Ada) does not suffer from these problems, as it relies on semantic inclusion of context using **`with`** clauses to provide a unique declaration for each entity.

90.3 Going Towards Encapsulation

Many problems in C stem from the lack of encapsulation. There is no notion of namespace that would allow a file to make its declarations available without risking a conflict with other files. Thus MISRA C has a number of guidelines that discourage the use of external declarations:

- Directive 4.8 encourages hiding the definition of structures and unions in implementation files (`.c` files) when possible: "*If a pointer to a structure or union is never dereferenced within a translation unit, then the implementation of the object should be hidden.*"
- Rule 8.7 forbids the use of external declarations when not needed: "*Functions and objects should not be defined with external linkage if they are referenced in only one translation unit.*"
- Rule 8.8 forces the explicit use of keyword **`static`** when appropriate: "*The static storage class specifier shall be used in all declarations of objects and functions that have internal linkage.*"

The basic unit of modularization in SPARK, as in Ada, is the *package*. A package always has a spec (in an `.ads` file), which defines the interface to other units. It generally also has a body (in an `.adb` file), which completes the spec with an implementation. Only declarations from the package spec are visible from other units when they import (**`with`**) the package. In fact, only declarations from what is called the "visible part" of the spec (before the keyword **`private`**) are visible from units that **`with`** the package.

Listing 14: helper.ads

```
package Helper is
   procedure Public_Put_Line (S : String);
private
   procedure Private_Put_Line (S : String);
end Helper;
```

Listing 15: helper.adb

```
with Ada.Text_IO;

package body Helper is
   procedure Public_Put_Line (S : String) is
   begin
      Ada.Text_IO.Put_Line (S);
   end Public_Put_Line;
```

(continues on next page)

(continued from previous page)

```
8
9     procedure Private_Put_Line (S : String) is
10    begin
11       Ada.Text_IO.Put_Line (S);
12    end Private_Put_Line;
13
14    procedure Body_Put_Line (S : String) is
15    begin
16       Ada.Text_IO.Put_Line (S);
17    end Body_Put_Line;
18 end Helper;
```

Listing 16: hello_world.adb

```
1  with Helper; use Helper;
2
3  procedure Hello_World is
4  begin
5     Public_Put_Line ("hello, world!");
6     Private_Put_Line ("hello, world!");  --  ERROR
7     Body_Put_Line ("hello, world!");  --  ERROR
8  end Hello_World;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Program_Consistency.Hello_World
MD5: 148fd8101cc72413909675534f5e359c
```

Build output

```
hello_world.adb:6:04: error: "Private_Put_Line" is not visible
hello_world.adb:6:04: error: non-visible (private) declaration at helper.ads:4
hello_world.adb:7:04: error: "Body_Put_Line" is undefined
gprbuild: *** compilation phase failed
```

Note the different errors on the calls to the private and body versions of Put_Line. In the first case the compiler can locate the candidate procedure but it is illegal to call it from Hello_World, in the second case the compiler does not even know about any Body_Put_Line when compiling Hello_World since it only looks at the spec and not the body.

SPARK (and Ada) also allow defining a type in the private part of a package spec while simply declaring the type name in the public ("visible") part of the spec. This way, client code — i.e., code that **with**'s the package — can use the type, typically through a public API, but have no access to how the type is implemented:

Listing 17: vault.ads

```
1  package Vault is
2     type Data is private;
3     function Get (X : Data) return Integer;
4     procedure Set (X : out Data; Value : Integer);
5  private
6     type Data is record
7        Val : Integer;
8     end record;
9  end Vault;
```

Listing 18: vault.adb

```
package body Vault is
   function Get (X : Data) return Integer is (X.Val);
   procedure Set (X : out Data; Value : Integer) is
   begin
      X.Val := Value;
   end Set;
end Vault;
```

Listing 19: information_system.ads

```
with Vault;

package Information_System is
   Archive : Vault.Data;
end Information_System;
```

Listing 20: hacker.adb

```
with Information_System;
with Vault;

procedure Hacker is
   V : Integer := Vault.Get (Information_System.Archive);
begin
   Vault.Set (Information_System.Archive, V + 1);
   Information_System.Archive.Val := 0;  --  ERROR
end Hacker;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Program_Consistency.Hacker
MD5: 065ed34dc727e2eb0bdc50a667cb1f78
```

Build output

```
hacker.adb:8:22: error: invalid prefix in selected component "Information_System.
 ↪Archive"
gprbuild: *** compilation phase failed
```

Note that it is possible to declare a variable of type `Vault.Data` in package `Information_System` and to get/set it through its API in procedure `Hacker`, but not to directly access its `Val` field.

CHAPTER

NINETYONE

ENFORCING BASIC SYNTACTIC GUARANTEES

C's syntax is concise but also very permissive, which makes it easy to write programs whose effect is not what was intended. MISRA C contains guidelines to:

- clearly distinguish code from comments
- specially handle function parameters and result
- ensure that control structures are not abused

91.1 Distinguishing Code and Comments

The problem arises from block comments in C, starting with `/*` and ending with `*/`. These comments do not nest with other block comments or with line comments. For example, consider a block comment surrounding three lines that each increase variable a by one:

```
/*
++a;
++a;
++a; */
```

Now consider what happens if the first line is commented out using a block comment and the third line is commented out using a line comment (also known as a C++ style comment, allowed in C since C99):

```
/*
/* ++a; */
++a;
// ++a; */
```

The result of commenting out code that was already commented out is that the second line of code becomes live! Of course, the above example is simplified, but similar situations do arise in practice, which is the reason for MISRA C Directive 4.1 "*Sections of code should not be 'commented out'*". This is reinforced with Rules 3.1 and 3.2 from the section on "Comments" that forbid in particular the use of `/*` inside a comment like we did above.

These situations cannot arise in SPARK (or in Ada), as only line comments are permitted, using `--`:

```
--  A := A + 1;
--  A := A + 1;
--  A := A + 1;
```

So commenting again the first and third lines does not change the effect:

```
--  --  A := A + 1;
--  A := A + 1;
--  --  A := A + 1;
```

91.2 Specially Handling Function Parameters and Result

91.2.1 Handling the Result of Function Calls

It is possible in C to ignore the result of a function call, either implicitly or else explicitly by converting the result to **void**:

```
f();
(void)f();
```

This is particularly dangerous when the function returns an error status, as the caller is then ignoring the possibility of errors in the callee. Thus the MISRA C Directive 4.7: "*If a function returns error information, then that error information shall be tested*". In the general case of a function returning a result which is not an error status, MISRA C Rule 17.7 states that "*The value returned by a function having non-void return type shall be used*", where an explicit conversion to **void** counts as a use.

In SPARK, as in Ada, the result of a function call must be used, for example by assigning it to a variable or by passing it as a parameter, in contrast with procedures (which are equivalent to void-returning functions in C). SPARK analysis also checks that the result of the function is actually used to influence an output of the calling subprogram. For example, the first two calls to F in the following are detected as unused, even though the result of the function call is assigned to a variable, which is itself used in the second case:

Listing 1: fun.ads

```
1  package Fun is
2     function F return Integer is (1);
3  end Fun;
```

Listing 2: use_f.ads

```
1  procedure Use_F (Z : out Integer);
```

Listing 3: use_f.adb

```
1  with Fun; use Fun;
2
3  procedure Use_F (Z : out Integer) is
4     X, Y : Integer;
5  begin
6     X := F;
7
8     Y := F;
9     X := Y;
10
11    Z := F;
12 end Use_F;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Syntactic_Guarantees.Func_Return
MD5: 4fc78b4136677d6338984ab8ccfa5cd1
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
use_f.adb:6:06: warning: unused assignment
```

(continues on next page)

(continued from previous page)

```
use_f.adb:8:06: warning: unused assignment
use_f.adb:9:06: warning: unused assignment
```

Only the result of the third call is used to influence the value of an output of Use_F, here the output parameter Z of the procedure.

91.2.2 Handling Function Parameters

In C, function parameters are treated as local variables of the function. They can be modified, but these modifications won't be visible outside the function. This is an opportunity for mistakes. For example, the following code, which appears to swap the values of its parameters, has in reality no effect:

```
void swap (int x, int y) {
   int tmp = x;
   x = y;
   y = tmp;
}
```

MISRA C Rule 17.8 prevents such mistakes by stating that "*A function parameter should not be modified*".

No such rule is needed in SPARK, since function parameters are only inputs so cannot be modified, and procedure parameters have a *mode* defining whether they can be modified or not. Only parameters of mode **out** or ada:*in out* can be modified — and these are prohibited from functions in SPARK — and their modification is visible at the calling site. For example, assigning to a parameter of mode **in** (the default parameter mode if omitted) results in compilation errors:

Listing 4: swap.ads

```
1 procedure Swap (X, Y : Integer);
```

Listing 5: swap.adb

```
1 procedure Swap (X, Y : Integer) is
2    Tmp : Integer := X;
3 begin
4    X := Y;  --  ERROR
5    Y := Tmp;  --  ERROR
6 end Swap;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Syntactic_Guarantees.Swap
MD5: 187927c610e202f2e1eee6a602fda25e
```

Build output

```
swap.adb:4:04: error: assignment to "in" mode parameter not allowed
swap.adb:5:04: error: assignment to "in" mode parameter not allowed
gprbuild: *** compilation phase failed
```

Here is the output of AdaCore's GNAT compiler:

```
1.     procedure Swap (X, Y : Integer) is
2.        Tmp : Integer := X;
3.     begin
4.        X := Y;  --  ERROR
```

(continues on next page)

(continued from previous page)

```
            |
   >>> assignment to "in" mode parameter not allowed

5.          Y := Tmp;  --  ERROR
            |
   >>> assignment to "in" mode parameter not allowed

6.       end Swap;
```

The correct version of Swap in SPARK takes parameters of mode **in out**:

Listing 6: swap.ads

```
1  procedure Swap (X, Y : in out Integer);
```

Listing 7: swap.adb

```
1  procedure Swap (X, Y : in out Integer) is
2     Tmp : constant Integer := X;
3  begin
4     X := Y;
5     Y := Tmp;
6  end Swap;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Syntactic_Guarantees.Swap
MD5: c983a229fc5a69db5dbb85f49a91b325
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
```

91.3 Ensuring Control Structures Are Not Abused

The previous issue (ignoring the result of a function call) is an example of a control structure being abused, due to the permissive syntax of C. There are many such examples, and MISRA C contains a number of guidelines to prevent such abuse.

91.3.1 Preventing the Semicolon Mistake

Because a semicolon can act as a statement, and because an if-statement and a loop accept a simple statement (possibly only a semicolon) as body, inserting a single semicolon can completely change the behavior of the code:

```
int func() {
   if (0)
      return 1;
   while (1)
      return 0;
   return 0;
}
```

As written, the code above returns with status 0. If a semicolon is added after the first line (`if (0);`), then the code returns with status 1. If a semicolon is added instead after the third line (`while (1);`), then the code does not return. To prevent such surprises, MISRA C

Rule 15.6 states that "*The body of an iteration-statement or a selection-statement shall be a compound statement*" so that the code above must be written:

```
int func() {
   if (0) {
      return 1;
   }
   while (1) {
      return 0;
   }
   return 0;
}
```

Note that adding a semicolon after the test of the **if** or **while** statement has the same effect as before! But doing so would violate MISRA C Rule 15.6.

In SPARK, the semicolon is not a statement by itself, but rather a marker that terminates a statement. The null statement is an explicit **null**;, and all blocks of statements have explicit **begin** and **end** markers, which prevents mistakes that are possible in C. The SPARK (also Ada) version of the above C code is as follows:

Listing 8: func.ads

```
1  function Func return Integer;
```

Listing 9: func.adb

```
1  function Func return Integer is
2  begin
3     if False then
4        return 1;
5     end if;
6     while True loop
7        return 0;
8     end loop;
9     return 0;
10 end Func;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Syntactic_Guarantees.Semicolon
MD5: 34fc5967c41d337aada17429ee5f44e9
```

Prover output

```
Phase 1 of 2: generation of Global contracts ...
Phase 2 of 2: analysis of data and information flow ...
func.adb:3:04: warning: statement has no effect
func.adb:4:07: warning: this statement is never reached
```

91.3.2 Avoiding Complex Switch Statements

Switch statements are well-known for being easily misused. Control can jump to any case section in the body of the switch, which in C can be before any statement contained in the body of the switch. At the end of the sequence of statements associated with a case, execution continues with the code that follows unless a break is encountered. This is a recipe for mistakes, and MISRA C enforces a simpler *well-formed* syntax for switch statements defined in Rule 16.1: "*All switch statements shall be well-formed*".

The other rules in the section on "Switch statements" go on detailing individual consequences of Rule 16.1. For example Rule 16.3 forbids the fall-through from one case to the

next: "*An unconditional break statement shall terminate every switch-clause*". As another example, Rule 16.4 mandates the presence of a default case to handle cases not taken into account explicitly: "*Every switch statement shall have a default label*".

The analog of the C switch statements in SPARK (and in Ada) is the case statement. This statement has a simpler and more robust structure than the C switch, with control automatically exiting after one of the case alternatives is executed, and the compiler checking that the alternatives are disjoint (like in C) and complete (unlike in C). So the following code is rejected by the compiler:

Listing 10: sign_domain.ads

```
package Sign_Domain is

   type Sign is (Negative, Zero, Positive);

   function Opposite (A : Sign) return Sign is
     (case A is  --  ERROR
         when Negative => Positive,
         when Positive => Negative);

   function Multiply (A, B : Sign) return Sign is
     (case A is
         when Negative        => Opposite (B),
         when Zero | Positive => Zero,
         when Positive        => B);  --  ERROR

   procedure Get_Sign (X : Integer; S : out Sign);

end Sign_Domain;
```

Listing 11: sign_domain.adb

```
package body Sign_Domain is

   procedure Get_Sign (X : Integer; S : out Sign) is
   begin
      case X is
         when 0 => S := Zero;
         when others => S := Negative;  --  ERROR
         when 1 .. Integer'Last => S := Positive;
      end case;
   end Get_Sign;

end Sign_Domain;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Syntactic_Guarantees.Case_Statement
MD5: d345a4d23b5b2402f8bd103e5e550a3b
```

Build output

```
sign_domain.adb:7:15: error: the choice "others" must appear alone and last
sign_domain.ads:6:07: error: missing case value: "Zero"
sign_domain.ads:14:15: error: duplication of choice value: "Positive" at line 13
gprbuild: *** compilation phase failed
```

The error in function `Opposite` is that the **`when`** choices do not cover all values of the target expression. Here, `A` is of the enumeration type `Sign`, so all three values of the enumeration must be covered.

The error in function `Multiply` is that **`Positive`** is covered twice, in the second and the

third alternatives. This is not allowed.

The error in procedure `Get_Sign` is that the **`others`** choice (the equivalent of C **`default`** case) must come last. Note that an **`others`** choice would be useless in `Opposite` and `Multiply`, as all `Sign` values are covered.

Here is a correct version of the same code:

Listing 12: sign_domain.ads

```
package Sign_Domain is

   type Sign is (Negative, Zero, Positive);

   function Opposite (A : Sign) return Sign is
     (case A is
         when Negative => Positive,
         when Zero     => Zero,
         when Positive => Negative);

   function Multiply (A, B : Sign) return Sign is
     (case A is
         when Negative => Opposite (B),
         when Zero     => Zero,
         when Positive => B);

   procedure Get_Sign (X : Integer; S : out Sign);

end Sign_Domain;
```

Listing 13: sign_domain.adb

```
package body Sign_Domain is

   procedure Get_Sign (X : Integer; S : out Sign) is
   begin
      case X is
         when 0 => S := Zero;
         when 1 .. Integer'Last => S := Positive;
         when others => S := Negative;
      end case;
   end Get_Sign;

end Sign_Domain;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Syntactic_Guarantees.Case_Statement
MD5: 1c99fc53d2d2c0dddbea5e5b0a6c5746
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
sign_domain.ads:5:13: info: implicit aspect Always_Terminates on "Opposite" has␣
 ↪been proved, subprogram will terminate
sign_domain.ads:11:13: info: implicit aspect Always_Terminates on "Multiply" has␣
 ↪been proved, subprogram will terminate
sign_domain.ads:17:37: info: initialization of "S" proved
```

91.3.3 Avoiding Complex Loops

Similarly to C switches, for-loops in C can become unreadable. MISRA C thus enforces a simpler *well-formed* syntax for for-loops, defined in Rule 14.2: "*A for loop shall be well-formed*". The main effect of this simplification is that for-loops in C look like for-loops in SPARK (and in Ada), with a *loop counter* that is incremented or decremented at each iteration. Section 8.14 defines precisely what a loop counter is:

1. It has a scalar type;
2. Its value varies monotonically on each loop iteration; and
3. It is used in a decision to exit the loop.

In particular, Rule 14.2 forbids any modification of the loop counter inside the loop body. Here's the example used in MISRA C:2012 to illustrate this rule:

```
bool_t flag = false;

for ( int16_t i = 0; ( i < 5 ) && !flag; i++ )
{
  if ( C )
  {
    flag = true; /* Compliant - allows early termination of loop */
  }

  i = i + 3;     /* Non-compliant - altering the loop counter */
}
```

The equivalent SPARK (and Ada) code does not compile, because of the attempt to modify the value of the loop counter:

Listing 14: well_formed_loop.adb

```
procedure Well_Formed_Loop (C : Boolean) is
   Flag : Boolean := False;
begin
   for I in 0 .. 4 loop
      exit when not Flag;

      if C then
         Flag := True;
      end if;

      I := I + 3;  --  ERROR
   end loop;
end Well_Formed_Loop;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Syntactic_Guarantees.Well_Formed_Loop
MD5: 842564c961aa018e03e03f81439995ec
```

Build output

```
well_formed_loop.adb:11:07: error: assignment to loop parameter not allowed
gprbuild: *** compilation phase failed
```

Removing the problematic line leads to a valid program. Note that the additional condition being tested in the C for-loop has been moved to a separate exit statement at the start of the loop body.

SPARK (and Ada) loops can increase (or, with explicit syntax, decrease) the loop counter by 1 at each iteration.

```
for I in reverse 0 .. 4 loop
   ... -- Successive values of I are 4, 3, 2, 1, 0
end loop;
```

SPARK loops can iterate over any discrete type; i.e., integers as above or enumerations:

```
type Sign is (Negative, Zero, Positive);

for S in Sign loop
  ...
end loop;
```

91.3.4 Avoiding the Dangling Else Issue

C does not provide a closing symbol for an if-statement. This makes it possible to write the following code, which appears to try to return the absolute value of its argument, while it actually does the opposite:

Listing 15: main.c

```
#include <stdio.h>

int absval (int x) {
   int result = x;
   if (x >= 0)
      if (x == 0)
         result = 0;
   else
      result = -x;
   return result;
}

int main() {
   printf("absval(5) = %d\n", absval(5));
   printf("absval(0) = %d\n", absval(0));
   printf("absval(-10) = %d\n", absval(-10));
}
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Syntactic_Guarantees.Dangling_Else_C
MD5: c180a948dd8bed4e3b97efde1522214c
```

Runtime output

```
absval(5) = -5
absval(0) = 0
absval(-10) = -10
```

The warning issued by GCC or LLVM with option `-Wdangling-else` (implied by `-Wall`) gives a clue about the problem: although the **else** branch is written as though it completes the outer if-statement, in fact it completes the inner if-statement.

MISRA C Rule 15.6 avoids the problem: "*The body of an iteration-statement or a selection-statement shall be a compound statement*". That's the same rule as the one shown earlier for *Preventing the Semicolon Mistake* (page 1880). So the code for `absval` must be written:

Listing 16: main.c

```
#include <stdio.h>

```

(continues on next page)

(continued from previous page)

```
int absval (int x) {
   int result = x;
   if (x >= 0) {
      if (x == 0) {
         result = 0;
      }
   } else {
      result = -x;
   }
   return result;
}

int main() {
   printf("absval(5) = %d\n", absval(5));
   printf("absval(0) = %d\n", absval(0));
   printf("absval(-10) = %d\n", absval(-10));
}
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Syntactic_Guarantees.Dangling_Else_
↪MISRA_C
MD5: 2b76377aca52ff45ed6b19fa1f367473
```

Runtime output

```
absval(5) = 5
absval(0) = 0
absval(-10) = 10
```

which has the expected behavior.

In SPARK (as in Ada), each if-statement has a matching end marker end `if`; so the dangling-else problem cannot arise. The above C code is written as follows:

Listing 17: absval.ads

```
function Absval (X : Integer) return Integer;
```

Listing 18: absval.adb

```
function Absval (X : Integer) return Integer is
   Result : Integer := X;
begin
   if X >= 0 then
      if X = 0 then
         Result := 0;
      end if;
   else
      Result := -X;
   end if;
   return Result;
end Absval;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Syntactic_Guarantees.Dangling_Else_Ada
MD5: e867b6354ef7bdd89bae1673e888153a
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
absval.adb:9:17: medium: overflow check might fail, cannot prove upper bound for -
 ↪X [reason for check: result of negation must fit in a 32-bits machine integer]␣
 ↪[possible fix: add precondition (-X <= Integer'Last) to subprogram at absval.
 ↪ads:1]
gnatprove: unproved check messages considered as errors
```

Interestingly, SPARK analysis detects here that the negation operation on line 9 might overflow. That's an example of runtime error detection which will be covered in the chapter on *Detecting Undefined Behavior* (page 1923).

CHAPTER

NINETYTWO

ENFORCING STRONG TYPING

Annex C of MISRA C:2012 summarizes the problem succinctly:

> "*ISO C may be considered to exhibit poor type safety as it permits a wide range of implicit type conversions to take place. These type conversions can compromise safety as their implementation-defined aspects can cause developer confusion.*"

The most severe consequences come from inappropriate conversions involving pointer types, as they can cause memory safety violations. Two sections of MISRA C are dedicated to these issues: "Pointer type conversions" (9 rules) and "Pointers and arrays" (8 rules).

Inappropriate conversions between scalar types are only slightly less severe, as they may introduce arbitrary violations of the intended functionality. MISRA C has gone to great lengths to improve the situation, by defining a stricter type system on top of the C language. This is described in Appendix D of MISRA C:2012 and in the dedicated section on "The essential type model" (8 rules).

92.1 Enforcing Strong Typing for Pointers

Pointers in C provide a low-level view of the addressable memory as a set of integer addresses. To write at address 42, just go through a pointer:

Listing 1: main.c

```c
int main() {
   int *p = 42;
   *p = 0;
   return 0;
}
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Strong_Typing.Pointers_C
MD5: 005183ada50cb6642f38a3640d77efff
```

Running this program is likely to hit a segmentation fault on an operating system, or to cause havoc in an embedded system, both because address 42 will not be correctly aligned on a 32-bit or 64-bit machine and because this address is unlikely to correspond to valid addressable data for the application. The compiler might issue a helpful warning on the above code (with option `-Wint-conversion` implied by `-Wall` in GCC or LLVM), but note that the warning disappears when explicitly converting value 42 to the target pointer type, although the problem is still present.

Beyond their ability to denote memory addresses, pointers are also used in C to pass references as inputs or outputs to function calls, to construct complex data structures with indirection or sharing, and to denote arrays of elements. Pointers are thus at once pervasive, powerful and fragile.

92.1.1 Pointers Are Not Addresses

In an attempt to rule out issues that come from direct addressing of memory with pointers, MISRA C states in Rule 11.4 that "*A conversion should not be performed between a pointer to object and an integer type*". As this rule is classified as only Advisory, MISRA C completes it with two Required rules:

- Rule 11.6: "*A cast shall not be performed between pointer to void and an arithmetic type*"
- Rule 11.7: "*A cast shall not be performed between pointer to object and a non-integer arithmetic type*"

In Ada, pointers are not addresses, and addresses are not integers. An opaque standard type `System.Address` is used for addresses, and conversions to/from integers are provided in a standard package `System.Storage_Elements`. The previous C code can be written as follows in Ada:

Listing 2: pointer.adb

```
with System;
with System.Storage_Elements;

procedure Pointer is
   A : constant System.Address := System.Storage_Elements.To_Address (42);
   M : aliased Integer with Address => A;
   P : constant access Integer := M'Access;
begin
   P.all := 0;
end Pointer;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Strong_Typing.Pointers_Ada
MD5: 32ac91ade61a39d3505d155d7b97a8a5
```

The integer value 42 is converted to a memory address `A` by calling `System.Storage_Elements.To_Address`, which is then used as the address of integer variable `M`. The pointer variable `P` is set to point to `M` (which is allowed because `M` is declared as **`aliased`**).

Ada requires more verbiage than C:

- The integer value `42` must be explicitly converted to type **`Address`**
- To get a pointer to a declared variable such as `M`, the declaration must be marked as **`aliased`**

The added syntax helps first in making clear what is happening and, second, in ensuring that a potentially dangerous feature (assigning to a value at a specific machine address) is not used inadvertently.

The above example is legal in SPARK, but the SPARK analysis tool issues warnings as it cannot control how the program or its environment may update the memory cell at address 42.

92.1.2 Pointers Are Not References

Passing parameters by reference is critical for efficient programs, but the absence of references distinct from pointers in C incurs a serious risk. Any parameter of a pointer type can be copied freely to a variable whose lifetime is longer than the object pointed to, a problem known as "dangling pointers". MISRA C forbids such uses in Rule 18.6: "*The address of an object with automatic storage shall not be copied to another object that persists after the first object has ceased to exist*". Unfortunately, enforcing this rule is difficult, as it is undecidable.

In SPARK, parameters can be passed by reference, but no pointer to the parameter can be stored past the return point of the function, which completely solves this issue. In fact, the decision to pass a parameter by copy or by reference rests in many cases with the compiler, but such compiler dependency has no effect on the functional behavior of a SPARK program. In the example below, the compiler may decide to pass parameter P of procedure Rotate_X either by copy or by reference, but regardless of the choice the postcondition of Rotate_X will hold: the final value of P will be modified by rotation around the X axis.

Listing 3: geometry.ads

```
package Geometry is

   type Point_3D is record
      X, Y, Z : Float;
   end record;

   procedure Rotate_X (P : in out Point_3D) with
     Post => P = P'Old'Update (Y => P.Z'Old, Z => -P.Y'Old);

end Geometry;
```

Listing 4: geometry.adb

```
package body Geometry is

   procedure Rotate_X (P : in out Point_3D) is
      Tmp : constant Float := P.Y;
   begin
      P.Y := P.Z;
      P.Z := -Tmp;
   end Rotate_X;

end Geometry;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Strong_Typing.Geometry
MD5: d3801cf1413887ffd5fff8b6b86b7742
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
geometry.ads:8:14: info: postcondition proved
```

SPARK's analysis tool can mathematically prove that the postcondition is true.

92.1.3 Pointers Are Not Arrays

The greatest source of vulnerabilities regarding pointers is their use as substitutes for arrays. Although the C language has a syntax for declaring and accessing arrays, this is just a thin syntactic layer on top of pointers. Thus:

- Array access is just pointer arithmetic;
- If a function is to manipulate an array then the array's length must be separately passed as a parameter; and
- The program is susceptible to the various vulnerabilities originating from the confusion of pointers and arrays, such as buffer overflow.

Consider a function that counts the number of times a value is present in an array. In C, this could be written:

Listing 5: main.c

```c
#include <stdio.h>

int count(int *p, int len, int v) {
   int count = 0;
   while (len--) {
      if (*p++ == v) {
         count++;
      }
   }
   return count;
}

int main() {
   int p[5] = {0, 3, 9, 3, 3};
   int c = count(p, 5, 3);
   printf("value 3 is seen %d times in p\n", c);
   return 0;
}
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Strong_Typing.Arrays_C
MD5: 34e3f7c2352e89a7c834184761293e57
```

Runtime output

```
value 3 is seen 3 times in p
```

Function `count` has no control over the range of addresses accessed from pointer `p`. The critical property that the `len` parameter is a valid length for an array of integers pointed to by parameter `p` rests completely with the caller of `count`, and `count` has no way to check that this is true.

To mitigate the risks associated with pointers being used for arrays, MISRA C contains eight rules in a section on "Pointers and arrays". These rules forbid pointer arithmetic (Rule 18.4) or, if this Advisory rule is not followed, require pointer arithmetic to stay within bounds (Rule 18.1). But, even if we rewrite the loop in `count` to respect all decidable MISRA C rules, the program's correctness still depends on the caller of `count` passing a correct value of `len`:

Listing 6: main.c

```c
#include <stdio.h>

int count(int *p, int len, int v) {
   int count = 0;
   for (int i = 0; i < len; i++) {
      if (p[i] == v) {
         count++;
      }
   }
   return count;
}

int main() {
   int p[5] = {0, 3, 9, 3, 3};
   int c = count(p, 5, 3);
   printf("value 3 is seen %d times in p\n", c);
```

(continues on next page)

(continued from previous page)

```
17    return 0;
18 }
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Strong_Typing.Arrays_MISRA_C
MD5: d04179de3f1e309541b3d88e53eb5e3a
```

Runtime output

```
value 3 is seen 3 times in p
```

The resulting code is more readable, but still vulnerable to incorrect values of parameter `len` passed by the caller of `count`, which violates undecidable MISRA C Rules 18.1 (pointer arithmetic should stay within bounds) and 1.3 (no undefined behavior). Contrast this with the same function in SPARK (and Ada):

Listing 7: types.ads

```
1  package Types is
2     type Int_Array is array (Positive range <>) of Integer;
3  end Types;
```

Listing 8: count.ads

```
1  with Types; use Types;
2
3  function Count (P : Int_Array; V : Integer) return Natural;
```

Listing 9: count.adb

```
1  function Count (P : Int_Array; V : Integer) return Natural is
2     Count : Natural := 0;
3  begin
4     for I in P'Range loop
5        if P (I) = V then
6           Count := Count + 1;
7        end if;
8     end loop;
9     return Count;
10 end Count;
```

Listing 10: test_count.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2  with Types; use Types;
3  with Count;
4
5  procedure Test_Count is
6     P : constant Int_Array := (0, 3, 9, 3, 3);
7     C : constant Integer := Count (P, 3);
8  begin
9     Put_Line ("value 3 is seen" & C'Img & " times in p");
10 end Test_Count;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Strong_Typing.Arrays_Ada
MD5: 82e9d18d4b8ad8aa87ca8520bd7b830c
```

Runtime output

```
value 3 is seen 3 times in p
```

The array parameter P is not simply a homogeneous sequence of Integer values. The compiler must represent P so that its lower and upper bounds (P'First and P'Last) and thus also its length (P'Length) can be retrieved. Function **Count** can simply loop over the range of valid array indexes P'First .. P'Last (or P'Range for short). As a result, function **Count** can be verified in isolation to be free of vulnerabilities such as buffer overflow, as it does not depend on the values of parameters passed by its callers. In fact, we can go further in SPARK and show that the value returned by **Count** is no greater than the length of parameter P by stating this property in the postcondition of **Count** and asking the SPARK analysis tool to prove it:

Listing 11: types.ads

```
1  package Types is
2     type Int_Array is array (Positive range <>) of Integer;
3  end Types;
```

Listing 12: count.ads

```
1  with Types; use Types;
2
3  function Count (P : Int_Array; V : Integer) return Natural with
4    Post => Count'Result <= P'Length;
```

Listing 13: count.adb

```
1  function Count (P : Int_Array; V : Integer) return Natural
2  is
3     Count : Natural := 0;
4  begin
5     for I in P'Range loop
6        pragma Loop_Invariant (Count <= I - P'First);
7        if P (I) = V then
8           Count := Count + 1;
9        end if;
10    end loop;
11    return Count;
12 end Count;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Strong_Typing.Arrays_Ada
MD5: 4c9a34614d53c4d268cbff787c9b73e6
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
test_count.adb:9:32: info: range check proved
test_count.adb:9:40: info: range check proved
count.adb:6:30: info: loop invariant initialization proved
count.adb:6:30: info: loop invariant preservation proved
count.adb:6:41: info: overflow check proved
count.adb:8:25: info: overflow check proved
count.ads:3:10: info: implicit aspect Always_Terminates on "Count" has been proved,
 ↪ subprogram will terminate
count.ads:4:11: info: postcondition proved
```

(continues on next page)

(continued from previous page)

```
count.ads:4:28: info: range check proved
```

The only help that SPARK analysis required from the programmer, in order to prove the postcondition, is a loop invariant (a special kind of assertion) that reflects the value of `Count` at each iteration.

92.1.4 Pointers Should Be Typed

The C language defines a special pointer type `void*` that corresponds to an untyped pointer. It is legal to convert any pointer type to and from `void*`, which makes it a convenient way to simulate C++ style templates. Consider the following code which indirectly applies `assign_int` to integer `i` and `assign_float` to floating-point `f` by calling `assign` on both:

Listing 14: main.c

```c
#include <stdio.h>

void assign_int (int *p) {
   *p = 42;
}

void assign_float (float *p) {
   *p = 42.0;
}

typedef void (*assign_fun)(void *p);

void assign(assign_fun fun, void *p) {
   fun(p);
}

int main() {
   int i;
   float f;
   assign((assign_fun)&assign_int, &i);
   assign((assign_fun)&assign_float, &f);
   printf("i = %d; f = %f\n", i, f);
}
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Strong_Typing.Typed_Pointers_C
MD5: fc00ba9eb976400374885693475 91cc2
```

Runtime output

```
i = 42; f = 42.000000
```

The references to the variables `i` and `f` are implicitly converted to the `void*` type as a way to apply `assign` to any second parameter `p` whose type matches the argument type of its first argument `fun`. The use of an untyped argument means that the responsibility for the correct typing rests completely with the programmer. Swap `i` and `f` in the calls to `assign` and you still get a compilable program without warnings, that runs and produces completely bogus output:

```
i = 1109917696; f = 0.000000
```

instead of the expected:

```
i = 42; f = 42.000000
```

Generics in SPARK (and Ada) can implement the desired functionality in a fully typed way, with any errors caught at compile time, where procedure `Assign` applies its parameter procedure `Initialize` to its parameter V:

Listing 15: assign.ads

```
generic
   type T is private;
   with procedure Initialize (V : out T);
procedure Assign (V : out T);
```

Listing 16: assign.adb

```
procedure Assign (V : out T) is
begin
   Initialize (V);
end Assign;
```

Listing 17: apply_assign.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Assign;

procedure Apply_Assign is
   procedure Assign_Int (V : out Integer) is
   begin
      V := 42;
   end Assign_Int;

   procedure Assign_Float (V : out Float) is
   begin
      V := 42.0;
   end Assign_Float;

   procedure Assign_I is new Assign (Integer, Assign_Int);
   procedure Assign_F is new Assign (Float, Assign_Float);

   I : Integer;
   F : Float;
begin
   Assign_I (I);
   Assign_F (F);
   Put_Line ("I =" & I'Img & "; F =" & F'Img);
end Apply_Assign;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Strong_Typing.Typed_Pointers_Ada
MD5: af23d6f8a742676139aac38a385c7bf7
```

Runtime output

```
I = 42; F = 4.20000E+01
```

The generic procedure `Assign` must be instantiated with a specific type for T and a specific procedure (taking a single **out** parameter of this type) for `Initialize`. The procedure resulting from the instantiation applies to a variable of this type. So switching `I` and `F` above would result in an error detected by the compiler. Likewise, an instantiation such as the following would also be a compile-time error:

```
procedure Assign_I is new Assign (Integer, Assign_Float);
```

92.2 Enforcing Strong Typing for Scalars

In C, all scalar types can be converted both implicitly and explicitly to any other scalar type. The semantics is defined by rules of *promotion* and *conversion*, which can confuse even experts. One example was noted earlier, in the *Preface* (page 1867). Another example appears in an article introducing a safe library for manipulating scalars[469] by Microsoft expert David LeBlanc. In its conclusion, the author acknowledges the inherent difficulty in understanding scalar type conversions in C, by showing an early buggy version of the code to produce the minimum signed integer:

```
return (T)(1 << (BitCount()-1));
```

The issue here is that the literal 1 on the left-hand side of the shift is an **int**, so on a 64-bit machine with 32-bit **int** and 64-bit type T, the above is shifting 32-bit value 1 by 63 bits. This is a case of undefined behavior, producing an unexpected output with the Microsoft compiler. The correction is to convert the first literal 1 to T before the shift:

```
return (T)((T)1 << (BitCount()-1));
```

Although he'd asked some expert programmers to review the code, no one found this problem.

To avoid these issues as much as possible, MISRA C defines its own type system on top of C types, in the section on "The essential type model" (eight rules). These can be seen as additional typing rules, since all rules in this section are decidable, and can be enforced at the level of a single translation unit. These rules forbid in particular the confusing cases mentioned above. They can be divided into three sets of rules:

- restricting operations on types
- restricting explicit conversions
- restricting implicit conversions

92.2.1 Restricting Operations on Types

Apart from the application of some operations to floating-point arguments (the bitwise, mod and array access operations) which are invalid and reported by the compiler, all operations apply to all scalar types in C. MISRA C Rule 10.1 constrains the types on which each operation is possible as follows.

Arithmetic Operations on Arithmetic Types

Adding two Boolean values, or an Apple and an Orange, might sound like a bad idea, but it is easily done in C:

Listing 18: main.c

```
#include <stdbool.h>
#include <stdio.h>

int main() {
   bool b1 = true;
   bool b2 = false;
```

(continues on next page)

[469] https://msdn.microsoft.com/en-us/library/ms972705.aspx

(continued from previous page)

```
   bool b3 = b1 + b2;

   typedef enum {Apple, Orange} fruit;
   fruit f1 = Apple;
   fruit f2 = Orange;
   fruit f3 = f1 + f2;

   printf("b3 = %d; f3 = %d\n", b3, f3);

   return 0;
}
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Strong_Typing.Pointer_Arith_C
MD5: 30e28b34f616f8e6d35233a4ce698c23
```

Runtime output

```
b3 = 1; f3 = 1
```

No error from the compiler here. In fact, there is no undefined behavior in the above code. Variables b3 and f3 both end up with value 1. Of course it makes no sense to add Boolean or enumerated values, and thus MISRA C Rule 18.1 forbids the use of all arithmetic operations on Boolean and enumerated values, while also forbidding most arithmetic operations on characters. That leaves the use of arithmetic operations for signed or unsigned integers as well as floating-point types and the use of modulo operation `%` for signed or unsigned integers.

Here's an attempt to simulate the above C code in SPARK (and Ada):

Listing 19: bad_arith.ads

```
package Bad_Arith is

   B1 : constant Boolean := True;
   B2 : constant Boolean := False;
   B3 : constant Boolean := B1 + B2;

   type Fruit is (Apple, Orange);
   F1 : constant Fruit := Apple;
   F2 : constant Fruit := Orange;
   F3 : constant Fruit := F1 + F2;

end Bad_Arith;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Strong_Typing.Pointer_Arith_Ada
MD5: 984381fdcf1a682e1998f7881c0532f9
```

Build output

```
bad_arith.ads:5:32: error: there is no applicable operator "+" for type "Standard.
 ↪Boolean"
bad_arith.ads:10:30: error: there is no applicable operator "+" for type "Fruit"␣
 ↪defined at line 7
gprbuild: *** compilation phase failed
```

It is possible, however, to get the predecessor of a Boolean or enumerated value with `Value'Pred` and its successor with `Value'Succ`, as well as to iterate over all values of the

type:

Listing 20: ok_arith.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Ok_Arith is

   B1 : constant Boolean := False;
   B2 : constant Boolean := Boolean'Succ (B1);
   B3 : constant Boolean := Boolean'Pred (B2);

   type Fruit is (Apple, Orange);
   F1 : constant Fruit := Apple;
   F2 : constant Fruit := Fruit'Succ (F1);
   F3 : constant Fruit := Fruit'Pred (F2);

begin
   pragma Assert (B1 = B3);
   pragma Assert (F1 = F3);

   for B in Boolean loop
      Put_Line (B'Img);
   end loop;

   for F in Fruit loop
      Put_Line (F'Img);
   end loop;
end Ok_Arith;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Strong_Typing.Pointer_Arith_Ada
MD5: 6ad400913a48fd815845b6a99d90ec2d
```

Runtime output

```
FALSE
TRUE
APPLE
ORANGE
```

Boolean Operations on Boolean

"Two bee or not two bee? Let's C":

Listing 21: main.c

```
#include <stdbool.h>
#include <stdio.h>

int main() {
   typedef enum {Ape, Bee, Cat} Animal;
   bool answer = (2 * Bee) || ! (2 * Bee);
   printf("two bee or not two bee? %d\n", answer);
   return 0;
}
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Strong_Typing.Boolean_C
MD5: a9d4886827c983df51c9285fe3fd6c77
```

Runtime output

```
two bee or not two bee? 1
```

The answer to the question posed by Shakespeare's Hamlet is 1, since it reduces to A `or not` A and this is true in classical logic.

As previously noted, MISRA C forbids the use of the multiplication operator with an operand of an enumerated type. Rule 18.1 also forbids the use of Boolean operations "and", "or", and "not" (&&, ||, !, respectively, in C) on anything other than Boolean operands. It would thus prohibit the Shakespearian code above.

Below is an attempt to express the same code in SPARK (and Ada), where the Boolean operators are **and**, **or**, and **not**. The **and** and **or** operators evaluate both operands, and the language also supplies short-circuit forms that evaluate the left operand and only evaluate the right operand when its value may affect the result.

Listing 22: bad_hamlet.ads

```
package Bad_Hamlet is
   type Animal is (Ape, Bee, Cat);
   Answer : Boolean := 2 * Bee or not 2 * Bee; -- Illegal
end Bad_Hamlet;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Strong_Typing.Boolean_Ada
MD5: 9089114f9cc6495dabd6957b54b33bd2
```

Build output

```
bad_hamlet.ads:3:28: error: expected type universal integer
bad_hamlet.ads:3:28: error: found type "Animal" defined at line 2
bad_hamlet.ads:3:43: error: expected a modular type
bad_hamlet.ads:3:43: error: found type "Animal" defined at line 2
gprbuild: *** compilation phase failed
```

As expected, the compiler rejects this code. There is no available * operation that works on an enumeration type, and likewise no available **or** or **not** operation.

Bitwise Operations on Unsigned Integers

Here's a genetic engineering example that combines a Bee with a Dog to produce a Cat, by manipulating the atomic structure (the bits in its representation):

Listing 23: main.c

```
#include <stdbool.h>
#include <assert.h>

int main() {
   typedef enum {Ape, Bee, Cat, Dog} Animal;
   Animal mutant = Bee ^ Dog;
   assert (mutant == Cat);
   return 0;
}
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Strong_Typing.Bitwise_C
MD5: 645b0b6155f1cb17d02c7bcbb976993c
```

This algorithm works by accessing the underlying bitwise representation of Bee and Dog (0x01 and 0x03, respectively) and, by applying the exclusive-or operator ^, transforming it into the underlying bitwise representation of a Cat (0x02). While powerful, manipulating the bits in the representation of values is best reserved for unsigned integers as illustrated in the book Hacker's Delight[470]. MISRA C Rule 18.1 thus forbids the use of all bitwise operations on anything but unsigned integers.

Below is an attempt to do the same in SPARK (and Ada). The bitwise operators are **and**, **or**, **xor**, and **not**, and the related bitwise functions are Shift_Left, Shift_Right, Shift_Right_Arithmetic, Rotate_Left and Rotate_Right:

Listing 24: bad_genetics.ads

```
package Bad_Genetics is
   type Animal is (Ape, Bee, Cat, Dog);
   Mutant : Animal := Bee xor Dog;  --  ERROR
   pragma Assert (Mutant = Cat);
end Bad_Genetics;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Strong_Typing.Bitwise_Ada
MD5: 3f7c3dd616f065016590d574200cf1db
```

Build output

```
bad_genetics.ads:3:27: error: there is no applicable operator "Xor" for type
 ↪"Animal" defined at line 2
gprbuild: *** compilation phase failed
```

The declaration of Mutant is illegal, since the **xor** operator is only available for Boolean and unsigned integer (modular) values; it is not available for Animal. The same restriction applies to the other bitwise operators listed above. If we really wanted to achieve the effect of the above code in legal SPARK (or Ada), then the following approach will work (the type Unsigned_8 is an 8-bit modular type declared in the predefined package Interfaces).

Listing 25: unethical_genetics.ads

```
with Interfaces; use Interfaces;
package Unethical_Genetics is
   type Animal is (Ape, Bee, Cat, Dog);
   A      : constant array (Animal) of Unsigned_8 :=
               (Animal'Pos (Ape), Animal'Pos (Bee),
                Animal'Pos (Cat), Animal'Pos (Dog));
   Mutant : Animal := Animal'Val (A (Bee) xor A (Dog));
   pragma Assert (Mutant = Cat);
end Unethical_Genetics;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Strong_Typing.Bitwise_Ada_2
MD5: 359439d40740fe2d99e6f334ed3500f9
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
```

Note that **and**, **or**, **not** and **xor** are used both as logical operators and as bitwise operators, but there is no possible confusion between these two uses. Indeed the use of such operators

[470] http://www.hackersdelight.org/

on values from modular types is a natural generalization of their uses on Boolean, since values from modular types are often interpreted as arrays of Booleans.

92.2.2 Restricting Explicit Conversions

A simple way to bypass the restrictions of Rule 10.1 is to explicitly convert the arguments of an operation to a type that the rule allows. While it can often be useful to cast a value from one type to another, many casts that are allowed in C are either downright errors or poor replacements for clearer syntax.

One example is to cast from a scalar type to Boolean. A better way to express `(bool)x` is to compare x to the zero value of its type: `x != 0` for integers, `x != 0.0` for floats, `x != '0'` for characters, `x != Enum` where `Enum` is the first enumerated value of the type. Thus, MISRA C Rule 10.5 advises avoiding casting non-Boolean values to Boolean.

Rule 10.5 also advises avoiding other casts that are, at best, obscure:

- from a Boolean to any other scalar type
- from a floating-point value to an enumeration or a character
- from any scalar type to an enumeration

The rules are not symmetric, so although a float should not be cast to an enum, casting an enum to a float is allowed. Similarly, although it is advised to not cast a character to an enum, casting an enum to a character is allowed.

The rules in SPARK are simpler. There are no conversions between numeric types (integers, fixed-point and floating-point) and non-numeric types (such as Boolean, Character, and other enumeration types). Conversions between different non-numeric types are limited to those that make semantic sense, for example between a derived type and its parent type. Any numeric type can be converted to any other numeric type, with precise rules for rounding/truncating values when needed and run-time checking that the converted value is in the range associated with the target type.

92.2.3 Restricting Implicit Conversions

Rules 10.1 and 10.5 restrict operations on types and explicit conversions. That's not enough to avoid problematic C programs; a program violating one of these rules can be expressed using only implicit type conversions. For example, the Shakespearian code in section *Boolean Operations on Boolean* (page 1899) can be reformulated to satisfy both Rules 10.1 and 10.5:

Listing 26: main.c

```c
#include <stdbool.h>
#include <stdio.h>

int main() {
   typedef enum {Ape, Bee, Cat} Animal;
   int b = Bee;
   bool t = 2 * b;
   bool answer = t || ! t;
   printf("two bee or not two bee? %d\n", answer);
   return 0;
}
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Strong_Typing.Implicit_Conversion_C
MD5: a157dd05c5fe8926886361b533305e14
```

Runtime output

```
two bee or not two bee? 1
```

Here, we're implicitly converting the enumerated value Bee to an int, and then implicitly converting the integer value `2 * b` to a Boolean. This does not violate 10.1 or 10.5, but it is prohibited by MISRA C Rule 10.3: "*The value of an expression shall not be assigned to an object with a narrower essential type or of a different essential type category*".

Rule 10.1 also does not prevent arguments of an operation from being inconsistent, for example comparing a floating-point value and an enumerated value. But MISRA C Rule 10.4 handles this situation: "*Both operands of an operator in which the usual arithmetic conversions are performed shall have the same essential type category*".

In addition, three rules in the "Composite operators and expressions" section avoid common mistakes related to the combination of explicit/implicit conversions and operations.

The rules in SPARK (and Ada) are far simpler: there are no implicit conversions! This applies both between types of a different *essential type category* as MISRA C puts it, as well as between types that are structurally the same but declared as different types.

Listing 27: bad_conversions.adb

```
procedure Bad_Conversions is
   pragma Warnings (Off);
   F : Float := 0.0;
   I : Integer := 0;
   type Animal is (Ape, Bee, Cat);
   type My_Animal is new Animal; -- derived type
   A : Animal := Cat;
   M : My_Animal := Bee;
   B : Boolean := True;
   C : Character := 'a';
begin
   F := I;  --  ERROR
   I := A;  --  ERROR
   A := B;  --  ERROR
   M := A;  --  ERROR
   B := C;  --  ERROR
   C := F;  --  ERROR
end Bad_Conversions;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Strong_Typing.Implicit_Conversion_Bad_
 ↪Ada
MD5: f10b50048595df0b4ed77c06a7508412
```

Build output

```
bad_conversions.adb:12:09: error: expected type "Standard.Float"
bad_conversions.adb:12:09: error: found type "Standard.Integer"
bad_conversions.adb:13:09: error: expected type "Standard.Integer"
bad_conversions.adb:13:09: error: found type "Animal" defined at line 5
bad_conversions.adb:14:09: error: expected type "Animal" defined at line 5
bad_conversions.adb:14:09: error: found type "Standard.Boolean"
bad_conversions.adb:15:09: error: expected type "My_Animal" defined at line 6
bad_conversions.adb:15:09: error: found type "Animal" defined at line 5
bad_conversions.adb:16:09: error: expected type "Standard.Boolean"
bad_conversions.adb:16:09: error: found type "Standard.Character"
bad_conversions.adb:17:09: error: expected type "Standard.Character"
bad_conversions.adb:17:09: error: found type "Standard.Float"
gprbuild: *** compilation phase failed
```

The compiler reports a mismatch on every statement in the above procedure (the declarations are all legal).

Adding explicit conversions makes the assignments to F and M valid, since SPARK (and Ada) allow conversions between numeric types and between a derived type and its parent type, but all other conversions are illegal:

Listing 28: bad_conversions.adb

```
procedure Bad_Conversions is
   pragma Warnings (Off);
   F : Float := 0.0;
   I : Integer := 0;
   type Animal is (Ape, Bee, Cat);
   type My_Animal is new Animal; -- derived type
   A : Animal := Cat;
   M : My_Animal := Bee;
   B : Boolean := True;
   C : Character := 'a';
begin
   F := Float (I);       --  OK
   I := Integer (A);     --  ERROR
   A := Animal (B);      --  ERROR
   M := My_Animal (A);   --  OK
   B := Boolean (C);     --  ERROR
   C := Character (F);   --  ERROR
end Bad_Conversions;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Strong_Typing.Implicit_Conversion_Bad_
 ↪Ada
MD5: 4d3f6a8629d51f27b6628dae5fc7b680
```

Build output

```
bad_conversions.adb:13:18: error: illegal operand for numeric conversion
bad_conversions.adb:14:09: error: invalid conversion, not compatible with type
 ↪"Standard.Boolean"
bad_conversions.adb:16:09: error: invalid conversion, not compatible with type
 ↪"Standard.Character"
bad_conversions.adb:17:09: error: invalid conversion, not compatible with type
 ↪"Standard.Float"
gprbuild: *** compilation phase failed
```

Although an enumeration value cannot be converted to an integer (or *vice versa*) either implicitly or explicitly, SPARK (and Ada) provide functions to obtain the effect of a type conversion. For any enumeration type T, the function `T'Pos(e)` takes an enumeration value from type T and returns its relative position as an integer, starting at `0`. For example, `Animal'Pos(Bee)` is `1`, and `Boolean'Pos(False)` is `0`. In the other direction, `T'Val(n)`, where n is an integer, returns the enumeration value in type T at relative position n. If n is negative or greater then `T'Pos(T'Last)` then a run-time exception is raised.

Hence, the following is valid SPARK (and Ada) code; **`Character`** is defined as an enumeration type:

Listing 29: ok_conversions.adb

```
procedure Ok_Conversions is
   pragma Warnings (Off);
   F : Float := 0.0;
   I : Integer := 0;
```

(continues on next page)

(continued from previous page)

```
   type Animal is (Ape, Bee, Cat);
   type My_Animal is new Animal;
   A : Animal := Cat;
   M : My_Animal := Bee;
   B : Boolean := True;
   C : Character := 'a';
begin
   F := Float (I);
   I := Animal'Pos (A);
   I := My_Animal'Pos (M);
   I := Boolean'Pos (B);
   I := Character'Pos (C);
   I := Integer (F);
   A := Animal'Val (2);
end Ok_Conversions;
```

CHAPTER

NINETYTHREE

INITIALIZING DATA BEFORE USE

As with most programming languages, C does not require that variables be initialized at their declaration, which makes it possible to unintentionally read uninitialized data. This is a case of undefined behavior, which can sometimes be used to attack the program.

93.1 Detecting Reads of Uninitialized Data

MISRA C attempts to prevent reads of uninitialized data in a specific section on "Initialization", containing five rules. The most important is Rule 9.1: "*The value of an object with automatic storage duration shall not be read before it has been set*". The first example in the rule is interesting, as it shows a non-trivial (and common) case of conditional initialization, where a function f initializes an output parameter p only in some cases, and the caller g of f ends up reading the value of the variable u passed in argument to f in cases where it has not been initialized:

Listing 1: f.h

```
#include <stdint.h>

void f ( int b, uint16_t *p );
```

Listing 2: f.c

```
#include "f.h"

void f ( int b, uint16_t *p )
{
  if ( b )
  {
     *p = 3U;
  }
}
```

Listing 3: g.c

```
#include <stdint.h>
#include "f.h"

static void g (void)
{
   uint16_t u;

   f ( 0, &u );

   if ( u == 3U )
   {
```

(continues on next page)

(continued from previous page)

```
        /* Non-compliant use - "u" has not been assigned a value. */
    }
}
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Initialization.Read_Uninitialized_Data_C
MD5: f36430141f48b34810d53a43294c7d74
```

Detecting the violation of Rule 9.1 can be arbitrarily complex, as the program points corresponding to a variable's initialization and read can be separated by many calls and conditions. This is one of the undecidable rules, for which most MISRA C checkers won't detect all violations.

In SPARK, the guarantee that all reads are to initialized data is enforced by the SPARK analysis tool, GNATprove, through what is referred to as *flow analysis*. Every subprogram is analyzed separately to check that it cannot read uninitialized data. To make this modular analysis possible, SPARK programs need to respect the following constraints:

- all inputs of a subprogram should be initialized on subprogram entry
- all outputs of a subprogram should be initialized on subprogram return

Hence, given the following code translated from C, GNATprove reports that function F might not always initialize output parameter P:

Listing 4: init.ads

```
with Interfaces; use Interfaces;

package Init is
   procedure F (B : Boolean; P : out Unsigned_16);
   procedure G;
end Init;
```

Listing 5: init.adb

```
package body Init is

   procedure F (B : Boolean; P : out Unsigned_16) is
   begin
      if B then
         P := 3;
      end if;
   end F;

   procedure G is
      U : Unsigned_16;
   begin
      F (False, U);

      if U = 3 then
         null;
      end if;
   end G;

end Init;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Initialization.Read_Uninitialized_Data_
 ↪Ada
MD5: d54bc9901b3bff4f0cfea9942a795156
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
init.ads:4:30: medium: "P" might not be initialized in "F" [reason for check: OUT␣
 ↪parameter should be initialized on return] [possible fix: initialize "P" on all␣
 ↪paths or make "P" an IN OUT parameter]
gnatprove: unproved check messages considered as errors
```

We can correct the program by initializing P to value 0 when condition B is not satisfied:

Listing 6: init.ads

```
1  with Interfaces; use Interfaces;
2
3  package Init is
4     procedure F (B : Boolean; P : out Unsigned_16);
5     procedure G;
6  end Init;
```

Listing 7: init.adb

```
1  package body Init is
2
3     procedure F (B : Boolean; P : out Unsigned_16) is
4     begin
5        if B then
6           P := 3;
7        else
8           P := 0;
9        end if;
10    end F;
11
12    procedure G is
13       U : Unsigned_16;
14    begin
15       F (False, U);
16
17       if U = 3 then
18          null;
19       end if;
20    end G;
21
22 end Init;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Initialization.Read_Uninitialized_Data_
 ↪Ada
MD5: 481787c333014d56814a7205720f72bc
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
```

(continues on next page)

(continued from previous page)

```
init.adb:13:07: info: initialization of "U" proved
init.ads:4:30: info: initialization of "P" proved
```

GNATprove now does not report any possible reads of uninitialized data. On the contrary, it confirms that all reads are made from initialized data.

In contrast with C, SPARK does not guarantee that global data (called *library-level* data in SPARK and Ada) is zero-initialized at program startup. Instead, GNATprove checks that all global data is explicitly initialized (at declaration or elsewhere) before it is read. Hence it goes beyond the MISRA C Rule 9.1, which considers global data as always initialized even if the default value of all-zeros might not be valid data for the application. Here's a variation of the above code where variable U is now global:

Listing 8: init.ads

```
with Interfaces; use Interfaces;

package Init is
   U : Unsigned_16;
   procedure F (B : Boolean);
   procedure G;
end Init;
```

Listing 9: init.adb

```
package body Init is

   procedure F (B : Boolean) is
   begin
      if B then
         U := 3;
      end if;
   end F;

   procedure G is
   begin
      F (False);

      if U = 3 then
         null;
      end if;
   end G;

end Init;
```

Listing 10: call_init.adb

```
with Init;

procedure Call_Init is
begin
   Init.G;
end Call_Init;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Initialization.Read_Uninitialized_Data_
 ↪Ada
MD5: a85cde45a658727975367b041a1a5dc3
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
call_init.adb:5:08: medium: "U" might not be initialized after elaboration of main␣
 ↪program "Call_Init"
init.adb:14:07: warning: statement has no effect
gnatprove: unproved check messages considered as errors
```

GNATprove reports here that variable U might not be initialized at program startup, which is indeed the case here. It reports this issue on the main program `Call_Init` because its analysis showed that F needs to take U as an initialized input (since F is not initializing U on all paths, U keeps its value on the other path, which needs to be an initialized value), which means that G which calls F also needs to take U as an initialized input, which in turn means that `Call_Init` which calls G also needs to take U as an initialized input. At this point, we've reached the main program, so the initialization phase (referred to as *elaboration* in SPARK and Ada) should have taken care of initializing U. This is not the case here, hence the message from GNATprove.

It is possible in SPARK to specify that G should initialize variable U; this is done with a *data dependency* contract introduced with aspect `Global` following the declaration of procedure G:

Listing 11: init.ads

```
with Interfaces; use Interfaces;

package Init is
   U : Unsigned_16;
   procedure F (B : Boolean);
   procedure G with Global => (Output => U);
end Init;
```

Listing 12: init.adb

```
package body Init is

   procedure F (B : Boolean) is
   begin
      if B then
         U := 3;
      end if;
   end F;

   procedure G is
   begin
      F (False);

      if U = 3 then
         null;
      end if;
   end G;

end Init;
```

Listing 13: call_init.adb

```
with Init;

procedure Call_Init is
begin
   Init.G;
```

(continues on next page)

(continued from previous page)

```
6 end Call_Init;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Initialization.Read_Uninitialized_Data_
 ↪Ada
MD5: 100122ca3c8c60c134822a85d564a60a
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
init.adb:12:07: high: "U" is not an input in the Global contract of subprogram "G"␣
 ↪at init.ads:6
init.adb:12:07: high: either make "U" an input in the Global contract or␣
 ↪initialize it before use
init.adb:14:07: warning: statement has no effect
gnatprove: unproved check messages considered as errors
```

GNATprove reports the error on the call to F in G, as it knows at this point that F needs U to be initialized but the calling context in G cannot provide that guarantee. If we provide the same data dependency contract for F, then GNATprove reports the error on F itself, similarly to what we saw for an output parameter U.

93.2 Detecting Partial or Redundant Initialization of Arrays and Structures

The other rules in the section on "Initialization" deal with common errors in initializing aggregates and *designated initializers* in C99 to initialize a structure or array at declaration. These rules attempt to patch holes created by the lax syntax and rules in C standard. For example, here are five valid initializations of an array of 10 elements in C:

Listing 14: main.c

```
1 int main() {
2    int a[10] = {0};
3    int b[10] = {0, 0};
4    int c[10] = {0, [8] = 0};
5    int d[10] = {0, [8] = 0, 0};
6    int e[10] = {0, [8] = 0, 0, [8] = 1};
7    return 0;
8 }
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Initialization.Redundant_Init
MD5: 1212a5565fc3a382e7f967d1cf0b48f9
```

Only a is fully initialized to all-zeros in the above code snippet. MISRA C Rule 9.3 thus forbids all other declarations by stating that "*Arrays shall not be partially initialized*". In addition, MISRA C Rule 9.4 forbids the declaration of e by stating that "*An element of an object shall not be initialised more than once*" (in e's declaration, the element at index 8 is initialized twice).

The same holds for initialization of structures. Here is an equivalent set of declarations with the same potential issues:

Listing 15: main.c

```c
int main() {
   typedef struct { int x; int y; int z; } rec;
   rec a = {0};
   rec b = {0, 0};
   rec c = {0, .y = 0};
   rec d = {0, .y = 0, 0};
   rec e = {0, .y = 0, 0, .y = 1};
   return 0;
}
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Initialization.Redundant_Init
MD5: e562ef70b8c8a170d2bd09281cf2a075
```

Here only a, d and e are fully initialized. MISRA C Rule 9.3 thus forbids the declarations of b and c. In addition, MISRA C Rule 9.4 forbids the declaration of e.

In SPARK and Ada, the aggregate used to initialize an array or a record must fully cover the components of the array or record. Violations lead to compilation errors, both for records:

Listing 16: init_record.ads

```
package Init_Record is
   type Rec is record
      X, Y, Z : Integer;
   end record;
   R : Rec := (X => 1);  --  ERROR, Y and Z not specified
end Init_Record;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Initialization.Init_Record_1
MD5: 6b28bffe6270c5ea5055123c5b89c508
```

Build output

```
init_record.ads:5:15: error: no value supplied for component "Y"
init_record.ads:5:15: error: no value supplied for component "Z"
gprbuild: *** compilation phase failed
```

and for arrays:

Listing 17: init_array.ads

```
package Init_Array is
   type Arr is array (1 .. 10) of Integer;
   A : Arr := (1 => 1);  --  ERROR, elements 2..10 not specified
end Init_Array;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Initialization.Init_Array_1
MD5: 81aa6363ba770ded10bef8d3d8776914
```

Build output

```
init_array.ads:3:15: warning: too few elements for type "Arr" defined at line 2␣
 ↪[enabled by default]
init_array.ads:3:15: warning: expected 10 elements; found 1 element [enabled by␣
```

(continues on next page)

(continued from previous page)

```
 ↪default]
init_array.ads:3:15: warning: Constraint_Error will be raised at run time [enabled␣
 ↪by default]
```

Similarly, redundant initialization leads to compilation errors for records:

Listing 18: init_record.ads

```
package Init_Record is
   type Rec is record
      X, Y, Z : Integer;
   end record;
   R : Rec := (X => 1, Y => 1, Z => 1, X => 2);  --  ERROR, X duplicated
end Init_Record;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Initialization.Init_Record_2
MD5: 07d3f790009be97cef2daaf08b2f7afd
```

Build output

```
init_record.ads:5:40: error: more than one value supplied for "X"
gprbuild: *** compilation phase failed
```

and for arrays:

Listing 19: init_array.ads

```
package Init_Array is
   type Arr is array (1 .. 10) of Integer;
   A : Arr := (1 .. 8 => 1, 9 .. 10 => 2, 7 => 3);  --  ERROR, A(7) duplicated
end Init_Array;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Initialization.Init_Array_2
MD5: 12f5fa4615abccde43f63f72340fd4a0
```

Build output

```
init_array.ads:3:43: error: index value in array aggregate duplicates the one␣
 ↪given at line 3
init_array.ads:3:43: error:   7
gprbuild: *** compilation phase failed
```

Finally, while it is legal in Ada to leave uninitialized parts in a record or array aggregate by using the box notation (meaning that the default initialization of the type is used, which may be no initialization at all), SPARK analysis rejects such use when it leads to components not being initialized, both for records:

Listing 20: init_record.ads

```
package Init_Record is
   type Rec is record
      X, Y, Z : Integer;
   end record;
   R : Rec := (X => 1, others => <>);  --  ERROR, Y and Z not specified
end Init_Record;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Initialization.Init_Record_3
MD5: a7736f2b563c39fb4ab10007e927ad97
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
init_record.ads:5:04: error: "R" is not allowed in SPARK (due to box notation␣
 ↪without default or relaxed initialization)
init_record.ads:5:04: error: violation of pragma SPARK_Mode at /vagrant/frontend/
 ↪dist/test_output/projects/Courses/SPARK_For_The_MISRA_C_Dev/Initialization/Init_
 ↪Record_3/a7736f2b563c39fb4ab10007e927ad97/main_spark.adc:12
init_record.ads:5:15: error: box notation without default or relaxed␣
 ↪initialization is not allowed in SPARK (SPARK RM 4.3(1))
init_record.ads:5:15: error: violation of pragma SPARK_Mode at /vagrant/frontend/
 ↪dist/test_output/projects/Courses/SPARK_For_The_MISRA_C_Dev/Initialization/Init_
 ↪Record_3/a7736f2b563c39fb4ab10007e927ad97/main_spark.adc:12
gnatprove: error during analysis of data and information flow
```

and for arrays:

Listing 21: init_array.ads

```
1  package Init_Array is
2     type Arr is array (1 .. 10) of Integer;
3     A : Arr := (1 .. 8 => 1, 9 .. 10 => <>);  --  ERROR, A(9..10) not specified
4  end Init_Array;
```

CHAPTER

NINETYFOUR

CONTROLLING SIDE EFFECTS

As with most programming languages, C allows side effects in expressions. This leads to subtle issues about conflicting side effects, when subexpressions of the same expression read/write the same variable.

94.1 Preventing Undefined Behavior

Conflicting side effects are a kind of undefined behavior; the C Standard (section 6.5) defines the concept as follows:

> "*Between two sequence points, an object is modified more than once, or is modified and the prior value is read other than to determine the value to be stored*"

This legalistic wording is somewhat opaque, but the notion of sequence points is summarized in Annex C of the C90 and C99 standards. MISRA C repeats these conditions in the Amplification of Rule 13.2, including the read of a volatile variable as a side effect similar to writing a variable.

This rule is undecidable, so MISRA C completes it with two rules that provide simpler restrictions preventing some side effects in expressions, thus reducing the potential for undefined behavior:

- Rule 13.3: "*A full expression containing an increment (++) or decrement (--) operator should have no other potential side effects other than that caused by the increment or decrement operator*".
- Rule 13.4: "*The result of an assignment operator should not be used*".

In practice, conflicting side effects usually manifest themselves as portability issues, since the result of the evaluation of an expression depends on the order in which a compiler decides to evaluate its subexpressions. So changing the compiler version or the target platform might lead to a different behavior of the application.

To reduce the dependency on evaluation order, MISRA C Rule 13.1 states: "*Initializer lists shall not contain persistent side effects*". This case is theoretically different from the previously mentioned conflicting side effects, because initializers that comprise an initializer list are separated by sequence points, so there is no risk of undefined behavior if two initializers have conflicting side effects. But given that initializers are executed in an unspecified order, the result of a conflict is potentially as damaging for the application.

94.2 Reducing Programmer Confusion

Even in cases with no undefined or unspecified behavior, expressions with multiple side effects can be confusing to programmers reading or maintaining the code. This problem arises in particular with C's increment and decrement operators that can be applied prior to or after the expression evaluation, and with the assignment operator = in C since it can easily be mistaken for equality. Thus MISRA C forbids the use of the increment / decrement

(Rule 13.3) and assignment (Rule 13.4) operators in expressions that have other potential side effects.

In other cases, the presence of expressions with side effects might be confusing, if the programmer wrongly thinks that the side effects are guaranteed to occur. Consider the function `decrease_until_one_is_null` below, which decreases both arguments until one is null:

Listing 1: main.c

```c
#include <stdio.h>

void decrease_until_one_is_null (int *x, int *y) {
   if (x == 0 || y == 0) {
      return;
   }
   while (--*x != 0 && --*y != 0) {
      // nothing
   }
}

int main() {
   int x = 42, y = 42;
   decrease_until_one_is_null (&x, &y);
   printf("x = %d, y = %d\n", x, y);
   return 0;
}
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Side_Effect.Side_Effect_C
MD5: a3e991881894bc3fb25a5f49a083fd2e
```

Runtime output

```
x = 0, y = 1
```

The program produces the following output:

```
x = 0, y = 1
```

I.e., starting from the same value 42 for both x and y, only x has reached the value zero after `decrease_until_one_is_null` returns. The reason is that the side effect on y is performed only conditionally. To avoid such surprises, MISRA C Rule 13.5 states: "*The right hand operand of a logical && or || operator shall not contain persistent side effects*"; this rule forbids the code above.

MISRA C Rule 13.6 similarly states: "*The operand of the sizeof operator shall not contain any expression which has potential side effects*". Indeed, the operand of **`sizeof`** is evaluated only in rare situations, and only according to C99 rules, which makes any side effect in such an operand a likely mistake.

94.3 Side Effects and SPARK

In SPARK, expressions cannot have side effects; only statements can. In particular, there are no increment/decrement operators, and no assignment operator. There is instead an assignment statement, whose syntax using `:=` clearly distinguishes it from equality (using `=`). And in any event an expression is not allowed as a statement and this a construct such as `X = Y;` would be illegal. Here is how a variable X can be assigned, incremented and decremented:

```
X := 1;
X := X + 1;
X := X - 1;
```

There are two possible side effects when evaluating an expression:

- a read of a volatile variable
- a side effect occurring inside a function that the expression calls

Reads of volatile variables in SPARK are restricted to appear immediately at statement level, so the following is not allowed:

Listing 2: volatile_read.ads

```
package Volatile_Read is
   X : Integer with Volatile;
   procedure P (Y : out Integer);
end Volatile_Read;
```

Listing 3: volatile_read.adb

```
package body Volatile_Read is
   procedure P (Y : out Integer) is
   begin
      Y := X - X;  --  ERROR
   end P;
end Volatile_Read;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Side_Effect.Volatile_Read_1
MD5: 7ec58b4d1432d03d60b5ea6019cc031e
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
volatile_read.adb:4:12: error: volatile object in interfering context is not␣
 ↪allowed in SPARK (SPARK RM 7.1.3(9)) [E0004]
volatile_read.adb:4:12: error: violation of pragma SPARK_Mode at /vagrant/frontend/
 ↪dist/test_output/projects/Courses/SPARK_For_The_MISRA_C_Dev/Side_Effect/Volatile_
 ↪Read_1/7ec58b4d1432d03d60b5ea6019cc031e/main_spark.adc:12
volatile_read.adb:4:12: error: launch "gnatprove --explain=E0004" for more␣
 ↪information
volatile_read.adb:4:16: error: volatile object in interfering context is not␣
 ↪allowed in SPARK (SPARK RM 7.1.3(9)) [E0004]
volatile_read.adb:4:16: error: violation of pragma SPARK_Mode at /vagrant/frontend/
 ↪dist/test_output/projects/Courses/SPARK_For_The_MISRA_C_Dev/Side_Effect/Volatile_
 ↪Read_1/7ec58b4d1432d03d60b5ea6019cc031e/main_spark.adc:12
volatile_read.adb:4:16: error: launch "gnatprove --explain=E0004" for more␣
 ↪information
gnatprove: error during analysis of data and information flow
```

Instead, every read of a volatile variable must occur immediately before being assigned to another variable, as follows:

Listing 4: volatile_read.ads

```
package Volatile_Read is
   X : Integer with Volatile;
```

(continues on next page)

(continued from previous page)

```
   procedure P (Y : out Integer);
end Volatile_Read;
```

Listing 5: volatile_read.adb

```
package body Volatile_Read is
   procedure P (Y : out Integer) is
      X1 : constant Integer := X;
      X2 : constant Integer := X;
   begin
      Y := X1 - X2;
   end P;
end Volatile_Read;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Side_Effect.Volatile_Read_2
MD5: 1224af597a12a8ca77b96976c76b422f
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
volatile_read.ads:3:17: info: initialization of "Y" proved
```

Note here that the order of capture of the volatile value of X might be significant. For example, X might denote a quantity which only increases, like clock time, so that the above expression X1 - X2 would always be negative or zero.

Even more significantly, functions in SPARK cannot have side effects; only procedures can. The only effect of a SPARK function is the computation of a result from its inputs, which may be passed as parameters or as global variables. In particular, SPARK functions cannot have **out** or **in out** parameters:

Listing 6: bad_function.ads

```
function Bad_Function (X, Y : Integer; Sum, Max : out Integer) return Boolean;
--  ERROR, since "out" parameters are not allowed
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Side_Effect.Function_With_Out_Param
MD5: 204dd22df61fe15208ae34ebc3828974
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
bad_function.ads:1:40: error: function cannot have parameter of mode "out" or "in␣
 ↪out" in SPARK [E0015]
bad_function.ads:1:40: error: launch "gnatprove --explain=E0015" for more␣
 ↪information
bad_function.ads:1:45: error: function cannot have parameter of mode "out" or "in␣
 ↪out" in SPARK [E0015]
bad_function.ads:1:45: error: launch "gnatprove --explain=E0015" for more␣
 ↪information
gnatprove: error during generation of Global contracts
```

More generally, SPARK does not allow functions that have a side effect in addition to returning their result, as is typical of many idioms in other languages, for example when setting

a new value and returning the previous one:

Listing 7: bad_functions.ads

```
package Bad_Functions is
   function Set (V : Integer) return Integer;
   function Get return Integer;
end Bad_Functions;
```

Listing 8: bad_functions.adb

```
package body Bad_Functions is

   Value : Integer := 0;

   function Set (V : Integer) return Integer is
      Previous : constant Integer := Value;
   begin
      Value := V;  --  ERROR
      return Previous;
   end Set;

   function Get return Integer is (Value);

end Bad_Functions;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Side_Effect.Side_Effect_Ada
MD5: 3337b6025c4996e7fa8c7e27b4df42c1
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
bad_functions.ads:2:13: error: function "Set" with output global "Value" is not␣
 ↪allowed in SPARK [E0005]
bad_functions.ads:2:13: error: violation of pragma SPARK_Mode at /vagrant/frontend/
 ↪dist/test_output/projects/Courses/SPARK_For_The_MISRA_C_Dev/Side_Effect/Side_
 ↪Effect_Ada/3337b6025c4996e7fa8c7e27b4df42c1/main_spark.adc:12
bad_functions.ads:2:13: error: launch "gnatprove --explain=E0005" for more␣
 ↪information
gnatprove: error during analysis of data and information flow
```

GNATprove detects that function Set has a side effect on global variable Value and issues an error. The correct idiom in SPARK for such a case is to use a procedure with an **out** parameter to return the desired result:

Listing 9: ok_subprograms.ads

```
package Ok_Subprograms is
   procedure Set (V : Integer; Prev : out Integer);
   function Get return Integer;
end Ok_Subprograms;
```

Listing 10: ok_subprograms.adb

```
package body Ok_Subprograms is

   Value : Integer := 0;

```

(continues on next page)

(continued from previous page)

```
5     procedure Set (V : Integer; Prev : out Integer) is
6     begin
7        Prev := Value;
8        Value := V;
9     end Set;
10
11    function Get return Integer is (Value);
12
13 end Ok_Subprograms;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Side_Effect.No_Side_Effect_Ada
MD5: 04e2235b8b6a01706434d35f6636674c
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
ok_subprograms.ads:2:32: info: initialization of "Prev" proved
ok_subprograms.ads:3:13: info: implicit aspect Always_Terminates on "Get" has been␣
 ↪proved, subprogram will terminate
```

With the above restrictions in SPARK, none of the conflicts of side effects that can occur in C can occur in SPARK, and this is guaranteed by flow analysis.

CHAPTER

NINETYFIVE

DETECTING UNDEFINED BEHAVIOR

Undefined behavior (and critical unspecified behavior, which we'll treat as undefined behavior) are the plague of C programs. Many rules in MISRA C are designed to avoid undefined behavior, as evidenced by the twenty occurrences of "undefined" in the MISRA C:2012 document.

MISRA C Rule 1.3 is the overarching rule, stating very simply:

> "*There shall be no occurrence of undefined or critical unspecified behaviour.*"

The deceptive simplicity of this rule rests on the definition of *undefined or critical unspecified behaviour*. Appendix H of MISRA:C 2012 lists hundreds of cases of undefined and critical unspecified behavior in the C programming language standard, a majority of which are not individually decidable.

It is therefore not surprising that a majority of MISRA C checkers do not make a serious attempt to verify compliance with MISRA C Rule 1.3.

95.1 Preventing Undefined Behavior in SPARK

Since SPARK is a subset of the Ada programming language, SPARK programs may exhibit two types of undefined behaviors that can occur in Ada:

- *bounded error*: when the program enters a state not defined by the language semantics, but the consequences are bounded in various ways. For example, reading uninitialized data can lead to a bounded error, when the value read does not correspond to a valid value for the type of the object. In this specific case, the Ada Reference Manual states that either a predefined exception is raised or execution continues using the invalid representation.
- *erroneous execution*: when when the program enters a state not defined by the language semantics, but the consequences are not bounded by the Ada Reference Manual. This is the closest to an undefined behavior in C. For example, concurrently writing through different tasks to the same unprotected variable is a case of erroneous execution.

Many cases of undefined behavior in C would in fact raise exceptions in SPARK. For example, accessing an array beyond its bounds raises the exception `Constraint_Error` while reaching the end of a function without returning a value raises the exception `Program_Error`.

The SPARK Reference Manual defines the SPARK subset through a combination of *legality rules* (checked by the compiler, or the compiler-like phase preceding analysis) and *verification rules* (checked by the formal analysis tool GNATprove). Bounded errors and erroneous execution are prevented by a combination of legality rules and the *flow analysis* part of GNATprove, which in particular detects potential reads of uninitialized data, as described in *Detecting Reads of Uninitialized Data* (page 1907). The following discussion focuses on how SPARK can verify that no exceptions can be raised.

95.2 Proof of Absence of Run-Time Errors in SPARK

The most common run-time errors are related to misuse of arithmetic (division by zero, overflows, exceeding the range of allowed values), arrays (accessing beyond an array bounds, assigning between arrays of different lengths), and structures (accessing components that are not defined for a given variant).

Arithmetic run-time errors can occur with signed integers, unsigned integers, fixed-point and floating-point (although with IEEE 754 floating-point arithmetic, errors are manifest as special run-time values such as NaN and infinities rather than as exceptions that are raised). These errors can occur when applying arithmetic operations or when converting between numeric types (if the value of the expression being converted is outside the range of the type to which it is being converted).

Operations on enumeration values can also lead to run-time errors; e.g., `T'Pred(T'First)` or `T'Succ(T'Last)` for an enumeration type `T`, or `T'Val(N)` where `N` is an integer value that is outside the range `0 .. T'Pos(T'Last)`.

The `Update` procedure below contains what appears to be a simple assignment statement, which sets the value of array element `A(I+J)` to `P/Q`.

Listing 1: show_runtime_errors.ads

```
package Show_Runtime_Errors is

   type Nat_Array is array (Integer range <>) of Natural;
   --  The values in subtype Natural are 0 , 1, ... Integer'Last

   procedure Update (A : in out Nat_Array; I, J, P, Q : Integer);

end Show_Runtime_Errors;
```

Listing 2: show_runtime_errors.adb

```
package body Show_Runtime_Errors is

   procedure Update (A : in out Nat_Array; I, J, P, Q : Integer) is
   begin
      A (I + J) := P / Q;
   end Update;

end Show_Runtime_Errors;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Undefined_Behavior.Runtime_Errors
MD5: 8ad4488974ab9e49ac17bf094ae33eac
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: flow analysis and proof ...
show_runtime_errors.adb:5:12: medium: overflow check might fail, cannot prove␣
 ↪lower bound for I + J [reason for check: result of addition must fit in a 32-
 ↪bits machine integer] [possible fix: add precondition (if J >= 0 then I <=␣
 ↪Integer'Last - J else I >= Integer'First - J) to subprogram at show_runtime_
 ↪errors.ads:6]
show_runtime_errors.adb:5:12: medium: array index check might fail [reason for␣
 ↪check: result of addition must be a valid index into the array] [possible fix:␣
 ↪add precondition (if J >= 0 then I <= A'Last - J else I >= A'First - J) to␣
 ↪subprogram at show_runtime_errors.ads:6]
```

(continues on next page)

(continued from previous page)

```
show_runtime_errors.adb:5:22: medium: divide by zero might fail [possible fix: add␣
 ↪precondition (Q /= 0) to subprogram at show_runtime_errors.ads:6]
show_runtime_errors.adb:5:22: medium: overflow check might fail, cannot prove␣
 ↪lower bound for P / Q [reason for check: result of division must fit in a 32-
 ↪bits machine integer] [possible fix: add precondition (P / Q >= Integer'First)␣
 ↪to subprogram at show_runtime_errors.ads:6]
show_runtime_errors.adb:5:22: medium: range check might fail, cannot prove lower␣
 ↪bound for P / Q [reason for check: result of division must fit in the target␣
 ↪type of the assignment] [possible fix: add precondition (P / Q >= Natural'First)␣
 ↪to subprogram at show_runtime_errors.ads:6]
gnatprove: unproved check messages considered as errors
```

However, for an arbitrary invocation of this procedure, say `Update(A, I, J, P, Q)`, an exception can be raised in a variety of circumstances:

- The computation `I+J` may overflow, for example if `I` is `Integer'Last` and `J` is positive.

```
A (Integer'Last + 1) := P / Q;
```

- The value of `I+J` may be outside the range of the array `A`.

```
A (A'Last + 1) := P / Q;
```

- The division `P / Q` may overflow in the special case where `P` is `Integer'First` and `Q` is `-1`, because of the asymmetric range of signed integer types.

```
A (I + J) := Integer'First / -1;
```

- Since the array can only contain non-negative numbers (the element subtype is `Natural`), it is also an error to store a negative value in it.

```
A (I + J) := 1 / -1;
```

- Finally, if `Q` is 0 then a divide by zero error will occur.

```
A (I + J) := P / 0;
```

For each of these potential run-time errors, the compiler will generate checks in the executable code, raising an exception if any of the checks fail:

```
A (Integer'Last + 1) := P / Q;
--  raised CONSTRAINT_ERROR : overflow check failed

A (A'Last + 1) := P / Q;
--  raised CONSTRAINT_ERROR : index check failed

A (I + J) := Integer'First / (-1);
--  raised CONSTRAINT_ERROR : overflow check failed

A (I + J) := 1 / (-1);
--  raised CONSTRAINT_ERROR : range check failed

A (I + J) := P / 0;
--  raised CONSTRAINT_ERROR : divide by zero
```

These run-time checks incur an overhead in program size and execution time. Therefore it may be appropriate to remove them if we are confident that they are not needed.

The traditional way to obtain the needed confidence is through testing, but it is well known that this can never be complete, at least for non-trivial programs. Much better is to guarantee the absence of run-time errors through sound static analysis, and that's where SPARK and GNATprove can help.

More precisely, GNATprove logically interprets the meaning of every instruction in the program, taking into account both control flow and data/information dependencies. It uses this analysis to generate a logical formula called a *verification condition* for each possible check.

```
A (Integer'Last + 1) := P / Q;
--  medium: overflow check might fail

A (A'Last + 1) := P / Q;
--  medium: array index check might fail

A (I + J) := Integer'First / (-1);
--  medium: overflow check might fail

A (I + J) := 1 / (-1);
--  medium: range check might fail

A (I + J) := P / 0;
--  medium: divide by zero might fail
```

The verification conditions are then given to an automatic prover. If every verification condition can be proved, then no run-time errors will occur.

GNATprove's analysis is sound — it will detect all possible instances of run-time exceptions being raised — while also having high precision (i.e., not producing a cascade of "false alarms").

The way to program in SPARK so that GNATprove can guarantee the absence of run-time errors entails:

- declaring variables with precise constraints, and in particular to specify precise ranges for scalars; and
- defining preconditions and postconditions on subprograms, to specify respectively the constraints that callers should respect and the guarantees that the subprogram should provide on exit.

For example, here is a revised version of the previous example, which can guarantee through proof that no possible run-time error can be raised:

Listing 3: no_runtime_errors.ads

```
1  package No_Runtime_Errors is
2
3     subtype Index_Range is Integer range 0 .. 100;
4
5     type Nat_Array is array (Index_Range range <>) of Natural;
6
7     procedure Update (A    : in out Nat_Array;
8                       I, J : Index_Range;
9                       P, Q : Positive)
10    with
11      Pre => I + J in A'Range;
12
13 end No_Runtime_Errors;
```

Listing 4: no_runtime_errors.adb

```
1  package body No_Runtime_Errors is
2
3     procedure Update (A    : in out Nat_Array;
4                       I, J : Index_Range;
5                       P, Q : Positive) is
```

(continues on next page)

(continued from previous page)

```
   begin
      A (I + J) := P / Q;
   end Update;

end No_Runtime_Errors;
```

CHAPTER

NINETYSIX

DETECTING UNREACHABLE CODE AND DEAD CODE

MISRA C defines *unreachable code* as code that cannot be executed, and it defines *dead code* as code that can be executed but has no effect on the functional behavior of the program. (These definitions differ from traditional terminology, which refers to the first category as "dead code" and the second category as "useless code".) Regardless of the terminology, however, both types are actively harmful, as they might confuse programmers and lead to errors during maintenance.

The "Unused code" section of MISRA C contains seven rules that deal with detecting both unreachable code and dead code. The two most important rules are:

- Rule 2.1: "*A project shall not contain unreachable code*", and
- Rule 2.2: "*There shall not be dead code*".

Other rules in the same section prohibit unused entities of various kinds (type declarations, tag declarations, macro declarations, label declarations, function parameters).

While some simple cases of unreachable code can be detected by static analysis (typically if a condition in an **if** statement can be determined to be always true or false), most cases of unreachable code can only be detected by performing coverage analysis in testing, with the caveat that code reported as not being executed is not necessarily unreachable (it could simply reflect gaps in the test suite). Note that *statement coverage*, rather than the more comprehensive *decision coverage* or *modified condition / decision coverage* (MC/DC) as defined in the DO-178C standard for airborne software, is sufficient to detect potential unreachable statements, corresponding to code that is not covered during the testing campaign.

The presence of dead code is much harder to detect, both statically and dynamically, as it requires creating a complete dependency graph linking statements in the code and their effect on visible behavior of the program.

SPARK can detect some cases of both unreachable and dead code through its precise construction of a dependency graph linking a subprogram's statements to all its inputs and outputs. This analysis might not be able to detect complex cases, but it goes well beyond what other analyses do in general.

Listing 1: much_ado_about_little.ads

```
procedure Much_Ado_About_Little (X, Y, Z : Integer; Success : out Boolean);
```

Listing 2: much_ado_about_little.adb

```
procedure Much_Ado_About_Little (X, Y, Z : Integer; Success : out Boolean) is

   procedure Ok is
   begin
      Success := True;
   end Ok;

```

(continues on next page)

(continued from previous page)

```
8     procedure NOk is
9     begin
10       Success := False;
11    end NOk;
12
13 begin
14    Success := False;
15
16    for K in Y .. Z loop
17       if K < X and not Success then
18          Ok;
19       end if;
20    end loop;
21
22    if X > Y then
23       Ok;
24    else
25       NOk;
26    end if;
27
28    if Z > Y then
29       NOk;
30       return;
31    else
32       Ok;
33       return;
34    end if;
35
36    if Success then
37       Success := not Success;
38    end if;
39 end Much_Ado_About_Little;
```

Code block metadata

```
Project: Courses.SPARK_For_The_MISRA_C_Dev.Unreachable_And_Dead_Code.Much_Ado_
 ↪About_Little
MD5: ccccb112fbab169ba964b3f8ef36ec2d
```

Build output

```
much_ado_about_little.adb:36:04: warning: unreachable code [enabled by default]
```

Prover output

```
Phase 1 of 3: generation of data representation information ...
Phase 2 of 3: generation of Global contracts ...
Phase 3 of 3: analysis of data and information flow ...
much_ado_about_little.adb:5:15: warning: unused assignment, in call inlined at␣
 ↪much_ado_about_little.adb:18
much_ado_about_little.adb:5:15: warning: unused assignment, in call inlined at␣
 ↪much_ado_about_little.adb:23
much_ado_about_little.adb:10:15: warning: unused assignment, in call inlined at␣
 ↪much_ado_about_little.adb:25
much_ado_about_little.adb:14:12: warning: unused assignment
much_ado_about_little.adb:16:20: warning: statement has no effect
much_ado_about_little.adb:17:07: warning: statement has no effect
much_ado_about_little.adb:22:04: warning: statement has no effect
much_ado_about_little.adb:36:04: warning: unreachable code [enabled by default]
much_ado_about_little.adb:36:04: warning: this statement is never reached
much_ado_about_little.adb:37:15: warning: this statement is never reached
```

(continues on next page)

(continued from previous page)

```
much_ado_about_little.ads:1:34: warning: unused initial value of "X"
```

The only code in the body of `Much_Ado_About_Little` that affects the result of the procedure's execution is the `if Z > Y...` statement, since this statement sets `Success` to either True or False regardless of what the previous statements did. I.e., the statements preceding this `if` are dead code in the MISRA C sense. Since both branches of the `if Z > Y...` statement return from the procedure, the subsequent `if Success...` statement is unreachable. GNATprove detects and issues warnings about both the dead code and the unreachable code.

CHAPTER

NINETYSEVEN

CONCLUSION

The C programming language is "close to the metal" and has emerged as a *lingua franca* for the majority of embedded platforms of all sizes. However, its software engineering deficiencies (such as the absence of data encapsulation) and its many traps and pitfalls present major obstacles to those developing critical applications. To some extent, it is possible to put the blame for programming errors on programmers themselves, as Linus Torvalds admonished:

> "*Learn C, instead of just stringing random characters together until it compiles (with warnings).*"

But programmers are human, and even the best would be hard pressed to be 100% correct about the myriad of semantic details such as those discussed in this document. Programming language abstractions have been invented precisely to help developers focus on the "big picture" (thinking in terms of problem-oriented concepts) rather than low-level machine-oriented details, but C lacks these abstractions. As Kees Cook from the Kernel Self Protection Project puts it (during the Linux Security Summit North America 2018):

> "*Talking about C as a language, and how it's really just a fancy assembler*"

Even experts sometimes have problems with the C programming language rules, as illustrated by Microsoft expert David LeBlanc (see *Enforcing Strong Typing for Scalars* (page 1897)) or the MISRA C Committee itself (see the *Preface* (page 1867)).

The rules in MISRA C represent an impressive collective effort to improve the reliability of C code in critical applications, with a focus on avoiding error-prone features rather than enforcing a particular programming style. The Rationale provided with each rule is a clear and unobjectionable justification of the rule's benefit.

At a fundamental level, however, MISRA C is still built on a base language that was not really designed with the goal of supporting large high-assurance applications. As shown in this document, there are limits to what static analysis can enforce with respect to the MISRA C rules. It's hard to retrofit reliability, safety and security into a language that did not have these as goals from the start.

The SPARK language took a different approach, starting from a base language (Ada) that was designed from the outset to support solid software engineering, and eliminating features that were implementation dependent or otherwise hard to formally analyze. In this document we have shown how the SPARK programming language and its associated formal verification tools can contribute usefully to the goal of producing error-free software, going beyond the guarantees that can be achieved in MISRA C.

CHAPTER

NINETYEIGHT

REFERENCES

98.1 About MISRA C

The official website of the MISRA association https://www.misra.org.uk/ has many freely available resources about MISRA C, some of which can be downloaded after registering on the MISRA Bulletin Board at https://www.misra.org.uk/forum/ (such as the examples from the MISRA C:2012 standard, which includes a one-line description of each guideline).

The following documents are freely available:

- *MISRA Compliance 2016: Achieving compliance with MISRA coding guidelines*, 2016, which explains the rationale and process for compliance, including a thorough discussions of acceptable deviations
- *MISRA C:2012 - Amendment 1: Additional security guidelines for MISRA C:2012*, 2016, which contains 14 additional guidelines focusing on security. This is a minor addition to MISRA C.

The main MISRA C:2012 document can be purchased from the MISRA webstore.

PRQA is the company that first developed MISRA C, and they have been heavily involved in every version since then. Their webpage http://www.prqa.com/coding-standards/misra/ contains many resources about MISRA C: product datasheets, white papers, webinars, professional courses.

The PRQA Resources Library at http://info.prqa.com/resources-library?filter=white_paper has some freely available white papers on MISRA C and the use of static analyzers:

- An introduction to MISRA C:2012 at http://info.prqa.com/MISRA C-2012-whitepaper-evaluation-lp
- *The Myth of Perfect MISRA Compliance* at http://info.prqa.com/myth-of-perfect-MISRA Compliance-evaluation-lp, providing background information on the use and limitations of static analyzers for checking MISRA C compliance

In 2013 ISO standardized a set of 45 rules focused on security, available in the *C Secure Coding Rules*. A draft is freely available at http://www.open-std.org/jtc1/sc22/wg14/www/docs/n1624.pdf

In 2018 MISRA published *MISRA C:2012 - Addendum 2: Coverage of MISRA C:2012 against ISO/IEC TS 17961:2013* "*C Secure*", mapping ISO rules to MISRA C:2012 guidelines. This document is freely available from https://www.misra.org.uk/.

98.2 About SPARK

The e-learning website https://learn.adacore.com/ contains a freely available interactive course on SPARK.

The SPARK User's Guide is available at http://docs.adacore.com/spark2014-docs/html/ug/.

The SPARK Reference Manual is available at http://docs.adacore.com/spark2014-docs/html/lrm/.

A student-oriented textbook on SPARK is *Building High Integrity Applications with SPARK* by John McCormick and Peter Chapin, published by Cambridge University Press. It covers the latest version of the language, SPARK 2014.

A historical account of the evolution of SPARK technology and its use in industry is covered in the article *Are We There Yet? 20 Years of Industrial Theorem Proving with SPARK* by Roderick Chapman and Florian Schanda, at http://proteancode.com/keynote.pdf

The website https://www.adacore.com/sparkpro is a portal for up-to-date information and resources on SPARK. AdaCore blog's site https://blog.adacore.com/ contains a number of SPARK-related posts.

The booklet *AdaCore Technologies for Cyber Security* shows how AdaCore's technology can be used to prevent or mitigate the most common security vulnerabilities in software. See https://www.adacore.com/books/adacore-tech-for-cyber-security/.

The booklet *AdaCore Technologies for CENELEC EN 50128:2011* shows how AdaCore's technology can be used in conjunction with the CENELEC EN 50128:2011 software standard for railway control and protection systems. It describes in particular where the SPARK technology fits best and how it can be used to meet various requirements of the standard. See: https://www.adacore.com/books/cenelec-en-50128-2011/.

The booklet *AdaCore Technologies for DO-178C/ED-12C* similarly shows how AdaCore's technology can be used in conjunction with the DO-178C/ED-12C standard for airborne software, and describes in particular how SPARK can be used in conjunction with the Formal Methods supplement DO-333/ED-216. See https://www.adacore.com/books/do-178c-tech/.

98.3 About MISRA C and SPARK

The blog post at https://blog.adacore.com/MISRA-C-2012-vs-spark-2014-the-subset-matching-game reviews the 27 undecidable rules in MISRA C:2012 and describes how SPARK addresses them.

The white paper *A Comparison of SPARK with MISRA C and Frama-C* at https://www.adacore.com/papers/compare-spark-MISRA-C-frama-c compares SPARK to MISRA C and to the formal verification tool Frama-C for C programs.

Part X

Introduction to the GNAT Toolchain

Copyright © 2019 – 2024, AdaCore

This book is published under a CC BY-SA license, which means that you can copy, redistribute, remix, transform, and build upon the content for any purpose, even commercially, as long as you give appropriate credit, provide a link to the license, and indicate if changes were made. If you remix, transform, or build upon the material, you must distribute your contributions under the same license as the original. You can find license details on this page[471]



This course presents an introduction to the GNAT toolchain. The course includes first steps to get started with the toolchain and some details on the project manager (GPRbuild) and the integrated development environment (GNAT Studio).

This document was written by Gustavo A. Hoffmann, with contributions and review from Richard Kenner and Robert Duff.

Note

The code examples in this course use an 80-column limit, which is a typical limit for Ada code. Note that, on devices with a small screen size, some code examples might be difficult to read.

[471] http://creativecommons.org/licenses/by-sa/4.0

CHAPTER

NINETYNINE

GNAT TOOLCHAIN BASICS

This chapter presents a couple of basic commands from the GNAT toolchain.

99.1 Basic commands

Now that the toolchain is installed, you can start using it. From the command line, you can compile a project using **gprbuild**. For example:

```
gprbuild -P project.gpr
```

You can find the binary built with the command above in the *obj* directory. You can the run it in the same way as you would do with any other executable on your platform. For example:

```
obj/main
```

A handy command-line option for **gprbuild** you might want to use is `-p`, which automatically creates directories such as `obj` if they aren't in the directory tree:

```
gprbuild -p -P project.gpr
```

Ada source-code are stored in *.ads* and *.adb* files. To view the content of these files, you can use **GNAT Studio**. To open **GNAT Studio**, double-click on the *.gpr* project file or invoke **GNAT Studio** on the command line:

```
gps -P project.gpr
```

To compile your project using **GNAT Studio**, use the top-level menu to invoke `Build` → `Project` → `main.adb` (or press the keyboard shortcut F4). To run the main program, click on `Build` → Run → `main` (or press the keyboard shortcut `Shift + F2`).

99.2 Compiler warnings

One of the strengths of the GNAT compiler is its ability to generate many useful warnings. Some are displayed by default but others need to be explicitly enabled. In this section, we discuss some of these warnings, their purpose, and how you activate them.

99.2.1 `-gnatwa` switch and warning suppression

Section author: Robert Duff

We first need to understand the difference between a *warning* and an *error*. Errors are violations of the Ada language rules as specified in the Ada Reference Manual; warnings don't indicate violations of those rules, but instead flag constructs in a program that seem suspicious to the compiler. Warnings are GNAT-specific, so other Ada compilers might not warn about the same things GNAT does or might warn about them in a different way. Warnings

are typically conservative; meaning that some warnings are false alarms. The programmer needs to study the code to determine if each warning is describing a real problem.

Some warnings are produced by default while others are produced only if a switch enables them. Use the `-gnatwa` switch to turn on (almost) all warnings.

Warnings are useless if you don't do anything about them. If you give your team member some code that causes warnings, how are they supposed to know whether they represent real problems? If you don't address each warning, people will soon starting ignoring warnings and there'll be lots of things that generates warnings scattered all over your code. To avoid this, you may want to use the `-gnatwae` switch to both turn on (almost) all warnings and to treat warnings as errors. This forces you to get a clean (no warnings or errors) compilation.

However, as we said, some warnings are false alarms. Use **pragma** *Warnings* (Off) to suppress those warnings. It's best to be as specific as possible and narrow down to a single line of code and a single warning. Then use a comment to explain why the warning is a false alarm if it's not obvious.

Let's look at the following example:

```
with Ada.Text_IO; use Ada.Text_IO;

package body Warnings_Example is

   procedure Mumble (X : Integer) is
   begin
      Put_Line ("Mumble processing...");
   end Mumble;

end Warnings_Example;
```

We compile the above code with `-gnatwae`:

```
gnat compile -gnatwae ./src/warnings_example.adb
```

This causes GNAT to complain:

```
warnings_example.adb:5:22: warning: formal parameter "X" is not referenced
```

But the following compiles cleanly:

```
with Ada.Text_IO; use Ada.Text_IO;

package body Warnings_Example is

   pragma Warnings (Off, "formal parameter ""X"" is not referenced");
   procedure Mumble (X : Integer) is
   pragma Warnings (On, "formal parameter ""X"" is not referenced");

   --  X is ignored here, because blah blah blah...
   begin
      Put_Line ("Mumble processing...");
   end Mumble;

end Warnings_Example;
```

Here we've suppressed a specific warning message on a specific line.

If you get many warnings of a specific type and it's not feasible to fix all of them, you can suppress that type of message so the good warnings won't get buried beneath a pile of bogus ones. For example, you can use the `-gnatwaeF` switch to silence the warning on the first version of `Mumble` above: the F suppresses warnings on unreferenced formal parameters. It would be a good idea to use it if you have many of those.

As discussed above, `-gnatwa` activates almost all warnings, but not all. Refer to the section on warnings[472] of the GNAT User's Guide to get a list of the remaining warnings you could enable in your project. One is `-gnatw.o`, which displays warnings when the compiler detects modified but unreferenced **`out`** parameters. Consider the following example:

```
package Warnings_Example is

   procedure Process (X : in out Integer;
                      B :    out Boolean);

end Warnings_Example;
```

```
package body Warnings_Example is

   procedure Process (X : in out Integer;
                      B :    out Boolean) is
   begin
      if X = Integer'First or else X = Integer'Last then
         B := False;
      else
         X := X + 1;
         B := True;
      end if;
   end Process;

end Warnings_Example;
```

```
with Ada.Text_IO; use Ada.Text_IO;

with Warnings_Example; use Warnings_Example;

procedure Main  is
   X : Integer := 0;
   Success : Boolean;
begin
   Process (X, Success);
   Put_Line (Integer'Image (X));
end Main;
```

If we build the main application using the `-gnatw.o` switch, the compiler warns us that we didn't reference the `Success` variable, which was modified in the call to `Process`:

```
main.adb:8:16: warning: "Success" modified by call, but value might not be␣
↪referenced
```

In this case, this actually points us to a bug in our program, since X only contains a valid value if `Success` is **`True`**. The corrected code for `Main` is:

```
-- ...
begin
   Process (X, Success);

   if Success then
      Put_Line (Integer'Image (X));
   else
      Put_Line ("Couldn't process variable X.");
   end if;
end Main;
```

[472] https://docs.adacore.com/gnat_ugn-docs/html/gnat_ugn/gnat_ugn/building_executable_programs_with_gnat.html#warning-message-control

We suggest turning on as many warnings as makes sense for your project. Then, when you see a warning message, look at the code and decide if it's real. If it is, fix the code. If it's a false alarm, suppress the warning. In either case, we strongly recommend you make the warning disappear before you check your code into your configuration management system.

99.2.2 Style checking

GNAT provides many options to configure style checking of your code. The main compiler switch for this is `-gnatyy`, which sets almost all standard style check options. As indicated by the section on style checking[473] of the GNAT User's Guide, using this switch "is equivalent to `-gnaty3aAbcefhiklmnprst`, that is all checking options enabled with the exception of `-gnatyB`, `-gnatyd`, `-gnatyI`, `-gnatyLnnn`, `-gnatyo`, `-gnaty0`, `-gnatyS`, `-gnatyu`, and `-gnatyx`."

You may find that selecting the appropriate coding style is useful to detect issues at early stages. For example, the `-gnaty0` switch checks that overriding subprograms are explicitly marked as such. Using this switch can avoid surprises when you didn't intentionally want to override an operation for some data type. We recommend studying the list of coding style switches and selecting the ones that seem relevant for your project. When in doubt, you can start by using all of them — using `-gnatyy` and `-gnatyBdIL4o0Sux`, for example — and deactivating the ones that cause too much *noise* during compilation.

[473] https://docs.adacore.com/gnat_ugn-docs/html/gnat_ugn/gnat_ugn/building_executable_programs_with_gnat.html#style-checking

GPRBUILD

This chapter presents a brief overview of **GPRbuild**, the project manager of the GNAT toolchain. It can be used to manage complex builds. In terms of functionality, it's similar to **make** and **cmake**, just to name two examples.

For a detailed presentation of the tool, please refer to the GPRbuild User's Guide[474].

100.1 Basic commands

As mentioned in the previous chapter, you can build a project using **gprbuild** from the command line:

```
gprbuild -P project.gpr
```

In order to clean the project, you can use **gprclean**:

```
gprclean -P project.gpr
```

100.2 Project files

You can create project files using **GNAT Studio**, which presents many options on its graphical interface. However, you can also edit project files manually as a normal text file in an editor, since its syntax is human readable. In fact, project files use a syntax similar to the one from the Ada language. Let's look at the basic structure of project files and how to customize them.

100.2.1 Basic structure

The main element of a project file is a project declaration, which contains definitions for the current project. A project file may also include other project files in order to compose a complex build. One of the simplest form of a project file is the following:

```
project Default is

   for Main use ("main");
   for Source_Dirs use ("src");

end Default;
```

In this example, we declare a project named `Default`. The `for Main use` expression indicates that the `main.adb` file is used as the entry point (main source-code file) of the project. The main file doesn't necessary need to be called `main.adb`; we could use any source-code implementing a main application, or even have a list of multiple main files. The `for Source_Dirs use` expression indicates that the `src` directory contains the source-file for the application (including the main file).

[474] https://docs.adacore.com/gprbuild-docs/html/gprbuild_ug.html

100.2.2 Customization

GPRbuild support scenario variables, which allow you to control the way binaries are built. For example, you may want to distinguish between debug and optimized versions of your binary. In principle, you could pass command-line options to **gprbuild** that turn debugging on and off, for example. However, defining this information in the project file is usually easier to handle and to maintain. Let's define a scenario variable called `ver` in our project:

```
project Default is

   Ver := external ("ver", "debug");

   for Main use ("main");
   for Source_Dirs use ("src");

end Default;
```

In this example, we're specifying that the scenario variable `Ver` is initialized with the external variable `ver`. Its default value is set to debug.

We can now set this variable in the call to **gprbuild**:

```
gprbuild -P project.gpr -Xver=debug
```

Alternatively, we can simply specify an environment variable. For example, on Unix systems, we can say:

```
export ver=debug

# Value from environment variable "ver" used in the following call:

gprbuild -P project.gpr
```

In the project file, we can use the scenario variable to customize the build:

```
project Default is
   Ver := external ("ver", "debug");

   for Main use ("main.adb");
   for Source_Dirs use ("src");

   --  Using "ver" variable for obj directory
   for Object_Dir use "obj/" & Ver;

   package Compiler is
      case Ver is
         when "debug" =>
            for Switches ("Ada") use ("-g");
         when "opt" =>
            for Switches ("Ada") use ("-O2");
         when others =>
            null;
      end case;
   end Compiler;

end Default;
```

We're now using `Ver` in the `for Object_Dir` clause to specify a subdirectory of the `obj` directory that contains the object files. Also, we're using `Ver` to select compiler options in the `Compiler` package declaration.

We could also specify all available options in the project file by creating a typed variable. For example:

```
project Default is

   type Ver_Option is ("debug", "opt");
   Ver : Ver_Option := external ("ver", "debug");

   for Source_Dirs use ("src");
   for Main use ("main.adb");

   --  Using "ver" variable for obj directory
   for Object_Dir use "obj/" & Ver;

   package Compiler is
      case Ver is
         when "debug" =>
            for Switches ("Ada") use ("-g");
         when "opt" =>
            for Switches ("Ada") use ("-O2");
         when others =>
            null;
      end case;
   end Compiler;

end Default;
```

The advantage of this approach is that **gprbuild** can now check whether the value that you provide for the `ver` variable is available on the list of possible values and give you an error if you're entering a wrong value.

100.3 Project dependencies

GPRbuild supports project dependencies. This allows you to reuse information from existing projects. Specifically, the keyword **with** allows you to include another project within the current project.

100.3.1 Simple dependency

Let's look at a very simple example. We have a package called `Test_Pkg` associated with the project file `test_pkg.gpr`, which contains:

```
project Test_Pkg is
    for Source_Dirs use ("src");
    for Object_Dir use "obj";
end Test_Pkg;
```

This is the code for the `Test_Pkg` package:

```
package Test_Pkg is

   type T is record
      X : Integer;
      Y : Integer;
   end record;

   function Init return T;

end Test_Pkg;
```

```
package body Test_Pkg is

   function Init return T is
   begin
      return V : T do
         V.X := 0;
         V.Y := 0;
      end return;
   end Init;

end Test_Pkg;
```

For this example, we use a directory `test_pkg` containing the project file and a subdirectory `test_pkg/src` containing the source files. The directory structure looks like this:

```
|- test_pkg
|    | test_pkg.gpr
|    |- src
|    |    | test_pkg.adb
|    |    | test_pkg.ads
```

Suppose we want to use the `Test_Pkg` package in a new application. Instead of directly including the source files of `Test_Pkg` in the project file of our application (either directly or indirectly), we can instead reference the existing project file for the package by using `with "test_pkg.gpr"`. This is the resulting project file:

```
with "../test_pkg/test_pkg.gpr";

project Default is
    for Source_Dirs use ("src");
    for Object_Dir use "obj";
    for Main use ("main.adb");
end Default;
```

And this is the code for the main application:

```
with Test_Pkg; use Test_Pkg;

procedure Main is
   A : T;
begin
   A := Init;
end Main;
```

When we build the main project file (`default.gpr`), we're automatically building all dependent projects. More specifically, the project file for the main application automatically includes the information from the dependent projects such as `test_pkg.gpr`. Using a `with` in the main project file is all we have to do for that to happen.

100.3.2 Dependencies to dynamic libraries

We can structure project files to make use of dynamic (shared) libraries using a very similar approach. It's straightforward to convert the project above so that `Test_Pkg` is now compiled into a dynamic library and linked to our main application. All we need to do is to make a few additions to the project file for the `Test_Pkg` package:

```
library project Test_Pkg is
    for Source_Dirs use ("src");
    for Object_Dir use "obj";
    for Library_Name use "test_pkg";
```

(continues on next page)

(continued from previous page)

```
    for Library_Dir use "lib";
    for Library_Kind use "Dynamic";
end Test_Pkg;
```

This is what we had to do:

- We changed the `project` to `library project`.
- We added the specification for `Library_Name`, `Library_Dir` and `Library_Kind`.

We don't need to change the project file for the main application because **GPRbuild** automatically detects the dependency information (e.g., the path to the dynamic library) from the project file for the `Test_Pkg` package. With these small changes, we're able to compile the `Test_Pkg` package to a dynamic library and link it with our main application.

100.4 Configuration pragma files

Configuration pragma files contain a set of pragmas that modify the compilation of source files according to external requirements. For example, you may use pragmas to either relax or strengthen requirements depending on your environment.

In **GPRbuild**, we can use `Local_Configuration_Pragmas` (in the `Compiler` package) to indicate the configuration pragmas file we want **GPRbuild** to use with the source files in our project.

The file `gnat.adc` shown here is an example of a configuration pragma file:

```
pragma Suppress (Overflow_Check);
```

We can use this in our project by declaring a `Compiler` package. Here's the complete project file:

```
project Default is

   for Source_Dirs use ("src");
   for Object_Dir use "obj";
   for Main use ("main.adb");

   package Compiler is
      for Local_Configuration_Pragmas use "gnat.adc";
   end Compiler;

end Default;
```

Each pragma contained in `gnat.adc` is used in the compilation of each file, as if that pragma was placed at the beginning of each file.

100.5 Configuration packages

You can control the compilation of your source code by creating variants for various cases and selecting the appropriate variant in the compilation package in the project file. One example where this is useful is conditional compilation using Boolean constants, shown in the code below:

```
with Ada.Text_IO; use Ada.Text_IO;

with Config;
```

(continues on next page)

(continued from previous page)

```
procedure Main is
begin

   if Config.Debug then
      Put_Line ("Debug version");
   else
      Put_Line ("Release version");
   end if;
end Main;
```

In this example, we declared the Boolean constant in the `Config` package. By having multiple versions of that package, we can create different behavior for each usage. For this simple example, there are only two possible cases: either Debug is **`True`** or **`False`**. However, we can apply this strategy to create more complex cases.

In our next example, we store the packages in the subdirectories debug and `release` of the source code directory. Here's the content of the `src/debug/config.ads` file:

```
package Config is

   Debug : constant Boolean := True;

end Config;
```

Here's the `src/release/config.ads` file:

```
package Config is

   Debug : constant Boolean := False;

end Config;
```

In this case, **`GPRbuild`** selects the appropriate directory to look for the `config.ads` file according to information we provide for the compilation process. We do this by using a scenario type called Mode_Type in our project file:

```
gprbuild -P default.gpr -Xmode=release
```

```
project Default is

   type Mode_Type is ("debug", "release");

   Mode : Mode_Type := external ("mode", "debug");

   for Source_Dirs use ("src", "src/" & Mode);
   for Object_Dir use "obj";
   for Main use ("main.adb");

end Default;
```

We declare the scenario variable Mode and use it in the `Source_Dirs` declaration to add the desired path to the subdirectory containing the `config.ads` file. The expression `"src/"` & Mode concatenates the user-specified mode to select the appropriate subdirectory. For more complex cases, we could use either a tree of subdirectories or multiple scenario variables for each aspect that we need to configure.

CHAPTER

ONE

GNAT STUDIO

This chapter presents an introduction to the GNAT Studio, which provides an IDE to develop applications in Ada. For a detailed overview, please refer to the GNAT Studio tutorial[475]. Also, you can refer to the GNAT Studio product page[476] for some introductory videos.

In this chapter, all indications using "→" refer to options from the GNAT Studio menu that you can click in order to execute commands.

101.1 Start-up

The first step is to start-up the GNAT Studio. The actual step depends on your platform.

101.1.1 Windows

- You may find an icon (shortcut to **`GNAT Studio`**) on your desktop.
- Otherwise, start **`GNAT Studio`** by typing `gnatstudio` on the command prompt.

101.1.2 Linux

- Start **`GNAT Studio`** by typing `gnatstudio` on a shell.

101.2 Creating projects

After starting-up **`GNAT Studio`**, you can create a project. These are the steps:

- Click on `Create new project` in the welcome window
  - Alternatively, if the *wizard* (which let's you customize new projects) isn't already opened, click on `File` → `New Project...` to open it.
  - After clicking on `Create new project`, you should see a window with this title: `Create Project from Template`.
- Select one of the options from the list and click on `Next`.
  - The simplest one is `Basic > Simple Ada Project`, which creates a project containing a main application.
- Select the project location and basic settings, and click on `Apply`.
  - If you selected "Simple Ada Project" in the previous step, you may now select the name of the project and of the main file.
  - Note that you can select any name for the main file.

[475] https://docs.adacore.com/live/wave/gps/html/gps_tutorial/index.html
[476] https://www.adacore.com/gnatpro/toolsuite/gps

You should now have a working project file.

101.3 Building

As soon as you've created a project file, you can use it to build an application. These are the required steps:

- Click on `Build` → `Project` → `Build All`
  - You can also click on this icon:



- Alternatively, you can click on `Build` → `Project` → `Build & Run` → `<name of your main application>`
  - You can also click on this icon:



- You can also use the keyboard for building and running the main application:
  - Press F4 to open a window that allows you to build the main application and click on `Execute`.
  - Then, press `Shift + F2` to open a window that allows you to run the application, and click on `Execute`.

101.4 Debugging

101.4.1 Debug information

Before you can debug a project, you need to make sure that debugging symbols have been included in the binary build. You can do this by manually adding a debug version into your project, as described in the previous chapter (see *GPRbuild* (page 1945)).

Alternatively, you can change the project properties directly in **`GNAT Studio`**. In order to do that, click on `Edit` → `Project Properties...`, which opens the following window:

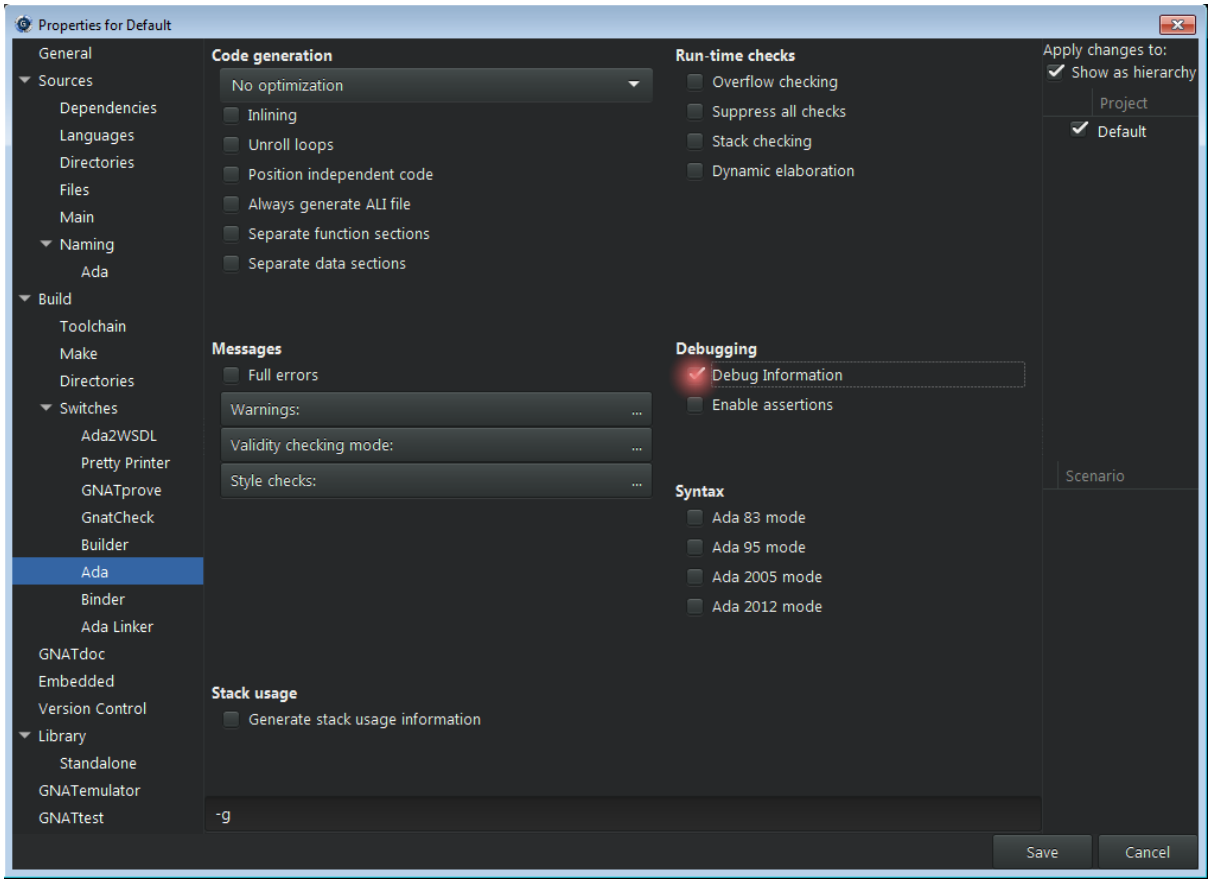

Click on `Build` → `Switches` → `Ada` on this window, and make sure that the `Debug Information` option is selected.

101.4.2 Improving main application

If you selected "Simple Ada Project" while creating your project in the beginning, you probably still have a very simple main application that doesn't do anything useful. Therefore, in order to make the debugging activity more interesting, please enter some statements to your application. For example:

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is
begin
   Put_Line ("Hello World!");
   Put_Line ("Hello again!");
end Main;
```

101.4.3 Debugging the application

You can now build and debug the application by clicking on `Build` → `Project` → `Build & Debug` → `<name of your main application>`.

You can then click on `Debug` → `Run...` to open a window that allows you to start the application. Alternatively, you can press `Shift + F9`. As soon as the application has started, you can press F5 to step through the application or press F6 to execute until the next line. Both commands are available in the menu by clicking on `Debug` → `Step` or `Debug` → `Next`.

When you've finished debugging your application, you need to terminate the debugger. To do this, you can click on `Debug` → `Terminate`.

101.5 Formal verification

In order to see how SPARK can detect issues, let's creating a simple application that accumulates values in a variable A:

```
procedure Main
  with SPARK_Mode is

   procedure Acc (A : in out Natural;
                  V :        Natural) is
   begin
      A := A + V;
   end Acc;

   A : Natural := 0;
begin
   Acc (A, Natural'Last);
   Acc (A, 1);
end Main;
```

You can now click on SPARK → `Prove All`, which opens a window with various options. For example, on this window, you can select the proof level — varying between 0 and 4 — on the `Proof level` list. Next, click on `Execute`. After the prover has completed its analysis, you'll see a list of issues found in the source code of your application.

For the example above, the prover complains about an overflow check that might fail. This is due to the fact that, in the Acc procedure, we're not dealing with the possibility that the result of the addition might be out of range. In order to fix this, we could define a new saturating addition Sat_Add that makes use of a custom type T with an extended range. For example:

```
procedure Main
  with SPARK_Mode is

   function Sat_Add (A : Natural;
                     V : Natural) return Natural
   is
      type T is range Natural'First .. Natural'Last * 2;

      A2     : T          := T (A);
      V2     : constant T := T (V);
      A_Last : constant T := T (Natural'Last);
   begin
      A2 := A2 + V2;

      --  Saturate result if needed
      if A2 > A_Last then
         A2 := A_Last;
      end if;

      return Natural (A2);
   end Sat_Add;

   procedure Acc (A : in out Natural;
                  V :        Natural) is
   begin
      A := Sat_Add (A, V);
   end Acc;

   A : Natural := 0;
begin
   Acc (A, Natural'Last);
```

(continues on next page)

(continued from previous page)

```
   Acc (A, 1);
end Main;
```

Now, when running the prover again with the modified code, no issues are found.

CHAPTER

TWO

GNAT TOOLS

In chapter we present a brief overview of some of the tools included in the GNAT toolchain.

For further details on how to use these tools, please refer to the GNAT User's Guide[477].

102.1 gnatchop

gnatchop renames files so they match the file structure and naming convention expected by the rest of the GNAT toolchain. The GNAT compiler expects specifications to be stored in `.ads` files and bodies (implementations) to be stored in `.adb` files. It also expects file names to correspond to the content of each file. For example, it expects the specification of a package `Pkg.Child` to be stored in a file named `pkg-child.ads`.

However, we may not want to use that convention for our project. For example, we may have multiple Ada packages contained in a single file. Consider a file `example.ada` containing the following:

```
with Ada.Text_IO; use Ada.Text_IO;

package P is
   procedure Test;
end P;

package body P is
   procedure Test is
   begin
      Put_Line("Test passed.");
   end Test;
end P;

with P; use P;

procedure P_Main is
begin
   P.Test;
end P_Main;
```

To compile this code, we first pass the file containing our source code to **gnatchop** before we call **gprbuild**:

```
gnatchop example.ada
gprbuild p_main
```

This generates source files for our project, extracted from `example_ada`, that conform to the default naming convention and then builds the executable binary `p_main` from those files. In this example **gnatchop** created the files `p.ads`, `p.adb`, and `p_main.adb` using the package names in `example.ada`.

[477] https://docs.adacore.com/gnat_ugn-docs/html/gnat_ugn/gnat_ugn.html

When we use this mechanism, any warnings or errors the compiler displays refers to the files generated by **gnatchop**. We can, however, instruct **gnatchop** to instrument the generated files so the compiler refers to the original file (`example.ada` in our case) when displaying messages. We do this by using the `-r` switch:

```
gnatchop -r example.ada
gprbuild p_main
```

If, for example, we had an unused variable in `example.ada`, the compiler warning would now refer to the line in the original file, not in one of the generated ones.

For documentation of other switches available for **gnatchop**, please refer to the gnatchop chapter[478] of the GNAT User's Guide.

102.2 gnatprep

We may want to use conditional compilation in some situations. For example, we might need a customized implementation of a package for a specific platform or need to select a specific version of an algorithm depending on the requirements of the target environment. A traditional way to do this uses a source-code preprocessor. However, in many cases where conditional compilation is needed, we can instead use the syntax of the Ada language or the functionality provided by **GPRbuild** to avoid using a preprocessor in those cases. The conditional compilation section[479] of the GNAT User's Guide discusses how to do this in detail.

Nevertheless, using a preprocessor is often the most straightforward option in complex cases. When we encounter such a case, we can use **gnatprep**, which provides a syntax that reminds us of the C and C++ preprocessor. However, unlike in C and C++, this syntax is not part of the Ada standard and can only be used with **gnatprep**. Also, you'll notice some differences in the syntax from that preprocessor, such as shown in the example below:

```
#if VERSION'Defined and then (VERSION >= 4) then
   --  Implementation for version 4.0 and above...
#else
   --  Standard implementation for older versions...
#end if;
```

Of course, in this simple case, we could have used the Ada language directly and avoided the preprocessor entirely:

```
package Config is
   Version : constant Integer := 4;
end Config;

with Config;
procedure Do_Something is
begin
   if Config.Version >= 4 then
      null;
      --  Implementation for version 4.0 and above...
   else
      null;
      --  Standard implementation for older versions...
   end if;
end Do_Something;
```

[478] https://docs.adacore.com/gnat_ugn-docs/html/gnat_ugn/gnat_ugn/the_gnat_compilation_model.html#renaming-files-with-gnatchop
[479] https://docs.adacore.com/gnat_ugn-docs/html/gnat_ugn/gnat_ugn/the_gnat_compilation_model.html#conditional-compilation

But for the sake of illustrating the use of **gnatprep**, let's use that tool in this simple case. This is the complete procedure, which we place in file `do_something.org.adb`:

```
procedure Do_Something is
begin
   #if VERSION'Defined and then (VERSION >= 4) then
   --  Implementation for version 4.0 and above...
   null;
   #else
   --  Standard implementation for older versions...
   null;
   #end if;
end Do_Something;
```

To preprocess this file and build the application, we call **gnatprep** followed by **GPRbuild**:

```
gnatprep do_something.org.adb do_something.adb
gprbuild do_something
```

If we look at the resulting file after preprocessing, we see that the `#else` implementation was selected by **gnatprep**. To cause it to select the newer "version" of the code, we include the symbol and its value in our call to **gnatprep**, just like we'd do for C/C++:

```
gnatprep -DVERSION=5 do_something.org.adb do_something.adb
```

However, a cleaner approach is to create a symbol definition file containing all symbols we use in our implementation. Let's create the file and name it `prep.def`:

```
VERSION := 5
```

Now we just need to pass it to **gnatprep**:

```
gnatprep do_something.org.adb do_something.adb prep.def
gprbuild do_something
```

When we use **gnatprep** in that way, the line numbers of the output file differ from those of the input file. To preserve line numbers, we can use one of these command-line switches:

- `-b`: replace stripped-out code by blank lines
- `-c`: comment-out the stripped-out code

For example:

```
gnatprep -b do_something.org.adb do_something.adb prep.def
gnatprep -c do_something.org.adb do_something.adb prep.def
```

When we use one of these options, **gnatprep** ensures that the output file `do_something.adb` has the same line numbering as the original file (`do_something.org.adb`).

The gnatprep chapter[480] of the GNAT User's Guide contains further details about this tool, such as how to integrate **gnatprep** with project files for **GPRbuild** and how to replace symbols without using preprocessing directives (using the `$symbol` syntax).

102.3 gnatmem

Memory allocation errors involving mismatches between allocations and deallocations are a common source of memory leaks. To test an application for memory allocation issues, we can use **gnatmem**. This tool monitors all memory allocations in our application. We use

[480] https://docs.adacore.com/gnat_ugn-docs/html/gnat_ugn/gnat_ugn/the_gnat_compilation_model.html#preprocessing-with-gnatprep

this tool by linking our application to a special version of the memory allocation library (`libgmem.a`).

Let's consider this simple example:

```
procedure Simple_Mem is
   I_Ptr : access Integer := new Integer;
begin
   null;
end Simple_Mem;
```

To generate a memory report for this code, we need to:

- Build the application, linking it to `libgmem.a`;
- Run the application, which generates an output file (`gmem.out`);
- Run **gnatmem** to generate a report from `gmem.out`.

For our example above, we do the following:

```
# Build application using gmem
gnatmake -g simple_mem.adb -largs -lgmem

# Run the application and generate gmem.out
./simple_mem

# Call gnatmem to display the memory report based on gmem.out
gnatmem simple_mem
```

For this example, **gnatmem** produces the following output:

```
Global information
------------------
   Total number of allocations        :   1
   Total number of deallocations      :   0
   Final Water Mark (non freed mem)   : 4 Bytes
   High Water Mark                    : 4 Bytes

Allocation Root # 1
-------------------
 Number of non freed allocations    :   1
 Final Water Mark (non freed mem)   : 4 Bytes
 High Water Mark                    : 4 Bytes
 Backtrace                          :
   simple_mem.adb:2 simple_mem
```

This shows all the memory we allocated and tells us that we didn't deallocate any of it.

Please refer to the chapter on gnatmem[481] of the GNAT User's Guide for a more detailed discussion of **gnatmem**.

102.4 gnatdoc

Use **GNATdoc** to generate HTML documentation for your project. It scans the source files in the project and extracts information from package, subprogram, and type declarations.

The simplest way to use it is to provide the name of the project or to invoke **GNATdoc** from a directory containing a project file:

[481] https://docs.adacore.com/gnat_ugn-docs/html/gnat_ugn/gnat_ugn/gnat_and_program_execution.html#the-gnatmem-tool

```
gnatdoc -P some_directory/default.gpr

# Alternatively, when the :file:`default.gpr` file is in the same directory

gnatdoc
```

Just using this command is sufficient if your goal is to generate a list of the packages and a list of subprograms in each. However, to create more meaningful documentation, you can annotate your source code to add a description of each subprogram, parameter, and field. For example:

```
package P is
--  Collection of auxiliary subprograms

   function Add_One
     (V : Integer
      --  Coefficient to be incremented
     ) return Integer;
   --  @return Coefficient incremented by one

end P;
```

```
package body P is

   function Add_One (V : Integer) return Integer is
   begin
      return V + 1;
   end Add_One;

end P;
```

```
with P; use P;

procedure Main is

   I : Integer;

begin
   I := Add_One (0);
end Main;
```

When we run this example, **GNATdoc** will extract the documentation from the specification of package P and add the description of each element, which we provided as a comment in the line below the actual declaration. It will also extract the package description, which we wrote as a comment in the line right after `package P is`. Finally, it will extract the documentation of function Add_One (both the description of the V parameter and the return value).

In addition to the approach we've just seen, **GNATdoc** also supports the tagged format that's commonly found in tools such as Javadoc and uses the @ syntax. We could rewrite the documentation for package P as follows:

```
package P is
-- @summary Collection of auxiliary subprograms

   function Add_One
     (V : Integer
     ) return Integer;
   -- @param V Coefficient to be incremented
   -- @return Coefficient incremented by one
```

(continues on next page)

(continued from previous page)

```
end P;
```

You can control what parts of the source-code **GNATdoc** parses to extract the documentation. For example, you can specify the `-b` switch to request that the package body be parsed for additional documentation and you can use the `-p` switch to request **GNATdoc** to parse the private part of package specifications. For a complete list of switches, please refer to the GNATdoc User's Guide[482].

102.5 gnatpp

The term 'pretty-printing' refers to the process of formatting source code according to a pre-defined convention. **gnatpp** is used for the pretty-printing of Ada source-code files.

Let's look at this example, which contains very messy formatting:

```
PrOcEDuRE Main
                  IS

   FUNCtioN
                        Init_2
                  RETurn
     inteGER                iS
                                    (2);

                I : INTeger;




     BeGiN
            I              :=        Init_2;
                 ENd;
```

We can request **gnatpp** to clean up this file by using the command:

```
gnatpp main.adb
```

gnatpp reformats the file in place. After this command, `main.adb` looks like this:

```
procedure Main is

   function Init_2 return Integer is (2);

   I : Integer;

begin
   I := Init_2;
end Main;
```

We can also process all source code files from a project at once by specifying a project file. For example:

```
gnatpp -P default.gpr
```

gnatpp has an extensive list of options, which allow for specifying the formatting of many

[482] http://docs.adacore.com/gnatdoc-docs/users_guide/_build/html/index.html

aspects of the source and implementing many coding styles. These are extensively discussed in the section on gnatpp[483] of the GNAT User's Guide.

102.6 gnatstub

Suppose you've created a complex specification of an Ada package. You can create the corresponding package body by copying and adapting the content of the package specification. But you can also have **gnatstub** do much of that job for you. For example, let's consider the following package specification:

```
package Aux is

   function Add_One (V : Integer) return Integer;

   procedure Reset (V : in out Integer);

end Aux;
```

We call **gnatstub**, passing the file containing the package specification:

```
gnatstub aux.ads
```

This generates the file aux.adb with the following contents:

```
pragma Ada_2012;
package body Aux is

   -------------
   -- Add_One --
   -------------

   function Add_One (V : Integer) return Integer is
   begin
      --  Generated stub: replace with real body!
      pragma Compile_Time_Warning (Standard.True, "Add_One unimplemented");
      return raise Program_Error with "Unimplemented function Add_One";
   end Add_One;

   -----------
   -- Reset --
   -----------

   procedure Reset (V : in out Integer) is
   begin
      --  Generated stub: replace with real body!
      pragma Compile_Time_Warning (Standard.True, "Reset unimplemented");
      raise Program_Error with "Unimplemented procedure Reset";
   end Reset;

end Aux;
```

As we can see in this example, not only has **gnatstub** created a package body from all the elements in the package specification, but it also created:

- Headers for each subprogram (as comments);
- Pragmas and exceptions that prevent us from using the unimplemented subprograms in our application.

[483] https://docs.adacore.com/gnat_ugn-docs/html/gnat_ugn/gnat_ugn/gnat_utility_programs.html#the-gnat-pretty-printer-gnatpp

This is a good starting point for the implementation of the body. Please refer to the section on gnatstub[484] of the GNAT User's Guide for a detailed discussion of **gnatstub** and its options.

[484] https://docs.adacore.com/gnat_ugn-docs/html/gnat_ugn/gnat_ugn/gnat_utility_programs.html#the-body-stub-generator-gnatstub

Part XI

Guidelines for Safe and Secure Ada/SPARK

Copyright © 2024, AdaCore

This book is published under a CC BY-SA license, which means that you can copy, redistribute, remix, transform, and build upon the content for any purpose, even commercially, as long as you give appropriate credit, provide a link to the license, and indicate if changes were made. If you remix, transform, or build upon the material, you must distribute your contributions under the same license as the original. You can find license details on this page[485]

This document provides a reasonable set of coding standards to be applied to Ada/SPARK source code. The contents can be used as-is, or customized for a particular project.

This document was originally written by Patrick Rogers, and modified by Michael Frank.

[485] http://creativecommons.org/licenses/by-sa/4.0

CHAPTER

THREE

INTRODUCTION

Ada is a general purpose, high-level programming language designed to support the construction of long-lived, highly-reliable applications. Like all general-purpose languages, only a subset of the full language is appropriate for safety-critical applications because the full language includes facilities that are difficult to analyze and verify to the degree required. This document facilitates identification of subsets appropriate for the highest levels of integrity, including safety-critical applications.

SPARK is a statically verifiable subset of Ada designed specifically for the most critical applications. Ada constructs not amenable to verification are precluded, such as arbitrary use of access types and full tasking. SPARK is also a superset of Ada, with additional contracts for specifying and verifying programs. Many of the guidelines (and more) are implicit in the design of SPARK.

Therefore, this document defines guidelines for the development of high-integrity, safety-critical applications in either the Ada or SPARK programming languages, or both (because the two can be mixed).

103.1 Scope

This document provides guidelines for development decisions, both at the system level and at the unit level, regarding the use of the programming languages Ada and SPARK, as well as related tools, such as static analyzers and unit test generators. It is not concerned with presentation issues such as naming, use of whitespace, or the like.

103.2 Structure

Rather than defining a specific set of rules defining a single subset, this document defines a set of criteria, in the form of guidelines, used by system architects to identify project-specific subsets appropriate to a given project.

The guidelines are separated into related categories, such as storage management, object-oriented programming, concurrency management, and so on. Each guideline is in a separate table, specifying the rule name, a unique identifier, and additional attributes common to each table.

103.3 Enforcement

Detection and enforcement mechanisms are indicated for each guideline. These mechanisms typically consist of the application of a language standard pragma named `Restrictions`, with policy-specific restriction identifiers given as parameters to the pragma [AdaRM2016]. Violations of the given restrictions are then detected and enforced by the Ada compiler.

Alternatively, the AdaCore GNATcheck utility program has rules precisely corresponding to those restriction identifiers, with the same degree of detection and enforcement. For example, the language restriction identifier `No_Unchecked_Deallocation` corresponds to the GNATcheck **+RRestrictions:No_Unchecked_Deallocation** rule.

The advantage of GNATcheck over the compiler is that all generated messages will be collected in the GNATcheck report that can be used as evidence of the level of adherence to the coding standard. In addition, GNATcheck provides a mechanism to deal with accepted exemptions. Note that, when the verification method indicates a GNATcheck rule could be used, the rule will note whether it is part of the atandard GNATcheck rule set, or has been provided as-is within the document repository, located here.[486]

In some cases the enforcement mechanism is the SPARK language and analyzer. Many of the guidelines (and more) are implicit in the design of SPARK and are, therefore, automatically enforced.

In some (very) rare cases the enforcement mechanism is manual program inspection, although alternatives (e.g., SPARK) are usually available and recommended. These guidelines are included because they are considered invaluable in this domain.

103.4 About the Rules

Although we refer to them as **rules** in the tables for the sake of brevity, these entries should be considered **guidance** because they require both thought and consideration of project-specific characteristics. For example, in some cases the guidance is to make a selection from among a set of distinct enumerated policies. In other cases a single guideline should be followed but not without some exceptional situations allowing it to be violated. The project lead should consider which guidelines to apply and how best to apply each guideline selected.

103.4.1 Mapping to Other Standards

Many of these rules can also be considered *good* programming practices. As such, many of them can be directly correlated to the *ISO/IEC Guidance to Avoiding Vulnerabilities in Programming Languages* [TR24772]. When a rule addresses one of these vulnerabilities, it is listed in the appropriate subsection.

In addition, MITRE's list of Common Weakness Enumerations [MITRE_CWE] contains many software issues that can be addressed by rules within this standard. Where appropriate, each rule lists the CWE(s) that can be addressed. Note that software CWEs tend to be generalized across all languages, so that many of the weaknesses may be prevented by the language itself. For this reason, the CWEs identified within this document specifically address vulnerabilities that would not be addressed by the Ada language itself (i.e., using the language is not sufficient to prevent the vulnerability).

[486] https://github.com/AdaCore/learn/tree/master/content/courses/Guidelines_for_Safe_and_Secure_Ada_SPARK/rules

CHAPTER

FOUR

DEFINITIONS

This section contains terms and values used in the definitions of the rules set forth in this chapter.

104.1 Level

Level is the compliance level for the rule. Possible values are:

Mandatory
: Non-compliance with a *Mandatory* recommendation level corresponds to a **high risk** of a software bug. There would need to be a good reason for non-conformity to a mandatory rule and, although it is accepted that exceptional cases may exist, any non-conformance should be accompanied by a clear technical explanation of the exceptional circumstance.

Required
: Non-compliance with a *Required* recommendation level corresponds to a **medium to high risk** of a software bug. Much like a *Mandatory* recommendation, there would need to be a good reason for non-conformity to a required rule. Although it is accepted that more exceptional cases may exist, non-conformance should be accompanied by a clear technical explanation of the exceptional circumstance.

Advisory
: Failure to follow an *Advisory* recommendation does not necessarily result in a software bug; the risk of a direct correlation between non-conformance of an advisory rule and a software bug is low. Non-compliance with an advisory recommendation level does not require a supporting technical explanation, however, as the quality of the code may be impacted, the reason for the non-conformance should be understood.

104.2 Remediation

Remediation indicates the the level of difficulty to modify/update code that does not follow this particular rule.

High
: Failure to follow this rule will likely cause an unreasonable amount of modifications/updates to bring the code base into compliance.

Medium
: Failure to follow this rule will likely cause a large amount of modifications/updates to bring the code base into compliance, but those changes may still be cost-effective.

Low
: Failure to follow this rule may cause a small amount of modifications/updates

to bring the code base into compliance, but those changes will be minor compared to the benefit.

N/A

This rule is more of a design decision (as opposed to a coding flaw) and therefore, if the rule is violated, it is done so with a specific purpose.

CHAPTER

FIVE

DYNAMIC STORAGE MANAGEMENT (DYN)

Goal

Maintainability
✓

Reliability
✓

Portability
Performance
✓

Security
✓

Description
Have a plan for managing dynamic memory allocation and deallocation.

Rules
DYN01, DYN02, DYN03, DYN04, DYN05, DYN06

In Ada, objects are created by being either *declared* or *allocated*. Declared objects may be informally thought of as being created "on the stack" although such details are not specified by the language. *Allocated* objects may be thought of as being allocated "from the heap", which is, again, an informal term. Allocated objects are created by the evaluation of allocators represented by the reserved word `new` and, unlike declared objects, have lifetimes independent of scope.

The terms *static* and *dynamic* tend to be used in place of *declared* and *allocated*, although in traditional storage management terminology all storage allocation in Ada is dynamic. In the following discussion, the term *dynamic allocation* refers to storage that is allocated by allocators. *Static* object allocation refers to objects that are declared. *Deallocation* refers to the reclamation of allocated storage.

Unmanaged dynamic storage allocation and deallocation can lead to storage exhaustion; the required analysis is difficult under those circumstances. Furthermore, access values can establish aliases that complicate verification, and explicit deallocation of dynamic storage can lead to specific errors (e.g., "double free", "use after free") having unpredictable results. As a result, the prevalent approach to storage management in high-integrity systems is to disallow dynamic management techniques completely. [SEI-C] [MISRA2013] [Holzmann2006] [ISO2000]

However, restricted forms of storage management and associated feature usage can support the necessary reliability and analyzability characteristics while retaining sufficient expressive power to justify the analysis expense. The following sections present possible approaches, including the traditional approach in which no dynamic behavior is allowed. Individual projects may then choose which storage management approach best fits their requirements and apply appropriate tailoring, if necessary, to the specific guidelines.

Realization
There is a spectrum of management schemes possible, trading ease of analysis against

increasing expressive power. At one end there is no dynamic memory allocation (and hence, deallocation) allowed, making analysis trivial. At the other end, nearly the full expressive power of the Ada facility is available, but with analyzability partially retained. In the latter, however, the user must create the allocators in such a manner as to ensure proper behavior.

Rule DYN01 is Required, as it avoids problematic features whatever the strategy chosen. Rules DYN02-05 are marked as Advisory, because one of them should be chosen and enforced throughout a given software project.

105.1 Common High Integrity Restrictions (DYN01)

Level → Required

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
Performance
Security
✓

Remediation → Low

Verification Method → Compiler restrictions

105.1.1 Reference

Ada Reference Manual: H.4 High Integrity Restrictions[487]

105.1.2 Description

The following restrictions must be in effect:

- `No_Anonymous_Allocators`
- `No_Coextensions`
- `No_Access_Parameter_Allocators`
- `Immediate_Reclamation`

The first three restrictions prevent problematic usage that, for example, may cause unreclaimed (and unreclaimable) storage. The last restriction ensures any storage allocated by the compiler at run-time for representing objects is reclaimed at once. (That restriction does not apply to objects created by allocators in the application.)

[487] http://www.ada-auth.org/standards/12rm/html/RM-H-4.html

105.1.3 Applicable Vulnerability within ISO TR 24772-2

- 4.10 Storage Pool

105.1.4 Applicable Common Weakness Enumeration

- **CWE-401 - Missing Release of Memory after Effective Lifetime**[488]
- **CWE-415 - Double Free**[489]
- **CWE-416 - Use After Free**[490]

105.1.5 Noncompliant Code Example

For No_Anonymous_Allocators:

```
X : access String := new String'("Hello");
...
X := new String'("Hello");
```

For No_Coextensions:

```
type Object (Msg : access String) is ...
Obj : Object (Msg => new String'("Hello"));
```

For No_Access_Parameter_Allocators:

```
procedure P (Formal : access String);
...
P (Formal => new String'("Hello"));
```

105.1.6 Compliant Code Example

For No_Anonymous_Allocators, use a named access type:

```
type String_Reference is access all String;
S : constant String_Reference := new String'("Hello");
X : access String := S;
...
X := S;
```

For No_Coextensions, use a variable of a named access type:

```
type Object (Msg : access String) is ...
type String_Reference is access all String;
S : String_Reference := new String'("Hello");
Obj : Object (Msg => S);
```

For No_Access_Parameter_Allocators, use a variable of a named access type:

```
procedure P (Formal : access String);
type String_Reference is access all String;
S : String_Reference := new String'("Hello");
...
P (Formal => S);
```

[488] https://cwe.mitre.org/data/definitions/401.html
[489] https://cwe.mitre.org/data/definitions/415.html
[490] https://cwe.mitre.org/data/definitions/416.html

105.1.7 Notes

The compiler will detect violations of the first three restrictions. Note that GNATcheck can detect violations in addition to the compiler.

The fourth restriction is a directive for implementation behavior, not subject to source-based violation detection.

105.2 Traditional Static Allocation Policy (DYN02)

Level → Advisory

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
Performance
Security
✓

Remediation → Low

Verification Method → Compiler restrictions

105.2.1 Reference

MISRA C Dir 4.12: "Dynamic memory allocation shall not be used."

105.2.2 Description

The following restrictions must be in effect:

- `No_Allocators`
- `No_Task_Allocators`

Under the traditional approach, no dynamic allocations and no deallocations occur. Only declared objects are used and no access types of any kind appear in the code.

Without allocations there is no issue with deallocation as there would be nothing to deallocate. *Heap* storage exhaustion and fragmentation are clearly prevented although storage may still be exhausted due to insufficient stack size allotments.

In this approach the following constructs are not allowed:

- Allocators
- Access-to-constant access types
- Access-to-variable access types
- User-defined storage pools
- Unchecked Deallocations

105.2.3 Applicable Vulnerability within ISO TR 24772-2

- 4.10 Storage Pool

105.2.4 Applicable Common Weakness Enumeration

- **CWE-401 - Missing Release of Memory after Effective Lifetime**[491]
- **CWE-758 - Reliance on Undefined, Unspecified, or Implementation-Defined Behavior**[492]
- **CWE-771 - Missing Reference to Active Allocated Resource**[493]
- **CWE-1325 - Improperly Controlled Sequential Memory Allocation**[494]

105.2.5 Noncompliant Code Example

Any code using the constructs listed above.

105.2.6 Compliant Code Example

N/A

105.2.7 Notes

The compiler, and/or GNATcheck, will detect violations of the restrictions.

105.3 Access Types Without Allocators Policy (DYN03)

Level → Advisory

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
Performance
Security
✓

Remediation → Low

Verification Method → Compiler restrictions

[491] https://cwe.mitre.org/data/definitions/401.html
[492] https://cwe.mitre.org/data/definitions/758.html
[493] https://cwe.mitre.org/data/definitions/771.html
[494] https://cwe.mitre.org/data/definitions/1325.html

105.3.1 Reference

MISRA C Rule 21.3: "The memory allocation and deallocation functions of <stdlib.h> shall not be used."

105.3.2 Description

The following restrictions must be in effect:

- `No_Allocators`
- `No_Dependence => Ada.Unchecked_Deallocation`

In this approach dynamic access values are only created via the attribute `'Access` applied to aliased objects. Allocation and deallocation never occur. As a result, storage exhaustion cannot occur because no *dynamic* allocations occur. Fragmentation cannot occur because there are no deallocations.

In this approach the following constructs are not allowed:

- Allocators
- User-defined storage pools
- Unchecked Deallocations

Aspects should be applied to all access types in this approach, specifying a value of zero for the storage size. Although the restriction `No_Allocators` is present, such clauses may be necessary to prevent any default storage pools from being allocated for the access types, even though the pools would never be used. A direct way to accomplish this is to use **`pragma`** *`Default_Storage_Pool`* with a parameter of **`null`** like so:

```
pragma Default_Storage_Pool (null);
```

The above would also ensure no allocations can occur with access types that have the default pool as their associated storage pool (per Ada Reference Manual: 13.11.3 (6.1/3) Default Storage Pools[495]).

105.3.3 Applicable Vulnerability within ISO TR 24772-2

- 6.14 Dangling reference to heap [XYK]

105.3.4 Applicable Common Weakness Enumeration

- **CWE-401 - Missing Release of Memory after Effective Lifetime**[496]
- **CWE-415 - Double Free**[497]
- **CWE-416 - Use After Free**[498]
- **CWE-771 - Missing Reference to Active Allocated Resource**[499]
- **CWE-1325 - Improperly Controlled Sequential Memory Allocation**[500]

[495] http://www.ada-auth.org/standards/12rm/html/RM-13-11-3.html
[496] https://cwe.mitre.org/data/definitions/401.html
[497] https://cwe.mitre.org/data/definitions/415.html
[498] https://cwe.mitre.org/data/definitions/416.html
[499] https://cwe.mitre.org/data/definitions/771.html
[500] https://cwe.mitre.org/data/definitions/1325.html

105.3.5 Noncompliant Code Example

Any code using the constructs listed above.

105.3.6 Compliant Code Example

```
type Descriptor is ...;
type Descriptor_Ref is access all Descriptor;
...
Device : aliased Descriptor;
...
P : Descriptor_Ref := Device'Access;
...
```

105.3.7 Notes

The compiler, and/or GNATcheck, will detect violations of the restrictions.

105.4 Minimal Dynamic Allocation Policy (DYN04)

Level → Advisory

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
Performance
Security

Remediation → Low

Verification Method → Compiler restrictions

105.4.1 Reference

Power of Ten rule 3: "Do not use dynamic memory allocation after initialization."

105.4.2 Description

The following restrictions must be in effect:

- `No_Local_Allocators`
- `No_Dependence => Ada.Unchecked_Deallocation`

In this approach dynamic allocation is only allowed during "start-up" and no later. Deallocations never occur. As a result, storage exhaustion should never occur assuming the initial allotment is sufficient. This assumption is as strong as when using only declared objects on

the "stack" because in that case a sufficient initial storage allotment for the stack must be made.

In this approach the following constructs are not allowed:

- Unchecked Deallocations

Note that some operating systems intended for this domain directly support this policy.

105.4.3 Applicable Vulnerability within ISO TR 24772-2

- 4.10 Storage Pool

105.4.4 Applicable Common Weakness Enumeration

- **CWE-401 - Missing Release of Memory after Effective Lifetime**[501]
- **CWE-415 - Double Free**[502]
- **CWE-416 - Use After Free**[503]
- **CWE-459 - Incomplete Cleanup**[504]
- **CWE-771 - Missing Reference to Active Allocated Resource**[505]
- **CWE-1325 - Improperly Controlled Sequential Memory Allocation**[506]

105.4.5 Noncompliant Code Example

Any code using the constructs listed above.

105.4.6 Compliant Code Example

Code performing dynamic allocations any time prior to an arbitrary point designated as the end of the "startup" interval.

105.4.7 Notes

The compiler, and/or GNATcheck, will detect violations of the restrictions.

105.5 User-Defined Storage Pools Policy (DYN05)

Level → Advisory

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

[501] https://cwe.mitre.org/data/definitions/401.html
[502] https://cwe.mitre.org/data/definitions/415.html
[503] https://cwe.mitre.org/data/definitions/416.html
[504] https://cwe.mitre.org/data/definitions/459.html
[505] https://cwe.mitre.org/data/definitions/771.html
[506] https://cwe.mitre.org/data/definitions/1325.html

Reliability
✓

Portability
Performance
Security
✓

Remediation → Low

Verification Method → Code inspection

105.5.1 Reference

MISRA C Rule 21.3: "The memory allocation and deallocation functions of <stdlib.h> shall not be used."

105.5.2 Description

There are two issues that make storage utilization analysis difficult:

1. the predictability of the allocation and deallocation implementation, and
2. how access values are used by the application.

The behavior of the underlying implementation is largely undefined and may, for example, consist of calls to the operating system (if present). Application code can manipulate access values beyond the scope of analysis.

Under this policy, the full expressive power of access-to-object types is provided but one of the two areas of analysis difficulty is removed. Specifically, predictability of the allocation and deallocation implementation is achieved via user-defined storage pools. With these storage pools, the implementation of allocation (`new`) and deallocation (instances of `Ada.Unchecked_Deallocation`) is defined by the pool type.

If the pool type is implemented with fixed-size blocks on the stack, allocation and deallocation timing behavior are predictable.

Such an implementation would also be free from fragmentation.

Given an analysis providing the worst-case allocations and deallocations, it would be possible to verify that pool exhaustion does not occur. However, as mentioned such analysis can be quite difficult. A mitigation would be the use of the "owning" access-to-object types provided by SPARK.

In this approach no storage-related constructs are disallowed unless the SPARK subset is applied.

105.5.3 Applicable Vulnerability within ISO TR 24772-2

- 4.10 Storage Pool

105.5.4 Applicable Common Weakness Enumeration

- **CWE-401 - Missing Release of Memory after Effective Lifetime**[507]
- **CWE-415 - Double Free**[508]
- **CWE-416 - Use After Free**[509]

[507] https://cwe.mitre.org/data/definitions/401.html
[508] https://cwe.mitre.org/data/definitions/415.html
[509] https://cwe.mitre.org/data/definitions/416.html

- **CWE-459 - Incomplete Cleanup**[510]

105.5.5 Noncompliant Code Example

Allocation via an access type not tied to a user-defined storage pool.

105.5.6 Compliant Code Example

```
Heap : Sequential_Fixed_Blocks.Storage_Pool
         (Storage_Size => Required_Storage_Size,
          Element_Size => Representable_Obj_Size,
          Alignment    => Representation_Alignment);
type Pointer is access all Unsigned_Longword with
   Storage_Pool => Heap;
Ptr : Pointer;
...
Ptr := new Unsigned_Longword; -- from Heap
```

105.5.7 Notes

Enforcement of this approach can only be provided by manual code review unless SPARK is used.

However, the User-Defined Storage Pools Policy can be enforced statically by specifying `Default_Storage_Pool (null)`. This essentially requires all access types to have a specified storage pool if any allocators are used with the access type.

105.6 Statically Determine Maximum Stack Requirements (DYN06)

Level → Required

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
Performance
Security

Remediation → Low

Verification Method → Static analysis tools

[510] https://cwe.mitre.org/data/definitions/459.html

105.6.1 Reference

N/A

105.6.2 Description

Each Ada application task has a stack, as does the "environment task" that elaborates library packages and calls the main subprogram. A tool to statically determine the maximum storage required for these stacks must be used, per task.

This guideline concerns another kind of dynamic memory utilization. The previous guidelines concerned the management of storage commonly referred to as the "heap." This guideline concerns the storage commonly referred to as the "stack." (Neither term is defined by the language, but both are commonly recognized and are artifacts of the underlying run-time library or operating system implementation.)

105.6.3 Applicable Vulnerability within ISO TR 24772-2

- 4.10 Storage Pool

105.6.4 Applicable Common Weakness Enumeration

- **CWE-770 - Allocation of Resources Without Limits or Throttling**[511]
- **CWE-789 - Uncontrolled Memory Allocation**[512]

105.6.5 Noncompliant Code Example

N/A

105.6.6 Compliant Code Example

N/A

105.6.7 Notes

The GNATstack[513] tool can statically determine the maximum requirements per task.

[511] https://cwe.mitre.org/data/definitions/770.html
[512] https://cwe.mitre.org/data/definitions/789.html
[513] http://docs.adacore.com/live/wave/gnatstack/html/gnatstack_ug/index.html

CHAPTER

SIX

SAFE RECLAMATION (RCL)

Goal

Maintainability
✓

Reliability
✓

Portability
Performance
✓

Security
✓

Description
Related to managing dynamic storage at the system (policy) level, these statement-level rules concern the safe reclamation of access (*pointer*) values.

Rules
RCL01, RCL02, RCL03

106.1 No Multiple Reclamations (RCL01)

Level → Mandatory

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
✓

Performance
Security
✓

Remediation → High

Verification Method → Code inspection

106.1.1 Reference

N/A

106.1.2 Description

Never deallocate the storage designated by a given access value more than once.

106.1.3 Applicable Vulnerability within ISO TR 24772-2

- 6.39 Memory leak and heap fragmentation [XYL]

106.1.4 Applicable Common Weakness Enumeration

- **CWE-415 - Double Free**[514]
- **CWE-416 - Use After Free**[515]

106.1.5 Noncompliant Code Example

```
   type String_Reference is access all String;
   procedure Free is new Ada.Unchecked_Deallocation
      (Object => String, Name => String_Reference);
   S : String_Reference := new String'("Hello");
   Y : String_Reference;
begin
   Y := S;
   Free (S);
   Free (Y);
```

106.1.6 Compliant Code Example

Remove the call to `Free (Y)`.

106.1.7 Notes

Enforcement of this rule can be provided by manual code review, unless deallocation is forbidden via `No_Unchecked_Deallocation` or SPARK is used, as ownership analysis in SPARK detects such cases. Note that storage utilization analysis tools such as Valgrind can usually find this sort of error. In addition, a GNAT-defined storage pool is available to help debug such errors.

106.2 Only Reclaim Allocated Storage (RCL02)

Level → Mandatory

Category

Safety
✓

Cyber
✓

Goal

[514] https://cwe.mitre.org/data/definitions/415.html
[515] https://cwe.mitre.org/data/definitions/416.html

Maintainability
✓

Reliability
✓

Portability
✓

Performance
Security
✓

Remediation → High

Verification Method → Code inspection

106.2.1 Reference

[SEI-C] MEM34-C: Only Free Memory Allocated Dynamically

106.2.2 Description

Only deallocate storage that was dynamically allocated by the evaluation of an allocator (i.e., `new`).

This is possible because Ada allows creation of access values designating declared (aliased) objects.

106.2.3 Applicable Vulnerability within ISO TR 24772-2

- 6.39 Memory leak and heap fragmentation [XYL]

106.2.4 Applicable Common Weakness Enumeration

- **CWE-590 - Free of Memory not on the Heap**[516]

106.2.5 Noncompliant Code Example

```
   type String_Reference is access all String;
   procedure Free is new Ada.Unchecked_Deallocation
     (Object => String, Name => String_Reference);
   S : aliased String := "Hello";
   Y : String_Reference := S'Access;
begin
   Free (Y);
```

106.2.6 Compliant Code Example

Remove the call to `Free (Y)`.

106.2.7 Notes

Enforcement of this rule can only be provided by manual code review, unless deallocation is forbidden via `No_Unchecked_Deallocation`.

[516] https://cwe.mitre.org/data/definitions/590.html

106.3 Only Reclaim to the Same Pool (RCL03)

Level → Mandatory

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
✓

Performance
Security
✓

Remediation → High

Verification Method → Code inspection

106.3.1 Reference

N/A

106.3.2 Description

When deallocating, ensure that the pool to which the storage will be returned is the same pool from which it was allocated. Execution is erroneous otherwise, meaning anything can happen (Ada Reference Manual: 13.11.2 (16) Unchecked Storage Deallocation[517]).

Each access type has an associated storage pool, either implicitly by default, or explicitly with a storage pool specified by the programmer. The implicit default pool might not be the same pool used for another access type, even an access type designating the same subtype.

106.3.3 Applicable Vulnerability within ISO TR 24772-2

- 6.39 Memory leak and heap fragmentation [XYL]

106.3.4 Applicable Common Weakness Enumeration

- **CWE-401 - Missing Release of Memory after Effective Lifetime**[518]

106.3.5 Noncompliant Code Example

[517] http://www.ada-auth.org/standards/12rm/html/RM-13-11-2.html
[518] https://cwe.mitre.org/data/definitions/401.html

```
   type Pointer1 is access all Integer;
   type Pointer2 is access all Integer;
   P1 : Pointer1;
   P2 : Pointer2;
   procedure Free is new Ada.Unchecked_Deallocation
      (Object => Integer, Name => Pointer2);
begin
   P1 := new Integer;
   P2 := Pointer2 (P1);
   Call_Something ( P2.all );
   ...
   Free (P2);
```

In the above, P1.**all** was allocated from Pointer1'Storage_Pool, but, via the type conversion, the code above is attempting to return it to Pointer2'Storage_Pool, which may be a different pool.

106.3.6 Compliant Code Example

```
   type Pointer1 is access all Integer;
   type Pointer2 is access all Integer;
   P1 : Pointer1;
   P2 : Pointer2;
   procedure Free is new Ada.Unchecked_Deallocation
      (Object => Integer, Name => Pointer1);
begin
   P1 := new Integer;
   P2 := Pointer2 (P1);
   Call_Something ( P2.all );
   ...
   Free (P1);
```

106.3.7 Notes

Enforcement of this rule can only be provided by manual code review, unless deallocation is forbidden via No_Unchecked_Deallocation.

CHAPTER

SEVEN

CONCURRENCY (CON)

Goal

Maintainability

✓

Reliability

✓

Portability

✓

Performance

✓

Security

Description

Have a plan for managing the use of concurrency in high-integrity applications having real-time requirements.

Rules

CON01, CON02, CON03

The canonical approach to applications having multiple periodic and aperiodic activities is to map those activities onto independent tasks, i.e., threads of control. The advantages for the application are both a matter of software engineering and also ease of implementation. For example, when the different periods are not harmonics of one another, the fact that each task executes independently means that the differences are trivially represented. In contrast, such periods are not easily implemented in a cyclic scheduler, which, by definition, involves only one (implicit) thread of control with one frame rate.

High integrity applications are subject to a number of stringent analyses, including, for example, safety analyses and certification against rigorous industry standards. In addition, high integrity applications with real-time requirements must undergo timing analysis because they must be shown to meet deadlines prior to deployment — failure to meet hard deadlines is unacceptable in this domain.

These analyses are applied both to the application and to the implementation of the underlying run-time library. However, analysis of the complete set of general Ada tasking features is not tractable, neither technically nor in terms of cost. A subset of the language is required.

The Ravenscar profile [AdaRM2016] is a subset of the Ada concurrency facilities that supports determinism, schedulability analysis, constrained memory utilization, and certification to the highest integrity levels. Four distinct application domains are specifically intended:

- Hard real-time applications requiring predictability;
- Safety-critical systems requiring formal, stringent certification;
- High-integrity applications requiring formal static analysis and verification;

- Embedded applications requiring both a small memory footprint and low execution overhead.

Those tasking constructs that preclude analysis at the source level or analysis of the tasking portion of the underlying run-time library are disallowed.

The Ravenscar profile is necessarily strict in terms of what it removes so that it can support the stringent analyses, such as safety analysis, that go beyond the timing analysis required for real-time applications. In addition, the strict subset facilitates that timing analysis in the first place.

However, not all high-integrity applications are amenable to expression in the Ravenscar profile subset. The Jorvik profile [AdaRM2020] is an alternative subset of the Ada concurrency facilities. It is based directly on the Ravenscar profile but removes selected restrictions in order to increase expressive power, while retaining analyzability and performance. As a result, typical idioms for protected objects can be used, for example, and relative delays statements are allowed. Timing analysis is still possible but slightly more complicated, and the underlying run-time library is slightly larger and more complex.

When the most stringent analyses are required and the tightest timing is involved, use the Ravenscar profile. When a slight increase in complexity is tolerable, i.e., in those cases not undergoing all of these stringent analyses, consider using the Jorvik profile.

107.1 Use the Ravenscar Profile (CON01)

Level → Advisory

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
✓

Performance
✓

Security

Remediation → High

Verification Method → GNATcheck rule: `uses_profile:ravenscar` (supplied with document)

Mutually Exclusive → CON02

107.1.1 Reference

Ada Reference Manual: D.13 The Ravenscar and Jorvik Profiles[519]

[519] http://www.ada-auth.org/standards/12rm/html/RM-D-13.html

107.1.2 Description

The following profile must be in effect:

```
pragma Profile (Ravenscar);
```

The profile is equivalent to the following set of pragmas:

```
pragma Task_Dispatching_Policy (FIFO_Within_Priorities);
pragma Locking_Policy (Ceiling_Locking);
pragma Detect_Blocking;
pragma Restrictions (
        No_Abort_Statements,
        No_Dynamic_Attachment,
        No_Dynamic_CPU_Assignment,
        No_Dynamic_Priorities,
        No_Implicit_Heap_Allocations,
        No_Local_Protected_Objects,
        No_Local_Timing_Events,
        No_Protected_Type_Allocators,
        No_Relative_Delay,
        No_Requeue_Statements,
        No_Select_Statements,
        No_Specific_Termination_Handlers,
        No_Task_Allocators,
        No_Task_Hierarchy,
        No_Task_Termination,
        Simple_Barriers,
        Max_Entry_Queue_Length => 1,
        Max_Protected_Entries => 1,
        Max_Task_Entries => 0,
        No_Dependence => Ada.Asynchronous_Task_Control,
        No_Dependence => Ada.Calendar,
        No_Dependence => Ada.Execution_Time.Group_Budgets,
        No_Dependence => Ada.Execution_Time.Timers,
        No_Dependence => Ada.Synchronous_Barriers,
        No_Dependence => Ada.Task_Attributes,
        No_Dependence => System.Multiprocessors.Dispatching_Domains);
```

107.1.3 Applicable Vulnerability within ISO TR 24772-2

- 6.59 Concurrency - Activation [GGA]
- 6.60 Concurrency - Directed termination [CGT]
- 6.61 Concurrent data access [CGX]
- 6.62 Concurrency - Premature termination [CGS]
- 6.63 Lock protocol errors [CGM]

107.1.4 Applicable Common Weakness Enumeration

- **CWE-362 - Concurrent Execution using Shared Resource with Improper Synchronization**[520]
- **CWE-366 - Race Condition within a Thread**[521]
- **CWE-367 - Time-of-check Time-of-use (TOCTOU) Race Condition**[522]

[520] https://cwe.mitre.org/data/definitions/362.html
[521] https://cwe.mitre.org/data/definitions/366.html
[522] https://cwe.mitre.org/data/definitions/367.html

107.1.5 Noncompliant Code Example

Any code disallowed by the profile. Remediation is **high** because use of the facilities outside the subset can be difficult to retrofit into compliance.

```
task body Task_T is
begin
   loop
      -- Error: No_Relative_Delay
      delay 1.0;
      Put_Line ("Hello World");
   end loop;
end Task_T;
```

107.1.6 Compliant Code Example

```
task body Task_T is
   Period     : constant Time_Span := Milliseconds (10);
   Activation : Time               := Clock;
begin
   loop
      delay until Activation;
      Put_Line ("Hello World");
      Activation := Activation + Period;
   end loop;
end Task_T;
```

107.1.7 Notes

The Ada builder will detect violations if the programmer specifies this profile or corresponding pragmas. GNATcheck also can detect violations of profile restrictions.

107.2 Use the Jorvik Profile (CON02)

Level → Advisory

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
✓

Performance
✓

Security

Remediation → High

Verification Method → GNATcheck rule: `uses_profile:jorvik` (supplied with document)

Mutually Exclusive → CON01

107.2.1 Reference

Ada Reference Manual: D.13 The Ravenscar and Jorvik Profiles[523]

107.2.2 Description

The following profile must be in effect:

```
pragma Profile (Jorvik);
```

The profile is equivalent to the following set of pragmas:

```
pragma Task_Dispatching_Policy (FIFO_Within_Priorities);
pragma Locking_Policy (Ceiling_Locking);
pragma Detect_Blocking;
pragma Restrictions (
           No_Abort_Statements,
           No_Dynamic_Attachment,
           No_Dynamic_CPU_Assignment,
           No_Dynamic_Priorities,
           No_Local_Protected_Objects,
           No_Local_Timing_Events,
           No_Protected_Type_Allocators,
           No_Requeue_Statements,
           No_Select_Statements,
           No_Specific_Termination_Handlers,
           No_Task_Allocators,
           No_Task_Hierarchy,
           No_Task_Termination,
           Pure_Barriers,
           Max_Task_Entries => 0,
           No_Dependence => Ada.Asynchronous_Task_Control,
           No_Dependence => Ada.Execution_Time.Group_Budgets,
           No_Dependence => Ada.Execution_Time.Timers,
           No_Dependence => Ada.Task_Attributes,
           No_Dependence => System.Multiprocessors.Dispatching_Domains);
```

The following restrictions are part of the Ravenscar profile but **not** part of the Jorvik profile.

```
No_Implicit_Heap_Allocations
No_Relative_Delay
Max_Entry_Queue_Length => 1
Max_Protected_Entries => 1
No_Dependence => Ada.Calendar
No_Dependence => Ada.Synchronous_Barriers
```

Jorvik also replaces restriction `Simple_Barriers` with `Pure_Barriers` (a weaker requirement than the restriction `Simple_Barriers`).

[523] http://www.ada-auth.org/standards/12rm/html/RM-D-13.html

107.2.3 Applicable Vulnerability within ISO TR 24772-2

- 6.59 Concurrency - Activation [GGA]
- 6.60 Concurrency - Directed termination [CGT]
- 6.61 Concurrent data access [CGX]
- 6.62 Concurrency - Premature termination [CGS]
- 6.63 Lock protocol errors [CGM]

107.2.4 Applicable Common Weakness Enumeration

- **CWE-362 - Concurrent Execution using Shared Resource with Improper Synchronization**[524]
- **CWE-366 - Race Condition within a Thread**[525]
- **CWE-367 - Time-of-check Time-of-use (TOCTOU) Race Condition**[526]

107.2.5 Noncompliant Code Example

Any code disallowed by the profile. Remediation is **high** because use of the facilities outside the subset can be difficult to retrofit into compliance.

```
task body Task_T is
begin
   -- Error: Max_Task_Entries => 0
   accept Entry_Point do
      Put_Line ("Hello World");
   end Entry_Point;
   loop
      delay 1.0;
      Put_Line ("Ping");
   end loop;
end Task_T;
```

107.2.6 Compliant Code Example

```
task body Task_T is
begin
   delay 1.0;
   Put_Line ("Hello World");
   loop
      delay 1.0;
      Put_Line ("Ping");
   end loop;
end Task_T;
```

107.2.7 Notes

The Ada builder will detect violations. GNATcheck can also detect violations.

[524] https://cwe.mitre.org/data/definitions/362.html
[525] https://cwe.mitre.org/data/definitions/366.html
[526] https://cwe.mitre.org/data/definitions/367.html

107.3 Avoid Shared Variables for Inter-task Communication (CON03)

Level → Advisory

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
✓

Performance
✓

Security

Remediation → High

Verification Method → GNATcheck rule: `Volatile_Objects_Without_Address_Clauses` (builtin rule)

107.3.1 Reference

Ada Reference Manual: D.13 The Ravenscar Profile[527]

107.3.2 Description

Although the Ravenscar and Jorvik profiles allow the use of shared variables for inter-task communication, such use is less robust and less reliable than encapsulating shared variables within protected objects.

107.3.3 Applicable Vulnerability within ISO TR 24772-2

- 6.56 Undefined behaviour [EWF]

107.3.4 Applicable Common Weakness Enumeration

- **CWE-567 - Unsynchronized Access to Shared Data in a Multithreaded Context**[528]
- **CWE-667 - Improper Locking**[529]

[527] http://www.ada-auth.org/standards/12rm/html/RM-D-13.html
[528] https://cwe.mitre.org/data/definitions/567.html
[529] https://cwe.mitre.org/data/definitions/667.html

107.3.5 Noncompliant Code Example

```
   Global_Object : Integer
     with Volatile;
   function Get return Integer is (Global_Object);
```

Note that variables marked as `Atomic` are also `Volatile`, per the Ada Reference Manual: C.6 (8/3) Shared Variable Control[530]

107.3.6 Compliant Code Example

When assigned to a memory address, a `Volatile` variable can be used to interact with a memory-mapped device, among other similar usages.

```
   Global_Object : Integer
     with Volatile,
          Address => To_Address (16#1234_5678#);
   function Get return Integer is (Global_Object);
```

107.3.7 Notes

In additon to GNATcheck, SPARK and CodePeer can also detect conflicting access to unprotected variables.

[530] http://www.ada-auth.org/standards/12rm/html/RM-C-6.html

CHAPTER

EIGHT

ROBUST PROGRAMMING PRACTICE (RPP)

Goal

Maintainability
✓

Reliability
✓

Portability
✓

Performance
✓

Security
✓

Description
These rules promote the production of robust software.

Rules
RPP01, RPP02, RPP03, RPP04, RPP05, RPP06, RPP07, RPP07, RPP08, RPP09, RPP10, RPP11, RPP12, RPP13, RPP14

108.1 No Use of "others" in Case Constructs (RPP01)

Level → Required

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
✓

Performance
Security

Remediation → Low

Verification Method → GNATcheck rule: `OTHERS_In_CASE_Statements` (builtin rule)

108.1.1 Reference

[SEI-C] MSC01-C

108.1.2 Description

Case statement alternatives and case-expressions must not include use of the **`others`** discrete choice option. This rule prevents accidental coverage of a choice added after the initial case statement is written, when an explicit handler was intended for the addition.

Note that this is opposite to typical C guidelines such as [SEI-C] MSC01-C. The reason is that in C, the **`default`** alternative plays the role of defensive code to mitigate the switch statement's non-exhaustivity. In Ada, the **`case`** construct is exhaustive: the compiler statically verifies that for every possible value of the **`case`** expression there is a branch alternative, and there is also a dynamic check against invalid values which serves as implicit defensive code. As a result, Ada's **`others`** alternative doesn't play C's defensive code role and therefore a stronger guideline can be adopted.

108.1.3 Applicable Vulnerability within ISO TR 24772-2

- 6.27 Switch statements and static analysis [CLL]

108.1.4 Applicable Common Weakness Enumeration

- **CWE-478 - Missing Default Case in Multiple Condition Expression**[531]

108.1.5 Noncompliant Code Example

```
case Digit_T (C) is
   when '0' | '9' =>
      C := Character'succ (C);
   when others =>
      C := Character'pred (C);
end case;
```

108.1.6 Compliant Code Example

```
case Digit_T (C) is
   when '0' | '9' =>
      C := Character'succ (C);
   when '1' | '2' | '3' | '4' | '5' | '6' | '7' | '8' =>
      C := Character'pred (C);
end case;
```

108.1.7 Notes

N/A

[531] https://cwe.mitre.org/data/definitions/478.html

108.2 No Enumeration Ranges in Case Constructs (RPP02)

Level → Required

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
✓

Performance
Security

Remediation → Low

Verification Method → GNATcheck rule: `Enumeration_Ranges_In_CASE_Statements` (builtin rule)

108.2.1 Reference

Similar to RPP01

108.2.2 Description

A range of enumeration literals must not be used as a choice in a **case** statement or a **case** expression. This includes explicit ranges (`A .. B`), subtypes, and the `'Range` attribute. Much like the use of **others** in **case** statement alternatives, the use of ranges makes it possible for a new enumeration value to be added but not handled with a specific alternative, when a specific alternative was intended.

108.2.3 Applicable Vulnerability within ISO TR 24772-2

- 6.5 Enumerator issues [CCB]

108.2.4 Applicable Common Weakness Enumeration

N/A

108.2.5 Noncompliant Code Example

```
case Digit_T (C) is
   when '0' | '9' =>
      C := Character'Succ (C);
   when '1' .. '8' =>
      C := Character'Pred (C);
end case;
```

108.2.6 Compliant Code Example

```
case Digit_T (C) is
   when '0' | '9' =>
      C := Character'Succ (C);
   when '1' | '2' | '3' | '4' | '5' | '6' | '7' | '8' =>
      C := Character'Pred (C);
end case;
```

108.2.7 Notes

N/A

108.3 Limited Use of "others" in Aggregates (RPP03)

Level → Advisory

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
✓

Performance
Security

Remediation → Low

Verification Method → GNATcheck rule: `OTHERS_In_Aggregates` (builtin rule)

108.3.1 Reference

Similar to RPP01

108.3.2 Description

Do not use an **others** choice in an extension aggregate. In **record** and **array** aggregates, do not use an **others** choice unless it is used either to refer to all components, or to all but one component.

This guideline prevents accidental provision of a general value for a **record** component or **array** component, when a specific value was intended. This possibility includes the case in which new components are added to an existing composite type.

108.3.3 Applicable Vulnerability within ISO TR 24772-2

- 6.5 Enumerator issues [CCB]
- 6.27 Switch statements and static analysis [CLL]

108.3.4 Applicable Common Weakness Enumeration

- **CWE-478 - Missing Default Case in Multiple Condition Expression**[532]

108.3.5 Noncompliant Code Example

```
type Record_T is record
   Field1 : Integer   := 1;
   Field2 : Boolean   := False;
   Field3 : Character := ' ';
end record;
type Array_T is array (Character) of Boolean;
Rec : Record_T := (Field1 => 1,
                   Field3 => '2',
                   others => <>);
Arr : Array_T := ('0' .. '9' => True,
                  others     => False);
```

108.3.6 Compliant Code Example

```
type Record_T is record
   Field1 : Integer   := 1;
   Field2 : Boolean   := False;
   Field3 : Character := ' ';
end record;
type Array_T is array (Character) of Boolean;
Rec : Record_T := (Field1 => 1,
                   others => <>);
Arr : Array_T := (others => False);
```

108.3.7 Notes

N/A

108.4 No Unassigned Mode-Out Procedure Parameters (RPP04)

Level → Required

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

[532] https://cwe.mitre.org/data/definitions/478.html

Reliability
✓

Portability
✓

Performance
Security

Remediation → High

Verification Method → GNATcheck rule: `Unassigned_OUT_Parameters` (builtin rule)

108.4.1 Reference

MISRA C Rule 9.1: "The value of an object with automatic storage duration shall not be read before it has been set."

108.4.2 Description

For any procedure, all formal parameters of mode **out** must be assigned a value if the procedure exits normally. This rule ensures that, upon a normal return, the corresponding actual parameter has a defined value. Ensuring a defined value is especially important for scalar parameters because they are passed by value, such that some value is copied out to the actual. These undefined values can be especially difficult to locate because evaluation of the actual parameter's value might not occur immediately after the call returns.

108.4.3 Applicable Vulnerability within ISO TR 24772-2

- 6.32 Passing parameters and return values [CSJ]

108.4.4 Applicable Common Weakness Enumeration

- **CWE-457 - Use of Uninitialized Variable**[533]

108.4.5 Noncompliant Code Example

```
for Value_T use
  (Alpha   => 2#1#,
   Baker   => 2#10#,
   Charlie => 2#100#,
   Dog     => 2#1000#,
   Invalid => 2#1111#);

procedure Noncompliant (Register  :     Character;
                        Registera : out Value_T;
                        Registerb : out Value_T) is
begin
   if Register = 'A' then
      Registera := Alpha;
   end if;
end Noncompliant;
```

In the above example, some value is copied back for an output parameter as specified by `Register`. The other parameter is not assigned, and on return the value copied to the actual parameter may not be a valid representation for a value of the type. (We give the enumeration values a non-standard representation for the sake of illustration, i.e., to make it more likely that the undefined value is not valid.)

[533] https://cwe.mitre.org/data/definitions/457.html

108.4.6 Compliant Code Example

```
procedure Compliant (Register  :     Character;
                     Registera : out Value_T;
                     Registerb : out Value_T) is
begin
   Registera := Invalid;
   Registerb := Invalid;
   if Register = 'A' then
      Registera := Alpha;
   end if;
end Compliant;
```

108.4.7 Notes

The GNATcheck rule specified above only detects a trivial case of an unassigned variable and doesn't provide a guarantee that there is no uninitialized access. It is not a replacement for a rigorous check for uninitialized access provided by advanced static analysis tools such as SPARK and CodePeer.

Note that the GNATcheck rule does not check function parameters (as of Ada 2012 functions can have **out** parameters). As a result, the better choice is either SPARK or CodePeer.

108.5 No Use of "others" in Exception Handlers (RPP05)

Level → Required

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
✓

Performance
Security

Remediation → Low

Verification Method → GNATcheck rule: `OTHERS_In_Exception_Handlers` (builtin rule)

108.5.1 Reference

N/A

108.5.2 Description

Much like the situation with **others** in **case** statements and **case** expressions, the use of **others** in exception handlers makes it possible to omit an intended specific handler for an exception, especially a new exception added to an existing set of handlers. As a result, a subprogram could return normally without having applied any recovery for the specific exception occurrence, which is likely a coding error.

108.5.3 Applicable Vulnerability within ISO TR 24772-2

N/A

108.5.4 Applicable Common Weakness Enumeration

- **CWE-396 - Declaration of Catch for Generic Exception**[534]

108.5.5 Noncompliant Code Example

```
procedure Noncompliant (X : in out Integer) is
begin
   X := X * X;
exception
   when others =>
      X := -1;
end Noncompliant;
```

108.5.6 Compliant Code Example

```
procedure Compliant (X : in out Integer) is
begin
   X := X * X;
exception
   when Constraint_Error =>
      X := -1;
end Compliant;
```

108.5.7 Notes

ISO TR 24772-2: 6.50.2 slightly contradicts this when applying exception handlers around calls to library routines:

- Put appropriate exception handlers in all routines that call library routines, including the catch-all exception handler **when others** =>
- Put appropriate exception handlers in all routines that are called by library routines, including the catch-all exception handler **when others** =>

ISO TR 24772-2 also recommends "All tasks should contain an exception handler at the outer level to prevent silent termination due to unhandled exceptions."

108.6 Avoid Function Side-Effects (RPP06)

Level → Advisory

Category

[534] https://cwe.mitre.org/data/definitions/396.html

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
✓

Performance
Security

Remediation → Medium

Verification Method → Code inspection

108.6.1 Reference

MISRA C Rule 13.2: "The value of an expression and its persistent side effects shall be the same under all permitted evaluation orders."

108.6.2 Description

Functions cannot update an actual parameter or global variable.

A side effect occurs when evaluation of an expression updates an object. This rule applies to function calls, a specific form of expression.

Side effects enable one form of parameter aliasing (see below) and evaluation order dependencies. In general they are a potential point of confusion because the reader expects only a computation of a value.

There are useful idioms based on functions with side effects. Indeed, a random number generator expressed as a function must use side effects to update the seed value. So-called "memo" functions are another example, in which the function tracks the number of times it is called. Therefore, exceptions to this rule are anticipated but should only be allowed on a per-instance basis after careful analysis.

108.6.3 Applicable Vulnerability within ISO TR 24772-2

- 6.24 Side-effects and order of evaluation [SAM]

108.6.4 Applicable Common Weakness Enumeration

N/A

108.6.5 Noncompliant Code Example

```
Call_Count : Integer := 0;
function F return Boolean is
   Result : Boolean;
begin
   ...
```

(continues on next page)

(continued from previous page)

```
   Call_Count := Call_Count + 1;
   return Result;
end F;
```

108.6.6 Compliant Code Example

Remove the update to `Call_Count`, or change the function into a procedure with a parameter for `Call_Count`.

108.6.7 Notes

Violations are detected by SPARK as part of a rule disallowing side effects on expression evaluation.

108.7 Functions Only Have Mode "in" (RPP07)

Level → Required

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
✓

Performance
Security

Remediation → Low

Verification Method → GNATcheck rule: `function_out_parameters` (supplied with document)

108.7.1 Reference

N/A

108.7.2 Description

Functions must have only mode **in**.

As of Ada 2012, functions are allowed to have the same modes as procedures. However, this can lead to side effects and aliasing.

This rule disallows all modes except mode **in** for functions.

108.7.3 Applicable Vulnerability within ISO TR 24772-2

- 6.24 Side-effects and order of evaluation [SAM]

108.7.4 Applicable Common Weakness Enumeration

N/A

108.7.5 Noncompliant Code Example

```
function Noncompliant (Value : in out Integer) return Integer is
begin
   if Value < Integer'last then
      Value := Value + 1;
   end if;
   return Value;
end Noncompliant;
```

108.7.6 Compliant Code Example

```
function Compliant (Value : Integer) return Integer is
begin
   return Value + 1;
end Compliant;
```

OR

```
procedure Compliant (Value : in out Integer) is
begin
   if Value < Integer'last then
      Value := Value + 1;
   end if;
end Compliant;
```

108.7.7 Notes

Violations are detected by SPARK.

108.8 Limit Parameter Aliasing (RPP08)

Level → Required

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
✓

Performance
Security

Remediation → High

Verification Method → Code inspection

108.8.1 Reference

Ada Reference Manual: 6.2 Formal Parameter Modes[535]

SPARK Reference Manual: Anti-Aliasing[536]

108.8.2 Description

In software, an alias is a name which refers to the same object as another name. In some cases, it is an error in Ada to reference an object through a name while updating it through another name in the same subprogram. Most of these cases cannot be detected by a compiler. Even when not an error, the presence of aliasing makes it more difficult to understand the code for both humans and analysis tools, and thus it may lead to errors being introduced during maintenance.

This rule is meant to detect problematic cases of aliasing that are introduced through the actual parameters and between actual parameters and global variables in a subprogram call. It is a simplified version of the SPARK rule for anti-aliasing defined in SPARK Reference Manual, section 6.4.2: Anti-Aliasing[537].

A formal parameter is said to be immutable when the subprogram cannot modify its value or modify the value of an object by dereferencing a part of the parameter of access type (at any depth in the case of SPARK). In Ada and SPARK, this corresponds to either an anonymous access-to-constant parameter or a parameter of mode `in` and not of an access type. Otherwise, the formal parameter is said to be mutable.

A procedure call shall not pass two actual parameters which potentially introduce aliasing via parameter passing unless either:

- both of the corresponding formal parameters are immutable; or
- at least one of the corresponding formal parameters is immutable and is of a by-copy type that is not an access type.

If an actual parameter in a procedure call and a global variable referenced by the called procedure potentially introduce aliasing via parameter passing, then:

- the corresponding formal parameter shall be immutable; and
- if the global variable is written in the subprogram, then the corresponding formal parameter shall be of a by-copy type that is not an access type.

Where one of the rules above prohibits the occurrence of an object or any of its subcomponents as an actual parameter, the following constructs are also prohibited in this context:

- A type conversion whose operand is a prohibited construct;
- A call to an instance of `Unchecked_Conversion` whose operand is a prohibited construct;
- A qualified expression whose operand is a prohibited construct;
- A prohibited construct enclosed in parentheses.

[535] http://www.ada-auth.org/standards/12rm/html/RM-6-2.html
[536] https://docs.adacore.com/spark2014-docs/html/lrm/subprograms.html#anti-aliasing
[537] https://docs.adacore.com/spark2014-docs/html/lrm/subprograms.html#anti-aliasing

108.8.3 Applicable Vulnerability within ISO TR 24772-2

- 6.32 Passing parameters and return values [CSJ]

108.8.4 Applicable Common Weakness Enumeration

N/A

108.8.5 Noncompliant Code Example

```
   type R is record
     Data : Integer := 0;
   end record;

   procedure Detect_Aliasing (Val_1 : in out R;
                              Val_2 : in R)
   is
   begin
      null;
   end Detect_Aliasing;

   Obj : R;

begin
   Detect_Aliasing (Obj, Obj);
```

108.8.6 Compliant Code Example

Do not pass `Obj` as the actual parameter to both formal parameters.

108.8.7 Notes

All violations are detected by SPARK. The GNAT compiler switch `-gnateA[1]` enables detection of some cases, but not all.

108.9 Use Precondition and Postcondition Contracts (RPP09)

Level → Advisory

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
✓

Performance	
Security	✓

Remediation → Low

Verification Method → Code inspection

108.9.1 Reference

Power of Ten rule 5: "The assertion density of the code should average to a minimum of two assertions per function."

108.9.2 Description

Subprograms should declare `Pre` and/or `Post` contracts. Developers should consider specifying the Global contract as well, when the default does not apply.

Subprogram contracts complete the Ada notion of a specification, enabling clients to know what the subprogram does without having to know how it is implemented.

Preconditions define those logical (Boolean) conditions required for the body to be able to provide the specified behavior. As such, they are obligations on the callers. These conditions are checked at run-time in Ada, prior to each call, and verified statically in SPARK.

Postconditions define those logical (Boolean) conditions that will hold after the call returns normally. As such, they express obligations on the implementer, i.e., the subprogram body. The implementation must be such that the postcondition holds, either at run-time for Ada, or statically in SPARK.

Not all subprograms will have both a precondition and a postcondition, some will have neither.

The `Global` contract specifies interactions with those objects not local to the corresponding subprogram body. As such, they help complete the specification because, otherwise, one would need to examine the body of the subprogram itself and all those it calls, directly or indirectly, to know whether any global objects were accessed.

108.9.3 Applicable Vulnerability within ISO TR 24772-2

- 6.42 Violations of the Liskov substitution principle or the contract model [BLP]

108.9.4 Applicable Common Weakness Enumeration

- **CWE-754 - Improper Check for Unusual or Exceptional Conditions**[538]

108.9.5 Noncompliant Code Example

```
type Stack is private;
procedure Push (This : in out Stack;  Item : Element);
```

108.9.6 Compliant Code Example

```
type Stack is private;
procedure Push (This : in out Stack;  Item : Element) with
   Pre  => not Full (This),
```

(continues on next page)

[538] https://cwe.mitre.org/data/definitions/754.html

(continued from previous page)

```
   Post => not Empty (This)
           and Top_Element (This) = Item
           and Extent (This) = Extent (This)'Old + 1
           and Unchanged (This'Old, Within => This),
   Global => null;
```

108.9.7 Notes

This rule must be enforced by manual inspection.

Moreover, the program must be compiled with enabled assertions (GNAT `-gnata` switch) to ensure that the contracts are executed, or a sound static analysis tool such as CodePeer or SPARK toolset should be used to prove that the contracts are always true.

108.10 Do Not Re-Verify Preconditions in Subprogram Bodies (RPP10)

Level → Advisory

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
✓

Performance
Security

Remediation → Low

Verification Method → Static analysis tools

108.10.1 Reference

N/A

108.10.2 Description

Do not re-verify preconditions in the corresponding subprogram bodies. It is a waste of cycles and confuses the reader as well.

108.10.3 Applicable Vulnerability within ISO TR 24772-2

N/A

108.10.4 Applicable Common Weakness Enumeration

N/A

108.10.5 Noncompliant Code Example

```
type Stack is private;
procedure Push (This : in out Stack;  Item : Element) with
   Pre  => not Full (This),
   Post => ...
...
procedure Push (This : in out Stack;  Item : Element) is
begin
   if Full (This) then  -- redundant check
      raise Overflow;
   end if;
   This.Top := This.Top + 1;
   This.Values (This.Top) := Item;
end Push;
```

108.10.6 Compliant Code Example

```
type Stack is private;
procedure Push (This : in out Stack;  Item : Element) with
   Pre  => not Full (This),
   Post => ...
...
procedure Push (This : in out Stack;  Item : Element) is
begin
   This.Top := This.Top + 1;
   This.Values (This.Top) := Item;
end Push;
```

108.10.7 Notes

This rule can be enforced by CodePeer or SPARK, via detection of dead code.

108.11 Always Use the Result of Function Calls (RPP11)

Level → Advisory

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
✓

Performance
Security

Remediation → Low

Verification Method → Compiler restrictions

108.11.1 Reference

MISRA C Rule 17.7: "The value returned by a function having non-void return type shall be used," and

Directive 4.7: "If a function returns error information, that error information shall be tested."

108.11.2 Description

In Ada and SPARK, it is not possible to ignore the object returned by a function call. The call must be treated as a value, otherwise the compiler will reject the call. For example, the value must be assigned to a variable, or passed as the actual parameter to a formal parameter of another call, and so on.

However, that does not mean that the value is actually used to compute some further results. Although almost certainly a programming error, one could call a function, assign the result to a variable (or constant), and then not use that variable further.

Note that functions will not have side-effects (due to RPP06) so it is only the returned value that is of interest here.

108.11.3 Applicable Vulnerability within ISO TR 24772-2

- 6.47 Inter-language calling [DJS]

108.11.4 Applicable Common Weakness Enumeration

- **CWE-252 - Unchecked Return Value**[539]
- **CWE-563 - Assignment to Variable without Use**[540]

108.11.5 Noncompliant Code Example

N/A

108.11.6 Compliant Code Example

N/A

108.11.7 Notes

The GNAT compiler warning switch `-gnatwu` (or the more general `-gnatwa` warnings switch) will cause the compiler to detect variables assigned but not read. CodePeer will detect these unused variables as well. SPARK goes further by checking that all computations contribute all the way to subprogram outputs.

[539] https://cwe.mitre.org/data/definitions/252.html
[540] https://cwe.mitre.org/data/definitions/563.html

108.12 No Recursion (RPP12)

Level → Advisory

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
✓

Performance
Security

Remediation → Low

Verification Method → GNATcheck rule: `Recursive_Subprograms` (builtin rule)

108.12.1 Reference

MISRA C Rule 17.2: "Functions shall not call themselves, either directly or indirectly."

108.12.2 Description

No subprogram shall be invoked, directly or indirectly, as part of its own execution.

In addition to making static analysis more complex, recursive calls make static stack usage analysis extremely difficult, requiring, for example, manual supply of call limits.

108.12.3 Applicable Vulnerability within ISO TR 24772-2

- 6.35 Recursion [GDL]

108.12.4 Applicable Common Weakness Enumeration

- **CWE-674 - Uncontrolled Recursion**[541]

108.12.5 Noncompliant Code Example

```
function Noncompliant (N : Positive) return Positive is
begin
   if N = 1 then
      return 1;
   else
      return N * Noncompliant (N - 1);  -- could overflow
   end if;
end Noncompliant;
```

[541] https://cwe.mitre.org/data/definitions/674.html

108.12.6 Compliant Code Example

```
function Compliant (N : Positive) return Positive is
   Result : Positive := 1;
begin
   for K in 2 .. N loop
      Result := Result * K;  -- could overflow
   end loop;
   return Result;
end Compliant;
```

108.12.7 Notes

The compiler will detect violations with the restriction `No_Recursion` in place. Note this is a dynamic check.

The GNATcheck rule specified above is a static check, subject to the limitations described in GNATcheck Reference Manual: Recursive Subprograms[542].

108.13 No Reuse of Standard Typemarks (RPP13)

Level → Advisory

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
✓

Performance
Security

Remediation → Low

Verification Method → GNATcheck rule: `overrides_standard_name` (supplied with document)

108.13.1 Reference

N/A

108.13.2 Description

Do not reuse the names of standard Ada typemarks (e.g. `type Integer is range -1_000 .. 1_000;`)

[542] https://docs.adacore.com/live/wave/lkql/html/gnatcheck_rm/gnatcheck_rm/predefined_rules.html#recursive-subprograms

When a developer uses an identifier that has the same name as a standard typemark, such as `Integer`, a subsequent maintainer might be unaware that this identifier does not actually refer to `Standard.Integer` and might unintentionally use the locally-scoped `Integer` rather than the original `Standard.Integer`. The locally-scoped `Integer` can have different attributes (and may not even be of the same base type).

108.13.3 Applicable Vulnerability within ISO TR 24772-2

N/A

108.13.4 Applicable Common Weakness Enumeration

- **CWE-843 - Access of Resource Using Incompatible Type ('Type Confusion')**[543]

108.13.5 Noncompliant Code Example

```
type Boolean is range 0 .. 1 with Size => 1;
type Character is ('A', 'E', 'I', 'O', 'U');
```

108.13.6 Compliant Code Example

```
type Boolean_T is range 0 .. 1 with Size => 1;
type Character_T is ('A', 'E', 'I', 'O', 'U');
```

108.13.7 Notes

N/A

108.14 Use Symbolic Constants for Literal Values (RPP14)

Level → Advisory

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
✓

Performance
Security

[543] https://cwe.mitre.org/data/definitions/843.html

Remediation → Low

Verification Method → GNATcheck rule: `Numeric_Literals` (builtin rule)

108.14.1 Reference

N/A

108.14.2 Description

Extensive use of literals in a program can lead to two problems. First, the meaning of the literal is often obscured or unclear from the context. Second, changing a frequently used literal requires searching the entire program source for that literal and distinguishing the uses that must be modified from those that should remain unmodified.

Avoid these problems by declaring objects with meaningfully named constants, setting their values to the desired literals, and referencing the constants instead of the literals throughout the program. This approach clearly indicates the meaning or intended use of each literal. Furthermore, should the constant require modification, the change is limited to the declaration; searching the code is unnecessary.

Some literals can be replaced with attribute values. For example, when iterating over an array, it is better to use `Array_Object'First .. Array_Object'Last` than using `1 .. Array_Object'Length`.

108.14.3 Applicable Vulnerability within ISO TR 24772-2

N/A

108.14.4 Applicable Common Weakness Enumeration

- **CWE-547 - Use of Hard-coded, Security-relevant Constants**[544]
- **CWE-1106 - Insufficient Use of Symbolic Constants**[545]

108.14.5 Noncompliant Code Example

```
type Array_T is array (0 .. 31) of Boolean;
function Any_Set (X : Array_T) return Boolean is
   (for some Flag in 0 .. 31 => X (Flag));
```

108.14.6 Compliant Code Example

```
Number_Of_Bits : constant := 32;
type Array_T is array (0 .. Number_Of_Bits - 1) of Boolean;
function Any_Set (X : Array_T) return Boolean is
   (for some Flag in X'Range => X (Flag));
```

108.14.7 Notes

N/A

[544] https://cwe.mitre.org/data/definitions/547.html
[545] https://cwe.mitre.org/data/definitions/1106.html

CHAPTER

NINE

EXCEPTION USAGE (EXU)

Goal

Maintainability
✓

Reliability
✓

Portability
✓

Performance
✓

Security
✓

Description
Have a plan for managing the use of Ada exceptions at the application level.

Rules
EXU01, EXU02, EXU03, EXU04

Exceptions in modern languages present the software architect with a dilemma. On one hand, exceptions can increase integrity by allowing components to signal specific errors in a manner that cannot be ignored, and, in general, allow residual errors to be caught. (Although there should be no unexpected errors in high integrity code, there may be some such errors due, for example, to unforeseeable events such as radiation-induced single-event upsets.) On the other hand, unmanaged use of exceptions increases verification expense and difficulty, especially flow analysis, perhaps to an untenable degree. In that case overall integrity is reduced or unwarranted.

In addition, programming languages may define some system-level errors in terms of language-defined exceptions. Such exceptions may be unavoidable, at least at the system level. For example, in Ada, stack overflow is signalled with the language-defined `Storage_Error` exception. Other system events, such as bus error, may also be mapped to language-defined or vendor-defined exceptions.

Complicating the issue further is the fact that, if exceptions are completely disallowed, there will be no exception handling code in the underlying run-time library. The effects are unpredictable if any exception actually does occur.

Therefore, for the application software the system software architect must decide whether to allow exceptions at all, and if they are to be used, decide the degree and manner of their usage. At the system level, the architect must identify the exceptions that are possible and how they will be addressed.

109.1 Do Not Raise Language-Defined Exceptions (EXU01)

Level → Required

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
✓

Performance
Security

Remediation → Low

Verification Method → GNATcheck rule: `Raising_Predefined_Exceptions` (builtin rule)

109.1.1 Reference

[SEI-Java] ERR07-J

109.1.2 Description

In no case should the application explicitly raise a language-defined exception.

The Ada language-defined exceptions are raised implicitly in specific circumstances defined by the language standard. Explicitly raising these exceptions would be confusing to application developers. The potential for confusion increases as the exception is propagated up the dynamic call chain, away from the point of the **`raise`** statement, because this increases the number of paths and thus corresponding language-defined checks that could have been the cause.

109.1.3 Applicable Vulnerability within ISO TR 24772-2

N/A

109.1.4 Applicable Common Weakness Enumeration

- **CWE-397 - Declaration of Throws for Generic Exception**[546]

109.1.5 Noncompliant Code Example

[546] https://cwe.mitre.org/data/definitions/397.html

```
procedure Noncompliant (X : in out Integer) is
begin
   if X < Integer'Last / 2
   then
      X := X * 2;
   else
      raise Constraint_Error;
   end if;
end Noncompliant;
```

109.1.6 Compliant Code Example

```
procedure Compliant (X : in out Integer) is
begin
   if X < Integer'Last / 2
   then
      X := X * 2;
   else
      raise Math_Overflow;
   end if;
end Compliant;
```

109.1.7 Notes

N/A

109.2 No Unhandled Application-Defined Exceptions (EXU02)

Level → Required

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
✓

Performance
Security

Remediation → Low

Verification Method → GNATcheck rule: `Unhandled_Exceptions` (supplied with document)

109.2.1 Reference

N/A

109.2.2 Description

All application-defined exceptions must have at least one corresponding handler that is applicable. Otherwise, if an exception is raised, undesirable behavior is possible. The term *applicable* means that there is no dynamic call chain that can reach the active exception which does not also include a handler that will be invoked for that exception, somewhere in that chain.

When an unhandled exception occurs in the sequence of statements of an application task and propagates to task's body, the task terminates abnormally. No *notification* of some sort is required or defined by the language, although some vendors' implementations may print out a log message or provide some other non-standard response. (Note that such a notification implies an external persistent environment, such as an operating system, that may not be present in all platforms.) The task failure does not affect any other tasks unless those other tasks attempt to communicate with it. In short, failure is silent.

Although the language-defined package `Ada.Task_Termination` can be used to provide a response using standard facilities, not all run-time libraries provide that package. For example, under the Ravenscar profile, application tasks are not intended to terminate, neither normally nor abnormally, and the language does not define what happens if they do. A run-time library for a memory-constrained target, especially a bare-metal target without an operating system, might not include any support for task termination when the tasking model is Ravenscar. The effects of task termination in that case are not defined by the language.

When an unhandled exception occurrence reaches the main subprogram and is not handled there, the exception occurrence is propagated to the environment task, which then completes abnormally. Even if the main subprogram does handle the exception, the environment task still completes (normally in that case).

When the environment task completes (normally or abnormally) it waits for the completion of dependent application tasks, if any. Those dependent tasks continue executing normally, i.e., they do not complete as a result of the environment task completion. Alternatively, however, instead of waiting for them, the implementation has permission to abort the dependent application tasks, per Ada Reference Manual: 10.2 (30) Program Execution[547] The resulting application-specific effect is undefined.

Finally, whether the environment task waited for the dependent tasks or aborted them, the semantics of further execution beyond that point are undefined. There is no concept of a calling environment beyond the environment task (Ada Reference Manual: 10.2 (30) Program Execution[548]). In some systems there is no calling environment, such as bare-metal platforms with only an Ada run-time library and no operating system.

109.2.3 Applicable Vulnerability within ISO TR 24772-2

- 6.36 Ignored error status and unhandled exceptions [OYB]

109.2.4 Applicable Common Weakness Enumeration

- **CWE-248 - Uncaught Exception**[549]

[547] http://www.ada-auth.org/standards/12rm/html/RM-10-2.html
[548] http://www.ada-auth.org/standards/12rm/html/RM-10-2.html
[549] https://cwe.mitre.org/data/definitions/248.html

109.2.5 Noncompliant Code Example

```
procedure Main is
begin
   if Argument_Count = 0 then
      raise Cli_Exception;
   else
      begin
         Start_Application (Argument (1));
      exception
         when Application_Exception =>
            Put_Line ("Application failed");
      end;
   end if;
end Main;
```

109.2.6 Compliant Code Example

```
procedure Main is
begin
   if Argument_Count = 0 then
      raise Cli_Exception;
   else
      begin
         Start_Application (Argument (1));
      exception
         when Application_Exception =>
            Put_Line ("Application failed");
      end;
   end if;
exception
   when Cli_Exception =>
      Put_Line ("Failure");
end Main;
```

109.2.7 Notes

SPARK can prove that no exception will be raised (or fail to prove it and indicate the failure).

109.3 No Exception Propagation Beyond Name Visibility (EXU03)

Level → Required

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
✓

Performance
Security

Remediation → Low

Verification Method → GNATcheck rule: `Non_Visible_Exceptions` (builtin rule)

109.3.1 Reference

RPP05

109.3.2 Description

An active exception can be propagated dynamically past the point where the name of the exception is visible (the scope of the declaration). The exception can only be handled via **others** past that point. That situation prevents handling the exception specifically, and violates RPP05.

109.3.3 Applicable Vulnerability within ISO TR 24772-2

N/A

109.3.4 Applicable Common Weakness Enumeration

- **CWE-248 - Uncaught Exception**[550]

109.3.5 Noncompliant Code Example

```
procedure Noncompliant (Param : in out Integer) is
   Noncompliant_Exception : exception;
begin
   Param := Param * Param;
exception
   when others =>
      raise Noncompliant_Exception;
end Noncompliant;
```

As a result the exception name cannot be referenced outside the body:

```
procedure Bad_Call (Param : in out Integer) is
begin
   Noncompliant (Param);
exception
   when Noncompliant_Exception =>  -- compile error
      null;
end Bad_Call;
```

109.3.6 Compliant Code Example

```
Compliant_Exception : exception;
procedure Compliant (Param : in out Integer) is
begin
   Param := Param * Param;
```

(continues on next page)

[550] https://cwe.mitre.org/data/definitions/248.html

(continued from previous page)

```
exception
   when others =>
      raise Compliant_Exception;
end Compliant;

procedure Good_Call (Param : in out Integer) is
begin
   Compliant (Param);
exception
   when Compliant_Exception =>
      null;
end Good_Call;
```

109.3.7 Notes

N/A

109.4 Prove Absence of Run-time Exceptions (EXU04)

Level → Required

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
✓

Performance
Security

Remediation → Low

Verification Method → Compiler restrictions

109.4.1 Reference

MISRA C Rule 1.3: "There shall be no occurrence of undefined or critical unspecified behaviour."

109.4.2 Description

In many high-integrity systems the possible responses to an exception are limited or nonexistent. In these cases the only approach is to prove exceptions cannot occur in the first place. Additionally, the cost of proving exceptions cannot happen may be less than the cost of analyzing code in which they are allowed to be raised.

The restriction `No_Exceptions` can be used with **`pragma`** *`Restrictions`* to enforce this approach. Specifically, the restriction ensures that **`raise`** statements and exception handlers

do not appear in the source code and that language-defined checks are not emitted by the compiler. However, a run-time check performed automatically by the hardware is permitted because it typically cannot be prevented. An example of such a check would be traps on invalid addresses. If a hardware check fails, or if an omitted language-defined check would have failed, execution is unpredictable. As a result, enforcement with the restriction is not ideal. However, proof of the absence of run-time errors is possible using the SPARK subset of Ada.

109.4.3 Applicable Vulnerability within ISO TR 24772-2

N/A

109.4.4 Applicable Common Weakness Enumeration

- **CWE-248 - Uncaught Exception**[551]

109.4.5 Noncompliant Code Example

N/A

109.4.6 Compliant Code Example

N/A

109.4.7 Notes

This restriction is detected by SPARK, in which any statements explicitly raising an exception must be proven unreachable (or proof fails and the failure is indicated), and any possibility of run-time exception should be proved not to happen.

[551] https://cwe.mitre.org/data/definitions/248.html

OBJECT-ORIENTED PROGRAMMING (OOP)

Goal

Maintainability
✓

Reliability
✓

Portability
Performance
Security
✓

Description
Have a plan for selecting the OOP facilities of the language to use.

Rules
OOP01, OOP02, OOP03, OOP04, OOP05, OOP06, OOP07

There are many issues to consider when planning the use of Object Oriented features in a high-integrity application. Choices should be made based on the desired expressive power of the OO features and the required level of certification or safety case.

For example, the use of inheritance can provide abstraction and separation of concerns. However, the extensive use of inheritance, particularly in deep hierarchies, can lead to fragile code bases.

Similarly, when new types of entities are added, dynamic dispatching provides separation of the code that must change from the code that manipulates those types and need not be changed to handle new types. However, analysis of dynamic dispatching must consider every candidate object type and analyze the associated subprogram for appropriate behavior.

Therefore, the system architect has available a range of possibilities for the use of OOP constructs, with tool enforcement available for the selections. Note that full use of OOP, including dynamic dispatching, may not be unreasonable.

The following rules assume use of tagged types, a requirement for full OOP in Ada.

110.1 No Class-wide Constructs Policy (OOP01)

Level → Advisory

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
Performance
Security
✓

Remediation → N/A

Verification Method → Compiler restrictions

Mutually Exclusive → OOP02

110.1.1 Reference

N/A

110.1.2 Description

In this approach, tagged types are allowed and type extension (inheritance) is allowed, but there are no class-wide constructs.

This restriction ensures there are no class-wide objects or formal parameters, nor access types designating class-wide types.

In this approach there are no possible dynamic dispatching calls because such calls can only occur when a class-wide value is passed as the parameter to a primitive operation of a tagged type.

110.1.3 Applicable Vulnerability within ISO TR 24772-2

- 6.43 Redispatching [PPH]

110.1.4 Applicable Common Weakness Enumeration

N/A

110.1.5 Noncompliant Code Example

```
X : Object'Class := Some_Object;
```

110.1.6 Compliant Code Example

```
X : Object := Some_Object;
```

110.1.7 Notes

The compiler will detect violations with the standard Ada restriction `No_Dispatch` applied.

110.2 Static Dispatching Only Policy (OOP02)

Level → Advisory

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
Performance
Security
✓

Remediation → N/A

Verification Method → Compiler restrictions

Mutually Exclusive → OOP01

110.2.1 Reference

N/A

110.2.2 Description

In this approach, class-wide constructs are allowed, as well as tagged types and type extension (inheritance), but dynamic dispatching remains disallowed (i.e., as in OOP01).

This rule ensures there are no class-wide values passed as the parameter to a primitive operation of a tagged type, hence there are no dynamically dispatched calls.

Note that this rule should not be applied without due consideration.

110.2.3 Applicable Vulnerability within ISO TR 24772-2

- 6.43 Redispatching [PPH]

110.2.4 Applicable Common Weakness Enumeration

N/A

110.2.5 Noncompliant Code Example

```
Some_Primitive (Object'Class (X));
```

110.2.6 Compliant Code Example

```
Some_Primitive (X);
```

110.2.7 Notes

N/A

110.3 Limit Inheritance Hierarchy Depth (OOP03)

Level → Advisory

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
Performance
Security
✓

Remediation → High

Verification Method → GNATcheck rule: `Deep_Inheritance_Hierarchies:2` (builtin rule)

110.3.1 Reference

[AdaOOP2016] section 5.1

110.3.2 Description

A class inheritance hierarchy consists of a set of types related by inheritance. Each class, other than the root class, is a subclass of other classes, and each, except for "leaf" nodes, is a base class for those that are derived from it.

Improperly designed inheritance hierarchies complicate system maintenance and increase the effort in safety certification, in any programming language.

A common characteristic of problematic hierarchies is "excessive" depth, in which a given class is a subclass of many other classes. Depth can be a problem because a change to a class likely requires inspection, modification, recompilation, and retesting/reverification of all classes below it in the hierarchy. The extent of that effect increases as we approach the root class. This rippling effect is known as the *fragile base class* problem. Clearly, the greater the depth the more subclasses there are to be potentially affected. In addition, note that a change to one class may cause a cascade of other secondary changes to subclasses, so the effect is often not limited to a single change made to all the subclasses in question.

Deep inheritance hierarchies also contribute to complexity, rather than lessening it, by requiring the reader to understand multiple superclasses in order to understand the behavior of a given subclass.

110.3.3 Applicable Vulnerability within ISO TR 24772-2

- 6.41 Inheritance [RIP]

110.3.4 Applicable Common Weakness Enumeration

- **CWE-1074 - Class with Excessively Deep Inheritance**[552]
- **CWE-1086 - Class with Excessive Number of Child Classes**[553]

110.3.5 Noncompliant Code Example

The threshold for "too deep" is inexact, but beyond around 4 or 5 levels the complexity accelerates rapidly.

```
type Shape_T is tagged private;
procedure Set_Name (Shape : Shape_T; Name  : String);
function Get_Name (Shape : Shape_T) return String;

type Quadrilateral_T is new Shape_T with private;
type Trapezoid_T is new Quadrilateral_T with private;
type Parallelogram_T is new Trapezoid_T with private;
type Rectangle_T is new Parallelogram_T with private;
type Square_T is new Rectangle_T with private;
```

110.3.6 Compliant Code Example

```
type Shape_T is tagged private;
procedure Set_Name (Shape : Shape_T; Name  : String);
function Get_Name (Shape : Shape_T) return String;

type Quadrilateral_T is new Shape_T with private;
type Rectangle_T is new Quadrilateral_T with private;
type Square_T is new Rectangle_T with private;
```

110.3.7 Notes

N/A

110.4 Limit Statically-Dispatched Calls to Primitive Operations (OOP04)

Level → Advisory

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

[552] https://cwe.mitre.org/data/definitions/1074.html
[553] https://cwe.mitre.org/data/definitions/1086.html

Reliability
✓

Portability
✓

Performance
Security

Remediation → Medium (easy fix, but a difficult to detect bug)

Verification Method → GNATcheck rule: `Direct_Calls_To_Primitives` (builtin rule)

110.4.1 Reference

N/A

110.4.2 Description

This rule applies only to tagged types, when visibly tagged at the point of a call from one primitive to another of that same type.

By default, subprogram calls are statically dispatched. Dynamic dispatching only occurs when a class-wide value is passed to a primitive operation of a specific type. Forcing an otherwise optional dynamic dispatching call in this case is known as *redispatching.*

When one primitive operation of a given tagged type invokes another distinct primitive operation of that same type, use redispatching so that an overriding version of that other primitive will be invoked if it exists. Otherwise an existing overridden version would not be invoked, which is very likely an error.

This rule does not apply to the common case in which an overriding of a primitive operation calls the "parent" type's version of the overridden operation. Such calls occur in the overridden body when the new version is not replacing, but rather, is augmenting the parent type's version. In this case the new version must do whatever the parent version did, and can then add functionality specific to the new type.

By default, this rule applies to another common case in which static calls from one primitive operation to another make sense. Specifically, *constructors* are often implemented in Ada as functions that create a new value of the tagged type. As constructors, these functions are type-specific. They must call the primitive operations of the type being created, not operations that may be overridden for some type later derived from it. (Note that there is a GNATcheck rule parameter to not flag this case.)

Typically constructor functions only have the tagged type as the result type, not as the type for formal parameters, if any, because actual parameters of the tagged type would themselves likely require construction. This specific usage is the case ignored by the GNATcheck rule parameter.

Note that constructors implemented as procedures also call primitive operations of the specific type, for the same reasons as constructor functions. This usage is allowed by this rule and does not require the GNATcheck parameter. (The difference between function and procedure constructors is that these procedures will have a formal parameter of the tagged type, of mode `out`.)

110.4.3 Applicable Vulnerability within ISO TR 24772-2

- 6.42 Violations of the Liskov substitution principle of the contract model [BLP]
- 6.43 Redispatching [PPH]
- 6.44 Polymorphic variables [BKK]

110.4.4 Applicable Common Weakness Enumeration

N/A

110.4.5 Noncompliant Code Example

Class constructs

```
package Root is
   type Root_T is tagged null record;
   procedure Noncompliant (X : in out Root_T) is null;
   procedure Compliant (X : in out Root_T) is null;
   procedure Other_Prim (X : in out Root_T) is null;
end Root;

package Child is
   use Root;
   type Child_T is new Root_T with null record;
   procedure Noncompliant (X : in out Child_T);
   procedure Compliant (X : in out Child_T);
   procedure Other_Prim (X : in out Child_T);
end Child;

procedure Not_A_Primitive (X : in out Child.Child_T) is null;
```

Noncompliant Code

```
procedure Noncompliant (X : in out Child_T) is
begin
   Other_Prim (Root_T (X));
   Other_Prim (X);
end Noncompliant;
```

110.4.6 Compliant Code Example

```
procedure Compliant (X : in out Child_T) is
begin
   Compliant (Root_T (X)); -- constructor style is OK
   Not_A_Primitive (X);
end Compliant;
```

110.4.7 Notes

N/A

110.5 Use Explicit Overriding Annotations (OOP05)

Level → Required

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
✓

Performance
Security

Remediation → Low

Verification Method → GNATcheck rule: `Style_Checks:0` (builtin rule)

110.5.1 Reference

[AdaOOP2016] section 4.3

110.5.2 Description

The declaration of a primitive operation that overrides an inherited operation must include an explicit **`overriding`** annotation.

The semantics of inheritance in mainstream object-oriented languages may result in two kinds of programming errors: 1) intending, but failing, to override an inherited subprogram, and 2) intending not to override an inherited subprogram, but doing so anyway. Because an overridden subprogram may perform subclass-specific safety or security checks, the invocation of the parent subprogram on a subclass instance can introduce a vulnerability.

The first issue (intending but failing to override) typically occurs when the subprogram name is misspelled. In this case a new or overloaded subprogram is actually declared.

The second issue (unintended overriding) can arise when a new subprogram is added to a parent type in an existing inheritance hierarchy. The new subprogram happens to cause one or more inherited subprograms below it to override the new superclass version. This mistake typically happens during program maintenance.

In Ada, much like other modern languages, one can annotate a subprogram declaration (and body) with an indication that the subprogram is an overriding of an inherited version. This is done with the **`overriding`** reserved word preceding the subprogram specification.

Similarly, in Ada one can explicitly indicate that a subprogram is not an overriding. To do so, the programmer includes the reserved words **`not overriding`** immediately prior to the subprogram specification.

Of course, incorrect marking errors are flagged by the compiler. If a subprogram is explicitly marked as overriding but is not actually overriding, the compiler will reject the code. Likewise, if a primitive subprogram is explicitly marked as not overriding, but actually is overriding, the compiler will reject the code.

However, most subprograms are not overriding so it would be a heavy burden on the programmer to make them explicitly indicate that fact. That's not to mention the relatively heavy syntax required.

In addition, both annotations are optional for the sake of compatibility with prior versions of the language. Therefore, a subprogram without either annotation might or might not be overriding. A legal program could contain some explicitly annotated subprograms and some that are not annotated at all. But because the compiler will reject explicit annotations that are incorrect, all we require is that one of the two cases be explicitly indicated for all such subprograms. Any unannotated subprograms not flagged as errors are then necessarily not that case, they must be the other one.

Since overriding is less common and involves slightly less syntax to annotate, the guideline requires explicit annotations only for overriding subprograms. It follows that any subprograms not flagged as errors by the compiler are not overriding, so they need not be marked explicitly as such.

This guideline is implemented by compiler switches, or alternatively, by a GNATcheck rule (specified below the table). With this guideline applied and enforced, the two inheritance errors described in the introduction cannot happen.

Note that the compiler switches will also require the explicit overriding indicator when overriding a language-defined operator. The switches also apply to inherited primitive subprograms for non-tagged types.

110.5.3 Applicable Vulnerability within ISO TR 24772-2

- 6.34 Subprogram signature mismatch [OTR]
- 6.41 Inheritance [RIP]

110.5.4 Applicable Common Weakness Enumeration

- **CWE-685 - Function Call With Incorrect Number of Arguments**[554]

110.5.5 Noncompliant Code Example

```
type Root_T is tagged null record;
procedure Primitive (X : in out Root_T) is null;
```

```
type Noncompliant_Child_T is new Root_T with null record;
procedure Primitive (X : in out Noncompliant_Child_T) is null;
```

110.5.6 Compliant Code Example

```
type Compliant_Child_T is new Root_T with null record;
overriding procedure Primitive (X : in out Compliant_Child_T) is null;
```

110.5.7 Notes

This rule requires the GNAT compiler switches `-gnaty0` and `-gnatwe` in order for the compiler to flag missing overriding annotations as errors. The first causes the compiler to generate the warnings, and the second causes those warnings to be treated as errors.

110.6 Use Class-wide Pre/Post Contracts (OOP06)

Level → Required

Category

Safety
✓

Cyber
✓

Goal

[554] https://cwe.mitre.org/data/definitions/685.html

Maintainability
✓

Reliability
✓

Portability
Performance
Security
✓

Remediation → Low

Verification Method → GNATcheck rule: `Specific_Pre_Post` (builtin rule)

110.6.1 Reference

[AdaOOP2016] section 6.1.4

SPARK User's Guide, section 7.5.2[555]

110.6.2 Description

For primitive operations of tagged types, use only class-wide pre/post contracts, if any.

The class-wide form of precondition and postcondition expresses conditions that are intended to apply to any version of the subprogram. Therefore, when a subprogram is derived as part of inheritance, only the class-wide form of those contracts is inherited from the parent subprogram, if any are defined. As a result, it only makes sense to use the class-wide form in this situation.

(The same semantics and recommendation applies to type invariants.)

Note: this approach will be required for OOP07 (Ensure Local Type Consistency).

110.6.3 Applicable Vulnerability within ISO TR 24772-2

- 6.42 Violations of the Liskov substitution principle or the contract model [BLP]

110.6.4 Applicable Common Weakness Enumeration

N/A

110.6.5 Noncompliant Code Example

```
type Root_T is tagged null record;
procedure Set_Name (X    : Root_T;
                    Name : String)
  with Pre => Name'length > 0;
function Get_Name (X : Root_T) return String
  with Post => Get_Name'result'length > 0;
```

110.6.6 Compliant Code Example

[555] https://docs.adacore.com/live/wave/spark2014/html/spark2014_ug/en/source/how_to_write_object_oriented_contracts.html#writing-contracts-on-dispatching-subprograms

```
type Root_T is tagged null record;
procedure Set_Name (X    : Root_T;
                    Name : String)
  with Pre'class => Name'length > 0;
function Get_Name (X : Root_T) return String
  with Post'class => Get_Name'result'length > 0;
```

110.6.7 Notes

N/A

110.7 Ensure Local Type Consistency (OOP07)

Level → Required

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
Performance
Security
✓

Remediation → N/A

Verification Method → Software test

110.7.1 Reference

[AdaOOP2016] See section 4.2.

GNAT User's Guide, section 5.10.11[556]

110.7.2 Description

Either:

- Formally verify local type consistency, or
- Ensure that each tagged type passes all the tests of all the parent types which it can replace.

Rationale:

One of the fundamental benefits of OOP is the ability to manipulate objects in a class inheritance hierarchy without "knowing" at compile-time the specific classes of the objects being manipulated. By *manipulate* we mean invoking the primitive operations, the *methods* defined by the classes.

[556] https://docs.adacore.com/gnat_ugn-docs/html/gnat_ugn/gnat_ugn/gnat_utility_programs.html

We will use the words *class* and *type* interchangeably, because classes are composed in Ada and SPARK using a combination of building blocks, especially type declarations. However, we will use the term *subclass* rather than *subtype* because the latter has a specific meaning in Ada and SPARK that is unrelated to OOP.

The objects whose operations are being invoked can be of types anywhere in the inheritance tree, from the root down to the bottom. The location, i.e., the specific type, is transparent to the manipulating code. This type transparency is possible because the invoked operations are dynamically dispatched at run-time, rather than statically dispatched at compile-time.

Typically, the code manipulating the objects does so in terms of superclasses closer to the root of the inheritance tree. Doing so increases generality because it increases the number of potential subclasses that can be manipulated. The actual superclass chosen will depend on the operations required by the manipulation. In Ada and SPARK, subclasses can add operations but can never remove them, so more operations are found as we move down from the root. That is the nature of specialization. Note that the guarantee of an invoked operations' existence is essential for languages used in this domain.

However, for this transparent manipulation to be functionally correct — to accomplish what the caller intends — the primitive operations of subclasses must be functionally indistinguishable from those of the superclasses. That doesn't mean the subclasses cannot make changes. Indeed, the entire point of subclasses is to make changes. In particular, functional changes can be either introduction of new operations, or overridings of inherited operations. It is these overridings that must be functionally transparent to the manipulating code. (Of course, for an inherited operation that is not overridden, the functionality is inherited as-is, and is thus transparent trivially.)

The concept of functional transparency was introduced, albeit with different terminology, by Liskov and Wing in 1994 [LiskovWing1994] and is, therefore, known as the Liskov Substitution Principle, or LSP. The *substitution* in LSP means that a subclass must be substitutable for its superclass, i.e., a subclass instance should be usable whenever a superclass instance is required.

Unfortunately, requirements-based testing will not detect violations of LSP because unit-level requirements do not concern themselves with superclass substitutability.

However, the OO supplement of DO-178C [DO178C] offers solutions, two of which are in fact the options recommended by this guideline.

Specifically, the supplement suggests adding a specific verification activity it defines as Local Type Consistency Verification. This activity ensures LSP is respected and, in so doing, addresses the vulnerability.

Verification can be accomplished statically with formal methods in SPARK, or dynamically via a modified form of testing.

For the static approach, type consistency is verified by examining the properties of the overriding operation's preconditions and postconditions. These are the properties required by Design by Contract, as codified by Bertrand Meyer [Meyer1997]. Specifically, an overridden primitive may only replace the precondition with one weaker than that of the parent version, and may only replace the postcondition with one stronger. In essence, relative to the parent version, an overridden operation can only require the same or less, and provide the same or more. Satisfying that requirement is sufficient to ensure functional transparency because the manipulating code only "knows" the contracts of the class it manipulates, i.e., the view presented by the type, which may very well be a superclass of the one actually invoked.

In Ada and SPARK, the class-wide form of preconditions and postconditions are inherited by overridden primitive operations of tagged types. The inherited precondition and that of the overriding (if any) are combined into a conjunction. All must hold, otherwise the precondition fails. Likewise, the inherited postcondition is combined with the overriding postcondition into a disjunction. At least one of them must hold. In Ada these are tested

at run-time. In SPARK, they are verified statically (or not, in which case proof fails and an error is indicated).

To verify substitutability via testing, all the tests for all superclass types are applied to objects of the given subclass type. If all the parent tests pass, this provides a high degree of confidence that objects of the new tagged type can properly substitute for parent type objects. Note that static proof of consistency provides an even higher degree of confidence.

110.7.3 Applicable Vulnerability within ISO TR 24772-2

- 6.42 Violations of the Liskov substitution principle of the contract model [BLP]
- 6.43 Redispatching [PPH]
- 6.44 Polymorphic variables [BKK]

110.7.4 Applicable Common Weakness Enumeration

N/A

110.7.5 Noncompliant Code Example

```
package P is
   pragma Elaborate_Body;
   type Rectangle is tagged private;
   procedure Set_Width (This  : in out Rectangle;
                        Value : Positive)
   with
      Post => Width (This) = Value and
              Height (This) = Height (This'Old);

   function Width (This : Rectangle) return Positive;

   procedure Set_Height (This  : in out Rectangle;
                         Value : Positive)
   with
      Post => Height (This) = Value and
              Width (This) = Width (This'Old);

   function Height (This : Rectangle) return Positive;

private
   ...
end P;
```

The postcondition for `Set_Width` states that the `Height` is not changed. Likewise, for `Set_Height`, the postcondition asserts that the `Width` is not changed. However, these postconditions are not class-wide so they are not inherited by subclasses.

Now, in a subclass `Square`, the operations are overridden so that setting the width also sets the height to the same value, and vice versa. Thus the overridden operations do not maintain type consistency, but this fact is neither detected at run-time, nor could SPARK verify it statically (and SPARK is not used at all in these versions of the packages).

```
with P; use P;
package Q is
   pragma Elaborate_Body;
   type Square is new Rectangle with private;

   overriding
   procedure Set_Width (This  : in out Square;
```

(continues on next page)

(continued from previous page)

```
                      Value : Positive)
   with
  Post => Width (This) = Height (This);

   overriding
   procedure Set_Height (This  : in out Square;
                         Value : Positive)
   with
  Post  => Width (This) = Height (This);

private
   ...
end Q;
```

110.7.6 Compliant Code Example

```
package P with SPARK_Mode is
   pragma Elaborate_Body;
   type Rectangle is tagged private;

   procedure Set_Width (This  : in out Rectangle;
                        Value : Positive)
   with
      Post'Class => Width (This) = Value and
                    Height (This) = Height (This'Old);

   function Width (This : Rectangle) return Positive;

   procedure Set_Height (This  : in out Rectangle;
                         Value : Positive)
   with
      Post'Class => Height (This) = Value and
                    Width (This) = Width (This'Old);

   function Height (This : Rectangle) return Positive;

private
   ...
end P;
```

Now the postconditions are class-wide so they are inherited by subclasses. In the subclass Square, the postconditions will not hold at run-time. Likewise, SPARK can now prove that type consistency is not verified because the postconditions are weaker than those inherited:

```
with P; use P;
package Q with SPARK_Mode is
   pragma Elaborate_Body;
   type Square is new Rectangle with private;

   overriding
   procedure Set_Width (This  : in out Square;
                        Value : Positive)
   with
  Post'Class => Width (This) = Height (This);

   overriding
   procedure Set_Height (This  : in out Square;
                         Value : Positive)
   with
  Post'Class => Width (This) = Height (This);
```

(continues on next page)

(continued from previous page)

```
private
   type Square is new Rectangle with null record;
end Q;
```

110.7.7 Notes

Verification can be achieved dynamically with the GNATtest tool, using the `--validate-type-extensions` switch. SPARK enforces this rule.

CHAPTER

ONE

SOFTWARE ENGINEERING (SWE)

Goal

Maintainability
✓

Reliability
✓

Portability
✓

Performance
Security
✓

Description
These rules promote "best practices" for software development.

Rules
SWE01, SWE02, SWE03, SWE04

111.1 Use SPARK Extensively (SWE01)

Level → Advisory

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
✓

Performance
✓

Security
✓

Remediation → High, as retrofit can be extensive

Verification Method → Compiler restrictions

111.1.1 Reference

SPARK User's Guide, section 8: "Applying SPARK in Practice"[557]

111.1.2 Description

SPARK has proven itself highly effective, both in terms of low defects, low development costs, and high productivity. The guideline advises extensive use of SPARK, especially for the sake of formally proving the most critical parts of the source code. The rest of the code can be in SPARK as well, even if formal proof is not intended, with some parts in Ada when features outside the SPARK subset are essential.

111.1.3 Applicable Vulnerability within ISO TR 24772-2

N/A

111.1.4 Applicable Common Weakness Enumeration

- **CWE-670 - Always-Incorrect Control Flow Implementation**[558]
- **CWE-754 - Improper Check for Unusual or Exceptional Conditions**[559]

111.1.5 Noncompliant Code Example

Any code outside the (very large) SPARK subset is flagged by the compiler.

111.1.6 Compliant Code Example

N/A

111.1.7 Notes

Violations are detected by the SPARK toolset.

111.2 Enable Optional Warnings and Treat As Errors (SWE02)

Level → Required

Category

Safety
✓

Cyber
✓

Goal

[557] https://docs.adacore.com/live/wave/spark2014/html/spark2014_ug/en/usage_scenarios.html
[558] https://cwe.mitre.org/data/definitions/670.html
[559] https://cwe.mitre.org/data/definitions/754.html

Maintainability
✓

Reliability
✓

Portability
Performance
Security
✓

Remediation → Low

Verification Method → Compiler restrictions

111.2.1 Reference

Power of 10 rule #10: "All code must be compiled, from the first day of development, with all compiler warnings enabled at the most pedantic setting available. All code must compile without warnings."

111.2.2 Description

The Ada compiler does a degree of static analysis itself, and generates many warnings when they are enabled. These warnings likely indicate very real problems so they should be examined and addressed, either by changing the code or disabling the warning for the specific occurrence flagged in the source code.

To ensure that warnings are examined and addressed one way or the other, the compiler must be configured to treat warnings as errors, i.e., preventing object code generation.

Note that warnings will occasionally be given for code usage that is intentional. In those cases the warnings should be disabled by using `pragma Warnings` with the parameter `Off`, and a string indicating the error message to be disabled. In other cases, a different mechanism might be appropriate, such as aspect (or pragma) `Unreferenced`.

111.2.3 Applicable Vulnerability within ISO TR 24772-2

- 6.18 Dead Store [WXQ]
- 6.19 Unused variable [YZS]
- 6.20 Identifier name reuse [YOW]
- 6.22 Initialization of variables [LAV]

111.2.4 Applicable Common Weakness Enumeration

- **CWE-1127 - Compilation with Insufficient Warnings or Errors**[560]

111.2.5 Noncompliant Code Example

```
procedure P (This : Obj) is
begin
   ... code not referencing This
end P;
```

The formal parameter controls dispatching for the sake of selecting the subprogram to be called but does not participate in the implementation of the body.

[560] https://cwe.mitre.org/data/definitions/1127.html

111.2.6 Compliant Code Example

```
procedure P (This : Obj) is
   pragma Unreferenced (This);
begin
   ... code not referencing This
end P;
```

The compiler will no longer issue a warning that the formal parameter `This` is not referenced. Of course, if that changes and `This` becomes referenced, the compiler will flag the `pragma`.

111.2.7 Notes

This rule can be applied via the GNAT `-gnatwae` compiler switch, which both enables warnings and treats them as errors. Note that the switch enables almost all optional warnings, but not all. Some optional warnings correspond to very specific circumstances, and would otherwise generate too much noise for their value.

111.3 Use a Static Analysis Tool Extensively (SWE03)

Level → Mandatory

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability
✓

Performance
✓

Security
✓

Remediation → High

Verification Method → Static analysis tools

111.3.1 Reference

Power of 10 rule #10: "All code must also be checked daily with at least one, but preferably more than one, strong static source code analyzer and should pass all analyses with zero warnings."

111.3.2 Description

If not using SPARK for regular development, use a static analyzer, such as CodePeer, extensively. No warnings or errors should remain unresolved at the given level adopted for analysis (which can be selected to adjust the false positive ratio).

Specifically, any code checked into the configuration management system must be checked by the analyzer and be error-free prior to check-in. Similarly, each nightly build should produce a CodePeer baseline for the project.

111.3.3 Applicable Vulnerability within ISO TR 24772-2

- 6.6 Conversion errors [FLC]
- 6.18 Dead store [WXQ]
- 6.19 Unused variable [YZS]
- 6.20 Identifier name reuse [YOW]
- 6.24 Side-effects and order of evaluation [SAM]
- 6.25 Likely incorrect expression [KOA]

111.3.4 Applicable Common Weakness Enumeration

N/A

111.3.5 Noncompliant Code Example

N/A

111.3.6 Compliant Code Example

N/A

111.3.7 Notes

CodePeer is the recommended static analyzer. Note that CodePeer can detect GNATcheck rule violations (via the `--gnatcheck` CodePeer switch and a rules file).

111.4 Hide Implementation Artifacts (SWE04)

Level → Advisory

Category

Safety
✓

Cyber
✓

Goal

Maintainability
✓

Reliability
✓

Portability	
Performance	
Security	
	✓

Remediation → High, as retrofit can be extensive

Verification Method → GNATcheck rule: `Visible_Components` (builtin rule)

111.4.1 Reference

MISRA C Rule 8.7: "Functions and objects should not be defined with external linkage if they are referenced in only one translation unit."

111.4.2 Description

Do not make implementation artifacts compile-time visible to clients. Only make available those declarations that define the abstraction presented to clients by the component. In other words, define Abstract Data Types and use the language to enforce the abstraction. This is a fundamental Object-Oriented Design principle.

This guideline minimizes client dependencies and thus allows the maximum flexibility for changes in the underlying implementation. It minimizes the editing changes required for client code when implementation changes are made.

This guideline also limits the region of code required to find any bugs to the package and child packages, if any, defining the abstraction.

This guideline is to be followed extensively as the design default for components. Once the application code size becomes non-trivial, the cost of retrofit is extremely high.

111.4.3 Applicable Vulnerability within ISO TR 24772-2

N/A

111.4.4 Applicable Common Weakness Enumeration

- **CWE-496 - Public Data Assigned to Private Array-Typed Field**[561]
- **CWE-1061 - Insufficient Encapsulation**[562]

111.4.5 Noncompliant Code Example

```
package Noncompliant is
   type Content_T is array (Capacity_T range <>) of Integer;
   type Stack_T (Capacity : Capacity_T) is tagged record
      Content : Content_T (1 .. Capacity);
      Top     : Capacity_T := 0;
   end record;
   procedure Push
     (Stack : in out Stack_T;
      Item  :        Integer);
   procedure Pop
     (Stack : in out Stack_T;
      Item  :    out Integer);
end Noncompliant;
```

[561] https://cwe.mitre.org/data/definitions/496.html
[562] https://cwe.mitre.org/data/definitions/1061.html

Note that both type Content_T, as well as the record type components of type Stack_T, are visible to clients. Client code may declare variables of type Content_T and may directly access and modify the record components. Bugs introduced via this access could be anywhere in the entire client codebase.

111.4.6 Compliant Code Example

```
package Compliant is
   type Stack_T (Capacity : Capacity_T) is tagged private;
   procedure Push
     (Stack : in out Stack_T;
      Item  :        Integer);
   procedure Pop
     (Stack : in out Stack_T;
      Item  :    out Integer);
private
   type Content_T is array (Capacity_T range <>) of Integer;
   type Stack_T (Capacity : Capacity_T) is tagged record
      Content : Content_T (1 .. Capacity);
      Top     : Capacity_T := 0;
   end record;
end Compliant;
```

Type Content_T, as well as the record type components of type Stack_T, are no longer visible to clients. Any bugs in the stack processing code must be in this package, or its child packages, if any.

111.4.7 Notes

The GNATcheck rule specified above is not exhaustive.

CHAPTER

TWO

REFERENCES

- AdaCore. SPARK 2014 User's Guide.[565]
- Adacore. GNAT User's Guide for Native Platforms[566]
- AdaCore. "GNATstack User's Guide"[567]

[565] http://docs.adacore.com/spark2014-docs/html/ug/index.html
[566] http://docs.adacore.com/live/wave/gnat_ugn/html/gnat_ugn/gnat_ugn.html
[567] http://docs.adacore.com/live/wave/gnatstack/html/gnatstack_ug/index.html

Part XII

Introduction to Ada: Laboratories

Copyright © 2019 – 2024, AdaCore

This book is published under a CC BY-SA license, which means that you can copy, redistribute, remix, transform, and build upon the content for any purpose, even commercially, as long as you give appropriate credit, provide a link to the license, and indicate if changes were made. If you remix, transform, or build upon the material, you must distribute your contributions under the same license as the original. You can find license details on this page[568]



These labs contain exercises for the *Introduction to Ada* (page 5) course.

This document was written by Gustavo A. Hoffmann and reviewed by Michael Frank.

Note

The code examples in this course use an 80-column limit, which is a typical limit for Ada code. Note that, on devices with a small screen size, some code examples might be difficult to read.

[568] http://creativecommons.org/licenses/by-sa/4.0

CHAPTER

THREE

IMPERATIVE LANGUAGE

For the exercises below (except for the first one), don't worry about the details of the `Main` procedure. You should just focus on implementing the application in the subprogram specified by the exercise.

113.1 Hello World

Goal: create a "Hello World!" application.

Steps:

1. Complete the `Main` procedure.

Requirements:

1. The application must display the message "Hello World!".

Remarks:

1. The part that you have to modify is indicated by the *`-- Implement the application here!`* comment in the source code.

Listing 1: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is
begin
   --  Implement the application here!
   null;
end Main;
```

113.2 Greetings

Goal: create an application that greets a person.

Steps:

1. Complete the `Greet` procedure.

Requirements:

1. Given an input string <name>, procedure `Greet` must display the message "Hello <name>!".
    1. For example, if the name is "John", it displays the message "Hello John!".

Remarks:

1. You can use the concatenation operator (`&`).

2. The part that you have to modify is indicated by the `-- Implement the application here!` comment in the source code.

Listing 2: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

procedure Main is

   procedure Greet (Name : String) is
   begin
      --  Implement the application here!
      null;
   end Greet;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Greet (Argument (1));
end Main;
```

113.3 Positive Or Negative

Goal: create an application that classifies integer numbers.

Steps:

1. Complete the `Classify_Number` procedure.

Requirements:

1. Given an integer number `X`, procedure `Classify_Number` must classify `X` as positive, negative or zero and display the result:
    1. If `X > 0`, it displays `Positive`.
    2. If `X < 0`, it displays `Negative`.
    3. If `X = 0`, it displays `Zero`.

Listing 3: classify_number.ads

```
procedure Classify_Number (X : Integer);
```

Listing 4: classify_number.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Classify_Number (X : Integer) is
begin
   --  Implement the application here!
   null;
end Classify_Number;
```

Listing 5: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Classify_Number;

procedure Main is
   A : Integer;
begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   A := Integer'Value (Argument (1));

   Classify_Number (A);
end Main;
```

113.4 Numbers

Goal: create an application that displays numbers in a specific order.

Steps:

1. Complete the `Display_Numbers` procedure.

Requirements:

1. Given two integer numbers, `Display_Numbers` displays all numbers in the range starting with the smallest number.

Listing 6: display_numbers.ads

```
procedure Display_Numbers (A, B : Integer);
```

Listing 7: display_numbers.adb

```
procedure Display_Numbers (A, B : Integer) is
begin
   --  Implement the application here!
   null;
end Display_Numbers;
```

Listing 8: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Display_Numbers;

procedure Main is
   A, B : Integer;
begin
   if Argument_Count < 2 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
```

(continues on next page)

(continued from previous page)

```
   elsif Argument_Count > 2 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   A := Integer'Value (Argument (1));
   B := Integer'Value (Argument (2));

   Display_Numbers (A, B);
end Main;
```

CHAPTER

FOUR

SUBPROGRAMS

114.1 Subtract procedure

Goal: write a procedure that subtracts two numbers.

Steps:

1. Complete the procedure `Subtract`.

Requirements:

1. `Subtract` performs the operation `A - B`.

Listing 1: subtract.ads

```
--  Write the correct parameters for the procedure below.
procedure Subtract;
```

Listing 2: subtract.adb

```
procedure Subtract is
begin
   --  Implement the procedure here.
   null;
end Subtract;
```

Listing 3: main.adb

```
with Ada.Command_Line;     use Ada.Command_Line;
with Ada.Text_IO;          use Ada.Text_IO;

with Subtract;

procedure Main is
   type Test_Case_Index is
     (Sub_10_1_Chk,
      Sub_10_100_Chk,
      Sub_0_5_Chk,
      Sub_0_Minus_5_Chk);

   procedure Check (TC : Test_Case_Index) is
      Result : Integer;
   begin
      case TC is
      when Sub_10_1_Chk =>
         Subtract (10, 1, Result);
         Put_Line ("Result: " & Integer'Image (Result));
      when Sub_10_100_Chk =>
         Subtract (10, 100, Result);
```

(continues on next page)

(continued from previous page)

```
         Put_Line ("Result: " & Integer'Image (Result));
      when Sub_0_5_Chk =>
         Subtract (0, 5, Result);
         Put_Line ("Result: " & Integer'Image (Result));
      when Sub_0_Minus_5_Chk =>
         Subtract (0, -5, Result);
         Put_Line ("Result: " & Integer'Image (Result));
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

114.2 Subtract function

Goal: write a function that subtracts two numbers.

Steps:

1. Rewrite the `Subtract` procedure from the previous exercise as a function.

Requirements:

1. `Subtract` performs the operation `A - B` and returns the result.

Listing 4: subtract.ads

```
--  Write the correct signature for the function below.
--  Don't forget to replace the keyword "procedure" by "function."
procedure Subtract;
```

Listing 5: subtract.adb

```
procedure Subtract is
begin
   --  Implement the function here!
   null;
end Subtract;
```

Listing 6: main.adb

```
with Ada.Command_Line;     use Ada.Command_Line;
with Ada.Text_IO;          use Ada.Text_IO;

with Subtract;

procedure Main is
   type Test_Case_Index is
     (Sub_10_1_Chk,
      Sub_10_100_Chk,
      Sub_0_5_Chk,
      Sub_0_Minus_5_Chk);
```

(continues on next page)

(continued from previous page)

```
12
13    procedure Check (TC : Test_Case_Index) is
14       Result : Integer;
15    begin
16       case TC is
17       when Sub_10_1_Chk =>
18          Result := Subtract (10, 1);
19          Put_Line ("Result: " & Integer'Image (Result));
20       when Sub_10_100_Chk =>
21          Result := Subtract (10, 100);
22          Put_Line ("Result: " & Integer'Image (Result));
23       when Sub_0_5_Chk =>
24          Result := Subtract (0, 5);
25          Put_Line ("Result: " & Integer'Image (Result));
26       when Sub_0_Minus_5_Chk =>
27          Result := Subtract (0, -5);
28          Put_Line ("Result: " & Integer'Image (Result));
29       end case;
30    end Check;
31
32 begin
33    if Argument_Count < 1 then
34       Put_Line ("ERROR: missing arguments! Exiting...");
35       return;
36    elsif Argument_Count > 1 then
37       Put_Line ("Ignoring additional arguments...");
38    end if;
39
40    Check (Test_Case_Index'Value (Argument (1)));
41 end Main;
```

114.3 Equality function

Goal: write a function that compares two values and returns a flag.

Steps:

1. Complete the `Is_Equal` subprogram.

Requirements:

1. `Is_Equal` returns a flag as a **`Boolean`** value.
2. The flag must indicate whether the values are equal (flag is **`True`**) or not (flag is **`False`**).

Listing 7: is_equal.ads

```
1 --  Write the correct signature for the function below.
2 --  Don't forget to replace the keyword "procedure" by "function."
3 procedure Is_Equal;
```

Listing 8: is_equal.adb

```
1 procedure Is_Equal is
2 begin
3    --  Implement the function here!
4    null;
5 end Is_Equal;
```

Listing 9: main.adb

```
with Ada.Command_Line;     use Ada.Command_Line;
with Ada.Text_IO;          use Ada.Text_IO;

with Is_Equal;

procedure Main is
   type Test_Case_Index is
     (Equal_Chk,
      Inequal_Chk);

   procedure Check (TC : Test_Case_Index) is

      procedure Display_Equal (A, B  : Integer;
                               Equal : Boolean) is
      begin
         Put (Integer'Image (A));
         if Equal then
            Put (" is equal to ");
         else
            Put (" isn't equal to ");
         end if;
         Put_Line (Integer'Image (B) & ".");
      end Display_Equal;

      Result : Boolean;
   begin
      case TC is
      when Equal_Chk =>
         for I in 0 .. 10 loop
            Result := Is_Equal (I, I);
            Display_Equal (I, I, Result);
         end loop;
      when Inequal_Chk =>
         for I in 0 .. 10 loop
            Result := Is_Equal (I, I - 1);
            Display_Equal (I, I - 1, Result);
         end loop;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

114.4 States

Goal: write a procedure that displays the state of a machine.

Steps:

1. Complete the procedure `Display_State`.

Requirements:

1. The states can be set according to the following numbers:

Number	State
0	Off
1	On: Simple Processing
2	On: Advanced Processing

2. The procedure `Display_State` receives the number corresponding to a state and displays the state (indicated by the table above) as a user message.

Remarks:

1. You can use a case statement to implement this procedure.

Listing 10: display_state.ads

```
procedure Display_State (State : Integer);
```

Listing 11: display_state.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Display_State (State : Integer) is
begin
   null;
end Display_State;
```

Listing 12: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Display_State;

procedure Main is
   State : Integer;
begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   State := Integer'Value (Argument (1));

   Display_State (State);
end Main;
```

114.5 States #2

Goal: write a function that returns the state of a machine.

Steps:

1. Implement the function `Get_State`.

Requirements:

1. Implement same state machine as in the previous exercise.
2. Function `Get_State` must return the state as a string.

Remarks:

1. You can implement a function returning a string by simply using quotes in a return statement. For example:

Listing 13: get_hello.ads

```
function Get_Hello return String;
```

Listing 14: get_hello.adb

```
function Get_Hello return String is
begin
   return "Hello";
end Get_Hello;
```

Listing 15: main.adb

```
with Ada.Text_IO;      use Ada.Text_IO;
with Get_Hello;

procedure Main is
   S : constant String := Get_Hello;
begin
   Put_Line (S);
end Main;
```

2. You can reuse your previous implementation and replace it by a case expression.
    1. For values that do not correspond to a state, you can simply return an empty string ("").

Listing 16: get_state.ads

```
function Get_State (State : Integer) return String;
```

Listing 17: get_state.adb

```
function Get_State (State : Integer) return String is
begin
   return "";
end Get_State;
```

Listing 18: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Get_State;

procedure Main is
   State : Integer;
begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
```

(continues on next page)

(continued from previous page)

```
   end if;

   State := Integer'Value (Argument (1));

   Put_Line (Get_State (State));
end Main;
```

114.6 States #3

Goal: implement an on/off indicator for a state machine.

Steps:

1. Implement the function `Is_On`.
2. Implement the procedure `Display_On_Off`.

Requirements:

1. Implement same state machine as in the previous exercise.
2. Function `Is_On` returns:
   - `True` if the machine is on;
   - otherwise, it returns `False`.
3. Procedure `Display_On_Off` displays the message
   - "On" if the machine is on, or
   - "Off" otherwise.
4. `Is_On` must be called in the implementation of `Display_On_Off`.

Remarks:

1. You can implement both subprograms using if expressions.

Listing 19: is_on.ads

```
function Is_On (State : Integer) return Boolean;
```

Listing 20: is_on.adb

```
function Is_On (State : Integer) return Boolean is
begin
   return False;
end Is_On;
```

Listing 21: display_on_off.ads

```
procedure Display_On_Off (State : Integer);
```

Listing 22: display_on_off.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Is_On;

procedure Display_On_Off (State : Integer) is
begin
   Put_Line ("");
end Display_On_Off;
```

Listing 23: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Display_On_Off;
with Is_On;

procedure Main is
   State : Integer;
begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   State := Integer'Value (Argument (1));

   Display_On_Off (State);
   Put_Line (Boolean'Image (Is_On (State)));
end Main;
```

114.7 States #4

Goal: implement a procedure to update the state of a machine.

Steps:

1. Implement the procedure `Set_Next`.

Requirements:

1. Implement the same state machine as in the previous exercise.
2. Procedure `Set_Next` updates the machine's state with the next one in a *circular* manner:
   - In general, after a call to `Set_Next` for an integer variable `N` (`Set_Next (N)`), the new value of `N` must be the next number for that variable `N` (i.e., `N := N'Old + 1`).
     - In other words, a call to `Set_Next (N)` has the same effect as `N := N + 1`.
     - For example, after the statements `N := 1; Set_Next (N);`, we have that `N = 2`.
   - However, if the state is the last valid one for the machine (which, for this exercise, it's 2), the next state must be the first valid one (in this case: 0).
     - In other words, for `N := 2; Set_Next (N);`, we have that `N = 0`.

Remarks:

1. You can use an if expression to implement `Set_Next`.

Listing 24: set_next.ads

```
procedure Set_Next (State : in out Integer);
```

Listing 25: set_next.adb

```
procedure Set_Next (State : in out Integer) is
begin
   null;
end Set_Next;
```

Listing 26: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Set_Next;

procedure Main is
   State : Integer;
begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   State := Integer'Value (Argument (1));

   Set_Next (State);
   Put_Line (Integer'Image (State));
end Main;
```

CHAPTER

FIVE

MODULAR PROGRAMMING

115.1 Months

Goal: create a package to display the months of the year.

Steps:

1. Convert the `Months` procedure below to a package.
2. Create the specification and body of the `Months` package.

Requirements:

1. `Months` must contain the declaration of strings for each month of the year, which are stored in three-character constants based on the month's name.
    - For example, the string `"January"` is stored in the constant `Jan`. These strings are then used by the `Display_Months` procedure, which is also part of the `Months` package.

Remarks:

1. The goal of this exercise is to create the `Months` package.
    1. In the code below, `Months` is declared as a procedure.
        - Therefore, we need to *convert* it into a real package.
    2. You have to modify the procedure declaration and implementation in the code below, so that it becomes a package specification and a package body.

Listing 1: months.ads

```
--  Create specification for Months package, which includes
--  the declaration of the Display_Months procedure.
--
procedure Months;
```

Listing 2: months.adb

```
--  Create body of Months package, which includes
--  the implementation of the Display_Months procedure.
--
procedure Months is

   procedure Display_Months is
   begin
      Put_Line ("Months:");
      Put_Line ("- " & Jan);
      Put_Line ("- " & Feb);
      Put_Line ("- " & Mar);
      Put_Line ("- " & Apr);
```

(continues on next page)

(continued from previous page)

```
      Put_Line ("- " & May);
      Put_Line ("- " & Jun);
      Put_Line ("- " & Jul);
      Put_Line ("- " & Aug);
      Put_Line ("- " & Sep);
      Put_Line ("- " & Oct);
      Put_Line ("- " & Nov);
      Put_Line ("- " & Dec);
   end Display_Months;

begin
   null;
end Months;
```

Listing 3: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Months;           use Months;

procedure Main is

   type Test_Case_Index is
     (Months_Chk);

   procedure Check (TC : Test_Case_Index) is
   begin
      case TC is
         when Months_Chk =>
            Display_Months;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

115.2 Operations

Goal: create a package to perform basic mathematical operations.

Steps:

1. Implement the `Operations` package.
    1. Declare and implement the `Add` function.
    2. Declare and implement the `Subtract` function.
    3. Declare and implement the `Multiply`: function.
    4. Declare and implement the `Divide` function.
2. Implement the `Operations.Test` package

1. Declare and implement the `Display` procedure.

Requirements:

1. Package `Operations` contains functions for each of the four basic mathematical operations for parameters of **`Integer`** type:
    1. Function `Add` performs the addition of `A` and `B` and returns the result;
    2. Function `Subtract` performs the subtraction of `A` and `B` and returns the result;
    3. Function `Multiply` performs the multiplication of `A` and `B` and returns the result;
    4. Function `Divide` performs the division of `A` and `B` and returns the result.
2. Package `Operations.Test` contains the test environment:
    1. Procedure `Display` must use the functions from the parent (`Operations`) package as indicated by the template in the code below.

Listing 4: operations.ads

```
package Operations is

   --  Create specification for Operations package, including the
   --  declaration of the functions mentioned above.
   --

end Operations;
```

Listing 5: operations.adb

```
package body Operations is

   --  Create body of Operations package.
   --

end Operations;
```

Listing 6: operations-test.ads

```
package Operations.Test is

   --  Create specification for Operations package, including the
   --  declaration of the Display procedure:
   --
   --   procedure Display (A, B : Integer);
   --

end Operations.Test;
```

Listing 7: operations-test.adb

```
package body Operations.Test is

   --  Implement body of Operations.Test package.
   --

   procedure Display (A, B : Integer) is
      A_Str : constant String := Integer'Image (A);
      B_Str : constant String := Integer'Image (B);
   begin
      Put_Line ("Operations:");
      Put_Line (A_Str & " + " & B_Str & " = "
```

(continues on next page)

(continued from previous page)

```
                & Integer'Image (Add (A, B))
                & ",");
      --  Use the line above as a template and add the rest of the
      --  implementation for Subtract, Multiply and Divide.
   end Display;

end Operations.Test;
```

Listing 8: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Operations;
with Operations.Test;  use Operations.Test;

procedure Main is

   type Test_Case_Index is
     (Operations_Chk,
      Operations_Display_Chk);

   procedure Check (TC : Test_Case_Index) is
   begin
      case TC is
         when Operations_Chk =>
            Put_Line ("Add (100, 2) = "
                      & Integer'Image (Operations.Add (100, 2)));
            Put_Line ("Subtract (100, 2) = "
                      & Integer'Image (Operations.Subtract (100, 2)));
            Put_Line ("Multiply (100, 2) = "
                      & Integer'Image (Operations.Multiply (100, 2)));
            Put_Line ("Divide (100, 2) = "
                      & Integer'Image (Operations.Divide (100, 2)));
         when Operations_Display_Chk =>
            Display (10, 5);
            Display ( 1, 2);
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

CHAPTER

SIX

STRONGLY TYPED LANGUAGE

116.1 Colors

Goal: create a package to represent HTML colors in hexadecimal form and its corresponding names.

Steps:

1. Implement the `Color_Types` package.
    1. Declare the `HTML_Color` enumeration.
    2. Declare the `Basic_HTML_Color` enumeration.
    3. Implement the `To_Integer` function.
    4. Implement the `To_HTML_Color` function.

Requirements:

1. Enumeration `HTML_Color` has the following colors:
    - Salmon
    - Firebrick
    - Red
    - Darkred
    - Lime
    - Forestgreen
    - Green
    - Darkgreen
    - Blue
    - Mediumblue
    - Darkblue
2. Enumeration `Basic_HTML_Color` has the following colors: Red, Green, Blue.
3. Function `To_Integer` converts from the `HTML_Color` type to the HTML color code — as integer values in hexadecimal notation.
    - You can find the HTML color codes in the table below.
4. Function `To_HTML_Color` converts from `Basic_HTML_Color` to `HTML_Color`.
5. This is the table to convert from an HTML color to a HTML color code in hexadecimal notation:

Color	HTML color code (hexa)
Salmon	#FA8072
Firebrick	#B22222
Red	#FF0000
Darkred	#8B0000
Lime	#00FF00
Forestgreen	#228B22
Green	#008000
Darkgreen	#006400
Blue	#0000FF
Mediumblue	#0000CD
Darkblue	#00008B

Remarks:

1. In order to express the hexadecimal values above in Ada, use the following syntax: 16#<hex_value># (e.g.: `16#FFFFFF#`).
2. For function `To_Integer`, you may use a **`case`** for this.

Listing 1: color_types.ads

```
package Color_Types is

   --  Include type declaration for HTML_Color!
   --
   --  type HTML_Color is [...]
   --

   --  Include function declaration for:
   --  function To_Integer (C : HTML_Color) return Integer;

   --  Include type declaration for Basic_HTML_Color!
   --
   --  type Basic_HTML_Color is [...]
   --

   --  Include function declaration for:
   --  - Basic_HTML_Color => HTML_Color
   --
   --  function To_HTML_Color [...];
   --
end Color_Types;
```

Listing 2: color_types.adb

```
package body Color_Types is

   --  Implement the conversion from HTML_Color to Integer here!
   --
   --  function To_Integer (C : HTML_Color) return Integer is
   --  begin
   --  --  Hint: use 'case' for the HTML colors;
   --  --        use 16#...# for the hexadecimal values.
   --  end To_Integer;

   --  Implement the conversion from Basic_HTML_Color to HTML_Color here!
   --
   --  function To_HTML_Color [...] is
```

(continues on next page)

(continued from previous page)

```
   --
end Color_Types;
```

Listing 3: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;
with Ada.Integer_Text_IO;

with Color_Types; use Color_Types;

procedure Main is
   type Test_Case_Index is
     (HTML_Color_Range,
      HTML_Color_To_Integer,
      Basic_HTML_Color_To_HTML_Color);

   procedure Check (TC : Test_Case_Index) is
   begin
      case TC is
         when HTML_Color_Range =>
            for I in HTML_Color'Range loop
               Put_Line (HTML_Color'Image (I));
            end loop;
         when HTML_Color_To_Integer =>
            for I in HTML_Color'Range loop
               Ada.Integer_Text_IO.Put (Item  => To_Integer (I),
                                        Width => 6,
                                        Base  => 16);
               New_Line;
            end loop;
         when Basic_HTML_Color_To_HTML_Color =>
            for I in Basic_HTML_Color'Range loop
               Put_Line (HTML_Color'Image (To_HTML_Color (I)));
            end loop;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

116.2 Integers

Goal: implement a package with various integer types.

Steps:

1. Implement the `Int_Types` package.
    1. Declare the integer type `I_100`.
    2. Declare the modular type `U_100`.

3. Implement the `To_I_100` function to convert from the `U_100` type.
4. Implement the `To_U_100` function to convert from the `I_100` type.
5. Declare the derived type `D_50`.
6. Declare the subtype `S_50`.
7. Implement the `To_D_50` function to convert from the `I_100` type.
8. Implement the `To_S_50` function to convert from the `I_100` type.
9. Implement the `To_I_100` function to convert from the `D_50` type.

Requirements:

1. Types `I_100` and `U_100` have values between 0 and 100.
    1. Type `I_100` is an integer type.
    2. Type `U_100` is a modular type.
2. Function `To_I_100` converts from the `U_100` type to the `I_100` type.
3. Function `To_U_100` converts from the `I_100` type to the `U_100` type.
4. Types `D_50` and `S_50` have values between 10 and 50 and use `I_100` as a base type.
    1. `D_50` is a derived type.
    2. `S_50` is a subtype.
5. Function `To_D_50` converts from the `I_100` type to the `D_50` type.
6. Function `To_S_50` converts from the `I_100` type to the `S_50` type.
7. Functions `To_D_50` and `To_S_50` saturate the input values if they are out of range.
    - If the input is less than 10 the output should be 10.
    - If the input is greater than 50 the output should be 50.
8. Function `To_I_100` converts from the `D_50` type to the `I_100` type.

Remarks:

1. For the implementation of functions `To_D_50` and `To_S_50`, you may use the type attributes `D_50'First` and `D_50'Last`:
    1. `D_50'First` indicates the minimum value of the `D_50` type.
    2. `D_50'Last` indicates the maximum value of the `D_50` type.
    3. The same attributes are available for the `S_50` type (`S_50'First` and `S_50'Last`).
2. We could have implemented a function `To_I_100` as well to convert from `S_50` to `I_100`. However, we skip this here because explicit conversions are not needed for subtypes.

Listing 4: int_types.ads

```
package Int_Types is

   --  Include type declarations for I_100 and U_100!
   --
   --  type I_100 is [...]
   --  type U_100 is [...]
   --

   function To_I_100 (V : U_100) return I_100;

   function To_U_100 (V : I_100) return U_100;
```

(continues on next page)

(continued from previous page)

```
12
13    --  Include type declarations for D_50 and S_50!
14    --
15    --  [...] D_50 is [...]
16    --  [...] S_50 is [...]
17    --
18
19    function To_D_50 (V : I_100) return D_50;
20
21    function To_S_50 (V : I_100) return S_50;
22
23    function To_I_100 (V : D_50) return I_100;
24
25 end Int_Types;
```

Listing 5: int_types.adb

```
1  package body Int_Types is
2
3     function To_I_100 (V : U_100) return I_100 is
4     begin
5        --  Implement the conversion from U_100 to I_100 here!
6        --
7        null;
8     end To_I_100;
9
10    function To_U_100 (V : I_100) return U_100 is
11    begin
12       --  Implement the conversion from I_100 to U_100 here!
13       --
14       null;
15    end To_U_100;
16
17    function To_D_50 (V : I_100) return D_50 is
18       Min : constant I_100 := I_100 (D_50'First);
19       Max : constant I_100 := I_100 (D_50'Last);
20    begin
21       --  Implement the conversion from I_100 to D_50 here!
22       --
23       --  Hint: using the constants above simplifies the checks needed for
24       --        this function.
25       --
26       null;
27    end To_D_50;
28
29    function To_S_50 (V : I_100) return S_50 is
30    begin
31       --  Implement the conversion from I_100 to S_50 here!
32       --
33       --  Remark: don't forget to verify whether an explicit conversion like
34       --          S_50 (V) is needed.
35       --
36       null;
37    end To_S_50;
38
39    function To_I_100 (V : D_50) return I_100 is
40    begin
41       --  Implement the conversion from I_100 to D_50 here!
42       --
43       --  Remark: don't forget to verify whether an explicit conversion like
44       --          I_100 (V) is needed.
```

(continues on next page)

(continued from previous page)

```
      --
      null;
   end To_I_100;

end Int_Types;
```

Listing 6: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Int_Types;        use Int_Types;

procedure Main is
   package I_100_IO is new Ada.Text_IO.Integer_IO (I_100);
   package U_100_IO is new Ada.Text_IO.Modular_IO (U_100);
   package D_50_IO  is new Ada.Text_IO.Integer_IO (D_50);

   use I_100_IO;
   use U_100_IO;
   use D_50_IO;

   type Test_Case_Index is
     (I_100_Range,
      U_100_Range,
      U_100_Wraparound,
      U_100_To_I_100,
      I_100_To_U_100,
      D_50_Range,
      S_50_Range,
      I_100_To_D_50,
      I_100_To_S_50,
      D_50_To_I_100,
      S_50_To_I_100);

   procedure Check (TC : Test_Case_Index) is
   begin
      I_100_IO.Default_Width := 1;
      U_100_IO.Default_Width := 1;
      D_50_IO.Default_Width  := 1;

      case TC is
         when I_100_Range =>
            Put (I_100'First);
            New_Line;
            Put (I_100'Last);
            New_Line;
         when U_100_Range =>
            Put (U_100'First);
            New_Line;
            Put (U_100'Last);
            New_Line;
         when U_100_Wraparound =>
            Put (U_100'First - 1);
            New_Line;
            Put (U_100'Last + 1);
            New_Line;
         when U_100_To_I_100 =>
            for I in U_100'Range loop
               I_100_IO.Put (To_I_100 (I));
               New_Line;
```

(continues on next page)

(continued from previous page)

```
            end loop;
         when I_100_To_U_100 =>
            for I in I_100'Range loop
               Put (To_U_100 (I));
               New_Line;
            end loop;
         when D_50_Range =>
            Put (D_50'First);
            New_Line;
            Put (D_50'Last);
            New_Line;
         when S_50_Range =>
            Put (S_50'First);
            New_Line;
            Put (S_50'Last);
            New_Line;
         when I_100_To_D_50 =>
            for I in I_100'Range loop
               Put (To_D_50 (I));
               New_Line;
            end loop;
         when I_100_To_S_50 =>
            for I in I_100'Range loop
               Put (To_S_50 (I));
               New_Line;
            end loop;
         when D_50_To_I_100 =>
            for I in D_50'Range loop
               Put (To_I_100 (I));
               New_Line;
            end loop;
         when S_50_To_I_100 =>
            for I in S_50'Range loop
               Put (I);
               New_Line;
            end loop;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

116.3 Temperatures

Goal: create a package to handle temperatures in Celsius and Kelvin.

Steps:

1. Implement the `Temperature_Types` package.
    1. Declare the `Celsius` type.
    2. Declare the `Int_Celsius` type.

3. Implement the `To_Celsius` function.
4. Implement the `To_Int_Celsius` function.
5. Declare the `Kelvin` type.
6. Implement the `To_Celsius` function to convert from the `Kelvin` type.
7. Implement the `To_Kelvin` function.

Requirements:

1. The custom floating-point types declared in `Temperature_Types` must use a precision of six digits.
2. Types `Celsius` and `Int_Celsius` are used for temperatures in Celsius:
    1. `Celsius` is a floating-point type with a range between -273.15 and 5504.85.
    2. `Int_Celsius` is an integer type with a range between -273 and 5505.
3. Functions `To_Celsius` and `To_Int_Celsius` are used for type conversion:
    1. `To_Celsius` converts from `Int_Celsius` to `Celsius` type.
    2. `To_Int_Celsius` converts from `Celsius` and `Int_Celsius` types:
4. `Kelvin` is a floating-point type for temperatures in Kelvin using a range between 0.0 and 5778.0.
5. The functions `To_Celsius` and `To_Kelvin` are used to convert between temperatures in `Kelvin` and `Celsius`.
    1. In order to convert temperatures in Celsius to Kelvin, you must use the formula $K = C + 273.15$, where:
        - *K* is the temperature in Kelvin, and
        - *C* is the temperature in Celsius.

Remarks:

1. When implementing the `To_Celsius` function for the `Int_Celsius` type:
    1. You'll need to check for the minimum and maximum values of the input values because of the slightly different ranges.
    2. You may use variables of floating-point type (**`Float`**) for intermediate values.
2. For the implementation of the functions `To_Celsius` and `To_Kelvin` (used for converting between `Kelvin` and `Celsius`), you may use a variable of floating-point type (**`Float`**) for intermediate values.

Listing 7: temperature_types.ads

```
package Temperature_Types is

   --  Include type declaration for Celsius!
   --
   --  Celsius is [...];
       --  Int_Celsius is [...];
   --

   function To_Celsius (T : Int_Celsius) return Celsius;

   function To_Int_Celsius (T : Celsius) return Int_Celsius;

   --  Include type declaration for Kelvin!
   --
   --  type Kelvin is [...];
```

(continues on next page)

(continued from previous page)

```
   --
end Temperature_Types;
```

Listing 8: temperature_types.adb

```
package body Temperature_Types is

   function To_Celsius (T : Int_Celsius) return Celsius is
   begin
      null;
   end To_Celsius;

   function To_Int_Celsius (T : Celsius) return Int_Celsius is
   begin
      null;
   end To_Int_Celsius;

   --  Include function implementation for:
   --  - Kelvin  => Celsius
   --  - Celsius => Kelvin
   --
   --  function To_Celsius [...] is
   --  function To_Kelvin  [...] is
   --
end Temperature_Types;
```

Listing 9: main.adb

```
with Ada.Command_Line;  use Ada.Command_Line;
with Ada.Text_IO;       use Ada.Text_IO;

with Temperature_Types; use Temperature_Types;

procedure Main is
   package Celsius_IO     is new Ada.Text_IO.Float_IO (Celsius);
   package Kelvin_IO      is new Ada.Text_IO.Float_IO (Kelvin);
   package Int_Celsius_IO is new Ada.Text_IO.Integer_IO (Int_Celsius);

   use Celsius_IO;
   use Kelvin_IO;
   use Int_Celsius_IO;

   type Test_Case_Index is
     (Celsius_Range,
      Celsius_To_Int_Celsius,
      Int_Celsius_To_Celsius,
      Kelvin_To_Celsius,
      Celsius_To_Kelvin);

   procedure Check (TC : Test_Case_Index) is
   begin
      Celsius_IO.Default_Fore := 1;
```

(continues on next page)

(continued from previous page)

```
      Kelvin_IO.Default_Fore  := 1;
      Int_Celsius_IO.Default_Width := 1;

      case TC is
         when Celsius_Range =>
            Put (Celsius'First);
            New_Line;
            Put (Celsius'Last);
            New_Line;
         when Celsius_To_Int_Celsius =>
            Put (To_Int_Celsius (Celsius'First));
            New_Line;
            Put (To_Int_Celsius (0.0));
            New_Line;
            Put (To_Int_Celsius (Celsius'Last));
            New_Line;
         when Int_Celsius_To_Celsius =>
            Put (To_Celsius (Int_Celsius'First));
            New_Line;
            Put (To_Celsius (0));
            New_Line;
            Put (To_Celsius (Int_Celsius'Last));
            New_Line;
         when Kelvin_To_Celsius =>
            Put (To_Celsius (Kelvin'First));
            New_Line;
            Put (To_Celsius (0));
            New_Line;
            Put (To_Celsius (Kelvin'Last));
            New_Line;
         when Celsius_To_Kelvin =>
            Put (To_Kelvin (Celsius'First));
            New_Line;
            Put (To_Kelvin (Celsius'Last));
            New_Line;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

CHAPTER

SEVEN

RECORDS

117.1 Directions

Goal: create a package that handles directions and geometric angles.

Steps:

1. Implement the `Directions` package.
    1. Declare the `Ext_Angle` record.
    2. Implement the `Display` procedure.
    3. Implement the `To_Ext_Angle` function.

Requirements:

1. Record `Ext_Angle` stores information about the extended angle (see remark about *extended angles* below).
2. Procedure `Display` displays information about the extended angle.
    1. You should use the implementation that has been commented out (see code below) as a starting point.
3. Function `To_Ext_Angle` converts a simple angle value to an extended angle (`Ext_Angle` type).

Remarks:

1. We make use of the algorithm implemented in the `Check_Direction` procedure (*chapter on imperative language* (page 9)).
2. For the sake of this exercise, we use the concept of *extended angles*. This includes the actual geometric angle and the corresponding direction (North, South, Northwest, and so on).

Listing 1: directions.ads

```
1  package Directions is
2
3     type Angle_Mod is mod 360;
4
5     type Direction is
6       (North,
7        Northeast,
8        East,
9        Southeast,
10       South,
11       Southwest,
12       West,
13       Northwest);
14
```

(continues on next page)

(continued from previous page)

```
   function To_Direction (N: Angle_Mod) return Direction;

   --  Include type declaration for Ext_Angle record type:
   --
   --  NOTE: Use the Angle_Mod and Direction types declared above!
   --
   --  type Ext_Angle is [...]
   --

   function To_Ext_Angle (N : Angle_Mod) return Ext_Angle;

   procedure Display (N : Ext_Angle);

end Directions;
```

Listing 2: directions.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Directions is

   procedure Display (N : Ext_Angle) is
   begin
      --  Uncomment the code below and fill the missing elements
      --
      --  Put_Line ("Angle: "
      --            & Angle_Mod'Image (____)
      --            & " => "
      --            & Direction'Image (____)
      --            & ".");
      null;
   end Display;

   function To_Direction (N : Angle_Mod) return Direction is
   begin
      case N is
         when   0        => return North;
         when   1 ..  89 => return Northeast;
         when  90        => return East;
         when  91 .. 179 => return Southeast;
         when 180        => return South;
         when 181 .. 269 => return Southwest;
         when 270        => return West;
         when 271 .. 359 => return Northwest;
      end case;
   end To_Direction;

   function To_Ext_Angle (N : Angle_Mod) return Ext_Angle is
   begin
      --  Implement the conversion from Angle_Mod to Ext_Angle here!
      --
      --  Hint: you can use a return statement and an aggregate.
      --
      null;
   end To_Ext_Angle;

end Directions;
```

Listing 3: main.adb

```
with Ada.Command_Line;  use Ada.Command_Line;
with Ada.Text_IO;       use Ada.Text_IO;

with Directions;        use Directions;

procedure Main is
   type Test_Case_Index is
     (Direction_Chk);

   procedure Check (TC : Test_Case_Index) is
   begin
      case TC is
      when Direction_Chk =>
         Display (To_Ext_Angle (0));
         Display (To_Ext_Angle (30));
         Display (To_Ext_Angle (45));
         Display (To_Ext_Angle (90));
         Display (To_Ext_Angle (91));
         Display (To_Ext_Angle (120));
         Display (To_Ext_Angle (180));
         Display (To_Ext_Angle (250));
         Display (To_Ext_Angle (270));
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

117.2 Colors

Goal: create a package to represent HTML colors in RGB format using the hexadecimal form.

Steps:

1. Implement the `Color_Types` package.
    1. Declare the RGB record.
    2. Implement the `To_RGB` function.
    3. Implement the `Image` function for the RGB type.

Requirements:

1. The following table contains the HTML colors and the corresponding value in hexadecimal form for each color element:

Color	Red	Green	Blue
Salmon	#FA	#80	#72
Firebrick	#B2	#22	#22
Red	#FF	#00	#00
Darkred	#8B	#00	#00
Lime	#00	#FF	#00
Forestgreen	#22	#8B	#22
Green	#00	#80	#00
Darkgreen	#00	#64	#00
Blue	#00	#00	#FF
Mediumblue	#00	#00	#CD
Darkblue	#00	#00	#8B

2. The hexadecimal information of each HTML color can be mapped to three color elements: red, green and blue.
    1. Each color element has a value between 0 and 255, or `00` and FF in hexadecimal.
    2. For example, for the color *salmon*, the hexadecimal value of the color elements are:
        - red = FA,
        - green = 80, and
        - blue = 72.
3. Record RGB stores information about HTML colors in RGB format, so that we can retrieve the individual color elements.
4. Function `To_RGB` converts from the `HTML_Color` enumeration to the RGB type based on the information from the table above.
5. Function `Image` returns a string representation of the RGB type in this format:
    - `"(Red => 16#..#, Green => 16#...#, Blue => 16#...# )"`

Remarks:

1. We use the exercise on HTML colors from the previous lab on *Strongly typed language* (page 2077) as a starting point.

Listing 4: color_types.ads

```
package Color_Types is

   type HTML_Color is
     (Salmon,
      Firebrick,
      Red,
      Darkred,
      Lime,
      Forestgreen,
      Green,
      Darkgreen,
      Blue,
      Mediumblue,
      Darkblue);

   function To_Integer (C : HTML_Color) return Integer;

   type Basic_HTML_Color is
     (Red,
```

(continues on next page)

(continued from previous page)

```
      Green,
      Blue);

   function To_HTML_Color (C : Basic_HTML_Color) return HTML_Color;

   subtype Int_Color is Integer range 0 .. 255;

   --  Replace type declaration for RGB record below
   --
   --  - NOTE: Use the Int_Color type declared above!
   --
   --  type RGB is [...]
   --
   type RGB is null record;

   function To_RGB (C : HTML_Color) return RGB;

   function Image (C : RGB) return String;

end Color_Types;
```

Listing 5: color_types.adb

```
with Ada.Integer_Text_IO;

package body Color_Types is

   function To_Integer (C : HTML_Color) return Integer is
   begin
      case C is
         when Salmon      => return 16#FA8072#;
         when Firebrick   => return 16#B22222#;
         when Red         => return 16#FF0000#;
         when Darkred     => return 16#8B0000#;
         when Lime        => return 16#00FF00#;
         when Forestgreen => return 16#228B22#;
         when Green       => return 16#008000#;
         when Darkgreen   => return 16#006400#;
         when Blue        => return 16#0000FF#;
         when Mediumblue  => return 16#0000CD#;
         when Darkblue    => return 16#00008B#;
      end case;

   end To_Integer;

   function To_HTML_Color (C : Basic_HTML_Color) return HTML_Color is
   begin
      case C is
         when Red   => return Red;
         when Green => return Green;
         when Blue  => return Blue;
      end case;
   end To_HTML_Color;

   function To_RGB (C : HTML_Color) return RGB is
   begin
      --  Implement the conversion from HTML_Color to RGB here!
      --
      return (null record);
   end To_RGB;

```

(continues on next page)

(continued from previous page)

```
   function Image (C : RGB) return String is
      subtype Str_Range is Integer range 1 .. 10;
      SR : String (Str_Range);
      SG : String (Str_Range);
      SB : String (Str_Range);
   begin
      --  Replace argument in the calls to Put below
      --  with the missing elements (red, green, blue)
      --  from the RGB record
      --
      Ada.Integer_Text_IO.Put (To    => SR,
                               Item  => 0,    --  REPLACE!
                               Base  => 16);
      Ada.Integer_Text_IO.Put (To    => SG,
                               Item  => 0,    --  REPLACE!
                               Base  => 16);
      Ada.Integer_Text_IO.Put (To    => SB,
                               Item  => 0,    --  REPLACE!
                               Base  => 16);
      return ("(Red => " & SR
              & ", Green => " & SG
              & ", Blue => "  & SB
              &")");
   end Image;

end Color_Types;
```

Listing 6: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Color_Types;      use Color_Types;

procedure Main is
   type Test_Case_Index is
     (HTML_Color_To_RGB);

   procedure Check (TC : Test_Case_Index) is
   begin
      case TC is
         when HTML_Color_To_RGB =>
            for I in HTML_Color'Range loop
               Put_Line (HTML_Color'Image (I) & " => "
                         & Image (To_RGB (I)) & ".");
            end loop;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

117.3 Inventory

Goal: create a simplified inventory system for a store to enter items and keep track of assets.

Steps:

1. Implement the `Inventory_Pkg` package.
    1. Declare the `Item` record.
    2. Implement the `Init` function.
    3. Implement the `Add` procedure.

Requirements:

1. Record `Item` collects information about products from the store.
    1. To keep it simple, this record only contains the name, quantity and price of each item.
    2. The record components are:
        - `Name` of `Item_Name` type;
        - `Quantity` of **`Natural`** type;
        - `Price` of **`Float`** type.
2. Function `Init` returns an initialized item (of `Item` type).
    1. Function `Init` must also display the item name by calling the `To_String` function for the `Item_Name` type.
        - This is already implemented in the code below.
3. Procedure `Add` adds an item to the assets.
    1. Since we want to keep track of the assets, the implementation must accumulate the total value of each item's inventory, the result of multiplying the item quantity and its price.

Listing 7: inventory_pkg.ads

```
package Inventory_Pkg is

   type Item_Name is
     (Ballpoint_Pen, Oil_Based_Pen_Marker, Feather_Quill_Pen);

   function To_String (I : Item_Name) return String;

   --  Replace type declaration for Item record:
   --
   type Item is null record;

   function Init (Name     : Item_Name;
                  Quantity : Natural;
                  Price    : Float) return Item;

   procedure Add (Assets : in out Float;
                  I      : Item);

end Inventory_Pkg;
```

Listing 8: inventory_pkg.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Inventory_Pkg is

   function To_String (I : Item_Name) return String is
   begin
      case I is
         when Ballpoint_Pen        => return "Ballpoint Pen";
         when Oil_Based_Pen_Marker => return "Oil-based Pen Marker";
         when Feather_Quill_Pen    => return "Feather Quill Pen";
      end case;
   end To_String;

   function Init (Name     : Item_Name;
                  Quantity : Natural;
                  Price    : Float) return Item is
   begin
      Put_Line ("Item: " & To_String (Name) & ".");

      --  Replace return statement with the actual record initialization!
      --
      return (null record);
   end Init;

   procedure Add (Assets : in out Float;
                  I      : Item) is
   begin
      --  Implement the function that adds an item to the inventory here!
      --
      null;
   end Add;

end Inventory_Pkg;
```

Listing 9: main.adb

```
with Ada.Command_Line;  use Ada.Command_Line;
with Ada.Text_IO;       use Ada.Text_IO;

with Inventory_Pkg;     use Inventory_Pkg;

procedure Main is
   --  Remark: the following line is not relevant.
   F   : array (1 .. 10) of Float := (others => 42.42);

   type Test_Case_Index is
     (Inventory_Chk);

   procedure Display (Assets : Float) is
      package F_IO is new Ada.Text_IO.Float_IO (Float);

      use F_IO;
   begin
      Put ("Assets: $");
      Put (Assets, 1, 2, 0);
      Put (".");
      New_Line;
   end Display;

```

(continues on next page)

(continued from previous page)

```
   procedure Check (TC : Test_Case_Index) is
      I      : Item;
      Assets : Float := 0.0;

      --  Please ignore the following three lines!
      pragma Warnings (Off, "default initialization");
      for Assets'Address use F'Address;
      pragma Warnings (On, "default initialization");
   begin
      case TC is
      when Inventory_Chk =>
         I := Init (Ballpoint_Pen,        185,  0.15);
         Add (Assets, I);
         Display (Assets);

         I := Init (Oil_Based_Pen_Marker, 100,  9.0);
         Add (Assets, I);
         Display (Assets);

         I := Init (Feather_Quill_Pen,      2, 40.0);
         Add (Assets, I);
         Display (Assets);
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

CHAPTER

EIGHT

ARRAYS

118.1 Constrained Array

Goal: declare a constrained array and implement operations on it.

Steps:

1. Implement the `Constrained_Arrays` package.
    1. Declare the range type `My_Index`.
    2. Declare the array type `My_Array`.
    3. Declare and implement the `Init` function.
    4. Declare and implement the `Double` procedure.
    5. Declare and implement the `First_Elem` function.
    6. Declare and implement the `Last_Elem` function.
    7. Declare and implement the `Length` function.
    8. Declare the object `A` of `My_Array` type.

Requirements:

1. Range type `My_Index` has a range from 1 to 10.
2. `My_Array` is a constrained array of `Integer` type.
    1. It must make use of the `My_Index` type.
    2. It is therefore limited to 10 elements.
3. Function `Init` returns an array where each element is initialized with the corresponding index.
4. Procedure `Double` doubles the value of each element of an array.
5. Function `First_Elem` returns the first element of the array.
6. Function `Last_Elem` returns the last element of the array.
7. Function `Length` returns the length of the array.
8. Object `A` of `My_Array` type is initialized with:
    1. the values 1 and 2 for the first two elements, and
    2. 42 for all other elements.

Listing 1: constrained_arrays.ads

```
package Constrained_Arrays is

   --  Complete the type and subprogram declarations:
   --
   --  type My_Index is [...]
   --
   --  type My_Array is [...]
   --
   --  function Init ...
   --
   --  procedure Double ...
   --
   --  function First_Elem ...
   --
   --  function Last_Elem ...
   --
   --  function Length ...
   --
   --  A : ...

end Constrained_Arrays;
```

Listing 2: constrained_arrays.adb

```
package body Constrained_Arrays is

   --  Create the implementation of the subprograms!
   --

end Constrained_Arrays;
```

Listing 3: main.adb

```
with Ada.Command_Line;   use Ada.Command_Line;
with Ada.Text_IO;        use Ada.Text_IO;

with Constrained_Arrays; use Constrained_Arrays;

procedure Main is
   type Test_Case_Index is
     (Range_Chk,
      Array_Range_Chk,
      A_Obj_Chk,
      Init_Chk,
      Double_Chk,
      First_Elem_Chk,
      Last_Elem_Chk,
      Length_Chk);

   procedure Check (TC : Test_Case_Index) is
      AA : My_Array;

      procedure Display (A : My_Array) is
      begin
         for I in A'Range loop
            Put_Line (Integer'Image (A (I)));
         end loop;
      end Display;

      procedure Local_Init (A : in out My_Array) is
```

(continues on next page)

(continued from previous page)

```
      begin
         A := (100, 90, 80, 10, 20, 30, 40, 60, 50, 70);
      end Local_Init;
   begin
      case TC is
      when Range_Chk =>
         for I in My_Index loop
            Put_Line (My_Index'Image (I));
         end loop;
      when Array_Range_Chk =>
         for I in My_Array'Range loop
            Put_Line (My_Index'Image (I));
         end loop;
      when A_Obj_Chk =>
         Display (A);
      when Init_Chk =>
         AA := Init;
         Display (AA);
      when Double_Chk =>
         Local_Init (AA);
         Double (AA);
         Display (AA);
      when First_Elem_Chk =>
         Local_Init (AA);
         Put_Line (Integer'Image (First_Elem (AA)));
      when Last_Elem_Chk =>
         Local_Init (AA);
         Put_Line (Integer'Image (Last_Elem (AA)));
      when Length_Chk =>
         Put_Line (Integer'Image (Length (AA)));
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

118.2 Colors: Lookup-Table

Goal: rewrite a package to represent HTML colors in RGB format using a lookup table.

Steps:

1. Implement the `Color_Types` package.
    1. Declare the array type `HTML_Color_RGB`.
    2. Declare the `To_RGB_Lookup_Table` object and initialize it.
    3. Adapt the implementation of the `To_RGB` function.

Requirements:

1. Array type `HTML_Color_RGB` is used for the table.
2. The `To_RGB_Lookup_Table` object of `HTML_Color_RGB` type contains the lookup table.

- This table must be implemented as an array of constant values.

3. The implementation of the To_RGB function must use the To_RGB_Lookup_Table object.

Remarks:

1. This exercise is based on the HTML colors exercise from a previous lab (*Records* (page 2087)).
2. In the previous implementation, you could use a **case** statement to implement the To_RGB function. Here, you must rewrite the function using a look-up table.
    1. The implementation of the To_RGB function below includes the case statement as commented-out code. You can use this as your starting point: you just need to copy it and convert the case statement to an array declaration.
    1. Don't use a case statement to implement the To_RGB function. Instead, write code that accesses To_RGB_Lookup_Table to get the correct value.
3. The following table contains the HTML colors and the corresponding value in hexadecimal form for each color element:

Color	Red	Green	Blue
Salmon	#FA	#80	#72
Firebrick	#B2	#22	#22
Red	#FF	#00	#00
Darkred	#8B	#00	#00
Lime	#00	#FF	#00
Forestgreen	#22	#8B	#22
Green	#00	#80	#00
Darkgreen	#00	#64	#00
Blue	#00	#00	#FF
Mediumblue	#00	#00	#CD
Darkblue	#00	#00	#8B

Listing 4: color_types.ads

```
1  package Color_Types is
2
3     type HTML_Color is
4       (Salmon,
5        Firebrick,
6        Red,
7        Darkred,
8        Lime,
9        Forestgreen,
10       Green,
11       Darkgreen,
12       Blue,
13       Mediumblue,
14       Darkblue);
15
16    subtype Int_Color is Integer range 0 .. 255;
17
18    type RGB is record
19       Red   : Int_Color;
20       Green : Int_Color;
21       Blue  : Int_Color;
22    end record;
23
```

(continues on next page)

(continued from previous page)

```
   function To_RGB (C : HTML_Color) return RGB;

   function Image (C : RGB) return String;

   --  Declare array type for lookup table here:
   --
   --  type HTML_Color_RGB is ...

   --  Declare lookup table here:
   --
   --  To_RGB_Lookup_Table : ...

end Color_Types;
```

Listing 5: color_types.adb

```
with Ada.Integer_Text_IO;
package body Color_Types is

   function To_RGB (C : HTML_Color) return RGB is
   begin
      --  Implement To_RGB using To_RGB_Lookup_Table
      return (0, 0, 0);

      --  Use the code below from the previous version of the To_RGB
      --  function to declare the To_RGB_Lookup_Table:
      --
      --  case C is
      --     when Salmon      => return (16#FA#, 16#80#, 16#72#);
      --     when Firebrick   => return (16#B2#, 16#22#, 16#22#);
      --     when Red         => return (16#FF#, 16#00#, 16#00#);
      --     when Darkred     => return (16#8B#, 16#00#, 16#00#);
      --     when Lime        => return (16#00#, 16#FF#, 16#00#);
      --     when Forestgreen => return (16#22#, 16#8B#, 16#22#);
      --     when Green       => return (16#00#, 16#80#, 16#00#);
      --     when Darkgreen   => return (16#00#, 16#64#, 16#00#);
      --     when Blue        => return (16#00#, 16#00#, 16#FF#);
      --     when Mediumblue  => return (16#00#, 16#00#, 16#CD#);
      --     when Darkblue    => return (16#00#, 16#00#, 16#8B#);
      --  end case;

   end To_RGB;

   function Image (C : RGB) return String is
      subtype Str_Range is Integer range 1 .. 10;
      SR : String (Str_Range);
      SG : String (Str_Range);
      SB : String (Str_Range);
   begin
      Ada.Integer_Text_IO.Put (To    => SR,
                               Item  => C.Red,
                               Base  => 16);
      Ada.Integer_Text_IO.Put (To    => SG,
                               Item  => C.Green,
                               Base  => 16);
      Ada.Integer_Text_IO.Put (To    => SB,
                               Item  => C.Blue,
                               Base  => 16);
      return ("(Red => " & SR
              & ", Green => " & SG
              & ", Blue => "  & SB
```

(continues on next page)

(continued from previous page)

```
               &")");
   end Image;

end Color_Types;
```

Listing 6: main.adb

```
with Ada.Command_Line;     use Ada.Command_Line;
with Ada.Text_IO;          use Ada.Text_IO;

with Color_Types;          use Color_Types;

procedure Main is
   type Test_Case_Index is
     (Color_Table_Chk,
      HTML_Color_To_Integer_Chk);

   procedure Check (TC : Test_Case_Index) is
   begin
      case TC is
         when Color_Table_Chk =>
            Put_Line ("Size of HTML_Color_RGB: "
                      & Integer'Image (HTML_Color_RGB'Length));
            Put_Line ("Firebrick: "
                      & Image (To_RGB_Lookup_Table (Firebrick)));
         when HTML_Color_To_Integer_Chk =>
            for I in HTML_Color'Range loop
               Put_Line (HTML_Color'Image (I) & " => "
                         & Image (To_RGB (I)) & ".");
            end loop;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

118.3 Unconstrained Array

Goal: declare an unconstrained array and implement operations on it.

Steps:

1. Implement the `Unconstrained_Arrays` package.
    1. Declare the `My_Array` type.
    2. Declare and implement the `Init` procedure.
    3. Declare and implement the `Init` function.
    4. Declare and implement the `Double` procedure.
    5. Declare and implement the `Diff_Prev_Elem` function.

Requirements:

1. `My_Array` is an unconstrained array (with a **`Positive`** range) of **`Integer`** elements.
2. Procedure `Init` initializes each element with the index starting with the last one.
   - For example, for an array of 3 elements where the index of the first element is 1 (`My_Array (1 .. 3)`), the values of these elements after a call to `Init` must be `(3, 2, 1)`.
3. Function `Init` returns an array based on the length `L` and start index `I` provided to the `Init` function.
   1. `I` indicates the index of the first element of the array.
   2. `L` indicates the length of the array.
   3. Both `I` and `L` must be positive.
   4. This is its declaration: `function Init (I, L : Positive) return My_Array;`.
   5. You must initialize the elements of the array in the same manner as for the `Init` procedure described above.
4. Procedure `Double` doubles each element of an array.
5. Function `Diff_Prev_Elem` returns — for each element of an input array `A` — an array with the difference between an element of array `A` and the previous element.
   1. For the first element, the difference must be zero.
   2. For example:
      - **INPUT**: `(2, 5, 15)`
      - **RETURN** of `Diff_Prev_Elem`: `(0, 3, 10)`, where
        - `0` is the constant difference for the first element;
        - `5 - 2 = 3` is the difference between the second and the first elements of the input array;
        - `15 - 5 = 10` is the difference between the third and the second elements of the input array.

Remarks:

1. For an array `A`, you can retrieve the index of the last element with the attribute `'Last`.
   1. For example: `Y : Positive := A'Last;`
   2. This can be useful during the implementation of procedure `Init`.
2. For the implementation of the `Init` function, you can call the `Init` procedure to initialize the elements. By doing this, you avoid code duplication.
3. Some hints about attributes:
   1. You can use the range attribute (`A'Range`) to retrieve the range of an array `A`.
   2. You can also use the range attribute in the declaration of another array (e.g.: `B : My_Array (A'Range)`).
   3. Alternatively, you can use the `A'First` and `A'Last` attributes in an array declaration.

Listing 7: unconstrained_arrays.ads

```
1  package Unconstrained_Arrays is
2
3     --  Complete the type and subprogram declarations:
```

(continues on next page)

(continued from previous page)

```
   --
   --  type My_Array is ...;
   --
   --  procedure Init ...;

   function Init (I, L : Positive) return My_Array;

   --  procedure Double ...;
   --
   --  function Diff_Prev_Elem ...;

end Unconstrained_Arrays;
```

Listing 8: unconstrained_arrays.adb

```
package body Unconstrained_Arrays is

   --  Implement the subprograms:
   --

   --  procedure Init is...

   --  function Init (L : Positive) return My_Array is...

   --  procedure Double ... is...

   --  function Diff_Prev_Elem ... is...

end Unconstrained_Arrays;
```

Listing 9: main.adb

```
with Ada.Command_Line;     use Ada.Command_Line;
with Ada.Text_IO;          use Ada.Text_IO;

with Unconstrained_Arrays; use Unconstrained_Arrays;

procedure Main is
   type Test_Case_Index is
     (Init_Chk,
      Init_Proc_Chk,
      Double_Chk,
      Diff_Prev_Chk,
      Diff_Prev_Single_Chk);

   procedure Check (TC : Test_Case_Index) is
      AA : My_Array (1 .. 5);
      AB : My_Array (5 .. 9);

      procedure Display (A : My_Array) is
      begin
         for I in A'Range loop
            Put_Line (Integer'Image (A (I)));
         end loop;
      end Display;

      procedure Local_Init (A : in out My_Array) is
      begin
         A := (1, 2, 5, 10, -10);
      end Local_Init;
```

(continues on next page)

(continued from previous page)

```
29
30    begin
31       case TC is
32       when Init_Chk =>
33          AA := Init (AA'First, AA'Length);
34          AB := Init (AB'First, AB'Length);
35          Display (AA);
36          Display (AB);
37       when Init_Proc_Chk =>
38          Init (AA);
39          Init (AB);
40          Display (AA);
41          Display (AB);
42       when Double_Chk =>
43          Local_Init (AB);
44          Double (AB);
45          Display (AB);
46       when Diff_Prev_Chk =>
47          Local_Init (AB);
48          AB := Diff_Prev_Elem (AB);
49          Display (AB);
50       when Diff_Prev_Single_Chk =>
51          declare
52             A1 : My_Array (1 .. 1) := (1 => 42);
53          begin
54             A1 := Diff_Prev_Elem (A1);
55             Display (A1);
56          end;
57       end case;
58    end Check;
59
60 begin
61    if Argument_Count < 1 then
62       Put_Line ("ERROR: missing arguments! Exiting...");
63       return;
64    elsif Argument_Count > 1 then
65       Put_Line ("Ignoring additional arguments...");
66    end if;
67
68    Check (Test_Case_Index'Value (Argument (1)));
69 end Main;
```

118.4 Product info

Goal: create a system to keep track of quantities and prices of products.

Steps:

1. Implement the `Product_Info_Pkg` package.
    1. Declare the array type `Product_Infos`.
    2. Declare the array type `Currency_Array`.
    3. Implement the `Total` procedure.
    4. Implement the `Total` function returning an array of `Currency_Array` type.
    5. Implement the `Total` function returning a single value of `Currency` type.

Requirements:

1. Quantity of an individual product is represented by the `Quantity` subtype.

2. Price of an individual product is represented by the `Currency` subtype.
3. Record type `Product_Info` deals with information for various products.
4. Array type `Product_Infos` is used to represent a list of products.
5. Array type `Currency_Array` is used to represent a list of total values of individual products (see more details below).
6. Procedure `Total` receives an input array of products.
    1. It outputs an array with the total value of each product using the `Currency_Array` type.
    2. The total value of an individual product is calculated by multiplying the quantity for this product by its price.
7. Function `Total` returns an array of `Currency_Array` type.
    1. This function has the same purpose as the procedure `Total`.
    2. The difference is that the function returns an array instead of providing this array as an output parameter.
8. The second function `Total` returns a single value of `Currency` type.
    1. This function receives an array of products.
    2. It returns a single value corresponding to the total value for all products in the system.

Remarks:

1. You can use `Currency (Q)` to convert from an element `Q` of `Quantity` type to the `Currency` type.
    1. As you might remember, Ada requires an explicit conversion in calculations where variables of both integer and floating-point types are used.
    2. In our case, the `Quantity` subtype is based on the **`Integer`** type and the `Currency` subtype is based on the **`Float`** type, so a conversion is necessary in calculations using those types.

Listing 10: product_info_pkg.ads

```
package Product_Info_Pkg is

   subtype Quantity is Natural;

   subtype Currency is Float;

   type Product_Info is record
      Units : Quantity;
      Price : Currency;
   end record;

   --  Complete the type declarations:
   --
   --  type Product_Infos is ...
   --
   --  type Currency_Array is ...

   procedure Total (P   : Product_Infos;
                    Tot : out Currency_Array);

   function Total (P : Product_Infos) return Currency_Array;

   function Total (P : Product_Infos) return Currency;
```

(continues on next page)

(continued from previous page)

```
24
25 end Product_Info_Pkg;
```

Listing 11: product_info_pkg.adb

```
1  package body Product_Info_Pkg is
2
3     --  Complete the subprogram implementations:
4     --
5
6     --  procedure Total (P   : Product_Infos;
7     --                   Tot : out Currency_Array) is ...
8
9     --  function Total (P : Product_Infos) return Currency_Array is ...
10
11    --  function Total (P : Product_Infos) return Currency is ...
12
13 end Product_Info_Pkg;
```

Listing 12: main.adb

```
1  with Ada.Command_Line;   use Ada.Command_Line;
2  with Ada.Text_IO;        use Ada.Text_IO;
3
4  with Product_Info_Pkg;   use Product_Info_Pkg;
5
6  procedure Main is
7     package Currency_IO is new Ada.Text_IO.Float_IO (Currency);
8
9     type Test_Case_Index is
10      (Total_Func_Chk,
11       Total_Proc_Chk,
12       Total_Value_Chk);
13
14    procedure Check (TC : Test_Case_Index) is
15       subtype Test_Range is Positive range 1 .. 5;
16
17       P    : Product_Infos (Test_Range);
18       Tots : Currency_Array (Test_Range);
19       Tot  : Currency;
20
21       procedure Display (Tots : Currency_Array) is
22       begin
23          for I in Tots'Range loop
24             Currency_IO.Put (Tots (I));
25             New_Line;
26          end loop;
27       end Display;
28
29       procedure Local_Init (P : in out Product_Infos) is
30       begin
31          P := ((1,   0.5),
32                (2,  10.0),
33                (5,  40.0),
34                (10, 10.0),
35                (10, 20.0));
36       end Local_Init;
37
38    begin
39       Currency_IO.Default_Fore := 1;
```

(continues on next page)

(continued from previous page)

```
      Currency_IO.Default_Aft  := 2;
      Currency_IO.Default_Exp  := 0;

      case TC is
      when Total_Func_Chk =>
         Local_Init (P);
         Tots := Total (P);
         Display (Tots);
      when Total_Proc_Chk =>
         Local_Init (P);
         Total (P, Tots);
         Display (Tots);
      when Total_Value_Chk =>
         Local_Init (P);
         Tot := Total (P);
         Currency_IO.Put (Tot);
         New_Line;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

118.5 String_10

Goal: work with constrained string types.

Steps:

1. Implement the `Strings_10` package.
    1. Declare the `String_10` type.
    2. Implement the `To_String_10` function.

Requirements:

1. The constrained string type `String_10` is an array of ten characters.
2. Function `To_String_10` returns constrained strings of `String_10` type based on an input parameter of **`String`** type.
    - For strings that are more than 10 characters, omit everything after the 11th character.
    - For strings that are fewer than 10 characters, pad the string with `' '` characters until it is 10 characters.

Remarks:

1. Declaring `String_10` as a subtype of **`String`** is the easiest way.
    - You may declare it as a new type as well. However, this requires some adaptations in the `Main` test procedure.
2. You can use **`Integer`**`'Min` to calculate the minimum of two integer values.

Listing 13: strings_10.ads

```
package Strings_10 is

   --  Complete the type and subprogram declarations:
   --

   --  subtype String_10 is ...;

   --  Using "type String_10 is..." is possible, too. However, it
   --  requires a custom Put_Line procedure that is called in Main:
   --  procedure Put_Line (S : String_10);

   --  function To_String_10 ...;

end Strings_10;
```

Listing 14: strings_10.adb

```
package body Strings_10 is

   --  Complete the subprogram declaration and implementation:
   --
   --  function To_String_10 ... is

end Strings_10;
```

Listing 15: main.adb

```
with Ada.Command_Line;   use Ada.Command_Line;
with Ada.Text_IO;        use Ada.Text_IO;

with Strings_10;         use Strings_10;

procedure Main is
   type Test_Case_Index is
     (String_10_Long_Chk,
      String_10_Short_Chk);

   procedure Check (TC : Test_Case_Index) is
      SL   : constant String := "And this is a long string just for testing...";
      SS   : constant String := "Hey!";
      S_10 : String_10;

   begin
      case TC is
      when String_10_Long_Chk =>
         S_10 := To_String_10 (SL);
         Put_Line (String (S_10));
      when String_10_Short_Chk =>
         S_10 := (others => ' ');
         S_10 := To_String_10 (SS);
         Put_Line (String (S_10));
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Ada.Text_IO.Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
```

(continues on next page)

(continued from previous page)

```
      Ada.Text_IO.Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

118.6 List of Names

Goal: create a system for a list of names and ages.

Steps:

1. Implement the `Names_Ages` package.
    1. Declare the `People_Array` array type.
    2. Complete the declaration of the `People` record type with the `People_A` element of `People_Array` type.
    3. Implement the `Add` procedure.
    4. Implement the `Reset` procedure.
    5. Implement the `Get` function.
    6. Implement the `Update` procedure.
    7. Implement the `Display` procedure.

Requirements:

1. Each person is represented by the `Person` type, which is a record containing the name and the age of that person.
2. `People_Array` is an unconstrained array of `Person` type with a positive range.
3. The `Max_People` constant is set to 10.
4. Record type `People` contains:
    1. The `People_A` element of `People_Array` type.
    2. This array must be constrained by the `Max_People` constant.
5. Procedure `Add` adds a person to the list.
    1. By default, the age of this person is set to zero in this procedure.
6. Procedure `Reset` resets the list.
7. Function `Get` retrieves the age of a person from the list.
8. Procedure `Update` updates the age of a person in the list.
9. Procedure `Display` shows the complete list using the following format:
    1. The first line must be `LIST OF NAMES:`. It is followed by the name and age of each person in the next lines.
    2. For each person on the list, the procedure must display the information in the following format:

```
NAME: XXXX
AGE: YY
```

Remarks:

1. In the implementation of procedure Add, you may use an index to indicate the last valid position in the array — see `Last_Valid` in the code below.
2. In the implementation of procedure `Display`, you should use the `Trim` function from the `Ada.Strings.Fixed` package to format the person's name — for example: `Trim (P.Name, Right)`.
3. You may need the `Integer'Min (A, B)` and the `Integer'Max (A, B)` functions to get the minimum and maximum values in a comparison between two integer values A and B.
4. Fixed-length strings can be initialized with whitespaces using the `others` syntax. For example: `S : String_10 := (others => ' ');`
5. You may implement additional subprograms to deal with other types declared in the `Names_Ages` package below, such as the `Name_Type` and the `Person` type.
    1. For example, a function `To_Name_Type` to convert from `String` to `Name_Type` might be useful.
    2. Take a moment to reflect on which additional subprograms could be useful as well.

Listing 16: names_ages.ads

```
package Names_Ages is

   Max_People : constant Positive := 10;

   subtype Name_Type is String (1 .. 50);

   type Age_Type is new Natural;

   type Person is record
      Name  : Name_Type;
      Age   : Age_Type;
   end record;

   --  Add type declaration for People_Array record:
   --
   --  type People_Array is ...;

   --  Replace type declaration for People record. You may use the
   --  following template:
   --
   --  type People is record
   --     People_A   : People_Array ...;
   --     Last_Valid : Natural;
   --  end record;
   --
   type People is null record;

   procedure Reset (P : in out People);

   procedure Add (P    : in out People;
                  Name : String);

   function Get (P    : People;
                 Name : String) return Age_Type;

   procedure Update (P    : in out People;
                     Name : String;
                     Age  : Age_Type);

   procedure Display (P : People);
```

(continues on next page)

(continued from previous page)

```
41
42 end Names_Ages;
```

Listing 17: names_ages.adb

```
1  with Ada.Text_IO;       use Ada.Text_IO;
2  with Ada.Strings;       use Ada.Strings;
3  with Ada.Strings.Fixed; use Ada.Strings.Fixed;
4
5  package body Names_Ages is
6
7     procedure Reset (P : in out People) is
8     begin
9        null;
10    end Reset;
11
12    procedure Add (P    : in out People;
13                   Name :        String) is
14    begin
15       null;
16    end Add;
17
18    function Get (P    : People;
19                  Name : String) return Age_Type is
20    begin
21       return 0;
22    end Get;
23
24    procedure Update (P    : in out People;
25                      Name :        String;
26                      Age  :        Age_Type) is
27    begin
28       null;
29    end Update;
30
31    procedure Display (P : People) is
32    begin
33       null;
34    end Display;
35
36 end Names_Ages;
```

Listing 18: main.adb

```
1  with Ada.Command_Line;   use Ada.Command_Line;
2  with Ada.Text_IO;        use Ada.Text_IO;
3
4  with Names_Ages;         use Names_Ages;
5
6  procedure Main is
7     type Test_Case_Index is
8       (Names_Ages_Chk,
9        Get_Age_Chk);
10
11    procedure Check (TC : Test_Case_Index) is
12       P : People;
13    begin
14       case TC is
15       when Names_Ages_Chk =>
16          Reset (P);
```

(continues on next page)

(continued from previous page)

```
17          Add (P, "John");
18          Add (P, "Patricia");
19          Add (P, "Josh");
20          Display (P);
21          Update (P, "John",     18);
22          Update (P, "Patricia", 35);
23          Update (P, "Josh",     53);
24          Display (P);
25       when Get_Age_Chk =>
26          Reset (P);
27          Add (P, "Peter");
28          Update (P, "Peter", 45);
29          Put_Line ("Peter is "
30                    & Age_Type'Image (Get (P, "Peter"))
31                    & " years old.");
32       end case;
33    end Check;
34
35 begin
36    if Argument_Count < 1 then
37       Ada.Text_IO.Put_Line ("ERROR: missing arguments! Exiting...");
38       return;
39    elsif Argument_Count > 1 then
40       Ada.Text_IO.Put_Line ("Ignoring additional arguments...");
41    end if;
42
43    Check (Test_Case_Index'Value (Argument (1)));
44 end Main;
```

CHAPTER

NINE

MORE ABOUT TYPES

119.1 Aggregate Initialization

Goal: initialize records and arrays using aggregates.

Steps:

1. Implement the `Aggregates` package.
    1. Create the record type Rec.
    2. Create the array type `Int_Arr`.
    3. Implement the `Init` procedure that outputs a record of Rec type.
    4. Implement the `Init_Some` procedure.
    5. Implement the `Init` procedure that outputs an array of `Int_Arr` type.

Requirements:

1. Record type Rec has four components of **`Integer`** type. These are the components with the corresponding default values:
    - `W` = 10
    - `X` = 11
    - `Y` = 12
    - `Z` = 13
2. Array type `Int_Arr` has 20 elements of **`Integer`** type (with indices ranging from 1 to 20).
3. The first `Init` procedure outputs a record of Rec type where:
    1. `X` is initialized with 100,
    2. `Y` is initialized with 200, and
    3. the remaining elements use their default values.
4. Procedure `Init_Some` outputs an array of `Int_Arr` type where:
    1. the first five elements are initialized with the value 99, and
    2. the remaining elements are initialized with the value 100.
5. The second `Init` procedure outputs an array of `Int_Arr` type where:
    1. all elements are initialized with the value 5.

Listing 1: aggregates.ads

```
package Aggregates is

   --  type Rec is ...;

   --  type Int_Arr is ...;

   procedure Init;

   --  procedure Init_Some ...;

   --  procedure Init ...;

end Aggregates;
```

Listing 2: aggregates.adb

```
package body Aggregates is

   procedure Init is null;

end Aggregates;
```

Listing 3: main.adb

```
with Ada.Command_Line;  use Ada.Command_Line;
with Ada.Text_IO;       use Ada.Text_IO;

with Aggregates;        use Aggregates;

procedure Main is
   --  Remark: the following line is not relevant.
   F   : array (1 .. 10) of Float := (others => 42.42)
     with Unreferenced;

   type Test_Case_Index is
     (Default_Rec_Chk,
      Init_Rec_Chk,
      Init_Some_Arr_Chk,
      Init_Arr_Chk);

   procedure Check (TC : Test_Case_Index) is
      A : Int_Arr;
      R : Rec;
      DR : constant Rec := (others => <>);
   begin
      case TC is
         when Default_Rec_Chk =>
            R := DR;
            Put_Line ("Record Default:");
            Put_Line ("W => " & Integer'Image (R.W));
            Put_Line ("X => " & Integer'Image (R.X));
            Put_Line ("Y => " & Integer'Image (R.Y));
            Put_Line ("Z => " & Integer'Image (R.Z));
         when Init_Rec_Chk =>
            Init (R);
            Put_Line ("Record Init:");
            Put_Line ("W => " & Integer'Image (R.W));
            Put_Line ("X => " & Integer'Image (R.X));
            Put_Line ("Y => " & Integer'Image (R.Y));
            Put_Line ("Z => " & Integer'Image (R.Z));
```

(continues on next page)

(continued from previous page)

```
         when Init_Some_Arr_Chk =>
            Init_Some (A);
            Put_Line ("Array Init_Some:");
            for I in A'Range loop
               Put_Line (Integer'Image (I) & " "
                         & Integer'Image (A (I)));
            end loop;
         when Init_Arr_Chk =>
            Init (A);
            Put_Line ("Array Init:");
            for I in A'Range loop
               Put_Line (Integer'Image (I) & " "
                         & Integer'Image (A (I)));
            end loop;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

119.2 Versioning

Goal: implement a simple package for source-code versioning.

Steps:

1. Implement the `Versioning` package.
    1. Declare the record type `Version`.
    2. Implement the `Convert` function that returns a string.
    3. Implement the `Convert` function that returns a floating-point number.

Requirements:

1. Record type `Version` has the following components of **`Natural`** type:
    1. `Major`,
    2. `Minor`, and
    3. `Maintenance`.
2. The first `Convert` function returns a string containing the version number.
3. The second `Convert` function returns a floating-point value.
    1. For this floating-point value:
        1. the number before the decimal point must correspond to the major number, and
        2. the number after the decimal point must correspond to the minor number.
        3. the maintenance number is ignored.
    2. For example, version "1.3.5" is converted to the floating-point value `1.3`.

3. An obvious limitation of this function is that it can only handle one-digit numbers for the minor component.
   - For example, we cannot convert version "1.10.0" to a reasonable value with the approach described above. The result of the call `Convert ((1, 10, 0))` is therefore unspecified.
   - For the scope of this exercise, only version numbers with one-digit components are checked.

Remarks:

1. We use overloading for the `Convert` functions.
2. For the function `Convert` that returns a string, you can make use of the `Image_Trim` function, as indicated in the source-code below — see package body of `Versioning`.

Listing 4: versioning.ads

```
package Versioning is

   --  type Version is record...

   --  function Convert ...

   --  function Convert

end Versioning;
```

Listing 5: versioning.adb

```
with Ada.Strings; use Ada.Strings;
with Ada.Strings.Fixed; use Ada.Strings.Fixed;

package body Versioning is

   function Image_Trim (N : Natural) return String is
      S_N : constant String := Trim (Natural'Image (N), Left);
   begin
      return S_N;
   end Image_Trim;

   --  function Convert ...
   --     S_Major : constant String := Image_Trim (V.Major);
   --     S_Minor : constant String := Image_Trim (V.Minor);
   --     S_Maint : constant String := Image_Trim (V.Maintenance);
   --  begin
   --  end Convert;

   --  function Convert ...
   --  begin
   --  end Convert;

end Versioning;
```

Listing 6: main.adb

```
with Ada.Command_Line;  use Ada.Command_Line;
with Ada.Text_IO;       use Ada.Text_IO;

with Versioning;        use Versioning;

procedure Main is
```

(continues on next page)

(continued from previous page)

```
   type Test_Case_Index is
     (Ver_String_Chk,
      Ver_Float_Chk);

   procedure Check (TC : Test_Case_Index) is
      V : constant Version := (1, 3, 23);
   begin
      case TC is
         when Ver_String_Chk =>
            Put_Line (Convert (V));
         when Ver_Float_Chk =>
            Put_Line (Float'Image (Convert (V)));
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

119.3 Simple todo list

Goal: implement a simple to-do list system.

Steps:

1. Implement the `Todo_Lists` package.
    1. Declare the `Todo_Item` type.
    2. Declare the `Todo_List` type.
    3. Implement the `Add` procedure.
    4. Implement the `Display` procedure.

Requirements:

1. `Todo_Item` type is used to store a to-do item.
    1. It should be implemented as an access type to strings.
2. `Todo_Items` type is an array of to-do items.
    1. It should be implemented as an unconstrained array with positive range.
3. `Todo_List` type is the container for all to-do items.
    1. This record type must have a discriminant for the maximum number of elements of the list.
    2. In order to store the to-do items, it must contain a component named `Items` of `Todo_Items` type.
    3. Don't forget to keep track of the last element added to the list!
        - You should declare a `Last` component in the record.
4. Procedure `Add` adds items (of `Todo_Item` type) to the list (of `Todo_List` type).

    1. This requires allocating a string for the access type.
    2. An item can only be added to the list if the list isn't full yet — see next point for details on error handling.
5. Since the number of items that can be stored on the list is limited, the list might eventually become full in a call to Add.
    1. You must write code in the implementation of the Add procedure that verifies this condition.
    2. If the procedure detects that the list is full, it must display the following message: "ERROR: list is full!".
6. Procedure Display is used to display all to-do items.
    1. The header (first line) must be TO-DO LIST.
    2. It must display one item per line.

Remarks:

1. We use access types and unconstrained arrays in the implementation of the Todo_Lists package.

Listing 7: todo_lists.ads

```
package Todo_Lists is

   --  Replace by actual type declaration
   type Todo_Item is null record;

   --  Replace by actual type declaration
   type Todo_Items is null record;

   --  Replace by actual type declaration
   type Todo_List is null record;

   procedure Add (Todos : in out Todo_List;
                  Item  : String);

   procedure Display (Todos : Todo_List);

end Todo_Lists;
```

Listing 8: todo_lists.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Todo_Lists is

   procedure Add (Todos : in out Todo_List;
                  Item  : String) is
   begin
      Put_Line ("ERROR: list is full!");
   end Add;

   procedure Display (Todos : Todo_List) is
   begin
      null;
   end Display;

end Todo_Lists;
```

Listing 9: main.adb

```
with Ada.Command_Line;  use Ada.Command_Line;
with Ada.Text_IO;       use Ada.Text_IO;

with Todo_Lists;        use Todo_Lists;

procedure Main is
   type Test_Case_Index is
     (Todo_List_Chk);

   procedure Check (TC : Test_Case_Index) is
      T : Todo_List (10);
   begin
      case TC is
         when Todo_List_Chk =>
            Add (T, "Buy milk");
            Add (T, "Buy tea");
            Add (T, "Buy present");
            Add (T, "Buy tickets");
            Add (T, "Pay electricity bill");
            Add (T, "Schedule dentist appointment");
            Add (T, "Call sister");
            Add (T, "Revise spreasheet");
            Add (T, "Edit entry page");
            Add (T, "Select new design");
            Add (T, "Create upgrade plan");
            Display (T);
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

119.4 Price list

Goal: implement a list containing prices

Steps:

1. Implement the `Price_Lists` package.
    1. Declare the `Price_Type` type.
    2. Declare the `Price_List` record.
    3. Implement the `Reset` procedure.
    4. Implement the `Add` procedure.
    5. Implement the `Get` function.
    6. Implement the `Display` procedure.

Requirements:

1. `Price_Type` is a decimal fixed-point data type with a delta of two digits (e.g. `0.01`) and twelve digits in total.
2. `Price_List` is a record type that contains the price list.
    1. This record type must have a discriminant for the maximum number of elements of the list.
3. Procedure `Reset` resets the list.
4. Procedure `Add` adds a price to the list.
    1. You should keep track of the last element added to the list.
5. Function `Get` retrieves a price from the list using an index.
    1. This function returns a record instance of `Price_Result` type.
    2. `Price_Result` is a variant record containing:
        1. the Boolean component `Ok`, and
        2. the component `Price` (of `Price_Type`).
    3. The returned value of `Price_Result` type is one of the following:
        1. If the index specified in a call to `Get` contains a valid (initialized) price, then
            - `Ok` is set to **`True`**, and
            - the `Price` component contains the price for that index.
        2. Otherwise:
            - `Ok` is set to **`False`**, and
            - the `Price` component is not available.
6. Procedure `Display` shows all prices from the list.
    1. The header (first line) must be `PRICE LIST`.
    2. The remaining lines contain one price per line.
    3. For example:
        - For the following code:

```
procedure Test is
   L : Price_List (10);
begin
   Reset (L);
   Add (L, 1.45);
   Add (L, 2.37);
   Display (L);
end Test;
```

        - The output is:

```
PRICE LIST
 1.45
 2.37
```

Remarks:

1. To implement the package, you'll use the following features of the Ada language:
    1. decimal fixed-point types;
    2. records with discriminants;
    3. dynamically-sized record types;

4. variant records.

2. For record type `Price_List`, you may use an unconstrained array as a component of the record and use the discriminant in the component declaration.

Listing 10: price_lists.ads

```
package Price_Lists is

   --  Replace by actual type declaration
   type Price_Type is new Float;

   --  Replace by actual type declaration
   type Price_List is null record;

   --  Replace by actual type declaration
   type Price_Result is null record;

   procedure Reset (Prices : in out Price_List);

   procedure Add (Prices : in out Price_List;
                  Item   : Price_Type);

   function Get (Prices : Price_List;
                 Idx    : Positive) return Price_Result;

   procedure Display (Prices : Price_List);

end Price_Lists;
```

Listing 11: price_lists.adb

```
package body Price_Lists is

   procedure Reset (Prices : in out Price_List) is
   begin
      null;
   end Reset;

   procedure Add (Prices : in out Price_List;
                  Item   : Price_Type) is
   begin
      null;
   end Add;

   function Get (Prices : Price_List;
                 Idx    : Positive) return Price_Result is
   begin
      null;
   end Get;

   procedure Display (Prices : Price_List) is
   begin
      null;
   end Display;

end Price_Lists;
```

Listing 12: main.adb

```
with Ada.Command_Line;  use Ada.Command_Line;
with Ada.Text_IO;       use Ada.Text_IO;
```

(continues on next page)

(continued from previous page)

```
3
4  with Price_Lists;       use Price_Lists;
5
6  procedure Main is
7     type Test_Case_Index is
8       (Price_Type_Chk,
9        Price_List_Chk,
10       Price_List_Get_Chk);
11
12    procedure Check (TC : Test_Case_Index) is
13       L : Price_List (10);
14
15       procedure Local_Init_List is
16       begin
17          Reset (L);
18          Add (L, 1.45);
19          Add (L, 2.37);
20          Add (L, 3.21);
21          Add (L, 4.14);
22          Add (L, 5.22);
23          Add (L, 6.69);
24          Add (L, 7.77);
25          Add (L, 8.14);
26          Add (L, 9.99);
27          Add (L, 10.01);
28       end Local_Init_List;
29
30       procedure Get_Display (Idx : Positive) is
31          R : constant Price_Result := Get (L, Idx);
32       begin
33          Put_Line ("Attempt Get # " & Positive'Image (Idx));
34          if R.Ok then
35             Put_Line ("Element # " & Positive'Image (Idx)
36                       & " => "     & Price_Type'Image (R.Price));
37          else
38             declare
39             begin
40                Put_Line ("Element # " & Positive'Image (Idx)
41                          & " => "     & Price_Type'Image (R.Price));
42             exception
43                when others =>
44                   Put_Line ("Element not available (as expected)");
45             end;
46          end if;
47
48       end Get_Display;
49
50    begin
51       case TC is
52          when Price_Type_Chk =>
53             Put_Line ("The delta    value of Price_Type is "
54                       & Price_Type'Image (Price_Type'Delta) & ";");
55             Put_Line ("The minimum  value of Price_Type is "
56                       & Price_Type'Image (Price_Type'First) & ";");
57             Put_Line ("The maximum  value of Price_Type is "
58                       & Price_Type'Image (Price_Type'Last)  & ";");
59          when Price_List_Chk =>
60             Local_Init_List;
61             Display (L);
62          when Price_List_Get_Chk =>
63             Local_Init_List;
```

(continues on next page)

(continued from previous page)

```
            Get_Display (5);
            Get_Display (40);
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

PRIVACY

120.1 Directions

Goal: create a package that handles directions and geometric angles using a previous implementation.

Steps:

1. Fix the implementation of the `Test_Directions` procedure.

Requirements:

1. The implementation of the `Test_Directions` procedure must compile correctly.

Remarks:

1. This exercise is based on the *Directions* exercise from the *Records* (page 2087) labs.
    1. In this version, however, `Ext_Angle` is a private type.
2. In the implementation of the `Test_Directions` procedure below, the Ada developer tried to initialize `All_Directions` — an array of `Ext_Angle` type — with aggregates.
    1. Since we now have a private type, the compiler complains about this initialization.
3. To fix the implementation of the `Test_Directions` procedure, you should use the appropriate function from the `Directions` package.
4. The initialization of `All_Directions` in the code below contains a consistency error where the angle doesn't match the assessed direction.
    1. See if you can spot this error!
    2. This kind of errors can happen when record components that have correlated information are initialized individually without consistency checks — using private types helps to avoid the problem by requiring initialization routines that can enforce consistency.

Listing 1: directions.ads

```
1  package Directions is
2
3     type Angle_Mod is mod 360;
4
5     type Direction is
6       (North,
7        Northwest,
8        West,
9        Southwest,
10       South,
11       Southeast,
12       East);
13
14    function To_Direction (N : Angle_Mod) return Direction;
15
```

(continues on next page)

(continued from previous page)

```
   type Ext_Angle is private;

   function To_Ext_Angle (N : Angle_Mod) return Ext_Angle;

   procedure Display (N : Ext_Angle);

private

   type Ext_Angle is record
      Angle_Elem     : Angle_Mod;
      Direction_Elem : Direction;
   end record;

end Directions;
```

Listing 2: directions.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Directions is

   procedure Display (N : Ext_Angle) is
   begin
      Put_Line ("Angle: "
                & Angle_Mod'Image (N.Angle_Elem)
                & " => "
                & Direction'Image (N.Direction_Elem)
                & ".");
   end Display;

   function To_Direction (N : Angle_Mod) return Direction is
   begin
      case N is
         when   0        => return East;
         when   1 ..  89 => return Northwest;
         when  90        => return North;
         when  91 .. 179 => return Northwest;
         when 180        => return West;
         when 181 .. 269 => return Southwest;
         when 270        => return South;
         when 271 .. 359 => return Southeast;
      end case;
   end To_Direction;

   function To_Ext_Angle (N : Angle_Mod) return Ext_Angle is
   begin
      return (Angle_Elem     => N,
              Direction_Elem => To_Direction (N));
   end To_Ext_Angle;

end Directions;
```

Listing 3: test_directions.adb

```
with Directions; use Directions;

procedure Test_Directions is
   type Ext_Angle_Array is array (Positive range <>) of Ext_Angle;

   All_Directions : constant Ext_Angle_Array (1 .. 6)
```

(continues on next page)

(continued from previous page)

```
     := ((0,   East),
         (45,  Northwest),
         (90,  North),
         (91,  North),
         (180, West),
         (270, South));

begin
   for I in All_Directions'Range loop
      Display (All_Directions (I));
   end loop;

end Test_Directions;
```

Listing 4: main.adb

```
with Ada.Command_Line;  use Ada.Command_Line;
with Ada.Text_IO;       use Ada.Text_IO;

with Test_Directions;

procedure Main is
     type Test_Case_Index is
     (Direction_Chk);

   procedure Check (TC : Test_Case_Index) is
   begin
      case TC is
      when Direction_Chk =>
         Test_Directions;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

120.2 Limited Strings

Goal: work with `limited private` types.

Steps:

1. Implement the `Limited_Strings` package.
    1. Implement the `Copy` function.
    2. Implement the `=` operator.

Requirements:

1. For both `Copy` and `=`, the two parameters may refer to strings with different lengths. We'll limit the implementation to just take the minimum length:

1. In case of copying the string "Hello World" to a string with 5 characters, the copied string is "Hello":

```
   S1 : constant Lim_String := Init ("Hello World");
   S2 :          Lim_String := Init (5);
begin
   Copy (From => S1, To => S2);
   Put_Line (S2);     --  This displays "Hello".
```

2. When comparing "Hello World" to "Hello", the = operator indicates that these strings are equivalent:

```
   S1 : constant Lim_String := Init ("Hello World");
   S2 : constant Lim_String := Init ("Hello");
begin
   if S1 = S2 then
      --  True => This branch gets selected.
```

2. When copying from a short string to a longer string, the remaining characters of the longer string must be initialized with underscores (_). For example:

```
   S1 : constant Lim_String := Init ("Hello");
   S2 :          Lim_String := Init (10);
begin
   Copy (From => S1, To => S2);
   Put_Line (S2);     --  This displays "Hello_____".
```

Remarks:

1. As we've discussed in the course:
    1. Variables of limited types have the following limitations:
        - they cannot be assigned to;
        - they don't have an equality operator (=).
    2. We can, however, define our own, custom subprograms to circumvent these limitations:
        - In order to copy instances of a limited type, we can define a custom `Copy` procedure.
        - In order to compare instances of a limited type, we can define an = operator.
2. You can use the `Min_Last` constant — which is already declared in the implementation of these subprograms — in the code you write.
3. Some details about the `Limited_Strings` package:
    1. The `Lim_String` type acts as a container for strings.
        1. In the the private part, `Lim_String` is declared as an access type to a **`String`**.
    2. There are two versions of the `Init` function that initializes an object of `Lim_String` type:
        1. The first one takes another string.
        2. The second one receives the number of characters for a string *container*.
    3. Procedure `Put_Line` displays object of `Lim_String` type.
    4. The design and implementation of the `Limited_Strings` package is very simplistic.
        1. A good design would have better handling of access types, for example.

Listing 5: limited_strings.ads

```
package Limited_Strings is

   type Lim_String is limited private;

   function Init (S : String) return Lim_String;

   function Init (Max : Positive) return Lim_String;

   procedure Put_Line (LS : Lim_String);

   procedure Copy (From :        Lim_String;
                   To   : in out Lim_String);

   function "=" (Ref, Dut : Lim_String) return Boolean;

private

   type Lim_String is access String;

end Limited_Strings;
```

Listing 6: limited_strings.adb

```
with Ada.Text_IO;

package body Limited_Strings
is

   function Init (S : String) return Lim_String is
      LS : constant Lim_String := new String'(S);
   begin
      return Ls;
   end Init;

   function Init (Max : Positive) return Lim_String is
      LS : constant Lim_String := new String (1 .. Max);
   begin
      LS.all := (others => '_');
      return LS;
   end Init;

   procedure Put_Line (LS : Lim_String) is
   begin
      Ada.Text_IO.Put_Line (LS.all);
   end Put_Line;

   function Get_Min_Last (A, B : Lim_String) return Positive is
   begin
      return Positive'Min (A'Last, B'Last);
   end Get_Min_Last;

   procedure Copy (From :        Lim_String;
                   To   : in out Lim_String) is
      Min_Last : constant Positive := Get_Min_Last (From, To);
   begin
      --  Complete the implementation!
      null;
   end;

```

(continues on next page)

(continued from previous page)

```
   function "=" (Ref, Dut : Lim_String) return Boolean is
      Min_Last : constant Positive := Get_Min_Last (Ref, Dut);
   begin
      --  Complete the implementation!
      return True;
   end;

end Limited_Strings;
```

Listing 7: check_lim_string.adb

```
with Ada.Text_IO;     use Ada.Text_IO;

with Limited_Strings; use Limited_Strings;

procedure Check_Lim_String is
   S  : constant String := "----------";
   S1 : constant Lim_String := Init ("Hello World");
   S2 : constant Lim_String := Init (30);
   S3 : Lim_String := Init (5);
   S4 : Lim_String := Init (S & S & S);
begin
   Put ("S1 => ");
   Put_Line (S1);
   Put ("S2 => ");
   Put_Line (S2);

   if S1 = S2 then
      Put_Line ("S1 is equal to S2.");
   else
      Put_Line ("S1 isn't equal to S2.");
   end if;

   Copy (From => S1, To => S3);
   Put ("S3 => ");
   Put_Line (S3);

   if S1 = S3 then
      Put_Line ("S1 is equal to S3.");
   else
      Put_Line ("S1 isn't equal to S3.");
   end if;

   Copy (From => S1, To => S4);
   Put ("S4 => ");
   Put_Line (S4);

   if S1 = S4 then
      Put_Line ("S1 is equal to S4.");
   else
      Put_Line ("S1 isn't equal to S4.");
   end if;
end Check_Lim_String;
```

Listing 8: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Check_Lim_String;
```

(continues on next page)

(continued from previous page)

```
5
6  procedure Main is
7     type Test_Case_Index is
8       (Lim_String_Chk);
9
10    procedure Check (TC : Test_Case_Index) is
11    begin
12       case TC is
13       when Lim_String_Chk =>
14          Check_Lim_String;
15       end case;
16    end Check;
17
18 begin
19    if Argument_Count < 1 then
20       Put_Line ("ERROR: missing arguments! Exiting...");
21       return;
22    elsif Argument_Count > 1 then
23       Put_Line ("Ignoring additional arguments...");
24    end if;
25
26    Check (Test_Case_Index'Value (Argument (1)));
27 end Main;
```

120.3 Bonus exercise

In previous labs, we had many source-code snippets containing records that could be declared private. The source-code for the exercise above (*Directions*) is an example: we've modified the type declaration of `Ext_Angle`, so that the record is now private. Encapsulating the record components — by declaring record components in the private part — makes the code safer. Also, because many of the code snippets weren't making use of record components directly (but handling record types via the API instead), they continue to work fine after these modifications.

This exercise doesn't contain any source-code. In fact, the **goal** here is to modify previous labs, so that the record declarations are made private. You can look into those labs, modify the type declarations, and recompile the code. The corresponding test-cases must still pass.

If no other changes are needed apart from changes in the declaration, then that indicates we have used good programming techniques in the original code. On the other hand, if further changes are needed, then you should investigate why this is the case.

Also note that, in some cases, you can move support types into the private part of the specification without affecting its compilation. This is the case, for example, for the `People_Array` type of the *List of Names* lab mentioned below. You should, in fact, keep only relevant types and subprograms in the public part and move all support declarations to the private part of the specification whenever possible.

Below, you find the selected labs that you can work on, including changes that you should make. In case you don't have a working version of the source-code of previous labs, you can look into the corresponding solutions.

120.3.1 Colors

Chapter: *Records* (page 2087)

Steps:

1. Change declaration of RGB type to **`private`**.

Requirements:

1. Implementation must compile correctly and test cases must pass.

120.3.2 List of Names

Chapter: *Arrays* (page 2097)

Steps:

1. Change declaration of `Person` and `People` types to **`limited private`**.
2. Move type declaration of `People_Array` to private part.

Requirements:

1. Implementation must compile correctly and test cases must pass.

120.3.3 Price List

Chapter: *More About Types* (page 2115)

Steps:

1. Change declaration of `Price_List` type to **`limited private`**.

Requirements:

1. Implementation must compile correctly and test cases must pass.

CHAPTER

ONE

GENERICS

121.1 Display Array

Goal: create a generic procedure that displays the elements of an array.

Steps:

1. Implement the generic procedure `Display_Array`.

Requirements:

1. Generic procedure `Display_Array` displays the elements of an array.
    1. It uses the following scheme:
        - First, it displays a header.
        - Then, it displays the elements of the array.
    2. When displaying the elements, it must:
        - use one line per element, and
        - include the corresponding index of the array.
    3. This is the expected format:

        ```
        <HEADER>
        <index #1>: <element #1>
        <index #2>: <element #2>
        ...
        ```

    4. For example:
        - For the following code:

            ```
            procedure Test is
               A : Int_Array (1 .. 2) := (1, 5);
            begin
               Display_Int_Array ("Elements of A", A);;
            end Test;
            ```

        - The output is:

            ```
            Elements of A
             1:  1
             2:  5
            ```

2. These are the formal parameters of the procedure:
    1. a range type `T_Range` for the the array;
    2. a formal type `T_Element` for the elements of the array;

- This type must be declared in such a way that it can be mapped to any type in the instantiation — including record types.

3. an array type T_Array using the T_Range and T_Element types;
4. a function Image that converts a variable of T_Element type to a **String**.

Listing 1: display_array.ads

```
generic
procedure Display_Array (Header : String;
                         A      : T_Array);
```

Listing 2: display_array.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Display_Array (Header : String;
                         A      : T_Array) is
begin
   null;
end Display_Array;
```

Listing 3: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Display_Array;

procedure Main is
   type Test_Case_Index is (Int_Array_Chk,
                            Point_Array_Chk);

   procedure Test_Int_Array is
      type Int_Array is array (Positive range <>) of Integer;

      procedure Display_Int_Array is new
        Display_Array (T_Range => Positive,
                       T_Element => Integer,
                       T_Array   => Int_Array,
                       Image     => Integer'Image);

      A : constant Int_Array (1 .. 5) := (1, 2, 5, 7, 10);
   begin
      Display_Int_Array ("Integers", A);
   end Test_Int_Array;

   procedure Test_Point_Array is
      type Point is record
         X : Float;
         Y : Float;
      end record;

      type Point_Array is array (Natural range <>) of Point;

      function Image (P : Point) return String is
      begin
         return "(" & Float'Image (P.X)
           & ", " & Float'Image (P.Y) & ")";
      end Image;

```

(continues on next page)

(continued from previous page)

```
      procedure Display_Point_Array is new
        Display_Array (T_Range   => Natural,
                       T_Element => Point,
                       T_Array   => Point_Array,
                       Image     => Image);

      A : constant Point_Array (0 .. 3) := ((1.0, 0.5), (2.0, -0.5),
                                            (5.0, 2.0), (-0.5, 2.0));
   begin
      Display_Point_Array ("Points", A);
   end Test_Point_Array;

   procedure Check (TC : Test_Case_Index) is
   begin
      case TC is
         when Int_Array_Chk =>
            Test_Int_Array;
         when Point_Array_Chk =>
            Test_Point_Array;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

121.2 Average of Array of Float

Goal: create a generic function that calculates the average of an array of floating-point elements.

Steps:

1. Declare and implement the generic function `Average`.

Requirements:

1. Generic function `Average` calculates the average of an array containing floating-point values of arbitrary precision.
2. Generic function `Average` must contain the following formal parameters:
    1. a range type `T_Range` for the array;
    2. a formal type `T_Element` that can be mapped to floating-point types of arbitrary precision;
    3. an array type `T_Array` using `T_Range` and `T_Element`;

Remarks:

1. You should use the `Float` type for the accumulator.

Listing 4: average.ads

```
generic
function Average (A : T_Array) return T_Element;
```

Listing 5: average.adb

```
function Average (A : T_Array) return T_Element is
begin
   return 0.0;
end Average;
```

Listing 6: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Average;

procedure Main is
   type Test_Case_Index is (Float_Array_Chk,
                            Digits_7_Float_Array_Chk);

   procedure Test_Float_Array is
      type Float_Array is array (Positive range <>) of Float;

      function Average_Float is new
        Average (T_Range   => Positive,
                 T_Element => Float,
                 T_Array   => Float_Array);

      A : constant Float_Array (1 .. 5) := (1.0, 3.0, 5.0, 7.5, -12.5);
   begin
      Put_Line ("Average: " & Float'Image (Average_Float (A)));
   end Test_Float_Array;

   procedure Test_Digits_7_Float_Array is
      type Custom_Float is digits 7 range 0.0 .. 1.0;

      type Float_Array is
        array (Integer range <>) of Custom_Float;

      function Average_Float is new
        Average (T_Range   => Integer,
                 T_Element => Custom_Float,
                 T_Array   => Float_Array);

      A : constant Float_Array (-1 .. 3) := (0.5, 0.0, 1.0, 0.6, 0.5);
   begin
      Put_Line ("Average: "
                & Custom_Float'Image (Average_Float (A)));
   end Test_Digits_7_Float_Array;

   procedure Check (TC : Test_Case_Index) is
   begin
      case TC is
         when Float_Array_Chk =>
            Test_Float_Array;
         when Digits_7_Float_Array_Chk =>
            Test_Digits_7_Float_Array;
      end case;
```

(continues on next page)

(continued from previous page)

```
48    end Check;
49
50 begin
51    if Argument_Count < 1 then
52       Put_Line ("ERROR: missing arguments! Exiting...");
53       return;
54    elsif Argument_Count > 1 then
55       Put_Line ("Ignoring additional arguments...");
56    end if;
57
58    Check (Test_Case_Index'Value (Argument (1)));
59 end Main;
```

121.3 Average of Array of Any Type

Goal: create a generic function that calculates the average of an array of elements of any arbitrary type.

Steps:

1. Declare and implement the generic function `Average`.
2. Implement the test procedure `Test_Item`.
    1. Declare the `F_IO` package.
    2. Implement the `Get_Total` function for the `Item` type.
    3. Implement the `Get_Price` function for the `Item` type.
    4. Declare the `Average_Total` function.
    5. Declare the `Average_Price` function.

Requirements:

1. Generic function `Average` calculates the average of an array containing elements of any arbitrary type.
2. Generic function `Average` has the same formal parameters as in the previous exercise, except for:
    1. `T_Element`, which is now a formal type that can be mapped to any arbitrary type.
    2. `To_Float`, which is an *additional* formal parameter.
        - `To_Float` is a function that converts the arbitrary element of `T_Element` type to the **`Float`** type.
3. Procedure `Test_Item` is used to test the generic `Average` procedure for a record type (`Item`).
    1. Record type `Item` contains the `Quantity` and `Price` components.
4. The following functions have to implemented to be used for the formal `To_Float` function parameter:
    1. For the `Decimal` type, the function is pretty straightforward: it simply returns the floating-point value converted from the decimal type.
    2. For the `Item` type, two functions must be created to convert to floating-point type:
        1. `Get_Total`, which returns the multiplication of the quantity and the price components of the `Item` type;
        2. `Get_Price`, which returns just the price.

5. The generic function Average must be instantiated as follows:
    1. For the Item type, you must:
        1. declare the Average_Total function (as an instance of Average) using the Get_Total for the To_Float parameter;
        2. declare the Average_Price function (as an instance of Average) using the Get_Price for the To_Float parameter.
6. You must use the Put procedure from Ada.Text_IO.Float_IO.
    1. The generic standard package Ada.Text_IO.Float_IO must be instantiated as F_IO in the test procedures.
    2. This is the specification of the Put procedure, as described in the appendix A.10.9 of the Ada Reference Manual:

```
procedure Put(Item : in Num;
              Fore : in Field := Default_Fore;
              Aft  : in Field := Default_Aft;
              Exp  : in Field := Default_Exp);
```

    3. This is the expected format when calling Put from Float_IO:

Function	Fore	Aft	Exp
Test_Item	3	2	0

Remarks:

1. In this exercise, you'll abstract the Average function from the previous exercises a step further.
    1. In this case, the function shall be able to calculate the average of any arbitrary type — including arrays containing elements of record types.
    2. Since record types can be composed by many components of different types, we need to provide a way to indicate which component (or components) of the record will be used when calculating the average of the array.
    3. This problem is solved by specifying a To_Float function as a formal parameter, which converts the arbitrary element of T_Element type to the **Float** type.
    4. In the implementation of the Average function, we use the To_Float function and calculate the average using a floating-point variable.

Listing 7: average.ads

```
generic
function Average (A : T_Array) return Float;
```

Listing 8: average.adb

```
function Average (A : T_Array) return Float is
begin
   null;
end Average;
```

Listing 9: test_item.ads

```
procedure Test_Item;
```

Listing 10: test_item.adb

```
with Ada.Text_IO;      use Ada.Text_IO;

with Average;

procedure Test_Item is
   type Amount is delta 0.01 digits 12;

   type Item is record
      Quantity : Natural;
      Price    : Amount;
   end record;

   type Item_Array is
     array (Positive range <>) of Item;

   A : constant Item_Array (1 .. 4)
     := ((Quantity =>  5,   Price => 10.00),
         (Quantity => 80,   Price =>  2.50),
         (Quantity => 40,   Price =>  5.00),
         (Quantity => 20,   Price => 12.50));

begin
   Put ("Average per item & quantity: ");
   F_IO.Put (Average_Total (A));
   New_Line;

   Put ("Average price:               ");
   F_IO.Put (Average_Price (A));
   New_Line;
end Test_Item;
```

Listing 11: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Test_Item;

procedure Main is
   type Test_Case_Index is (Item_Array_Chk);

   procedure Check (TC : Test_Case_Index) is
   begin
      case TC is
         when Item_Array_Chk =>
            Test_Item;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

121.4 Generic list

Goal: create a system based on a generic list to add and displays elements.

Steps:

1. Declare and implement the generic package `Gen_List`.
    1. Implement the `Init` procedure.
    2. Implement the `Add` procedure.
    3. Implement the `Display` procedure.

Requirements:

1. Generic package `Gen_List` must have the following subprograms:
    1. Procedure `Init` initializes the list.
    2. Procedure `Add` adds an item to the list.
        1. This procedure must contain a `Status` output parameter that is set to **`False`** when the list was full — i.e. if the procedure failed while trying to add the item;
    3. Procedure `Display` displays the complete list.
        1. This includes the *name* of the list and its elements — using one line per element.
        2. This is the expected format:

```
<NAME>
<element #1>
<element #2>
...
```

2. Generic package `Gen_List` has these formal parameters:
    1. an arbitrary formal type `Item`;
    2. an unconstrained array type `Items` of `Item` element with positive range;
    3. the `Name` parameter containing the name of the list;
        - This must be a formal input object of **`String`** type.
        - It must be used in the `Display` procedure.
    4. an actual array `List_Array` to store the list;
        - This must be a formal **`in out`** object of `Items` type.
    5. the variable `Last` to store the index of the last element;
        - This must be a formal **`in out`** object of **`Natural`** type.
    6. a procedure `Put` for the `Item` type.
        - This procedure is used in the `Display` procedure to display individual elements of the list.
3. The test procedure `Test_Int` is used to test a list of elements of **`Integer`** type.
4. For both test procedures, you must:
    1. add missing type declarations;
    2. declare and implement a `Put` procedure for individual elements of the list;
    3. declare instances of the `Gen_List` package.
        - For the `Test_Int` procedure, declare the `Int_List` package.

Remarks:

1. In previous labs, you've been implementing lists for a variety of types.
   - The *List of Names* exercise from the *Arrays* (page 2097) labs is an example.
   - In this exercise, you have to abstract those implementations to create the generic `Gen_List` package.

Listing 12: gen_list.ads

```
generic
package Gen_List is

   procedure Init;

   procedure Add (I      :     Item;
                  Status : out Boolean);

   procedure Display;

end Gen_List;
```

Listing 13: gen_list.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Gen_List is

   procedure Init is
   begin
      null;
   end Init;

   procedure Add (I      :     Item;
                  Status : out Boolean) is
   begin
      null;
   end Add;

   procedure Display is
   begin
      null;
   end Display;

end Gen_List;
```

Listing 14: test_int.ads

```
procedure Test_Int;
```

Listing 15: test_int.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Gen_List;

procedure Test_Int is

   type Integer_Array is array (Positive range <>) of Integer;

   A : Integer_Array (1 .. 3);
```

(continues on next page)

(continued from previous page)

```
   L : Natural;

   Success : Boolean;

   procedure Display_Add_Success (Success : Boolean) is
   begin
      if Success then
         Put_Line ("Added item successfully!");
      else
         Put_Line ("Couldn't add item!");
      end if;

   end Display_Add_Success;

begin
   Int_List.Init;

   Int_List.Add (2, Success);
   Display_Add_Success (Success);

   Int_List.Add (5, Success);
   Display_Add_Success (Success);

   Int_List.Add (7, Success);
   Display_Add_Success (Success);

   Int_List.Add (8, Success);
   Display_Add_Success (Success);

   Int_List.Display;
end Test_Int;
```

Listing 16: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Test_Int;

procedure Main is
   type Test_Case_Index is (Int_Chk);

   procedure Check (TC : Test_Case_Index) is
   begin
      case TC is
         when Int_Chk =>
            Test_Int;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

CHAPTER

TWO

EXCEPTIONS

122.1 Uninitialized Value

Goal: implement an enumeration to avoid the use of uninitialized values.

Steps:

1. Implement the `Options` package.
    1. Declare the `Option` enumeration type.
    2. Declare the `Uninitialized_Value` exception.
    3. Implement the `Image` function.

Requirements:

1. Enumeration `Option` contains:
    1. the `Uninitialized` value, and
    2. the actual options:
        - `Option_1`,
        - `Option_2`,
        - `Option_3`.
2. Function `Image` returns a string for the `Option` type.
    1. In case the argument to `Image` is `Uninitialized`, the function must raise the `Uninitialized_Value` exception.

Remarks:

1. In this exercise, we employ exceptions as a mechanism to avoid the use of uninitialized values for a certain type.

Listing 1: options.ads

```
package Options is

   --  Declare the Option enumeration type!
   type Option is null record;

   function Image (O : Option) return String;

end Options;
```

Listing 2: options.adb

```
package body Options is

   function Image (O : Option) return String is
   begin
      return "";
   end Image;

end Options;
```

Listing 3: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;
with Ada.Exceptions;   use Ada.Exceptions;

with Options;          use Options;

procedure Main is
   type Test_Case_Index is
     (Options_Chk);

   procedure Check (TC : Test_Case_Index) is

      procedure Check (O : Option) is
      begin
         Put_Line (Image (O));
      exception
         when E : Uninitialized_Value =>
            Put_Line (Exception_Message (E));
      end Check;

   begin
      case TC is
      when Options_Chk =>
         for O in Option loop
            Check (O);
         end loop;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

122.2 Numerical Exception

Goal: handle numerical exceptions in a test procedure.

Steps:

1. Add exception handling to the `Check_Exception` procedure.

Requirements:

1. The test procedure `Num_Exception_Test` from the `Tests` package below must be used in the implementation of `Check_Exception`.
2. The `Check_Exception` procedure must be extended to handle exceptions as follows:
    1. If the exception raised by `Num_Exception_Test` is `Constraint_Error`, the procedure must display the message "Constraint_Error detected!" to the user.
    2. Otherwise, it must display the message associated with the exception.

Remarks:

1. You can use the `Exception_Message` function to retrieve the message associated with an exception.

Listing 4: tests.ads

```
package Tests is

   type Test_ID is (Test_1, Test_2);

   Custom_Exception : exception;

   procedure Num_Exception_Test (ID : Test_ID);

end Tests;
```

Listing 5: tests.adb

```
package body Tests is

   pragma Warnings (Off, "variable ""C"" is assigned but never read");

   procedure Num_Exception_Test (ID : Test_ID) is
      A, B, C : Integer;
   begin
      case ID is
         when Test_1 =>
            A := Integer'Last;
            B := Integer'Last;
            C := A + B;
         when Test_2 =>
            raise Custom_Exception with "Custom_Exception raised!";
      end case;
   end Num_Exception_Test;

   pragma Warnings (On, "variable ""C"" is assigned but never read");

end Tests;
```

Listing 6: check_exception.adb

```
with Tests; use Tests;

procedure Check_Exception (ID : Test_ID) is
begin
   Num_Exception_Test (ID);
end Check_Exception;
```

Listing 7: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;
```

(continues on next page)

(continued from previous page)

```
with Ada.Exceptions;   use Ada.Exceptions;

with Tests;            use Tests;
with Check_Exception;

procedure Main is
   type Test_Case_Index is
     (Exception_1_Chk,
      Exception_2_Chk);

   procedure Check (TC : Test_Case_Index) is

      procedure Check_Handle_Exception (ID : Test_ID) is
      begin
         Check_Exception (ID);
      exception
         when Constraint_Error =>
            Put_Line ("Constraint_Error"
                      & " (raised by Check_Exception) detected!");
         when E : others =>
            Put_Line (Exception_Name (E)
                      & " (raised by Check_Exception) detected!");
      end Check_Handle_Exception;

   begin
      case TC is
      when Exception_1_Chk =>
         Check_Handle_Exception (Test_1);
      when Exception_2_Chk =>
         Check_Handle_Exception (Test_2);
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

122.3 Re-raising Exceptions

Goal: make use of exception re-raising in a test procedure.

Steps:

1. Declare new exception: `Another_Exception`.
2. Add exception re-raise to the `Check_Exception` procedure.

Requirements:

1. Exception `Another_Exception` must be declared in the `Tests` package.
2. Procedure `Check_Exception` must be extended to *re-raise* any exception. When an exception is detected, the procedure must:
    1. display a user message (as implemented in the previous exercise), and then

2. Raise or *re-raise* exception depending on the exception that is being handled:
    1. In case of `Constraint_Error` exception, *re-raise* the exception.
    2. In all other cases, raise `Another_Exception`.

Remarks:

1. In this exercise, you should extend the implementation of the `Check_Exception` procedure from the previous exercise.
    1. Naturally, you can use the code for the `Check_Exception` procedure from the previous exercise as a starting point.

Listing 8: tests.ads

```
package Tests is

   type Test_ID is (Test_1, Test_2);

   Custom_Exception : exception;

   procedure Num_Exception_Test (ID : Test_ID);

end Tests;
```

Listing 9: tests.adb

```
package body Tests is

   pragma Warnings (Off, "variable ""C"" is assigned but never read");

   procedure Num_Exception_Test (ID : Test_ID) is
      A, B, C : Integer;
   begin
      case ID is
         when Test_1 =>
            A := Integer'Last;
            B := Integer'Last;
            C := A + B;
         when Test_2 =>
            raise Custom_Exception with "Custom_Exception raised!";
      end case;
   end Num_Exception_Test;

   pragma Warnings (On, "variable ""C"" is assigned but never read");

end Tests;
```

Listing 10: check_exception.ads

```
with Tests; use Tests;

procedure Check_Exception (ID : Test_ID);
```

Listing 11: check_exception.adb

```
procedure Check_Exception (ID : Test_ID) is
begin
   Num_Exception_Test (ID);
end Check_Exception;
```

Listing 12: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;
with Ada.Exceptions;   use Ada.Exceptions;

with Tests;            use Tests;
with Check_Exception;

procedure Main is
   type Test_Case_Index is
     (Exception_1_Chk,
      Exception_2_Chk);

   procedure Check (TC : Test_Case_Index) is

      procedure Check_Handle_Exception (ID : Test_ID) is
      begin
         Check_Exception (ID);
      exception
         when Constraint_Error =>
            Put_Line ("Constraint_Error"
                      & " (raised by Check_Exception) detected!");
         when E : others =>
            Put_Line (Exception_Name (E)
                      & " (raised by Check_Exception) detected!");
      end Check_Handle_Exception;

   begin
      case TC is
      when Exception_1_Chk =>
         Check_Handle_Exception (Test_1);
      when Exception_2_Chk =>
         Check_Handle_Exception (Test_2);
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

CHAPTER

THREE

TASKING

123.1 Display Service

Goal: create a simple service that displays messages to the user.

Steps:

1. Implement the `Display_Services` package.
    1. Declare the task type `Display_Service`.
    2. Implement the `Display` entry for strings.
    3. Implement the `Display` entry for integers.

Requirements:

1. Task type `Display_Service` uses the `Display` entry to display messages to the user.
2. There are two versions of the `Display` entry:
    1. One that receives messages as a string parameter.
    2. One that receives messages as an **`Integer`** parameter.
3. When a message is received via a `Display` entry, it must be displayed immediately to the user.

Listing 1: display_services.ads

```
package Display_Services is

end Display_Services;
```

Listing 2: display_services.adb

```
package body Display_Services is

end Display_Services;
```

Listing 3: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Display_Services; use Display_Services;

procedure Main is
   type Test_Case_Index is (Display_Service_Chk);

   procedure Check (TC : Test_Case_Index) is
      Display : Display_Service;
```

(continues on next page)

(continued from previous page)

```
   begin
      case TC is
         when Display_Service_Chk =>
            Display.Display ("Hello");
            delay 0.5;
            Display.Display ("Hello again");
            delay 0.5;
            Display.Display (55);
            delay 0.5;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

123.2 Event Manager

Goal: implement a simple event manager.

Steps:

1. Implement the `Event_Managers` package.
    1. Declare the task type `Event_Manager`.
    2. Implement the `Start` entry.
    3. Implement the `Event` entry.

Requirements:

1. The event manager has a similar behavior as an alarm
    1. The sole purpose of this event manager is to display the event ID at the correct time.
    2. After the event ID is displayed, the task must finish.
2. The event manager (`Event_Manager` type) must have two entries:
    1. `Start`, which starts the event manager with an event ID;
    2. `Event`, which delays the task until a certain time and then displays the event ID as a user message.
3. The format of the user message displayed by the event manager is `Event #<event_id>`.
    1. You should use `Natural'Image` to display the ID (as indicated in the body of the `Event_Managers` package below).

Remarks:

1. In the `Start` entry, you can use the **`Natural`** type for the ID.
2. In the `Event` entry, you should use the `Time` type from the `Ada.Real_Time` package for the time parameter.

3. Note that the test application below creates an array of event managers with different delays.

Listing 4: event_managers.ads

```
package Event_Managers is

end Event_Managers;
```

Listing 5: event_managers.adb

```
package body Event_Managers is

      --   Don't forget to display the event ID:
      --
      --   Put_Line ("Event #" & Natural'Image (Event_ID));

end Event_Managers;
```

Listing 6: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Event_Managers;   use Event_Managers;
with Ada.Real_Time;    use Ada.Real_Time;

procedure Main is
   type Test_Case_Index is (Event_Manager_Chk);

   procedure Check (TC : Test_Case_Index) is
      Ev_Mng : array (1 .. 5) of Event_Manager;
   begin
      case TC is
         when Event_Manager_Chk =>
            for I in Ev_Mng'Range loop
               Ev_Mng (I).Start (I);
            end loop;
            Ev_Mng (1).Event (Clock + Seconds (5));
            Ev_Mng (2).Event (Clock + Seconds (3));
            Ev_Mng (3).Event (Clock + Seconds (1));
            Ev_Mng (4).Event (Clock + Seconds (2));
            Ev_Mng (5).Event (Clock + Seconds (4));
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

123.3 Generic Protected Queue

Goal: create a queue container using a protected type.

Steps:

1. Implement the generic package `Gen_Queues`.
    1. Declare the protected type `Queue`.
    2. Implement the `Empty` function.
    3. Implement the `Full` function.
    4. Implement the `Push` entry.
    5. Implement the `Pop` entry.

Requirements:

1. These are the formal parameters for the generic package `Gen_Queues`:
    1. a formal modular type;
        - This modular type should be used by the `Queue` to declare an array that stores the elements of the queue.
        - The modulus of the modular type must correspond to the maximum number of elements of the queue.
    2. the data type of the elements of the queue.
        - Select a formal parameter that allows you to store elements of any data type in the queue.
2. These are the operations of the `Queue` type:
    1. Function `Empty` indicates whether the queue is empty.
    2. Function `Full` indicates whether the queue is full.
    3. Entry `Push` stores an element in the queue.
    4. Entry `Pop` removes an element from the queue and returns the element via output parameter.

Remarks:

1. In this exercise, we create a queue container by declaring and implementing a protected type (`Queue`) as part of a generic package (`Gen_Queues`).
2. As a bonus exercise, you can analyze the body of the `Queue_Tests` package and understand how the `Queue` type is used there.
    1. In particular, the procedure `Concurrent_Test` implements two tasks: `T_Producer` and `T_Consumer`. They make use of the queue concurrently.

Listing 7: gen_queues.ads

```
1 package Gen_Queues is
2
3 end Gen_Queues;
```

Listing 8: gen_queues.adb

```
1 package body Gen_Queues is
2
3 end Gen_Queues;
```

Listing 9: queue_tests.ads

```
package Queue_Tests is

   procedure Simple_Test;

   procedure Concurrent_Test;

end Queue_Tests;
```

Listing 10: queue_tests.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Gen_Queues;

package body Queue_Tests is

   Max : constant := 10;
   type Queue_Mod is mod Max;

   procedure Simple_Test is
      package Queues_Float is new Gen_Queues (Queue_Mod, Float);

      Q_F : Queues_Float.Queue;
      V   : Float;
   begin
      V := 10.0;
      while not Q_F.Full loop
         Q_F.Push (V);
         V := V + 1.5;
      end loop;

      while not Q_F.Empty loop
         Q_F.Pop (V);
         Put_Line ("Value from queue: " & Float'Image (V));
      end loop;
   end Simple_Test;

   procedure Concurrent_Test is
      package Queues_Integer is new Gen_Queues (Queue_Mod, Integer);

      Q_I : Queues_Integer.Queue;

      task T_Producer;
      task T_Consumer;

      task body T_Producer is
         V : Integer := 100;
      begin
         for I in 1 .. 2 * Max loop
            Q_I.Push (V);
            V := V + 1;
         end loop;
      end T_Producer;

      task body T_Consumer is
         V : Integer;
      begin
         delay 1.5;

```

(continues on next page)

(continued from previous page)

```
         while not Q_I.Empty loop
            Q_I.Pop (V);
            Put_Line ("Value from queue: " & Integer'Image (V));
            delay 0.2;
         end loop;
      end T_Consumer;
   begin
      null;
   end Concurrent_Test;

end Queue_Tests;
```

Listing 11: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Queue_Tests;      use Queue_Tests;

procedure Main is
   type Test_Case_Index is (Simple_Queue_Chk,
                            Concurrent_Queue_Chk);

   procedure Check (TC : Test_Case_Index) is

   begin
      case TC is
         when Simple_Queue_Chk =>
            Simple_Test;
         when Concurrent_Queue_Chk =>
            Concurrent_Test;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

CHAPTER

FOUR

DESIGN BY CONTRACTS

124.1 Price Range

Goal: use predicates to indicate the correct range of prices.

Steps:

1. Complete the `Prices` package.
    1. Rewrite the type declaration of `Price`.

Requirements:

1. Type `Price` must use a predicate instead of a range.

Remarks:

1. As discussed in the course, ranges are a form of contract.
    1. For example, the subtype `Price` below indicates that a value of this subtype must always be positive:

        ```
        subtype Price is Amount range 0.0 .. Amount'Last;
        ```

    2. Interestingly, you can replace ranges by predicates, which is the goal of this exercise.

Listing 1: prices.ads

```
package Prices is

   type Amount is delta 10.0 ** (-2) digits 12;

   subtype Price is Amount range 0.0 .. Amount'Last;

end Prices;
```

Listing 2: main.adb

```
with Ada.Command_Line;  use Ada.Command_Line;
with Ada.Text_IO;       use Ada.Text_IO;
with System.Assertions; use System.Assertions;

with Prices;            use Prices;

procedure Main is

   type Test_Case_Index is
     (Price_Range_Chk);

   procedure Check (TC : Test_Case_Index) is
```

(continues on next page)

(continued from previous page)

```
13
14       procedure Check_Range (A : Amount) is
15          P : constant Price := A;
16       begin
17          Put_Line ("Price: " & Price'Image (P));
18       end Check_Range;
19
20    begin
21       case TC is
22       when Price_Range_Chk =>
23          Check_Range (-2.0);
24       end case;
25    exception
26       when Constraint_Error =>
27          Put_Line ("Constraint_Error detected (NOT as expected).");
28       when Assert_Failure =>
29          Put_Line ("Assert_Failure detected (as expected).");
30    end Check;
31
32 begin
33    if Argument_Count < 1 then
34       Put_Line ("ERROR: missing arguments! Exiting...");
35       return;
36    elsif Argument_Count > 1 then
37       Put_Line ("Ignoring additional arguments...");
38    end if;
39
40    Check (Test_Case_Index'Value (Argument (1)));
41 end Main;
```

124.2 Pythagorean Theorem: Predicate

Goal: use the Pythagorean theorem as a predicate.

Steps:

1. Complete the `Triangles` package.
    1. Add a predicate to the `Right_Triangle` type.

Requirements:

1. The `Right_Triangle` type must use the Pythagorean theorem as a predicate to ensure that its components are consistent.

Remarks:

1. As you probably remember, the Pythagoras' theorem[569] states that the square of the hypotenuse of a right triangle is equal to the sum of the squares of the other two sides.

Listing 3: triangles.ads

```
1  package Triangles is
2
3     subtype Length is Integer;
4
5     type Right_Triangle is record
6        H      : Length := 0;
7        --  Hypotenuse
8        C1, C2 : Length := 0;
```

(continues on next page)

[569] https://en.wikipedia.org/wiki/Pythagorean_theorem

(continued from previous page)

```
      --  Catheti / legs
   end record;

   function Init (H, C1, C2 : Length) return Right_Triangle is
     ((H, C1, C2));

end Triangles;
```

Listing 4: triangles-io.ads

```
package Triangles.IO is

   function Image (T : Right_Triangle) return String;

end Triangles.IO;
```

Listing 5: triangles-io.adb

```
package body Triangles.IO is

   function Image (T : Right_Triangle) return String is
     ("("    & Length'Image (T.H)
      & ", " & Length'Image (T.C1)
      & ", " & Length'Image (T.C2)
      & ")");

end Triangles.IO;
```

Listing 6: main.adb

```
with Ada.Command_Line;  use Ada.Command_Line;
with Ada.Text_IO;       use Ada.Text_IO;
with System.Assertions; use System.Assertions;

with Triangles;         use Triangles;
with Triangles.IO;      use Triangles.IO;

procedure Main is

   type Test_Case_Index is
     (Triangle_8_6_Pass_Chk,
      Triangle_8_6_Fail_Chk,
      Triangle_10_24_Pass_Chk,
      Triangle_10_24_Fail_Chk,
      Triangle_18_24_Pass_Chk,
      Triangle_18_24_Fail_Chk);

   procedure Check (TC : Test_Case_Index) is

      procedure Check_Triangle (H, C1, C2 : Length) is
         T : Right_Triangle;
      begin
         T := Init (H, C1, C2);
         Put_Line (Image (T));
      exception
         when Constraint_Error =>
            Put_Line ("Constraint_Error detected (NOT as expected).");
         when Assert_Failure =>
            Put_Line ("Assert_Failure detected (as expected).");
      end Check_Triangle;
```

(continues on next page)

(continued from previous page)

```
31
32    begin
33       case TC is
34          when Triangle_8_6_Pass_Chk   => Check_Triangle (10,  8,  6);
35          when Triangle_8_6_Fail_Chk   => Check_Triangle (12,  8,  6);
36          when Triangle_10_24_Pass_Chk => Check_Triangle (26, 10, 24);
37          when Triangle_10_24_Fail_Chk => Check_Triangle (12, 10, 24);
38          when Triangle_18_24_Pass_Chk => Check_Triangle (30, 18, 24);
39          when Triangle_18_24_Fail_Chk => Check_Triangle (32, 18, 24);
40       end case;
41    end Check;
42
43 begin
44    if Argument_Count < 1 then
45       Put_Line ("ERROR: missing arguments! Exiting...");
46       return;
47    elsif Argument_Count > 1 then
48       Put_Line ("Ignoring additional arguments...");
49    end if;
50
51    Check (Test_Case_Index'Value (Argument (1)));
52 end Main;
```

124.3 Pythagorean Theorem: Precondition

Goal: use the Pythagorean theorem as a precondition.

Steps:

1. Complete the `Triangles` package.
    1. Add a precondition to the `Init` function.

Requirements:

1. The `Init` function must use the Pythagorean theorem as a precondition to ensure that the input values are consistent.

Remarks:

1. In this exercise, you'll work again with the `Right_Triangle` type.
    1. This time, your job is to use a precondition instead of a predicate.
    2. The precondition is applied to the `Init` function, not to the `Right_Triangle` type.

Listing 7: triangles.ads

```
1  package Triangles is
2
3     subtype Length is Integer;
4
5     type Right_Triangle is record
6        H      : Length := 0;
7        --  Hypotenuse
8        C1, C2 : Length := 0;
9        --  Catheti / legs
10    end record;
11
12    function Init (H, C1, C2 : Length) return Right_Triangle is
13      ((H, C1, C2));
14
15 end Triangles;
```

Listing 8: triangles-io.ads

```
package Triangles.IO is

   function Image (T : Right_Triangle) return String;

end Triangles.IO;
```

Listing 9: triangles-io.adb

```
package body Triangles.IO is

   function Image (T : Right_Triangle) return String is
     ("("    & Length'Image (T.H)
      & ", " & Length'Image (T.C1)
      & ", " & Length'Image (T.C2)
      & ")");

end Triangles.IO;
```

Listing 10: main.adb

```
with Ada.Command_Line;  use Ada.Command_Line;
with Ada.Text_IO;       use Ada.Text_IO;
with System.Assertions; use System.Assertions;

with Triangles;         use Triangles;
with Triangles.IO;      use Triangles.IO;

procedure Main is

   type Test_Case_Index is
     (Triangle_8_6_Pass_Chk,
      Triangle_8_6_Fail_Chk,
      Triangle_10_24_Pass_Chk,
      Triangle_10_24_Fail_Chk,
      Triangle_18_24_Pass_Chk,
      Triangle_18_24_Fail_Chk);

   procedure Check (TC : Test_Case_Index) is

      procedure Check_Triangle (H, C1, C2 : Length) is
         T : Right_Triangle;
      begin
         T := Init (H, C1, C2);
         Put_Line (Image (T));
      exception
         when Constraint_Error =>
            Put_Line ("Constraint_Error detected (NOT as expected).");
         when Assert_Failure =>
            Put_Line ("Assert_Failure detected (as expected).");
      end Check_Triangle;

   begin
      case TC is
         when Triangle_8_6_Pass_Chk   => Check_Triangle (10,  8,  6);
         when Triangle_8_6_Fail_Chk   => Check_Triangle (12,  8,  6);
         when Triangle_10_24_Pass_Chk => Check_Triangle (26, 10, 24);
         when Triangle_10_24_Fail_Chk => Check_Triangle (12, 10, 24);
         when Triangle_18_24_Pass_Chk => Check_Triangle (30, 18, 24);
         when Triangle_18_24_Fail_Chk => Check_Triangle (32, 18, 24);
```

(continues on next page)

(continued from previous page)

```
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

124.4 Pythagorean Theorem: Postcondition

Goal: use the Pythagorean theorem as a postcondition.

Steps:

1. Complete the `Triangles` package.
    1. Add a postcondition to the `Init` function.

Requirements:

1. The `Init` function must use the Pythagorean theorem as a postcondition to ensure that the returned object is consistent.

Remarks:

1. In this exercise, you'll work again with the `Triangles` package.
    1. This time, your job is to apply a postcondition instead of a precondition to the `Init` function.

Listing 11: triangles.ads

```
package Triangles is

   subtype Length is Integer;

   type Right_Triangle is record
      H      : Length := 0;
      --  Hypotenuse
      C1, C2 : Length := 0;
      --  Catheti / legs
   end record;

   function Init (H, C1, C2 : Length) return Right_Triangle is
     ((H, C1, C2));

end Triangles;
```

Listing 12: triangles-io.ads

```
package Triangles.IO is

   function Image (T : Right_Triangle) return String;

end Triangles.IO;
```

Listing 13: triangles-io.adb

```
package body Triangles.IO is

   function Image (T : Right_Triangle) return String is
     ("("    & Length'Image (T.H)
      & ", " & Length'Image (T.C1)
      & ", " & Length'Image (T.C2)
      & ")");

end Triangles.IO;
```

Listing 14: main.adb

```
with Ada.Command_Line;  use Ada.Command_Line;
with Ada.Text_IO;       use Ada.Text_IO;
with System.Assertions; use System.Assertions;

with Triangles;         use Triangles;
with Triangles.IO;      use Triangles.IO;

procedure Main is

   type Test_Case_Index is
     (Triangle_8_6_Pass_Chk,
      Triangle_8_6_Fail_Chk,
      Triangle_10_24_Pass_Chk,
      Triangle_10_24_Fail_Chk,
      Triangle_18_24_Pass_Chk,
      Triangle_18_24_Fail_Chk);

   procedure Check (TC : Test_Case_Index) is

      procedure Check_Triangle (H, C1, C2 : Length) is
         T : Right_Triangle;
      begin
         T := Init (H, C1, C2);
         Put_Line (Image (T));
      exception
         when Constraint_Error =>
            Put_Line ("Constraint_Error detected (NOT as expected).");
         when Assert_Failure =>
            Put_Line ("Assert_Failure detected (as expected).");
      end Check_Triangle;

   begin
      case TC is
         when Triangle_8_6_Pass_Chk   => Check_Triangle (10,  8,  6);
         when Triangle_8_6_Fail_Chk   => Check_Triangle (12,  8,  6);
         when Triangle_10_24_Pass_Chk => Check_Triangle (26, 10, 24);
         when Triangle_10_24_Fail_Chk => Check_Triangle (12, 10, 24);
         when Triangle_18_24_Pass_Chk => Check_Triangle (30, 18, 24);
         when Triangle_18_24_Fail_Chk => Check_Triangle (32, 18, 24);
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
```

(continues on next page)

(continued from previous page)

```
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

124.5 Pythagorean Theorem: Type Invariant

Goal: use the Pythagorean theorem as a type invariant.

Steps:

1. Complete the `Triangles` package.
    1. Add a type invariant to the `Right_Triangle` type.

Requirements:

1. `Right_Triangle` is a private type.
    1. It must use the Pythagorean theorem as a type invariant to ensure that its encapsulated components are consistent.

Remarks:

1. In this exercise, `Right_Triangle` is declared as a private type.
    1. In this case, we use a type invariant for `Right_Triangle` to check the Pythagorean theorem.
2. As a bonus, after completing the exercise, you may analyze the effect that default values have on type invariants.
    1. For example, the declaration of `Right_Triangle` uses zero as the default values of the three triangle lengths.
    2. If you replace those default values with `Length'Last`, you'll get different results.
    3. Make sure you understand why this is happening.

Listing 15: triangles.ads

```
package Triangles is

   subtype Length is Integer;

   type Right_Triangle is private;

   function Init (H, C1, C2 : Length) return Right_Triangle;

private

   type Right_Triangle is record
      H      : Length := 0;
      --  Hypotenuse
      C1, C2 : Length := 0;
      --  Catheti / legs
   end record;

   function Init (H, C1, C2 : Length) return Right_Triangle is
     ((H, C1, C2));

end Triangles;
```

Listing 16: triangles-io.ads

```
package Triangles.IO is

   function Image (T : Right_Triangle) return String;

end Triangles.IO;
```

Listing 17: triangles-io.adb

```
package body Triangles.IO is

   function Image (T : Right_Triangle) return String is
     ("("    & Length'Image (T.H)
      & ", " & Length'Image (T.C1)
      & ", " & Length'Image (T.C2)
      & ")");

end Triangles.IO;
```

Listing 18: main.adb

```
with Ada.Command_Line;  use Ada.Command_Line;
with Ada.Text_IO;       use Ada.Text_IO;
with System.Assertions; use System.Assertions;

with Triangles;         use Triangles;
with Triangles.IO;      use Triangles.IO;

procedure Main is

   type Test_Case_Index is
     (Triangle_8_6_Pass_Chk,
      Triangle_8_6_Fail_Chk,
      Triangle_10_24_Pass_Chk,
      Triangle_10_24_Fail_Chk,
      Triangle_18_24_Pass_Chk,
      Triangle_18_24_Fail_Chk);

   procedure Check (TC : Test_Case_Index) is

      procedure Check_Triangle (H, C1, C2 : Length) is
         T : Right_Triangle;
      begin
         T := Init (H, C1, C2);
         Put_Line (Image (T));
      exception
         when Constraint_Error =>
            Put_Line ("Constraint_Error detected (NOT as expected).");
         when Assert_Failure =>
            Put_Line ("Assert_Failure detected (as expected).");
      end Check_Triangle;

   begin
      case TC is
         when Triangle_8_6_Pass_Chk   => Check_Triangle (10,  8,  6);
         when Triangle_8_6_Fail_Chk   => Check_Triangle (12,  8,  6);
         when Triangle_10_24_Pass_Chk => Check_Triangle (26, 10, 24);
         when Triangle_10_24_Fail_Chk => Check_Triangle (12, 10, 24);
         when Triangle_18_24_Pass_Chk => Check_Triangle (30, 18, 24);
         when Triangle_18_24_Fail_Chk => Check_Triangle (32, 18, 24);
```

(continues on next page)

(continued from previous page)

```
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

124.6 Primary Color

Goal: extend a package for HTML colors so that it can handle primary colors.

Steps:

1. Complete the `Color_Types` package.
    1. Declare the `HTML_RGB_Color` subtype.
    2. Implement the `To_Int_Color` function.

Requirements:

1. The `HTML_Color` type is an enumeration that contains a list of HTML colors.
2. The `To_RGB_Lookup_Table` array implements a lookup-table to convert the colors into a hexadecimal value using RGB color components (i.e. `Red`, `Green` and `Blue`)
3. Function `To_Int_Color` extracts one of the RGB components of an HTML color and returns its hexadecimal value.
    1. The function has two parameters:
        - First parameter is the HTML color (`HTML_Color` type).
        - Second parameter indicates which RGB component is to be extracted from the HTML color (`HTML_RGB_Color` subtype).
    2. For example, if we call `To_Int_Color (Salmon, Red)`, the function returns `#FA`,
        - This is the hexadecimal value of the red component of the `Salmon` color.
        - You can find further remarks below about this color as an example.
4. The `HTML_RGB_Color` subtype is limited to the primary RGB colors components (i.e. `Red`, `Green` and `Blue`).
    1. This subtype is used to select the RGB component in calls to `To_Int_Color`.
    2. You must use a predicate in the type declaration.

Remarks:

1. In this exercise, we reuse the code of the `Colors: Lookup-Table` exercise from the *Arrays* (page 2097) labs.
2. These are the hexadecimal values of the colors that we used in the original exercise:

Color	Value
Salmon	#FA8072
Firebrick	#B22222
Red	#FF0000
Darkred	#8B0000
Lime	#00FF00
Forestgreen	#228B22
Green	#008000
Darkgreen	#006400
Blue	#0000FF
Mediumblue	#0000CD
Darkblue	#00008B

3. You can extract the hexadecimal value of each primary color by splitting the values from the table above into three hexadecimal values with two digits each.
   - For example, the hexadecimal value of `Salmon` is `#FA8072`, where:
     - the first part of this hexadecimal value (`#FA`) corresponds to the red component,
     - the second part (`#80`) corresponds to the green component, and
     - the last part (`#72`) corresponds to the blue component.

Listing 19: color_types.ads

```
package Color_Types is

   type HTML_Color is
     (Salmon,
      Firebrick,
      Red,
      Darkred,
      Lime,
      Forestgreen,
      Green,
      Darkgreen,
      Blue,
      Mediumblue,
      Darkblue);

   subtype Int_Color is Integer range 0 .. 255;

   function Image (I : Int_Color) return String;

   type RGB is record
      Red   : Int_Color;
      Green : Int_Color;
      Blue  : Int_Color;
   end record;

   function To_RGB (C : HTML_Color) return RGB;

   function Image (C : RGB) return String;

   type HTML_Color_RGB_Array is array (HTML_Color) of RGB;

   To_RGB_Lookup_Table : constant HTML_Color_RGB_Array
     := (Salmon      => (16#FA#, 16#80#, 16#72#),
```

(continues on next page)

(continued from previous page)

```
         Firebrick   => (16#B2#, 16#22#, 16#22#),
         Red         => (16#FF#, 16#00#, 16#00#),
         Darkred     => (16#8B#, 16#00#, 16#00#),
         Lime        => (16#00#, 16#FF#, 16#00#),
         Forestgreen => (16#22#, 16#8B#, 16#22#),
         Green       => (16#00#, 16#80#, 16#00#),
         Darkgreen   => (16#00#, 16#64#, 16#00#),
         Blue        => (16#00#, 16#00#, 16#FF#),
         Mediumblue  => (16#00#, 16#00#, 16#CD#),
         Darkblue    => (16#00#, 16#00#, 16#8B#));

   subtype HTML_RGB_Color is HTML_Color;

   function To_Int_Color (C : HTML_Color;
                          S : HTML_RGB_Color) return Int_Color;
   --  Convert to hexadecimal value for the selected RGB component S

end Color_Types;
```

Listing 20: color_types.adb

```
with Ada.Integer_Text_IO;

package body Color_Types is

   function To_RGB (C : HTML_Color) return RGB is
   begin
      return To_RGB_Lookup_Table (C);
   end To_RGB;

   function To_Int_Color (C : HTML_Color;
                          S : HTML_RGB_Color) return Int_Color is
   begin
      --  Implement function!
      return 0;
   end To_Int_Color;

   function Image (I : Int_Color) return String is
      subtype Str_Range is Integer range 1 .. 10;
      S : String (Str_Range);
   begin
      Ada.Integer_Text_IO.Put (To    => S,
                               Item  => I,
                               Base  => 16);
      return S;
   end Image;

   function Image (C : RGB) return String is
   begin
      return ("(Red => "      & Image (C.Red)
              & ", Green => " & Image (C.Green)
              & ", Blue => "  & Image (C.Blue)
              &")");
   end Image;

end Color_Types;
```

Listing 21: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
```

(continues on next page)

(continued from previous page)

```
with Ada.Text_IO;      use Ada.Text_IO;

with Color_Types;      use Color_Types;

procedure Main is
   type Test_Case_Index is
     (HTML_Color_Red_Chk,
      HTML_Color_Green_Chk,
      HTML_Color_Blue_Chk);

   procedure Check (TC : Test_Case_Index) is

      procedure Check_HTML_Colors (S : HTML_RGB_Color) is
      begin
         Put_Line ("Selected: " & HTML_RGB_Color'Image (S));
         for I in HTML_Color'Range loop
            Put_Line (HTML_Color'Image (I) & " => "
                      & Image (To_Int_Color (I, S)) & ".");
         end loop;
      end Check_HTML_Colors;

   begin
      case TC is
         when HTML_Color_Red_Chk =>
            Check_HTML_Colors (Red);
         when HTML_Color_Green_Chk =>
            Check_HTML_Colors (Green);
         when HTML_Color_Blue_Chk =>
            Check_HTML_Colors (Blue);
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

CHAPTER

FIVE

OBJECT-ORIENTED PROGRAMMING

125.1 Simple type extension

Goal: work with type extensions using record types containing numeric components.

Steps:

1. Implement the `Type_Extensions` package.
    1. Declare the record type `T_Float`.
    2. Declare the record type `T_Mixed`
    3. Implement the `Init` function for the `T_Float` type with a floating-point input parameter.
    4. Implement the `Init` function for the `T_Float` type with an integer input parameter.
    5. Implement the `Image` function for the `T_Float` type.
    6. Implement the `Init` function for the `T_Mixed` type with a floating-point input parameter.
    7. Implement the `Init` function for the `T_Mixed` type with an integer input parameter.
    8. Implement the `Image` function for the `T_Mixed` type.

Requirements:

1. Record type `T_Float` contains the following component:
    1. `F`, a floating-point type.
2. Record type `T_Mixed` is derived from the `T_Float` type.
    1. `T_Mixed` extends `T_Float` with the following component:
        1. `I`, an integer component.
    2. Both components must be numerically *synchronized*:
        - For example, if the floating-point component contains the value 2.0, the value of the integer component must be 2.
        - In order to simplify the implementation, you can simply use `Integer (F)` to convert a floating-point variable F to integer.
3. Function `Init` returns an object of the corresponding type (`T_Float` or `T_Mixed`).
    1. For each type, two versions of `Init` must be declared:
        1. one with a floating-point input parameter,
        2. another with an integer input parameter.
    2. The parameter to `Init` is used to initialize the record components.
4. Function `Image` returns a string for the components of the record type.

1. In case of the Image function for the T_Float type, the string must have the format "{ F => <float value> }".
   - For example, the call Image (T_Float'(Init (8.0)))) should return the string "{ F => 8.00000E+00 }".
2. In case of the Image function for the T_Mixed type, the string must have the format "{ F => <float value>, I => <integer value> }".
   - For example, the call Image (T_Mixed'(Init (8.0)))) should return the string "{ F => 8.00000E+00, I => 8 }".

Listing 1: type_extensions.ads

```
package Type_Extensions is

   --  Create declaration of T_Float type!
   type T_Float is null record;

   --  function Init ...

   --  function Image ...

   --  Create declaration of T_Mixed type!
   type T_Mixed is null record;

end Type_Extensions;
```

Listing 2: type_extensions.adb

```
package body Type_Extensions is

end Type_Extensions;
```

Listing 3: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Type_Extensions;  use Type_Extensions;

procedure Main is

   type Test_Case_Index is
     (Type_Extension_Chk);

   procedure Check (TC : Test_Case_Index) is
      F1, F2 : T_Float;
      M1, M2 : T_Mixed;
   begin
      case TC is
      when Type_Extension_Chk =>
         F1 := Init (2.0);
         F2 := Init (3);
         M1 := Init (4.0);
         M2 := Init (5);

         if M2 in T_Float'Class then
           Put_Line ("T_Mixed is in T_Float'Class as expected");
         end if;

         Put_Line ("F1: " & Image (F1));
```

(continues on next page)

(continued from previous page)

```
         Put_Line ("F2: " & Image (F2));
         Put_Line ("M1: " & Image (M1));
         Put_Line ("M2: " & Image (M2));
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

125.2 Online Store

Goal: create an online store for the members of an association.

Steps:

1. Implement the `Online_Store` package.
    1. Declare the `Member` type.
    2. Declare the `Full_Member` type.
    3. Implement the `Get_Status` function for the `Member` type.
    4. Implement the `Get_Price` function for the `Member` type.
    5. Implement the `Get_Status` function for the `Full_Member` type.
    6. Implement the `Get_Price` function for the `Full_Member` type.
2. Implement the `Online_Store.Tests` child package.
    1. Implement the `Simple_Test` procedure.

Requirements:

1. Package `Online_Store` implements an online store application for the members of an association.
    1. In this association, members can have one of the following status:
        - associate member, or
        - full member.
2. Function `Get_Price` returns the correct price of an item.
    1. Associate members must pay the full price when they buy items from the online store.
    2. Full members can get a discount.
        1. The discount rate can be different for each full member — depending on factors that are irrelevant for this exercise.
3. Package `Online_Store` has following types:
    1. `Percentage` type, which represents a percentage ranging from 0.0 to 1.0.
    2. `Member` type for associate members containing following components:

- `Start`, which indicates the starting year of the membership.
  - This information is common for both associate and full members.
  - You can use the `Year_Number` type from the standard `Ada.Calendar` package for this component.

3. `Full_Member` type for full members.
   1. This type must extend the `Member` type above.
   2. It contains the following additional component:
      - `Discount`, which indicates the discount rate that the full member gets in the online store.
        - This component must be of `Percentage` type.

4. For the `Member` and `Full_Member` types, you must implement the following functions:
   1. `Get_Status`, which returns a string with the membership status.
      - The string must be `"Associate Member"` or `"Full Member"`, respectively.
   2. `Get_Price`, which returns the *adapted price* of an item — indicating the actual due amount.
      - For example, for a full member with a 10% discount rate, the actual due amount of an item with a price of 100.00 is 90.00.
      - Associated members don't get a discount, so they always pay the full price.
5. Procedure `Simple_Test` (from the `Online_Store.Tests` package) is used for testing.
   1. Based on a list of members that bought on the online store and the corresponding full price of the item, `Simple_Test` must display information about each member and the actual due amount after discounts.
   2. Information about the members must be displayed in the following format:

```
Member # <number>
Status: <status>
Since:  <year>
Due Amount:  <value>
--------
```

   3. For this exercise, `Simple_Test` must use the following list:

#	Membership status	Start (year)	Discount	Full Price
1	Associate	2010	*N/A*	250.00
2	Full	1998	10.0 %	160.00
3	Full	1987	20.0 %	400.00
4	Associate	2013	*N/A*	110.00

   4. In order to pass the tests, the information displayed by a call to `Simple_Test` must conform to the format described above.
      - You can find another example in the remarks below.

Remarks:

1. In previous labs, we could have implemented a simplified version of the system described above by simply using an enumeration type to specify the membership status. For example:

```
type Member_Status is (Associate_Member, Full_Member);
```

1. In this case, the `Get_Price` function would then evaluate the membership status and adapt the item price — assuming a fixed discount rate for all full members. This could be the corresponding function declaration:

```
type Amount is delta 10.0**(-2) digits 10;

function Get_Price (M : Member_Status;
                    P : Amount) return Amount;
```

2. In this exercise, however, we'll use type extension to represent the membership status in our application.

2. For the procedure `Simple_Test`, let's consider the following list of members as an example:

#	Membership status	Start (year)	Discount	Full Price
1	Associate	2002	*N/A*	100.00
2	Full	2005	10.0 %	100.00

- For this list, the test procedure displays the following information (in this exact format):

```
Member # 1
Status: Associate Member
Since:  2002
Due Amount:  100.00
--------
Member # 2
Status: Full Member
Since:  2005
Due Amount:  90.00
--------
```

- Here, although both members had the same full price (as indicated by the last column), member #2 gets a reduced due amount of 90.00 because of the full membership status.

Listing 4: online_store.ads

```
with Ada.Calendar; use Ada.Calendar;

package Online_Store is

   type Amount is delta 10.0**(-2) digits 10;

   subtype Percentage is Amount range 0.0 .. 1.0;

   --  Create declaration of Member type!
   --
   --  You can use Year_Number from Ada.Calendar for the membership
   --  starting year.
   --
   type Member is null record;

   function Get_Status (M : Member) return String;

   function Get_Price (M : Member;
                       P : Amount) return Amount;

   --  Create declaration of Full_Member type!
   --
```

(continues on next page)

(continued from previous page)

```
   --  Use the Percentage type for storing the membership discount.
   --
   type Full_Member is null record;

   function Get_Status (M : Full_Member) return String;

   function Get_Price (M : Full_Member;
                       P : Amount) return Amount;

end Online_Store;
```

Listing 5: online_store.adb

```
package body Online_Store is

   function Get_Status (M : Member) return String is
     ("");

   function Get_Status (M : Full_Member) return String is
     ("");

   function Get_Price (M : Member;
                       P : Amount) return Amount is (0.0);

   function Get_Price (M : Full_Member;
                       P : Amount) return Amount is
     (0.0);

end Online_Store;
```

Listing 6: online_store-tests.ads

```
package Online_Store.Tests is

   procedure Simple_Test;

end Online_Store.Tests;
```

Listing 7: online_store-tests.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Online_Store.Tests is

   procedure Simple_Test is
   begin
      null;
   end Simple_Test;

end Online_Store.Tests;
```

Listing 8: main.adb

```
with Ada.Command_Line;   use Ada.Command_Line;
with Ada.Text_IO;        use Ada.Text_IO;

with Online_Store;       use Online_Store;
with Online_Store.Tests; use Online_Store.Tests;

procedure Main is
```

(continues on next page)

(continued from previous page)

```
8
9     type Test_Case_Index is
10      (Type_Chk,
11       Unit_Test_Chk);
12
13    procedure Check (TC : Test_Case_Index) is
14
15       function Result_Image (Result : Boolean) return String is
16         (if Result then "OK" else "not OK");
17
18    begin
19       case TC is
20       when Type_Chk =>
21          declare
22             AM : constant Member      := (Start    => 2002);
23             FM : constant Full_Member := (Start    => 1990,
24                                           Discount => 0.2);
25          begin
26             Put_Line ("Testing Status of Associate Member Type => "
27                       & Result_Image (AM.Get_Status = "Associate Member"));
28             Put_Line ("Testing Status of Full Member Type => "
29                       & Result_Image (FM.Get_Status = "Full Member"));
30             Put_Line ("Testing Discount of Associate Member Type => "
31                       & Result_Image (AM.Get_Price (100.0) = 100.0));
32             Put_Line ("Testing Discount of Full Member Type => "
33                       & Result_Image (FM.Get_Price (100.0) = 80.0));
34          end;
35          when Unit_Test_Chk =>
36             Simple_Test;
37       end case;
38    end Check;
39
40 begin
41    if Argument_Count < 1 then
42       Put_Line ("ERROR: missing arguments! Exiting...");
43       return;
44    elsif Argument_Count > 1 then
45       Put_Line ("Ignoring additional arguments...");
46    end if;
47
48    Check (Test_Case_Index'Value (Argument (1)));
49 end Main;
```

CHAPTER

SIX

STANDARD LIBRARY: CONTAINERS

126.1 Simple todo list

Goal: implement a simple to-do list system using vectors.

Steps:

1. Implement the `Todo_Lists` package.
    1. Declare the `Todo_Item` type.
    2. Declare the `Todo_List` type.
    3. Implement the `Add` procedure.
    4. Implement the `Display` procedure.
2. `Todo_Item` type is used to store to-do items.
    1. It should be implemented as an access type to strings.
3. `Todo_List` type is the container for all to-do items.
    1. It should be implemented as a **vector**.
4. Procedure `Add` adds items (of `Todo_Item` type) to the list (of `Todo_List` type).
    1. This requires allocating a string for the access type.
5. Procedure `Display` is used to display all to-do items.
    1. It must display one item per line.

Remarks:

1. This exercise is based on the *Simple todo list* exercise from the *More About Types* (page 2115).
    1. Your goal is to rewrite that exercise using vectors instead of arrays.
    2. You may reuse the code you've already implemented as a starting point.

Listing 1: todo_lists.ads

```
1  package Todo_Lists is
2
3     type Todo_Item is access String;
4
5     type Todo_List is null record;
6
7     procedure Add (Todos : in out Todo_List;
8                    Item  : String);
9
10    procedure Display (Todos : Todo_List);
```

(continues on next page)

(continued from previous page)

```
11
12 end Todo_Lists;
```

Listing 2: todo_lists.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  package body Todo_Lists is
4
5     procedure Add (Todos : in out Todo_List;
6                    Item  : String) is
7     begin
8        null;
9     end Add;
10
11    procedure Display (Todos : Todo_List) is
12    begin
13       Put_Line ("TO-DO LIST");
14    end Display;
15
16 end Todo_Lists;
```

Listing 3: main.adb

```
1  with Ada.Command_Line;  use Ada.Command_Line;
2  with Ada.Text_IO;       use Ada.Text_IO;
3
4  with Todo_Lists;        use Todo_Lists;
5
6  procedure Main is
7     type Test_Case_Index is
8       (Todo_List_Chk);
9
10    procedure Check (TC : Test_Case_Index) is
11       T : Todo_List;
12    begin
13       case TC is
14          when Todo_List_Chk =>
15             Add (T, "Buy milk");
16             Add (T, "Buy tea");
17             Add (T, "Buy present");
18             Add (T, "Buy tickets");
19             Add (T, "Pay electricity bill");
20             Add (T, "Schedule dentist appointment");
21             Add (T, "Call sister");
22             Add (T, "Revise spreasheet");
23             Add (T, "Edit entry page");
24             Add (T, "Select new design");
25             Add (T, "Create upgrade plan");
26             Display (T);
27       end case;
28    end Check;
29
30 begin
31    if Argument_Count < 1 then
32       Put_Line ("ERROR: missing arguments! Exiting...");
33       return;
34    elsif Argument_Count > 1 then
35       Put_Line ("Ignoring additional arguments...");
36    end if;
```

(continues on next page)

(continued from previous page)

```
37
38    Check (Test_Case_Index'Value (Argument (1)));
39 end Main;
```

126.2 List of unique integers

Goal: create function that removes duplicates from and orders a collection of elements.

Steps:

1. Implement package `Ops`.
    1. Declare the `Int_Array` type.
    2. Declare the `Integer_Sets` type.
    3. Implement the `Get_Unique` function that returns a set.
    4. Implement the `Get_Unique` function that returns an array of integer values.

Requirements:

1. The `Int_Array` type is an unconstrained array of positive range.
2. The `Integer_Sets` package is an instantiation of the `Ordered_Sets` package for the **`Integer`** type.
3. The `Get_Unique` function must remove duplicates from an input array of integer values and order the elements.
    1. For example:
        - if the input array contains `(7, 7, 1)`
        - the function must return `(1, 7)`.
    2. You must implement this function by using sets from the `Ordered_Sets` package.
    3. `Get_Unique` must be implemented in two versions:
        - one version that returns a set — `Set` type from the `Ordered_Sets` package.
        - one version that returns an array of integer values — `Int_Array` type.

Remarks:

1. Sets — as the one found in the generic `Ordered_Sets` package — are useful for quickly and easily creating an algorithm that removes duplicates from a list of elements.

Listing 4: ops.ads

```
1  with Ada.Containers.Ordered_Sets;
2
3  package Ops is
4
5     --  type Int_Array is ...
6
7     --  package Integer_Sets is ...
8
9     subtype Int_Set is Integer_Sets.Set;
10
11    function Get_Unique (A : Int_Array) return Int_Set;
12
13    function Get_Unique (A : Int_Array) return Int_Array;
14
15 end Ops;
```

Listing 5: ops.adb

```
package body Ops is

   function Get_Unique (A : Int_Array) return Int_Set is
   begin
      null;
   end Get_Unique;

   function Get_Unique (A : Int_Array) return Int_Array is
   begin
      null;
   end Get_Unique;

end Ops;
```

Listing 6: main.adb

```
with Ada.Command_Line;        use Ada.Command_Line;
with Ada.Text_IO;             use Ada.Text_IO;

with Ops;                     use Ops;

procedure Main is
   type Test_Case_Index is
     (Get_Unique_Set_Chk,
      Get_Unique_Array_Chk);

   procedure Check (TC : Test_Case_Index;
                    A  : Int_Array) is

      procedure Display_Unique_Set (A : Int_Array) is
         S  : constant Int_Set := Get_Unique (A);
      begin
         for E of S loop
            Put_Line (Integer'Image (E));
         end loop;
      end Display_Unique_Set;

      procedure Display_Unique_Array (A : Int_Array) is
         AU : constant Int_Array := Get_Unique (A);
      begin
         for E of AU loop
            Put_Line (Integer'Image (E));
         end loop;
      end Display_Unique_Array;

   begin
      case TC is
         when Get_Unique_Set_Chk   => Display_Unique_Set (A);
         when Get_Unique_Array_Chk => Display_Unique_Array (A);
      end case;
   end Check;

begin
   if Argument_Count < 3 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   else
      declare
         A : Int_Array (1 .. Argument_Count - 1);
```

(continues on next page)

(continued from previous page)

```
      begin
         for I in A'Range loop
            A (I) := Integer'Value (Argument (1 + I));
         end loop;
         Check (Test_Case_Index'Value (Argument (1)), A);
      end;
   end if;
end Main;
```

CHAPTER

SEVEN

STANDARD LIBRARY: DATES & TIMES

127.1 Holocene calendar

Goal: create a function that returns the year in the Holocene calendar.

Steps:

1. Implement the `To_Holocene_Year` function.

Requirements:

1. The `To_Holocene_Year` extracts the year from a time object (`Time` type) and returns the corresponding year for the Holocene calendar[570].
    1. For positive (AD) years, the Holocene year is calculated by adding 10,000 to the year number.

Remarks:

1. In this exercise, we don't deal with BC years.
2. Note that the year component of the `Time` type from the `Ada.Calendar` package is limited to years starting with 1901.

Listing 1: to_holocene_year.adb

```
with Ada.Calendar; use Ada.Calendar;

function To_Holocene_Year (T : Time) return Integer is
begin
   return 0;
end To_Holocene_Year;
```

Listing 2: main.adb

```
with Ada.Command_Line;        use Ada.Command_Line;
with Ada.Text_IO;             use Ada.Text_IO;
with Ada.Calendar;            use Ada.Calendar;

with To_Holocene_Year;

procedure Main is
   type Test_Case_Index is
     (Holocene_Chk);

   procedure Display_Holocene_Year (Y : Year_Number) is
      HY : Integer;
   begin
      HY := To_Holocene_Year (Time_Of (Y, 1, 1));
```

(continues on next page)

[570] https://en.wikipedia.org/wiki/Holocene_calendar

(continued from previous page)

```
      Put_Line ("Year (Gregorian): " & Year_Number'Image (Y));
      Put_Line ("Year (Holocene):  " & Integer'Image (HY));
   end Display_Holocene_Year;

   procedure Check (TC : Test_Case_Index) is
   begin
      case TC is
         when Holocene_Chk =>
            Display_Holocene_Year (2012);
            Display_Holocene_Year (2020);
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

127.2 List of events

Goal: create a system to manage a list of events.

Steps:

1. Implement the `Events` package.
    1. Declare the `Event_Item` type.
    2. Declare the `Event_Items` type.
2. Implement the `Events.Lists` package.
    1. Declare the `Event_List` type.
    2. Implement the `Add` procedure.
    3. Implement the `Display` procedure.

Requirements:

1. The `Event_Item` type (from the `Events` package) contains the *description of an event*.
    1. This description shall be stored in an access-to-string type.
2. The `Event_Items` type stores a list of events.
    1. This will be used later to represent multiple events for a specific date.
    2. You shall use a vector for this type.
3. The `Events.Lists` package contains the subprograms that are used in the test application.
4. The `Event_List` type (from the `Events.Lists` package) maps a list of events to a specific date.
    1. You must use the `Event_Items` type for the list of events.
    2. You shall use the `Time` type from the `Ada.Calendar` package for the dates.

3. Since we expect the events to be ordered by the date, you shall use ordered maps for the `Event_List` type.

5. Procedure `Add` adds an event into the list of events for a specific date.

6. Procedure `Display` must display all events for each date (ordered by date) using the following format:

```
<event_date #1>
    <description of item #1a>
    <description of item #1b>
<event_date #2>
    <description of item #2a>
    <description of item #2b>
```

   1. You should use the auxiliary `Date_Image` function — available in the body of the `Events.Lists` package — to display the date in the `YYYY-MM-DD` format.

Remarks:

1. Let's briefly illustrate the expected output of this system.

   1. Consider the following example:

```
with Ada.Calendar;
with Ada.Calendar.Formatting; use Ada.Calendar.Formatting;

with Events.Lists;            use Events.Lists;

procedure Test is
   EL : Event_List;
begin
   EL.Add (Time_Of (2019, 4, 16),
           "Item #2");
   EL.Add (Time_Of (2019, 4, 15),
           "Item #1");
   EL.Add (Time_Of (2019, 4, 16),
           "Item #3");
   EL.Display;
end Test;
```

   2. The expected output of the `Test` procedure must be:

```
EVENTS LIST
- 2019-04-15
    - Item #1
- 2019-04-16
    - Item #2
    - Item #3
```

Listing 3: events.ads

```
1  package Events is
2
3     type Event_Item is null record;
4
5     type Event_Items is null record;
6
7  end Events;
```

Listing 4: events-lists.ads

```
with Ada.Calendar; use Ada.Calendar;

package Events.Lists is

   type Event_List is tagged private;

   procedure Add (Events     : in out Event_List;
                  Event_Time :        Time;
                  Event      :        String);

   procedure Display (Events : Event_List);

private

   type Event_List is tagged null record;

end Events.Lists;
```

Listing 5: events-lists.adb

```
with Ada.Text_IO;              use Ada.Text_IO;
with Ada.Calendar.Formatting; use Ada.Calendar.Formatting;

package body Events.Lists is

   procedure Add (Events     : in out Event_List;
                  Event_Time : Time;
                  Event      : String) is
   begin
      null;
   end Add;

   function Date_Image (T : Time) return String is
      Date_Img : constant String := Image (T);
   begin
      return Date_Img (1 .. 10);
   end;

   procedure Display (Events : Event_List) is
      T : Time;
   begin
      Put_Line ("EVENTS LIST");
      --  You should use Date_Image (T) here!
   end Display;

end Events.Lists;
```

Listing 6: main.adb

```
with Ada.Command_Line;         use Ada.Command_Line;
with Ada.Text_IO;              use Ada.Text_IO;
with Ada.Calendar;
with Ada.Calendar.Formatting; use Ada.Calendar.Formatting;

with Events.Lists;             use Events.Lists;

procedure Main is
   type Test_Case_Index is
     (Event_List_Chk);
```

(continues on next page)

(continued from previous page)

```
11
12    procedure Check (TC : Test_Case_Index) is
13       EL : Event_List;
14    begin
15       case TC is
16          when Event_List_Chk =>
17             EL.Add (Time_Of (2018, 2, 16),
18                     "Final check");
19             EL.Add (Time_Of (2018, 2, 16),
20                     "Release");
21             EL.Add (Time_Of (2018, 12, 3),
22                     "Brother's birthday");
23             EL.Add (Time_Of (2018, 1, 1),
24                     "New Year's Day");
25             EL.Display;
26       end case;
27    end Check;
28
29 begin
30    if Argument_Count < 1 then
31       Put_Line ("ERROR: missing arguments! Exiting...");
32       return;
33    elsif Argument_Count > 1 then
34       Put_Line ("Ignoring additional arguments...");
35    end if;
36
37    Check (Test_Case_Index'Value (Argument (1)));
38 end Main;
```

CHAPTER

EIGHT

STANDARD LIBRARY: STRINGS

128.1 Concatenation

Goal: implement functions to concatenate an array of unbounded strings.

Steps:

1. Implement the `Str_Concat` package.
    1. Implement the `Concat` function for `Unbounded_String`.
    2. Implement the `Concat` function for **`String`**.

Requirements:

1. The first `Concat` function receives an unconstrained array of unbounded strings and returns the concatenation of those strings as an unbounded string.
    1. The second `Concat` function has the same parameters, but returns a standard string (**`String`** type).
2. Both `Concat` functions have the following parameters:
    1. An unconstrained array of `Unbounded_String` strings (`Unbounded_Strings` type).
    2. `Trim_Str`, a Boolean parameter indicating whether each unbounded string must be trimmed.
    3. `Add_Whitespace`, a Boolean parameter indicating whether a whitespace shall be added between each unbounded string and the next one.
        1. No whitespace shall be added after the last string of the array.

Remarks:

1. You can use the `Trim` function from the `Ada.Strings.Unbounded` package.

Listing 1: str_concat.ads

```
with Ada.Strings.Unbounded; use Ada.Strings.Unbounded;

package Str_Concat is

   type Unbounded_Strings is array (Positive range <>) of Unbounded_String;

   function Concat (USA             : Unbounded_Strings;
                    Trim_Str        : Boolean;
                    Add_Whitespace : Boolean) return Unbounded_String;

   function Concat (USA             : Unbounded_Strings;
                    Trim_Str        : Boolean;
                    Add_Whitespace : Boolean) return String;

end Str_Concat;
```

Listing 2: str_concat.adb

```
with Ada.Strings; use Ada.Strings;

package body Str_Concat is

   function Concat (USA            : Unbounded_Strings;
                    Trim_Str       : Boolean;
                    Add_Whitespace : Boolean) return Unbounded_String is
   begin
      return "";
   end Concat;

   function Concat (USA            : Unbounded_Strings;
                    Trim_Str       : Boolean;
                    Add_Whitespace : Boolean) return String is
   begin
      return "";
   end Concat;

end Str_Concat;
```

Listing 3: main.adb

```
with Ada.Command_Line;        use Ada.Command_Line;
with Ada.Text_IO;             use Ada.Text_IO;
with Ada.Strings.Unbounded;   use Ada.Strings.Unbounded;

with Str_Concat;              use Str_Concat;

procedure Main is
   type Test_Case_Index is
     (Unbounded_Concat_No_Trim_No_WS_Chk,
      Unbounded_Concat_Trim_No_WS_Chk,
      String_Concat_Trim_WS_Chk,
      Concat_Single_Element);

   procedure Check (TC : Test_Case_Index) is
   begin
      case TC is
         when Unbounded_Concat_No_Trim_No_WS_Chk =>
            declare
               S : constant Unbounded_Strings := (
                  To_Unbounded_String ("Hello"),
                  To_Unbounded_String (" World"),
                  To_Unbounded_String ("!"));
            begin
               Put_Line (To_String (Concat (S, False, False)));
            end;
         when Unbounded_Concat_Trim_No_WS_Chk =>
            declare
               S : constant Unbounded_Strings := (
                  To_Unbounded_String (" This "),
                  To_Unbounded_String (" _is_ "),
                  To_Unbounded_String ("  a   "),
                  To_Unbounded_String (" _check "));
            begin
               Put_Line (To_String (Concat (S, True, False)));
            end;
         when String_Concat_Trim_WS_Chk =>
            declare
```

(continues on next page)

(continued from previous page)

```
               S : constant Unbounded_Strings := (
                   To_Unbounded_String ("  This  "),
                   To_Unbounded_String ("  is a  "),
                   To_Unbounded_String ("  test.  "));
            begin
               Put_Line (Concat (S, True, True));
            end;
         when Concat_Single_Element =>
            declare
               S : constant Unbounded_Strings := (
                   1 => To_Unbounded_String ("  Hi "));
            begin
               Put_Line (Concat (S, True, True));
            end;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

128.2 List of events

Goal: create a system to manage a list of events.

Steps:

1. Implement the `Events` package.
    1. Declare the `Event_Item` subtype.
2. Implement the `Events.Lists` package.
    1. Adapt the `Add` procedure.
    2. Adapt the `Display` procedure.

Requirements:

1. The `Event_Item` type (from the `Events` package) contains the *description of an event*.
    1. This description is declared as a subtype of unbounded string.
2. Procedure `Add` adds an event into the list of events for a specific date.
    1. The declaration of `E` needs to be adapted to use unbounded strings.
3. Procedure `Display` must display all events for each date (ordered by date) using the following format:
    1. The arguments to `Put_Line` need to be adapted to use unbounded strings.

Remarks:

1. We use the lab on the list of events from the previous chapter (*Standard library: Dates & Times* (page 2185)) as a starting point.

Listing 4: events.ads

```
with Ada.Containers.Vectors;

package Events is

   --  subtype Event_Item is

   package Event_Item_Containers is new
     Ada.Containers.Vectors
       (Index_Type   => Positive,
        Element_Type => Event_Item);

   subtype Event_Items is Event_Item_Containers.Vector;

end Events;
```

Listing 5: events-lists.ads

```
with Ada.Calendar;                use Ada.Calendar;
with Ada.Containers.Ordered_Maps;

package Events.Lists is

   type Event_List is tagged private;

   procedure Add (Events     : in out Event_List;
                  Event_Time :        Time;
                  Event      :        String);

   procedure Display (Events : Event_List);

private

   package Event_Time_Item_Containers is new
     Ada.Containers.Ordered_Maps
       (Key_Type         => Time,
        Element_Type     => Event_Items,
        "="              => Event_Item_Containers."=");

   type Event_List is new Event_Time_Item_Containers.Map with null record;

end Events.Lists;
```

Listing 6: events-lists.adb

```
with Ada.Text_IO;             use Ada.Text_IO;
with Ada.Calendar.Formatting; use Ada.Calendar.Formatting;

package body Events.Lists is

   procedure Add (Events     : in out Event_List;
                  Event_Time : Time;
                  Event      : String) is
      use Event_Item_Containers;
      E : constant Event_Item := new String'(Event);
   begin
      if not Events.Contains (Event_Time) then
         Events.Include (Event_Time, Empty_Vector);
      end if;
      Events (Event_Time).Append (E);
```

(continues on next page)

(continued from previous page)

```
   end Add;

   function Date_Image (T : Time) return String is
      Date_Img : constant String := Image (T);
   begin
      return Date_Img (1 .. 10);
   end;

   procedure Display (Events : Event_List) is
      use Event_Time_Item_Containers;
      T : Time;
   begin
      Put_Line ("EVENTS LIST");
      for C in Events.Iterate loop
         T := Key (C);
         Put_Line ("- " & Date_Image (T));
         for I of Events (C) loop
            Put_Line ("    - " & I.all);
         end loop;
      end loop;
   end Display;

end Events.Lists;
```

Listing 7: main.adb

```
with Ada.Command_Line;        use Ada.Command_Line;
with Ada.Text_IO;             use Ada.Text_IO;
with Ada.Calendar;
with Ada.Calendar.Formatting; use Ada.Calendar.Formatting;
with Ada.Strings.Unbounded;   use Ada.Strings.Unbounded;

with Events;
with Events.Lists;            use Events.Lists;

procedure Main is
   type Test_Case_Index is
     (Unbounded_String_Chk,
      Event_List_Chk);

   procedure Check (TC : Test_Case_Index) is
      EL : Event_List;
   begin
      case TC is
         when Unbounded_String_Chk =>
            declare
               S : constant Events.Event_Item := To_Unbounded_String ("Checked");
            begin
               Put_Line (To_String (S));
            end;
         when Event_List_Chk =>
            EL.Add (Time_Of (2018, 2, 16),
                    "Final check");
            EL.Add (Time_Of (2018, 2, 16),
                    "Release");
            EL.Add (Time_Of (2018, 12, 3),
                    "Brother's birthday");
            EL.Add (Time_Of (2018, 1, 1),
                    "New Year's Day");
            EL.Display;
      end case;
```

(continues on next page)

(continued from previous page)

```
36    end Check;
37
38 begin
39    if Argument_Count < 1 then
40       Put_Line ("ERROR: missing arguments! Exiting...");
41       return;
42    elsif Argument_Count > 1 then
43       Put_Line ("Ignoring additional arguments...");
44    end if;
45
46    Check (Test_Case_Index'Value (Argument (1)));
47 end Main;
```

CHAPTER

NINE

STANDARD LIBRARY: NUMERICS

129.1 Decibel Factor

Goal: implement functions to convert from Decibel values to factors and vice-versa.

Steps:

1. Implement the `Decibels` package.
    1. Implement the `To_Decibel` function.
    2. Implement the `To_Factor` function.

Requirements:

1. The subtypes `Decibel` and `Factor` are based on a floating-point type.
2. Function `To_Decibel` converts a multiplication factor (or ratio) to decibels.
    - For the implementation, use $20 * log_{10}(F)$, where *F* is the factor/ratio.
3. Function `To_Factor` converts a value in decibels to a multiplication factor (or ratio).
    - For the implementation, use $10^{D/20}$, where *D* is the value in Decibel.

Remarks:

1. The Decibel[571] is used to express the ratio of two values on a logarithmic scale.
    1. For example, an increase of 6 dB corresponds roughly to a multiplication by two (or an increase by 100 % of the original value).
2. You can find the functions that you'll need for the calculation in the `Ada.Numerics.Elementary_Functions` package.

Listing 1: decibels.ads

```
package Decibels is

   subtype Decibel is Float;
   subtype Factor  is Float;

   function To_Decibel (F : Factor) return Decibel;

   function To_Factor (D : Decibel) return Factor;

end Decibels;
```

[571] https://en.wikipedia.org/wiki/Decibel

Listing 2: decibels.adb

```
package body Decibels is

   function To_Decibel (F : Factor) return Decibel is
   begin
      return 0.0;
   end To_Decibel;

   function To_Factor (D : Decibel) return Factor is
   begin
      return 0.0;
   end To_Factor;

end Decibels;
```

Listing 3: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Decibels;         use Decibels;

procedure Main is
   type Test_Case_Index is
     (Db_Chk,
      Factor_Chk);

   procedure Check (TC : Test_Case_Index; V : Float) is

      package F_IO is new Ada.Text_IO.Float_IO (Factor);
      package D_IO is new Ada.Text_IO.Float_IO (Decibel);

      procedure Put_Decibel_Cnvt (D : Decibel) is
         F : constant Factor := To_Factor (D);
      begin
         D_IO.Put (D, 0, 2, 0);
         Put (" dB => Factor of ");
         F_IO.Put (F, 0, 2, 0);
         New_Line;
      end;

      procedure Put_Factor_Cnvt (F : Factor) is
         D : constant Decibel := To_Decibel (F);
      begin
         Put ("Factor of ");
         F_IO.Put (F, 0, 2, 0);
         Put (" => ");
         D_IO.Put (D, 0, 2, 0);
         Put_Line (" dB");
      end;
   begin
      case TC is
         when Db_Chk =>
            Put_Decibel_Cnvt (Decibel (V));
         when Factor_Chk =>
            Put_Factor_Cnvt (Factor (V));
      end case;
   end Check;

begin
   if Argument_Count < 2 then
```

(continues on next page)

(continued from previous page)

```
45       Put_Line ("ERROR: missing arguments! Exiting...");
46       return;
47    elsif Argument_Count > 2 then
48       Put_Line ("Ignoring additional arguments...");
49    end if;
50
51    Check (Test_Case_Index'Value (Argument (1)), Float'Value (Argument (2)));
52 end Main;
```

129.2 Root-Mean-Square

Goal: implement a function to calculate the root-mean-square of a sequence of values.

Steps:

1. Implement the `Signals` package.
    1. Implement the `Rms` function.

Requirements:

1. Subtype `Sig_Value` is based on a floating-point type.
2. Type `Signal` is an unconstrained array of `Sig_Value` elements.
3. Function `Rms` calculates the RMS of a sequence of values stored in an array of type `Signal`.
    1. See the remarks below for a description of the RMS calculation.

Remarks:

1. The root-mean-square[572] (RMS) value is an important information associated with sequences of values.
    1. It's used, for example, as a measurement for signal processing.
    2. It is calculated by:
        1. Creating a sequence S with the square of each value of an input sequence S_{in}.
        2. Calculating the mean value M of the sequence S.
        3. Calculating the square-root R of M.
    3. You can optimize the algorithm above by combining steps #1 and #2 into a single step.

Listing 4: signals.ads

```
1  package Signals is
2
3     subtype Sig_Value is Float;
4
5     type Signal is array (Natural range <>) of Sig_Value;
6
7     function Rms (S : Signal) return Sig_Value;
8
9  end Signals;
```

[572] https://en.wikipedia.org/wiki/Root_mean_square

Listing 5: signals.adb

```
with Ada.Numerics.Elementary_Functions; use Ada.Numerics.Elementary_Functions;

package body Signals is

   function Rms (S : Signal) return Sig_Value is
   begin
      return 0.0;
   end;

end Signals;
```

Listing 6: signals-std.ads

```
package Signals.Std is

   Sample_Rate : Float := 8000.0;

   function Generate_Sine (N : Positive; Freq : Float) return Signal;

   function Generate_Square (N : Positive) return Signal;

   function Generate_Triangular (N : Positive) return Signal;

end Signals.Std;
```

Listing 7: signals-std.adb

```
with Ada.Numerics;                      use Ada.Numerics;
with Ada.Numerics.Elementary_Functions; use Ada.Numerics.Elementary_Functions;

package body Signals.Std is

   function Generate_Sine (N : Positive; Freq : Float) return Signal is
      S : Signal (0 .. N - 1);
   begin
      for I in S'First .. S'Last loop
         S (I) := 1.0 * Sin (2.0 * Pi * (Freq * Float (I) / Sample_Rate));
      end loop;

      return S;
   end;

   function Generate_Square (N : Positive) return Signal is
      S : constant Signal (0 .. N - 1) := (others => 1.0);
   begin
      return S;
   end;

   function Generate_Triangular (N : Positive) return Signal is
      S      : Signal (0 .. N - 1);
      S_Half : constant Natural := S'Last / 2;
   begin
      for I in S'First .. S_Half loop
         S (I) := 1.0 * (Float (I) / Float (S_Half));
      end loop;
      for I in S_Half .. S'Last loop
         S (I) := 1.0 - (1.0 * (Float (I - S_Half) / Float (S_Half)));
      end loop;

```

(continues on next page)

(continued from previous page)

```
      return S;
   end;

end Signals.Std;
```

Listing 8: main.adb

```
with Ada.Command_Line;          use Ada.Command_Line;
with Ada.Text_IO;               use Ada.Text_IO;

with Signals;                   use Signals;
with Signals.Std;               use Signals.Std;

procedure Main is
   type Test_Case_Index is
     (Sine_Signal_Chk,
      Square_Signal_Chk,
      Triangular_Signal_Chk);

   procedure Check (TC : Test_Case_Index) is
      package Sig_IO is new Ada.Text_IO.Float_IO (Sig_Value);

      N    : constant Positive := 1024;
      S_Si : constant Signal := Generate_Sine (N, 440.0);
      S_Sq : constant Signal := Generate_Square (N);
      S_Tr : constant Signal := Generate_Triangular (N + 1);
   begin
      case TC is
         when Sine_Signal_Chk =>
            Put ("RMS of Sine Signal: ");
            Sig_IO.Put (Rms (S_Si), 0, 2, 0);
            New_Line;
         when Square_Signal_Chk =>
            Put ("RMS of Square Signal: ");
            Sig_IO.Put (Rms (S_Sq), 0, 2, 0);
            New_Line;
         when Triangular_Signal_Chk =>
            Put ("RMS of Triangular Signal: ");
            Sig_IO.Put (Rms (S_Tr), 0, 2, 0);
            New_Line;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

129.3 Rotation

Goal: use complex numbers to calculate the positions of an object in a circle after rotation.

Steps:

1. Implement the `Rotation` package.
    1. Implement the `Rotation` function.

Requirements:

1. Type `Complex_Points` is an unconstrained array of complex values.
2. Function `Rotation` returns a list of positions (represented by the `Complex_Points` type) when dividing a circle in `N` equal slices.
    1. See the remarks below for a more detailed explanation.
    2. You must use functions from `Ada.Numerics.Complex_Types` to implement `Rotation`.
3. Subtype `Angle` is based on a floating-point type.
4. Type `Angles` is an unconstrained array of angles.
5. Function `To_Angles` returns a list of angles based on an input list of positions.

Remarks:

1. Complex numbers are particularly useful in computer graphics to simplify the calculation of rotations.
    1. For example, let's assume you've drawn an object on your screen on position (1.0, 0.0).
    2. Now, you want to move this object in a circular path — i.e. make it rotate around position (0.0, 0.0) on your screen.
        - You could use *sine* and *cosine* functions to calculate each position of the path.
        - However, you could also calculate the positions using complex numbers.
2. In this exercise, you'll use complex numbers to calculate the positions of an object that starts on zero degrees — on position (1.0, 0.0) — and rotates around (0.0, 0.0) for *N* slices of a circle.
    1. For example, if we divide the circle in four slices, the object's path will consist of following points / positions:

        ```
        Point #1: ( 1.0,  0.0)
        Point #2: ( 0.0,  1.0)
        Point #3: (-1.0,  0.0)
        Point #4: ( 0.0, -1.0)
        Point #5: ( 1.0,  0.0)
        ```

        1. As expected, point #5 is equal to the starting point (point #1), since the object rotates around (0.0, 0.0) and returns to the starting point.
    2. We can also describe this path in terms of angles. The following list presents the angles for the path on a four-sliced circle:

        ```
        Point #1:    0.00 degrees
        Point #2:   90.00 degrees
        Point #3:  180.00 degrees
        Point #4:  -90.00 degrees (= 270 degrees)
        Point #5:    0.00 degrees
        ```

        1. To rotate a complex number simply multiply it by a unit vector whose arg is the radian angle to be rotated: $Z = e^{\frac{2\pi}{N}}$

Listing 9: rotation.ads

```
with Ada.Numerics.Complex_Types;
use  Ada.Numerics.Complex_Types;

package Rotation is

   type Complex_Points is array (Positive range <>) of Complex;

   function Rotation (N : Positive) return Complex_Points;

end Rotation;
```

Listing 10: rotation.adb

```
with Ada.Numerics; use Ada.Numerics;

package body Rotation is

   function Rotation (N : Positive) return Complex_Points is
      C : Complex_Points (1 .. 1) := (others => (0.0, 0.0));
   begin
      return C;
   end;

end Rotation;
```

Listing 11: angles.ads

```
with Rotation; use Rotation;

package Angles is

   subtype Angle is Float;

   type Angles is array (Positive range <>) of Angle;

   function To_Angles (C : Complex_Points) return Angles;

end Angles;
```

Listing 12: angles.adb

```
with Ada.Numerics;                use Ada.Numerics;
with Ada.Numerics.Complex_Types; use Ada.Numerics.Complex_Types;

package body Angles is

   function To_Angles (C : Complex_Points) return Angles is
   begin
      return A : Angles (C'Range) do
         for I in A'Range loop
            A (I) := Argument (C (I)) / Pi * 180.0;
         end loop;
      end return;
   end To_Angles;

end Angles;
```

Listing 13: rotation-tests.ads

```
package Rotation.Tests is

   procedure Test_Rotation (N : Positive);

   procedure Test_Angles (N : Positive);

end Rotation.Tests;
```

Listing 14: rotation-tests.adb

```
with Ada.Text_IO;            use Ada.Text_IO;
with Ada.Text_IO.Complex_IO;
with Ada.Numerics;           use Ada.Numerics;

with Angles;                 use Angles;

package body Rotation.Tests is

   package C_IO is new Ada.Text_IO.Complex_IO (Complex_Types);
   package F_IO is new Ada.Text_IO.Float_IO (Float);

   --
   --  Adapt value due to floating-point inaccuracies
   --

   function Adapt (C : Complex) return Complex is
      function Check_Zero (F : Float) return Float is
        (if F <= 0.0 and F >= -0.01 then 0.0 else F);
   begin
      return C_Out : Complex := C do
         C_Out.Re := Check_Zero (C_Out.Re);
         C_Out.Im := Check_Zero (C_Out.Im);
      end return;
   end Adapt;

   function Adapt (A : Angle) return Angle is
     (if A <= -179.99 and A >= -180.01 then 180.0 else A);

   procedure Test_Rotation (N : Positive) is
      C : constant Complex_Points := Rotation (N);
   begin
      Put_Line ("---- Points for " & Positive'Image (N) & " slices ----");
      for V of C loop
         Put ("Point: ");
         C_IO.Put (Adapt (V), 0, 1, 0);
         New_Line;
      end loop;
   end Test_Rotation;

   procedure Test_Angles (N : Positive) is
      C : constant Complex_Points := Rotation (N);
      A : constant Angles.Angles  := To_Angles (C);
   begin
      Put_Line ("---- Angles for " & Positive'Image (N) & " slices ----");
      for V of A loop
         Put ("Angle: ");
         F_IO.Put (Adapt (V), 0, 2, 0);
         Put_Line (" degrees");
      end loop;
```

(continues on next page)

(continued from previous page)

```
   end Test_Angles;

end Rotation.Tests;
```

Listing 15: main.adb

```
with Ada.Command_Line;          use Ada.Command_Line;
with Ada.Text_IO;               use Ada.Text_IO;

with Rotation.Tests;            use Rotation.Tests;

procedure Main is
   type Test_Case_Index is
     (Rotation_Chk,
      Angles_Chk);

   procedure Check (TC : Test_Case_Index; N : Positive) is
   begin
      case TC is
         when Rotation_Chk =>
            Test_Rotation (N);
         when Angles_Chk =>
            Test_Angles (N);
      end case;
   end Check;

begin
   if Argument_Count < 2 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 2 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)), Positive'Value (Argument (2)));
end Main;
```

SOLUTIONS

130.1 Imperative Language

130.1.1 Hello World

Listing 1: main.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Main is
begin
   Put_Line ("Hello World!");
end Main;
```

130.1.2 Greetings

Listing 2: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

procedure Main is

   procedure Greet (Name : String) is
   begin
      Put_Line ("Hello " & Name & "!");
   end Greet;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Greet (Argument (1));
end Main;
```

130.1.3 Positive Or Negative

Listing 3: classify_number.ads

```
procedure Classify_Number (X : Integer);
```

Listing 4: classify_number.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Classify_Number (X : Integer) is
begin
   if X > 0 then
      Put_Line ("Positive");
   elsif X < 0 then
      Put_Line ("Negative");
   else
      Put_Line ("Zero");
   end if;
end Classify_Number;
```

Listing 5: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Classify_Number;

procedure Main is
   A : Integer;
begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   A := Integer'Value (Argument (1));

   Classify_Number (A);
end Main;
```

130.1.4 Numbers

Listing 6: display_numbers.ads

```
procedure Display_Numbers (A, B : Integer);
```

Listing 7: display_numbers.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Display_Numbers (A, B : Integer) is
   X, Y : Integer;
begin
   if A <= B then
      X := A;
      Y := B;
   else
      X := B;
      Y := A;
   end if;

   for I in X .. Y loop
```

(continues on next page)

(continued from previous page)

```
      Put_Line (Integer'Image (I));
   end loop;
end Display_Numbers;
```

Listing 8: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Display_Numbers;

procedure Main is
   A, B : Integer;
begin
   if Argument_Count < 2 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 2 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   A := Integer'Value (Argument (1));
   B := Integer'Value (Argument (2));

   Display_Numbers (A, B);
end Main;
```

130.2 Subprograms

130.2.1 Subtract Procedure

Listing 9: subtract.ads

```
procedure Subtract (A, B   :     Integer;
                    Result : out Integer);
```

Listing 10: subtract.adb

```
procedure Subtract (A, B   :     Integer;
                    Result : out Integer) is
begin
   Result := A - B;
end Subtract;
```

Listing 11: main.adb

```
with Ada.Command_Line;     use Ada.Command_Line;
with Ada.Text_IO;          use Ada.Text_IO;

with Subtract;

procedure Main is
   type Test_Case_Index is
     (Sub_10_1_Chk,
      Sub_10_100_Chk,
      Sub_0_5_Chk,
      Sub_0_Minus_5_Chk);
```

(continues on next page)

(continued from previous page)

```
12
13    procedure Check (TC : Test_Case_Index) is
14       Result : Integer;
15    begin
16       case TC is
17       when Sub_10_1_Chk =>
18          Subtract (10, 1, Result);
19          Put_Line ("Result: " & Integer'Image (Result));
20       when Sub_10_100_Chk =>
21          Subtract (10, 100, Result);
22          Put_Line ("Result: " & Integer'Image (Result));
23       when Sub_0_5_Chk =>
24          Subtract (0, 5, Result);
25          Put_Line ("Result: " & Integer'Image (Result));
26       when Sub_0_Minus_5_Chk =>
27          Subtract (0, -5, Result);
28          Put_Line ("Result: " & Integer'Image (Result));
29       end case;
30    end Check;
31
32 begin
33    if Argument_Count < 1 then
34       Put_Line ("ERROR: missing arguments! Exiting...");
35       return;
36    elsif Argument_Count > 1 then
37       Put_Line ("Ignoring additional arguments...");
38    end if;
39
40    Check (Test_Case_Index'Value (Argument (1)));
41 end Main;
```

130.2.2 Subtract Function

Listing 12: subtract.ads

```
1 function Subtract (A, B : Integer) return Integer;
```

Listing 13: subtract.adb

```
1 function Subtract (A, B : Integer) return Integer is
2 begin
3    return A - B;
4 end Subtract;
```

Listing 14: main.adb

```
1  with Ada.Command_Line;     use Ada.Command_Line;
2  with Ada.Text_IO;          use Ada.Text_IO;
3
4  with Subtract;
5
6  procedure Main is
7     type Test_Case_Index is
8       (Sub_10_1_Chk,
9        Sub_10_100_Chk,
10       Sub_0_5_Chk,
11       Sub_0_Minus_5_Chk);
12
13    procedure Check (TC : Test_Case_Index) is
```

(continues on next page)

(continued from previous page)

```
      Result : Integer;
   begin
      case TC is
      when Sub_10_1_Chk =>
         Result := Subtract (10, 1);
         Put_Line ("Result: " & Integer'Image (Result));
      when Sub_10_100_Chk =>
         Result := Subtract (10, 100);
         Put_Line ("Result: " & Integer'Image (Result));
      when Sub_0_5_Chk =>
         Result := Subtract (0, 5);
         Put_Line ("Result: " & Integer'Image (Result));
      when Sub_0_Minus_5_Chk =>
         Result := Subtract (0, -5);
         Put_Line ("Result: " & Integer'Image (Result));
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.2.3 Equality function

Listing 15: is_equal.ads

```
function Is_Equal (A, B : Integer) return Boolean;
```

Listing 16: is_equal.adb

```
function Is_Equal (A, B : Integer) return Boolean is
begin
   return A = B;
end Is_Equal;
```

Listing 17: main.adb

```
with Ada.Command_Line;     use Ada.Command_Line;
with Ada.Text_IO;          use Ada.Text_IO;

with Is_Equal;

procedure Main is
   type Test_Case_Index is
     (Equal_Chk,
      Inequal_Chk);

   procedure Check (TC : Test_Case_Index) is

      procedure Display_Equal (A, B  : Integer;
                               Equal : Boolean) is
      begin
```

(continues on next page)

(continued from previous page)

```
         Put (Integer'Image (A));
         if Equal then
            Put (" is equal to ");
         else
            Put (" isn't equal to ");
         end if;
         Put_Line (Integer'Image (B) & ".");
      end Display_Equal;

      Result : Boolean;
   begin
      case TC is
      when Equal_Chk =>
         for I in 0 .. 10 loop
            Result := Is_Equal (I, I);
            Display_Equal (I, I, Result);
         end loop;
      when Inequal_Chk =>
         for I in 0 .. 10 loop
            Result := Is_Equal (I, I - 1);
            Display_Equal (I, I - 1, Result);
         end loop;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.2.4 States

Listing 18: display_state.ads

```
procedure Display_State (State : Integer);
```

Listing 19: display_state.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Display_State (State : Integer) is
begin
   case State is
      when 0 =>
         Put_Line ("Off");
      when 1 =>
         Put_Line ("On: Simple Processing");
      when 2 =>
         Put_Line ("On: Advanced Processing");
      when others =>
         null;
   end case;
end Display_State;
```

Listing 20: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Display_State;

procedure Main is
   State : Integer;
begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   State := Integer'Value (Argument (1));

   Display_State (State);
end Main;
```

130.2.5 States #2

Listing 21: get_state.ads

```
function Get_State (State : Integer) return String;
```

Listing 22: get_state.adb

```
function Get_State (State : Integer) return String is
begin
   return (case State is
            when 0 => "Off",
            when 1 => "On: Simple Processing",
            when 2 => "On: Advanced Processing",
            when others => "");
end Get_State;
```

Listing 23: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Get_State;

procedure Main is
   State : Integer;
begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   State := Integer'Value (Argument (1));

   Put_Line (Get_State (State));
end Main;
```

130.2.6 States #3

Listing 24: is_on.ads

```
function Is_On (State : Integer) return Boolean;
```

Listing 25: is_on.adb

```
function Is_On (State : Integer) return Boolean is
begin
   return not (State = 0);
end Is_On;
```

Listing 26: display_on_off.ads

```
procedure Display_On_Off (State : Integer);
```

Listing 27: display_on_off.adb

```
with Ada.Text_IO; use Ada.Text_IO;
with Is_On;

procedure Display_On_Off (State : Integer) is
begin
   Put_Line (if Is_On (State) then "On" else "Off");
end Display_On_Off;
```

Listing 28: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Display_On_Off;
with Is_On;

procedure Main is
   State : Integer;
begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   State := Integer'Value (Argument (1));

   Display_On_Off (State);
   Put_Line (Boolean'Image (Is_On (State)));
end Main;
```

130.2.7 States #4

Listing 29: set_next.ads

```
procedure Set_Next (State : in out Integer);
```

Listing 30: set_next.adb

```
procedure Set_Next (State : in out Integer) is
begin
   State := (if State < 2 then State + 1 else 0);
end Set_Next;
```

Listing 31: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Set_Next;

procedure Main is
   State : Integer;
begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   State := Integer'Value (Argument (1));

   Set_Next (State);
   Put_Line (Integer'Image (State));
end Main;
```

130.3 Modular Programming

130.3.1 Months

Listing 32: months.ads

```
package Months is

   Jan : constant String := "January";
   Feb : constant String := "February";
   Mar : constant String := "March";
   Apr : constant String := "April";
   May : constant String := "May";
   Jun : constant String := "June";
   Jul : constant String := "July";
   Aug : constant String := "August";
   Sep : constant String := "September";
   Oct : constant String := "October";
   Nov : constant String := "November";
   Dec : constant String := "December";

   procedure Display_Months;

end Months;
```

Listing 33: months.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Months is

   procedure Display_Months is
   begin
      Put_Line ("Months:");
      Put_Line ("- " & Jan);
      Put_Line ("- " & Feb);
      Put_Line ("- " & Mar);
      Put_Line ("- " & Apr);
      Put_Line ("- " & May);
      Put_Line ("- " & Jun);
      Put_Line ("- " & Jul);
      Put_Line ("- " & Aug);
      Put_Line ("- " & Sep);
      Put_Line ("- " & Oct);
      Put_Line ("- " & Nov);
      Put_Line ("- " & Dec);
   end Display_Months;

end Months;
```

Listing 34: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Months;           use Months;

procedure Main is

   type Test_Case_Index is
     (Months_Chk);

   procedure Check (TC : Test_Case_Index) is
   begin
      case TC is
         when Months_Chk =>
            Display_Months;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.3.2 Operations

Listing 35: operations.ads

```
package Operations is

   function Add (A, B : Integer) return Integer;

   function Subtract (A, B : Integer) return Integer;

   function Multiply (A, B : Integer) return Integer;

   function Divide (A, B : Integer) return Integer;

end Operations;
```

Listing 36: operations.adb

```
package body Operations is

   function Add (A, B : Integer) return Integer is
   begin
      return A + B;
   end Add;

   function Subtract (A, B : Integer) return Integer is
   begin
      return A - B;
   end Subtract;

   function Multiply (A, B : Integer) return Integer is
   begin
      return A * B;
   end Multiply;

   function Divide (A, B : Integer) return Integer is
   begin
      return A / B;
   end Divide;

end Operations;
```

Listing 37: operations-test.ads

```
package Operations.Test is

   procedure Display (A, B : Integer);

end Operations.Test;
```

Listing 38: operations-test.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Operations.Test is

   procedure Display (A, B : Integer) is
      A_Str : constant String := Integer'Image (A);
      B_Str : constant String := Integer'Image (B);
   begin
      Put_Line ("Operations:");
```

(continues on next page)

(continued from previous page)

```
      Put_Line (A_Str & " + " & B_Str & " = "
                & Integer'Image (Add (A, B))
                & ",");
      Put_Line (A_Str & " - " & B_Str & " = "
                & Integer'Image (Subtract (A, B))
                & ",");
      Put_Line (A_Str & " * " & B_Str & " = "
                & Integer'Image (Multiply (A, B))
                & ",");
      Put_Line (A_Str & " / " & B_Str & " = "
                & Integer'Image (Divide (A, B))
                & ",");
   end Display;

end Operations.Test;
```

Listing 39: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Operations;
with Operations.Test;  use Operations.Test;

procedure Main is

   type Test_Case_Index is
     (Operations_Chk,
      Operations_Display_Chk);

   procedure Check (TC : Test_Case_Index) is
   begin
      case TC is
         when Operations_Chk =>
            Put_Line ("Add (100, 2) = "
                      & Integer'Image (Operations.Add (100, 2)));
            Put_Line ("Subtract (100, 2) = "
                      & Integer'Image (Operations.Subtract (100, 2)));
            Put_Line ("Multiply (100, 2) = "
                      & Integer'Image (Operations.Multiply (100, 2)));
            Put_Line ("Divide (100, 2) = "
                      & Integer'Image (Operations.Divide (100, 2)));
         when Operations_Display_Chk =>
            Display (10, 5);
            Display ( 1, 2);
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.4 Strongly typed language

130.4.1 Colors

Listing 40: color_types.ads

```
package Color_Types is

   type HTML_Color is
     (Salmon,
      Firebrick,
      Red,
      Darkred,
      Lime,
      Forestgreen,
      Green,
      Darkgreen,
      Blue,
      Mediumblue,
      Darkblue);

   function To_Integer (C : HTML_Color) return Integer;

   type Basic_HTML_Color is
     (Red,
      Green,
      Blue);

   function To_HTML_Color (C : Basic_HTML_Color) return HTML_Color;

end Color_Types;
```

Listing 41: color_types.adb

```
package body Color_Types is

   function To_Integer (C : HTML_Color) return Integer is
   begin
      case C is
         when Salmon      => return 16#FA8072#;
         when Firebrick   => return 16#B22222#;
         when Red         => return 16#FF0000#;
         when Darkred     => return 16#8B0000#;
         when Lime        => return 16#00FF00#;
         when Forestgreen => return 16#228B22#;
         when Green       => return 16#008000#;
         when Darkgreen   => return 16#006400#;
         when Blue        => return 16#0000FF#;
         when Mediumblue  => return 16#0000CD#;
         when Darkblue    => return 16#00008B#;
      end case;

   end To_Integer;

   function To_HTML_Color (C : Basic_HTML_Color) return HTML_Color is
   begin
      case C is
         when Red   => return Red;
         when Green => return Green;
         when Blue  => return Blue;
      end case;
```

(continues on next page)

(continued from previous page)

```
   end To_HTML_Color;

end Color_Types;
```

Listing 42: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;
with Ada.Integer_Text_IO;

with Color_Types;       use Color_Types;

procedure Main is
   type Test_Case_Index is
     (HTML_Color_Range,
      HTML_Color_To_Integer,
      Basic_HTML_Color_To_HTML_Color);

   procedure Check (TC : Test_Case_Index) is
   begin
      case TC is
         when HTML_Color_Range =>
            for I in HTML_Color'Range loop
               Put_Line (HTML_Color'Image (I));
            end loop;
         when HTML_Color_To_Integer =>
            for I in HTML_Color'Range loop
               Ada.Integer_Text_IO.Put (Item  => To_Integer (I),
                                        Width => 1,
                                        Base  => 16);
               New_Line;
            end loop;
         when Basic_HTML_Color_To_HTML_Color =>
            for I in Basic_HTML_Color'Range loop
               Put_Line (HTML_Color'Image (To_HTML_Color (I)));
            end loop;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.4.2 Integers

Listing 43: int_types.ads

```
package Int_Types is

   type I_100 is range 0 .. 100;

   type U_100 is mod 101;
```

(continues on next page)

(continued from previous page)

```
6
7     function To_I_100 (V : U_100) return I_100;
8
9     function To_U_100 (V : I_100) return U_100;
10
11    type D_50 is new I_100 range 10 .. 50;
12
13    subtype S_50 is I_100 range 10 .. 50;
14
15    function To_D_50 (V : I_100) return D_50;
16
17    function To_S_50 (V : I_100) return S_50;
18
19    function To_I_100 (V : D_50) return I_100;
20
21 end Int_Types;
```

Listing 44: int_types.adb

```
1  package body Int_Types is
2
3     function To_I_100 (V : U_100) return I_100 is
4     begin
5        return I_100 (V);
6     end To_I_100;
7
8     function To_U_100 (V : I_100) return U_100 is
9     begin
10       return U_100 (V);
11    end To_U_100;
12
13    function To_D_50 (V : I_100) return D_50 is
14       Min : constant I_100 := I_100 (D_50'First);
15       Max : constant I_100 := I_100 (D_50'Last);
16    begin
17       if V > Max then
18          return D_50'Last;
19       elsif V < Min then
20          return D_50'First;
21       else
22          return D_50 (V);
23       end if;
24    end To_D_50;
25
26    function To_S_50 (V : I_100) return S_50 is
27    begin
28       if V > S_50'Last then
29          return S_50'Last;
30       elsif V < S_50'First then
31          return S_50'First;
32       else
33          return V;
34       end if;
35    end To_S_50;
36
37    function To_I_100 (V : D_50) return I_100 is
38    begin
39       return I_100 (V);
40    end To_I_100;
41
42 end Int_Types;
```

Listing 45: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Int_Types;        use Int_Types;

procedure Main is
   package I_100_IO is new Ada.Text_IO.Integer_IO (I_100);
   package U_100_IO is new Ada.Text_IO.Modular_IO (U_100);
   package D_50_IO  is new Ada.Text_IO.Integer_IO (D_50);

   use I_100_IO;
   use U_100_IO;
   use D_50_IO;

   type Test_Case_Index is
     (I_100_Range,
      U_100_Range,
      U_100_Wraparound,
      U_100_To_I_100,
      I_100_To_U_100,
      D_50_Range,
      S_50_Range,
      I_100_To_D_50,
      I_100_To_S_50,
      D_50_To_I_100,
      S_50_To_I_100);

   procedure Check (TC : Test_Case_Index) is
   begin
      I_100_IO.Default_Width := 1;
      U_100_IO.Default_Width := 1;
      D_50_IO.Default_Width  := 1;

      case TC is
         when I_100_Range =>
            Put (I_100'First);
            New_Line;
            Put (I_100'Last);
            New_Line;
         when U_100_Range =>
            Put (U_100'First);
            New_Line;
            Put (U_100'Last);
            New_Line;
         when U_100_Wraparound =>
            Put (U_100'First - 1);
            New_Line;
            Put (U_100'Last + 1);
            New_Line;
         when U_100_To_I_100 =>
            for I in U_100'Range loop
               I_100_IO.Put (To_I_100 (I));
               New_Line;
            end loop;
         when I_100_To_U_100 =>
            for I in I_100'Range loop
               Put (To_U_100 (I));
               New_Line;
            end loop;
```

(continues on next page)

(continued from previous page)

```
         when D_50_Range =>
            Put (D_50'First);
            New_Line;
            Put (D_50'Last);
            New_Line;
         when S_50_Range =>
            Put (S_50'First);
            New_Line;
            Put (S_50'Last);
            New_Line;
         when I_100_To_D_50 =>
            for I in I_100'Range loop
               Put (To_D_50 (I));
               New_Line;
            end loop;
         when I_100_To_S_50 =>
            for I in I_100'Range loop
               Put (To_S_50 (I));
               New_Line;
            end loop;
         when D_50_To_I_100 =>
            for I in D_50'Range loop
               Put (To_I_100 (I));
               New_Line;
            end loop;
         when S_50_To_I_100 =>
            for I in S_50'Range loop
               Put (I);
               New_Line;
            end loop;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.4.3 Temperatures

Listing 46: temperature_types.ads

```
package Temperature_Types is

   type Celsius is digits 6 range -273.15 .. 5504.85;

   type Int_Celsius is range -273 .. 5505;

   function To_Celsius (T : Int_Celsius) return Celsius;

   function To_Int_Celsius (T : Celsius) return Int_Celsius;

   type Kelvin is digits 6 range 0.0 .. 5778.00;

```

(continues on next page)

(continued from previous page)

```
   function To_Celsius (T : Kelvin) return Celsius;

   function To_Kelvin (T : Celsius) return Kelvin;

end Temperature_Types;
```

Listing 47: temperature_types.adb

```
package body Temperature_Types is

   function To_Celsius (T : Int_Celsius) return Celsius is
      Min : constant Float := Float (Celsius'First);
      Max : constant Float := Float (Celsius'Last);

      F   : constant Float := Float (T);
   begin
      if F > Max then
         return Celsius (Max);
      elsif F < Min then
         return Celsius (Min);
      else
         return Celsius (F);
      end if;
   end To_Celsius;

   function To_Int_Celsius (T : Celsius) return Int_Celsius is
   begin
      return Int_Celsius (T);
   end To_Int_Celsius;

   function To_Celsius (T : Kelvin) return Celsius is
      F : constant Float := Float (T);
   begin
      return Celsius (F - 273.15);
   end To_Celsius;

   function To_Kelvin (T : Celsius) return Kelvin is
      F : constant Float := Float (T);
   begin
      return Kelvin (F + 273.15);
   end To_Kelvin;

end Temperature_Types;
```

Listing 48: main.adb

```
with Ada.Command_Line;  use Ada.Command_Line;
with Ada.Text_IO;       use Ada.Text_IO;

with Temperature_Types; use Temperature_Types;

procedure Main is
   package Celsius_IO     is new Ada.Text_IO.Float_IO (Celsius);
   package Kelvin_IO      is new Ada.Text_IO.Float_IO (Kelvin);
   package Int_Celsius_IO is new Ada.Text_IO.Integer_IO (Int_Celsius);

   use Celsius_IO;
   use Kelvin_IO;
   use Int_Celsius_IO;

```

(continues on next page)

(continued from previous page)

```
   type Test_Case_Index is
     (Celsius_Range,
      Celsius_To_Int_Celsius,
      Int_Celsius_To_Celsius,
      Kelvin_To_Celsius,
      Celsius_To_Kelvin);

   procedure Check (TC : Test_Case_Index) is
   begin
      Celsius_IO.Default_Fore := 1;
      Kelvin_IO.Default_Fore  := 1;
      Int_Celsius_IO.Default_Width := 1;

      case TC is
         when Celsius_Range =>
            Put (Celsius'First);
            New_Line;
            Put (Celsius'Last);
            New_Line;
         when Celsius_To_Int_Celsius =>
            Put (To_Int_Celsius (Celsius'First));
            New_Line;
            Put (To_Int_Celsius (0.0));
            New_Line;
            Put (To_Int_Celsius (Celsius'Last));
            New_Line;
         when Int_Celsius_To_Celsius =>
            Put (To_Celsius (Int_Celsius'First));
            New_Line;
            Put (To_Celsius (0));
            New_Line;
            Put (To_Celsius (Int_Celsius'Last));
            New_Line;
         when Kelvin_To_Celsius =>
            Put (To_Celsius (Kelvin'First));
            New_Line;
            Put (To_Celsius (0));
            New_Line;
            Put (To_Celsius (Kelvin'Last));
            New_Line;
         when Celsius_To_Kelvin =>
            Put (To_Kelvin (Celsius'First));
            New_Line;
            Put (To_Kelvin (Celsius'Last));
            New_Line;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.5 Records

130.5.1 Directions

Listing 49: directions.ads

```
package Directions is

   type Angle_Mod is mod 360;

   type Direction is
     (North,
      Northeast,
      East,
      Southeast,
      South,
      Southwest,
      West,
      Northwest);

   function To_Direction (N: Angle_Mod) return Direction;

   type Ext_Angle is record
      Angle_Elem     : Angle_Mod;
      Direction_Elem : Direction;
   end record;

   function To_Ext_Angle (N : Angle_Mod) return Ext_Angle;

   procedure Display (N : Ext_Angle);

end Directions;
```

Listing 50: directions.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Directions is

   procedure Display (N : Ext_Angle) is
   begin
      Put_Line ("Angle: "
                & Angle_Mod'Image (N.Angle_Elem)
                & " => "
                & Direction'Image (N.Direction_Elem)
                & ".");
   end Display;

   function To_Direction (N : Angle_Mod) return Direction is
   begin
      case N is
         when   0        => return North;
         when   1 ..  89 => return Northeast;
         when  90        => return East;
         when  91 .. 179 => return Southeast;
         when 180        => return South;
         when 181 .. 269 => return Southwest;
         when 270        => return West;
         when 271 .. 359 => return Northwest;
      end case;
   end To_Direction;
```

(continues on next page)

(continued from previous page)

```
27
28    function To_Ext_Angle (N : Angle_Mod) return Ext_Angle is
29    begin
30       return (Angle_Elem     => N,
31               Direction_Elem => To_Direction (N));
32    end To_Ext_Angle;
33
34 end Directions;
```

Listing 51: main.adb

```
1  with Ada.Command_Line;  use Ada.Command_Line;
2  with Ada.Text_IO;       use Ada.Text_IO;
3
4  with Directions;        use Directions;
5
6  procedure Main is
7     type Test_Case_Index is
8       (Direction_Chk);
9
10    procedure Check (TC : Test_Case_Index) is
11    begin
12       case TC is
13       when Direction_Chk =>
14          Display (To_Ext_Angle (0));
15          Display (To_Ext_Angle (30));
16          Display (To_Ext_Angle (45));
17          Display (To_Ext_Angle (90));
18          Display (To_Ext_Angle (91));
19          Display (To_Ext_Angle (120));
20          Display (To_Ext_Angle (180));
21          Display (To_Ext_Angle (250));
22          Display (To_Ext_Angle (270));
23       end case;
24    end Check;
25
26 begin
27    if Argument_Count < 1 then
28       Put_Line ("ERROR: missing arguments! Exiting...");
29       return;
30    elsif Argument_Count > 1 then
31       Put_Line ("Ignoring additional arguments...");
32    end if;
33
34    Check (Test_Case_Index'Value (Argument (1)));
35 end Main;
```

130.5.2 Colors

Listing 52: color_types.ads

```
1  package Color_Types is
2
3     type HTML_Color is
4       (Salmon,
5        Firebrick,
6        Red,
7        Darkred,
8        Lime,
```

(continues on next page)

(continued from previous page)

```
      Forestgreen,
      Green,
      Darkgreen,
      Blue,
      Mediumblue,
      Darkblue);

   function To_Integer (C : HTML_Color) return Integer;

   type Basic_HTML_Color is
     (Red,
      Green,
      Blue);

   function To_HTML_Color (C : Basic_HTML_Color) return HTML_Color;

   subtype Int_Color is Integer range 0 .. 255;

   type RGB is record
      Red   : Int_Color;
      Green : Int_Color;
      Blue  : Int_Color;
   end record;

   function To_RGB (C : HTML_Color) return RGB;

   function Image (C : RGB) return String;

end Color_Types;
```

Listing 53: color_types.adb

```
with Ada.Integer_Text_IO;

package body Color_Types is

   function To_Integer (C : HTML_Color) return Integer is
   begin
      case C is
         when Salmon      => return 16#FA8072#;
         when Firebrick   => return 16#B22222#;
         when Red         => return 16#FF0000#;
         when Darkred     => return 16#8B0000#;
         when Lime        => return 16#00FF00#;
         when Forestgreen => return 16#228B22#;
         when Green       => return 16#008000#;
         when Darkgreen   => return 16#006400#;
         when Blue        => return 16#0000FF#;
         when Mediumblue  => return 16#0000CD#;
         when Darkblue    => return 16#00008B#;
      end case;

   end To_Integer;

   function To_HTML_Color (C : Basic_HTML_Color) return HTML_Color is
   begin
      case C is
         when Red   => return Red;
         when Green => return Green;
         when Blue  => return Blue;
      end case;
```

(continues on next page)

(continued from previous page)

```
   end To_HTML_Color;

   function To_RGB (C : HTML_Color) return RGB is
   begin
      case C is
         when Salmon      => return (16#FA#, 16#80#, 16#72#);
         when Firebrick   => return (16#B2#, 16#22#, 16#22#);
         when Red         => return (16#FF#, 16#00#, 16#00#);
         when Darkred     => return (16#8B#, 16#00#, 16#00#);
         when Lime        => return (16#00#, 16#FF#, 16#00#);
         when Forestgreen => return (16#22#, 16#8B#, 16#22#);
         when Green       => return (16#00#, 16#80#, 16#00#);
         when Darkgreen   => return (16#00#, 16#64#, 16#00#);
         when Blue        => return (16#00#, 16#00#, 16#FF#);
         when Mediumblue  => return (16#00#, 16#00#, 16#CD#);
         when Darkblue    => return (16#00#, 16#00#, 16#8B#);
      end case;

   end To_RGB;

   function Image (C : RGB) return String is
      subtype Str_Range is Integer range 1 .. 10;
      SR : String (Str_Range);
      SG : String (Str_Range);
      SB : String (Str_Range);
   begin
      Ada.Integer_Text_IO.Put (To    => SR,
                               Item  => C.Red,
                               Base  => 16);
      Ada.Integer_Text_IO.Put (To    => SG,
                               Item  => C.Green,
                               Base  => 16);
      Ada.Integer_Text_IO.Put (To    => SB,
                               Item  => C.Blue,
                               Base  => 16);
      return ("(Red => " & SR
              & ", Green => " & SG
              & ", Blue => "  & SB
              &")");
   end Image;

end Color_Types;
```

Listing 54: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Color_Types;      use Color_Types;

procedure Main is
   type Test_Case_Index is
     (HTML_Color_To_RGB);

   procedure Check (TC : Test_Case_Index) is
   begin
      case TC is
         when HTML_Color_To_RGB =>
            for I in HTML_Color'Range loop
               Put_Line (HTML_Color'Image (I) & " => "
                         & Image (To_RGB (I)) & ".");
```

(continues on next page)

(continued from previous page)

```
            end loop;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.5.3 Inventory

Listing 55: inventory_pkg.ads

```
package Inventory_Pkg is

   type Item_Name is
     (Ballpoint_Pen, Oil_Based_Pen_Marker, Feather_Quill_Pen);

   function To_String (I : Item_Name) return String;

   type Item is record
      Name     : Item_Name;
      Quantity : Natural;
      Price    : Float;
   end record;

   function Init (Name     : Item_Name;
                  Quantity : Natural;
                  Price    : Float) return Item;

   procedure Add (Assets : in out Float;
                  I      : Item);

end Inventory_Pkg;
```

Listing 56: inventory_pkg.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Inventory_Pkg is

   function To_String (I : Item_Name) return String is
   begin
      case I is
         when Ballpoint_Pen        => return "Ballpoint Pen";
         when Oil_Based_Pen_Marker => return "Oil-based Pen Marker";
         when Feather_Quill_Pen    => return "Feather Quill Pen";
      end case;
   end To_String;

   function Init (Name     : Item_Name;
                  Quantity : Natural;
                  Price    : Float) return Item is
```

(continues on next page)

(continued from previous page)

```
   begin
      Put_Line ("Item: " & To_String (Name) & ".");

      return (Name     => Name,
              Quantity => Quantity,
              Price    => Price);
   end Init;

   procedure Add (Assets : in out Float;
                  I      : Item) is
   begin
      Assets := Assets + Float (I.Quantity) * I.Price;
   end Add;

end Inventory_Pkg;
```

Listing 57: main.adb

```
with Ada.Command_Line;  use Ada.Command_Line;
with Ada.Text_IO;       use Ada.Text_IO;

with Inventory_Pkg;     use Inventory_Pkg;

procedure Main is
   --  Remark: the following line is not relevant.
   F   : array (1 .. 10) of Float := (others => 42.42);

   type Test_Case_Index is
     (Inventory_Chk);

   procedure Display (Assets : Float) is
      package F_IO is new Ada.Text_IO.Float_IO (Float);

      use F_IO;
   begin
      Put ("Assets: $");
      Put (Assets, 1, 2, 0);
      Put (".");
      New_Line;
   end Display;

   procedure Check (TC : Test_Case_Index) is
      I      : Item;
      Assets : Float := 0.0;

      --  Please ignore the following three lines!
      pragma Warnings (Off, "default initialization");
      for Assets'Address use F'Address;
      pragma Warnings (On, "default initialization");
   begin
      case TC is
      when Inventory_Chk =>
         I := Init (Ballpoint_Pen,        185,  0.15);
         Add (Assets, I);
         Display (Assets);

         I := Init (Oil_Based_Pen_Marker, 100,  9.0);
         Add (Assets, I);
         Display (Assets);

         I := Init (Feather_Quill_Pen,      2, 40.0);
```

(continues on next page)

(continued from previous page)

```
         Add (Assets, I);
         Display (Assets);
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.6 Arrays

130.6.1 Constrained Array

Listing 58: constrained_arrays.ads

```
package Constrained_Arrays is

   type My_Index is range 1 .. 10;

   type My_Array is array (My_Index) of Integer;

   function Init return My_Array;

   procedure Double (A : in out My_Array);

   function First_Elem (A : My_Array) return Integer;

   function Last_Elem (A : My_Array) return Integer;

   function Length (A : My_Array) return Integer;

   A : My_Array := (1, 2, others => 42);

end Constrained_Arrays;
```

Listing 59: constrained_arrays.adb

```
package body Constrained_Arrays is

   function Init return My_Array is
      A : My_Array;
   begin
      for I in My_Array'Range loop
         A (I) := Integer (I);
      end loop;

      return A;
   end Init;

   procedure Double (A : in out My_Array) is
   begin
```

(continues on next page)

(continued from previous page)

```
      for I in A'Range loop
         A (I) := A (I) * 2;
      end loop;
   end Double;

   function First_Elem (A : My_Array) return Integer is
   begin
      return A (A'First);
   end First_Elem;

   function Last_Elem (A : My_Array) return Integer is
   begin
      return A (A'Last);
   end Last_Elem;

   function Length (A : My_Array) return Integer is
   begin
      return A'Length;
   end Length;

end Constrained_Arrays;
```

Listing 60: main.adb

```
with Ada.Command_Line;   use Ada.Command_Line;
with Ada.Text_IO;        use Ada.Text_IO;

with Constrained_Arrays; use Constrained_Arrays;

procedure Main is
   type Test_Case_Index is
     (Range_Chk,
      Array_Range_Chk,
      A_Obj_Chk,
      Init_Chk,
      Double_Chk,
      First_Elem_Chk,
      Last_Elem_Chk,
      Length_Chk);

   procedure Check (TC : Test_Case_Index) is
      AA : My_Array;

      procedure Display (A : My_Array) is
      begin
         for I in A'Range loop
            Put_Line (Integer'Image (A (I)));
         end loop;
      end Display;

      procedure Local_Init (A : in out My_Array) is
      begin
         A := (100, 90, 80, 10, 20, 30, 40, 60, 50, 70);
      end Local_Init;
   begin
      case TC is
      when Range_Chk =>
         for I in My_Index loop
            Put_Line (My_Index'Image (I));
         end loop;
      when Array_Range_Chk =>
```

(continues on next page)

(continued from previous page)

```
         for I in My_Array'Range loop
            Put_Line (My_Index'Image (I));
         end loop;
      when A_Obj_Chk =>
         Display (A);
      when Init_Chk =>
         AA := Init;
         Display (AA);
      when Double_Chk =>
         Local_Init (AA);
         Double (AA);
         Display (AA);
      when First_Elem_Chk =>
         Local_Init (AA);
         Put_Line (Integer'Image (First_Elem (AA)));
      when Last_Elem_Chk =>
         Local_Init (AA);
         Put_Line (Integer'Image (Last_Elem (AA)));
      when Length_Chk =>
         Put_Line (Integer'Image (Length (AA)));
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.6.2 Colors: Lookup-Table

Listing 61: color_types.ads

```
package Color_Types is

   type HTML_Color is
     (Salmon,
      Firebrick,
      Red,
      Darkred,
      Lime,
      Forestgreen,
      Green,
      Darkgreen,
      Blue,
      Mediumblue,
      Darkblue);

   subtype Int_Color is Integer range 0 .. 255;

   type RGB is record
      Red   : Int_Color;
      Green : Int_Color;
      Blue  : Int_Color;
   end record;
```

(continues on next page)

(continued from previous page)

```
23
24    function To_RGB (C : HTML_Color) return RGB;
25
26    function Image (C : RGB) return String;
27
28    type HTML_Color_RGB is array (HTML_Color) of RGB;
29
30    To_RGB_Lookup_Table : constant HTML_Color_RGB
31      := (Salmon      => (16#FA#, 16#80#, 16#72#),
32          Firebrick   => (16#B2#, 16#22#, 16#22#),
33          Red         => (16#FF#, 16#00#, 16#00#),
34          Darkred     => (16#8B#, 16#00#, 16#00#),
35          Lime        => (16#00#, 16#FF#, 16#00#),
36          Forestgreen => (16#22#, 16#8B#, 16#22#),
37          Green       => (16#00#, 16#80#, 16#00#),
38          Darkgreen   => (16#00#, 16#64#, 16#00#),
39          Blue        => (16#00#, 16#00#, 16#FF#),
40          Mediumblue  => (16#00#, 16#00#, 16#CD#),
41          Darkblue    => (16#00#, 16#00#, 16#8B#));
42
43 end Color_Types;
```

Listing 62: color_types.adb

```
1  with Ada.Integer_Text_IO;
2  package body Color_Types is
3
4     function To_RGB (C : HTML_Color) return RGB is
5     begin
6        return To_RGB_Lookup_Table (C);
7     end To_RGB;
8
9     function Image (C : RGB) return String is
10       subtype Str_Range is Integer range 1 .. 10;
11       SR : String (Str_Range);
12       SG : String (Str_Range);
13       SB : String (Str_Range);
14    begin
15       Ada.Integer_Text_IO.Put (To    => SR,
16                                Item  => C.Red,
17                                Base  => 16);
18       Ada.Integer_Text_IO.Put (To    => SG,
19                                Item  => C.Green,
20                                Base  => 16);
21       Ada.Integer_Text_IO.Put (To    => SB,
22                                Item  => C.Blue,
23                                Base  => 16);
24       return ("(Red => " & SR
25               & ", Green => " & SG
26               & ", Blue => "  & SB
27               &")");
28    end Image;
29
30 end Color_Types;
```

Listing 63: main.adb

```
1  with Ada.Command_Line;     use Ada.Command_Line;
2  with Ada.Text_IO;          use Ada.Text_IO;
3
```

(continues on next page)

(continued from previous page)

```
with Color_Types;          use Color_Types;

procedure Main is
   type Test_Case_Index is
     (Color_Table_Chk,
      HTML_Color_To_Integer_Chk);

   procedure Check (TC : Test_Case_Index) is
   begin
      case TC is
         when Color_Table_Chk =>
            Put_Line ("Size of HTML_Color_RGB: "
                      & Integer'Image (HTML_Color_RGB'Length));
            Put_Line ("Firebrick: "
                      & Image (To_RGB_Lookup_Table (Firebrick)));
         when HTML_Color_To_Integer_Chk =>
            for I in HTML_Color'Range loop
               Put_Line (HTML_Color'Image (I) & " => "
                         & Image (To_RGB (I)) & ".");
            end loop;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.6.3 Unconstrained Array

Listing 64: unconstrained_arrays.ads

```
package Unconstrained_Arrays is

   type My_Array is array (Positive range <>) of Integer;

   procedure Init (A : in out My_Array);

   function Init (I, L : Positive) return My_Array;

   procedure Double (A : in out My_Array);

   function Diff_Prev_Elem (A : My_Array) return My_Array;

end Unconstrained_Arrays;
```

Listing 65: unconstrained_arrays.adb

```
package body Unconstrained_Arrays is

   procedure Init (A : in out My_Array) is
      Y : Natural := A'Last;
   begin
```

(continues on next page)

(continued from previous page)

```
      for I in A'Range loop
         A (I) := Y;
         Y := Y - 1;
      end loop;
   end Init;

   function Init (I, L : Positive) return My_Array is
      A : My_Array (I .. I + L - 1);
   begin
      Init (A);
      return A;
   end Init;

   procedure Double (A : in out My_Array) is
   begin
      for I in A'Range loop
         A (I) := A (I) * 2;
      end loop;
   end Double;

   function Diff_Prev_Elem (A : My_Array) return My_Array is
      A_Out : My_Array (A'Range);
   begin
      A_Out (A'First) := 0;
      for I in A'First + 1 .. A'Last loop
         A_Out (I) := A (I) - A (I - 1);
      end loop;

      return A_Out;
   end Diff_Prev_Elem;

end Unconstrained_Arrays;
```

Listing 66: main.adb

```
with Ada.Command_Line;     use Ada.Command_Line;
with Ada.Text_IO;          use Ada.Text_IO;

with Unconstrained_Arrays; use Unconstrained_Arrays;

procedure Main is
   type Test_Case_Index is
     (Init_Chk,
      Init_Proc_Chk,
      Double_Chk,
      Diff_Prev_Chk,
      Diff_Prev_Single_Chk);

   procedure Check (TC : Test_Case_Index) is
      AA : My_Array (1 .. 5);
      AB : My_Array (5 .. 9);

      procedure Display (A : My_Array) is
      begin
         for I in A'Range loop
            Put_Line (Integer'Image (A (I)));
         end loop;
      end Display;

      procedure Local_Init (A : in out My_Array) is
      begin
```

(continues on next page)

(continued from previous page)

```
27          A := (1, 2, 5, 10, -10);
28       end Local_Init;
29
30    begin
31       case TC is
32       when Init_Chk =>
33          AA := Init (AA'First, AA'Length);
34          AB := Init (AB'First, AB'Length);
35          Display (AA);
36          Display (AB);
37       when Init_Proc_Chk =>
38          Init (AA);
39          Init (AB);
40          Display (AA);
41          Display (AB);
42       when Double_Chk =>
43          Local_Init (AB);
44          Double (AB);
45          Display (AB);
46       when Diff_Prev_Chk =>
47          Local_Init (AB);
48          AB := Diff_Prev_Elem (AB);
49          Display (AB);
50       when Diff_Prev_Single_Chk =>
51          declare
52             A1 : My_Array (1 .. 1) := (1 => 42);
53          begin
54             A1 := Diff_Prev_Elem (A1);
55             Display (A1);
56          end;
57       end case;
58    end Check;
59
60 begin
61    if Argument_Count < 1 then
62       Put_Line ("ERROR: missing arguments! Exiting...");
63       return;
64    elsif Argument_Count > 1 then
65       Put_Line ("Ignoring additional arguments...");
66    end if;
67
68    Check (Test_Case_Index'Value (Argument (1)));
69 end Main;
```

130.6.4 Product info

Listing 67: product_info_pkg.ads

```
1  package Product_Info_Pkg is
2
3     subtype Quantity is Natural;
4
5     subtype Currency is Float;
6
7     type Product_Info is record
8        Units : Quantity;
9        Price : Currency;
10    end record;
11
12    type Product_Infos is array (Positive range <>) of Product_Info;
```

(continues on next page)

(continued from previous page)

```
13
14    type Currency_Array is array (Positive range <>) of Currency;
15
16    procedure Total (P   : Product_Infos;
17                     Tot : out Currency_Array);
18
19    function Total (P : Product_Infos) return Currency_Array;
20
21    function Total (P : Product_Infos) return Currency;
22
23 end Product_Info_Pkg;
```

Listing 68: product_info_pkg.adb

```
1  package body Product_Info_Pkg is
2
3     --  Get total for single product
4     function Total (P : Product_Info) return Currency is
5        (Currency (P.Units) * P.Price);
6
7     procedure Total (P   : Product_Infos;
8                      Tot : out Currency_Array) is
9     begin
10       for I in P'Range loop
11          Tot (I) := Total (P (I));
12       end loop;
13    end Total;
14
15    function Total (P : Product_Infos) return Currency_Array
16    is
17       Tot : Currency_Array (P'Range);
18    begin
19       Total (P, Tot);
20       return Tot;
21    end Total;
22
23    function Total (P : Product_Infos) return Currency
24    is
25       Tot : Currency := 0.0;
26    begin
27      for I in P'Range loop
28          Tot := Tot + Total (P (I));
29       end loop;
30       return Tot;
31    end Total;
32
33 end Product_Info_Pkg;
```

Listing 69: main.adb

```
1  with Ada.Command_Line;   use Ada.Command_Line;
2  with Ada.Text_IO;        use Ada.Text_IO;
3
4  with Product_Info_Pkg;   use Product_Info_Pkg;
5
6  procedure Main is
7     package Currency_IO is new Ada.Text_IO.Float_IO (Currency);
8
9     type Test_Case_Index is
10      (Total_Func_Chk,
```

(continues on next page)

(continued from previous page)

```
      Total_Proc_Chk,
      Total_Value_Chk);

   procedure Check (TC : Test_Case_Index) is
      subtype Test_Range is Positive range 1 .. 5;

      P    : Product_Infos (Test_Range);
      Tots : Currency_Array (Test_Range);
      Tot  : Currency;

      procedure Display (Tots : Currency_Array) is
      begin
         for I in Tots'Range loop
            Currency_IO.Put (Tots (I));
            New_Line;
         end loop;
      end Display;

      procedure Local_Init (P : in out Product_Infos) is
      begin
         P := ((1,   0.5),
               (2,  10.0),
               (5,  40.0),
               (10, 10.0),
               (10, 20.0));
      end Local_Init;

   begin
      Currency_IO.Default_Fore := 1;
      Currency_IO.Default_Aft  := 2;
      Currency_IO.Default_Exp  := 0;

      case TC is
      when Total_Func_Chk =>
         Local_Init (P);
         Tots := Total (P);
         Display (Tots);
      when Total_Proc_Chk =>
         Local_Init (P);
         Total (P, Tots);
         Display (Tots);
      when Total_Value_Chk =>
         Local_Init (P);
         Tot := Total (P);
         Currency_IO.Put (Tot);
         New_Line;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.6.5 String_10

Listing 70: strings_10.ads

```
package Strings_10 is

   subtype String_10 is String (1 .. 10);

   --  Using "type String_10 is..." is possible, too.

   function To_String_10 (S : String) return String_10;

end Strings_10;
```

Listing 71: strings_10.adb

```
package body Strings_10 is

   function To_String_10 (S : String) return String_10 is
      S_Out : String_10;
   begin
      for I in String_10'First .. Integer'Min (String_10'Last, S'Last) loop
         S_Out (I) := S (I);
      end loop;

      for I in Integer'Min (String_10'Last + 1, S'Last + 1) .. String_10'Last loop
         S_Out (I) := ' ';
      end loop;

      return S_Out;
   end To_String_10;

end Strings_10;
```

Listing 72: main.adb

```
with Ada.Command_Line;   use Ada.Command_Line;
with Ada.Text_IO;        use Ada.Text_IO;

with Strings_10;         use Strings_10;

procedure Main is
   type Test_Case_Index is
     (String_10_Long_Chk,
      String_10_Short_Chk);

   procedure Check (TC : Test_Case_Index) is
      SL   : constant String := "And this is a long string just for testing...";
      SS   : constant String := "Hey!";
      S_10 : String_10;

   begin
      case TC is
      when String_10_Long_Chk =>
         S_10 := To_String_10 (SL);
         Put_Line (String (S_10));
      when String_10_Short_Chk =>
         S_10 := (others => ' ');
         S_10 := To_String_10 (SS);
         Put_Line (String (S_10));
      end case;
   end Check;
```

(continues on next page)

(continued from previous page)

```
27
28 begin
29    if Argument_Count < 1 then
30       Ada.Text_IO.Put_Line ("ERROR: missing arguments! Exiting...");
31       return;
32    elsif Argument_Count > 1 then
33       Ada.Text_IO.Put_Line ("Ignoring additional arguments...");
34    end if;
35
36    Check (Test_Case_Index'Value (Argument (1)));
37 end Main;
```

130.6.6 List of Names

Listing 73: names_ages.ads

```
1  package Names_Ages is
2
3     Max_People : constant Positive := 10;
4
5     subtype Name_Type is String (1 .. 50);
6
7     type Age_Type is new Natural;
8
9     type Person is record
10       Name  : Name_Type;
11       Age   : Age_Type;
12    end record;
13
14    type People_Array is array (Positive range <>) of Person;
15
16    type People is record
17       People_A   : People_Array (1 .. Max_People);
18       Last_Valid : Natural;
19    end record;
20
21    procedure Reset (P : in out People);
22
23    procedure Add (P    : in out People;
24                   Name : String);
25
26    function Get (P    : People;
27                  Name : String) return Age_Type;
28
29    procedure Update (P    : in out People;
30                      Name : String;
31                      Age  : Age_Type);
32
33    procedure Display (P : People);
34
35 end Names_Ages;
```

Listing 74: names_ages.adb

```
1  with Ada.Text_IO;       use Ada.Text_IO;
2  with Ada.Strings;       use Ada.Strings;
3  with Ada.Strings.Fixed; use Ada.Strings.Fixed;
4
5  package body Names_Ages is
```

(continues on next page)

(continued from previous page)

```
6
7     function To_Name_Type (S : String) return Name_Type is
8        S_Out : Name_Type := (others => ' ');
9     begin
10       for I in 1 .. Integer'Min (S'Last, Name_Type'Last) loop
11          S_Out (I) := S (I);
12       end loop;
13
14       return S_Out;
15    end To_Name_Type;
16
17    procedure Init (P    : in out Person;
18                    Name :        String) is
19    begin
20       P.Name := To_Name_Type (Name);
21       P.Age := 0;
22    end Init;
23
24    function Match (P    : Person;
25                    Name : String) return Boolean is
26    begin
27       return P.Name = To_Name_Type (Name);
28    end Match;
29
30    function Get (P : Person) return Age_Type is
31    begin
32       return P.Age;
33    end Get;
34
35    procedure Update (P   : in out Person;
36                      Age :        Age_Type) is
37    begin
38       P.Age := Age;
39    end Update;
40
41    procedure Display (P : Person) is
42    begin
43       Put_Line ("NAME: " & Trim (P.Name, Right));
44       Put_Line ("AGE: "  & Age_Type'Image (P.Age));
45    end Display;
46
47    procedure Reset (P : in out People) is
48    begin
49       P.Last_Valid := 0;
50    end Reset;
51
52    procedure Add (P    : in out People;
53                   Name :        String) is
54    begin
55       P.Last_Valid := P.Last_Valid + 1;
56       Init (P.People_A (P.Last_Valid), Name);
57    end Add;
58
59    function Get (P    : People;
60                  Name : String) return Age_Type is
61    begin
62       for I in P.People_A'First .. P.Last_Valid loop
63          if Match (P.People_A (I), Name) then
64             return Get (P.People_A (I));
65          end if;
66       end loop;
```

(continues on next page)

(continued from previous page)

```
67
68          return 0;
69       end Get;
70
71       procedure Update (P    : in out People;
72                         Name :        String;
73                         Age  :        Age_Type) is
74       begin
75          for I in P.People_A'First .. P.Last_Valid loop
76             if Match (P.People_A (I), Name) then
77                Update (P.People_A (I), Age);
78             end if;
79          end loop;
80       end Update;
81
82       procedure Display (P : People) is
83       begin
84          Put_Line ("LIST OF NAMES:");
85          for I in P.People_A'First .. P.Last_Valid loop
86             Display (P.People_A (I));
87          end loop;
88       end Display;
89
90    end Names_Ages;
```

Listing 75: main.adb

```
1  with Ada.Command_Line;   use Ada.Command_Line;
2  with Ada.Text_IO;        use Ada.Text_IO;
3
4  with Names_Ages;         use Names_Ages;
5
6  procedure Main is
7     type Test_Case_Index is
8       (Names_Ages_Chk,
9        Get_Age_Chk);
10
11    procedure Check (TC : Test_Case_Index) is
12       P : People;
13    begin
14       case TC is
15       when Names_Ages_Chk =>
16          Reset (P);
17          Add (P, "John");
18          Add (P, "Patricia");
19          Add (P, "Josh");
20          Display (P);
21          Update (P, "John",     18);
22          Update (P, "Patricia", 35);
23          Update (P, "Josh",     53);
24          Display (P);
25       when Get_Age_Chk =>
26          Reset (P);
27          Add (P, "Peter");
28          Update (P, "Peter", 45);
29          Put_Line ("Peter is "
30                    & Age_Type'Image (Get (P, "Peter"))
31                    & " years old.");
32       end case;
33    end Check;
34
```

(continues on next page)

(continued from previous page)

```
begin
   if Argument_Count < 1 then
      Ada.Text_IO.Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Ada.Text_IO.Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.7 More About Types

130.7.1 Aggregate Initialization

Listing 76: aggregates.ads

```
package Aggregates is

   type Rec is record
      W : Integer := 10;
      X : Integer := 11;
      Y : Integer := 12;
      Z : Integer := 13;
   end record;

   type Int_Arr is array (1 .. 20) of Integer;

   procedure Init (R : out Rec);

   procedure Init_Some (A : out Int_Arr);

   procedure Init (A : out Int_Arr);

end Aggregates;
```

Listing 77: aggregates.adb

```
package body Aggregates is

   procedure Init (R : out Rec) is
   begin
      R := (X      => 100,
            Y      => 200,
            others => <>);
   end Init;

   procedure Init_Some (A : out Int_Arr) is
   begin
      A := (1 .. 5 => 99,
            others => 100);
   end Init_Some;

   procedure Init (A : out Int_Arr) is
   begin
      A := (others => 5);
   end Init;

end Aggregates;
```

Listing 78: main.adb

```
with Ada.Command_Line;  use Ada.Command_Line;
with Ada.Text_IO;       use Ada.Text_IO;

with Aggregates;        use Aggregates;

procedure Main is
   --  Remark: the following line is not relevant.
   F   : array (1 .. 10) of Float := (others => 42.42)
     with Unreferenced;

   type Test_Case_Index is
     (Default_Rec_Chk,
      Init_Rec_Chk,
      Init_Some_Arr_Chk,
      Init_Arr_Chk);

   procedure Check (TC : Test_Case_Index) is
      A : Int_Arr;
      R : Rec;
      DR : constant Rec := (others => <>);
   begin
      case TC is
         when Default_Rec_Chk =>
            R := DR;
            Put_Line ("Record Default:");
            Put_Line ("W => " & Integer'Image (R.W));
            Put_Line ("X => " & Integer'Image (R.X));
            Put_Line ("Y => " & Integer'Image (R.Y));
            Put_Line ("Z => " & Integer'Image (R.Z));
         when Init_Rec_Chk =>
            Init (R);
            Put_Line ("Record Init:");
            Put_Line ("W => " & Integer'Image (R.W));
            Put_Line ("X => " & Integer'Image (R.X));
            Put_Line ("Y => " & Integer'Image (R.Y));
            Put_Line ("Z => " & Integer'Image (R.Z));
         when Init_Some_Arr_Chk =>
            Init_Some (A);
            Put_Line ("Array Init_Some:");
            for I in A'Range loop
               Put_Line (Integer'Image (I) & " "
                         & Integer'Image (A (I)));
            end loop;
         when Init_Arr_Chk =>
            Init (A);
            Put_Line ("Array Init:");
            for I in A'Range loop
               Put_Line (Integer'Image (I) & " "
                         & Integer'Image (A (I)));
            end loop;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
```

(continues on next page)

(continued from previous page)

```
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.7.2 Versioning

Listing 79: versioning.ads

```
package Versioning is

   type Version is record
      Major       : Natural;
      Minor       : Natural;
      Maintenance : Natural;
   end record;

   function Convert (V : Version) return String;

   function Convert (V : Version) return Float;

end Versioning;
```

Listing 80: versioning.adb

```
with Ada.Strings; use Ada.Strings;
with Ada.Strings.Fixed; use Ada.Strings.Fixed;

package body Versioning is

   function Image_Trim (N : Natural) return String is
      S_N : constant String := Trim (Natural'Image (N), Left);
   begin
      return S_N;
   end Image_Trim;

   function Convert (V : Version) return String is
      S_Major : constant String := Image_Trim (V.Major);
      S_Minor : constant String := Image_Trim (V.Minor);
      S_Maint : constant String := Image_Trim (V.Maintenance);
   begin
      return (S_Major & "." & S_Minor & "." & S_Maint);
   end Convert;

   function Convert (V : Version) return Float is
   begin
      return Float (V.Major) + (Float (V.Minor) / 10.0);
   end Convert;

end Versioning;
```

Listing 81: main.adb

```
with Ada.Command_Line;  use Ada.Command_Line;
with Ada.Text_IO;       use Ada.Text_IO;

with Versioning;        use Versioning;

procedure Main is
```

(continues on next page)

(continued from previous page)

```
   type Test_Case_Index is
     (Ver_String_Chk,
      Ver_Float_Chk);

   procedure Check (TC : Test_Case_Index) is
      V : constant Version := (1, 3, 23);
   begin
      case TC is
         when Ver_String_Chk =>
            Put_Line (Convert (V));
         when Ver_Float_Chk =>
            Put_Line (Float'Image (Convert (V)));
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.7.3 Simple todo list

Listing 82: todo_lists.ads

```
package Todo_Lists is

   type Todo_Item is access String;

   type Todo_Items is array (Positive range <>) of Todo_Item;

   type Todo_List (Max_Len : Natural) is record
      Items : Todo_Items (1 .. Max_Len);
      Last  : Natural := 0;
   end record;

   procedure Add (Todos : in out Todo_List;
                  Item  : String);

   procedure Display (Todos : Todo_List);

end Todo_Lists;
```

Listing 83: todo_lists.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Todo_Lists is

   procedure Add (Todos : in out Todo_List;
                  Item  : String) is
   begin
      if Todos.Last < Todos.Items'Last then
         Todos.Last := Todos.Last + 1;
```

(continues on next page)

(continued from previous page)

```
         Todos.Items (Todos.Last) := new String'(Item);
      else
         Put_Line ("ERROR: list is full!");
      end if;
   end Add;

   procedure Display (Todos : Todo_List) is
   begin
      Put_Line ("TO-DO LIST");
      for I in Todos.Items'First .. Todos.Last loop
         Put_Line (Todos.Items (I).all);
      end loop;
   end Display;

end Todo_Lists;
```

Listing 84: main.adb

```
with Ada.Command_Line;  use Ada.Command_Line;
with Ada.Text_IO;       use Ada.Text_IO;

with Todo_Lists;        use Todo_Lists;

procedure Main is
   type Test_Case_Index is
     (Todo_List_Chk);

   procedure Check (TC : Test_Case_Index) is
      T : Todo_List (10);
   begin
      case TC is
         when Todo_List_Chk =>
            Add (T, "Buy milk");
            Add (T, "Buy tea");
            Add (T, "Buy present");
            Add (T, "Buy tickets");
            Add (T, "Pay electricity bill");
            Add (T, "Schedule dentist appointment");
            Add (T, "Call sister");
            Add (T, "Revise spreasheet");
            Add (T, "Edit entry page");
            Add (T, "Select new design");
            Add (T, "Create upgrade plan");
            Display (T);
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.7.4 Price list

Listing 85: price_lists.ads

```
package Price_Lists is

   type Price_Type is delta 0.01 digits 12;

   type Price_List_Array is array (Positive range <>) of Price_Type;

   type Price_List (Max : Positive) is record
      List : Price_List_Array (1 .. Max);
      Last : Natural := 0;
   end record;

   type Price_Result (Ok : Boolean) is record
      case Ok is
         when False =>
            null;
         when True =>
            Price : Price_Type;
      end case;
   end record;

   procedure Reset (Prices : in out Price_List);

   procedure Add (Prices : in out Price_List;
                  Item   : Price_Type);

   function Get (Prices : Price_List;
                 Idx    : Positive) return Price_Result;

   procedure Display (Prices : Price_List);

end Price_Lists;
```

Listing 86: price_lists.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Price_Lists is

   procedure Reset (Prices : in out Price_List) is
   begin
      Prices.Last := 0;
   end Reset;

   procedure Add (Prices : in out Price_List;
                  Item   : Price_Type) is
   begin
      if Prices.Last < Prices.List'Last then
         Prices.Last := Prices.Last + 1;
         Prices.List (Prices.Last) := Item;
      else
         Put_Line ("ERROR: list is full!");
      end if;
   end Add;

   function Get (Prices : Price_List;
                 Idx    : Positive) return Price_Result is
   begin
      if (Idx >= Prices.List'First and then
```

(continues on next page)

(continued from previous page)

```
          Idx <= Prices.Last)          then
         return Price_Result'(Ok    => True,
                              Price => Prices.List (Idx));
      else
         return Price_Result'(Ok    => False);
      end if;
   end Get;

   procedure Display (Prices : Price_List) is
   begin
      Put_Line ("PRICE LIST");
      for I in Prices.List'First .. Prices.Last loop
         Put_Line (Price_Type'Image (Prices.List (I)));
      end loop;
   end Display;

end Price_Lists;
```

Listing 87: main.adb

```
with Ada.Command_Line;  use Ada.Command_Line;
with Ada.Text_IO;       use Ada.Text_IO;

with Price_Lists;       use Price_Lists;

procedure Main is
   type Test_Case_Index is
     (Price_Type_Chk,
      Price_List_Chk,
      Price_List_Get_Chk);

   procedure Check (TC : Test_Case_Index) is
      L : Price_List (10);

      procedure Local_Init_List is
      begin
         Reset (L);
         Add (L, 1.45);
         Add (L, 2.37);
         Add (L, 3.21);
         Add (L, 4.14);
         Add (L, 5.22);
         Add (L, 6.69);
         Add (L, 7.77);
         Add (L, 8.14);
         Add (L, 9.99);
         Add (L, 10.01);
      end Local_Init_List;

      procedure Get_Display (Idx : Positive) is
         R : constant Price_Result := Get (L, Idx);
      begin
         Put_Line ("Attempt Get # " & Positive'Image (Idx));
         if R.Ok then
            Put_Line ("Element # " & Positive'Image (Idx)
                      & " => "     & Price_Type'Image (R.Price));
         else
            declare
            begin
               Put_Line ("Element # " & Positive'Image (Idx)
                         & " => "     & Price_Type'Image (R.Price));
```

(continues on next page)

(continued from previous page)

```
            exception
               when others =>
                  Put_Line ("Element not available (as expected)");
            end;
         end if;

      end Get_Display;

   begin
      case TC is
         when Price_Type_Chk =>
            Put_Line ("The delta    value of Price_Type is "
                      & Price_Type'Image (Price_Type'Delta) & ";");
            Put_Line ("The minimum  value of Price_Type is "
                      & Price_Type'Image (Price_Type'First) & ";");
            Put_Line ("The maximum  value of Price_Type is "
                      & Price_Type'Image (Price_Type'Last)  & ";");
         when Price_List_Chk =>
            Local_Init_List;
            Display (L);
         when Price_List_Get_Chk =>
            Local_Init_List;
            Get_Display (5);
            Get_Display (40);
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.8 Privacy

130.8.1 Directions

Listing 88: directions.ads

```
package Directions is

   type Angle_Mod is mod 360;

   type Direction is
     (North,
      Northwest,
      West,
      Southwest,
      South,
      Southeast,
      East);

   function To_Direction (N : Angle_Mod) return Direction;

```

(continues on next page)

(continued from previous page)

```
   type Ext_Angle is private;

   function To_Ext_Angle (N : Angle_Mod) return Ext_Angle;

   procedure Display (N : Ext_Angle);

private

   type Ext_Angle is record
      Angle_Elem     : Angle_Mod;
      Direction_Elem : Direction;
   end record;

end Directions;
```

Listing 89: directions.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Directions is

   procedure Display (N : Ext_Angle) is
   begin
      Put_Line ("Angle: "
                & Angle_Mod'Image (N.Angle_Elem)
                & " => "
                & Direction'Image (N.Direction_Elem)
                & ".");
   end Display;

   function To_Direction (N : Angle_Mod) return Direction is
   begin
      case N is
         when   0        => return East;
         when   1 ..  89 => return Northwest;
         when  90        => return North;
         when  91 .. 179 => return Northwest;
         when 180        => return West;
         when 181 .. 269 => return Southwest;
         when 270        => return South;
         when 271 .. 359 => return Southeast;
      end case;
   end To_Direction;

   function To_Ext_Angle (N : Angle_Mod) return Ext_Angle is
   begin
      return (Angle_Elem     => N,
              Direction_Elem => To_Direction (N));
   end To_Ext_Angle;

end Directions;
```

Listing 90: test_directions.adb

```
with Directions; use Directions;

procedure Test_Directions is
   type Ext_Angle_Array is array (Positive range <>) of Ext_Angle;

   All_Directions : constant Ext_Angle_Array (1 .. 6)
```

(continues on next page)

(continued from previous page)

```
     := (To_Ext_Angle (0),
         To_Ext_Angle (45),
         To_Ext_Angle (90),
         To_Ext_Angle (91),
         To_Ext_Angle (180),
         To_Ext_Angle (270));

begin
   for I in All_Directions'Range loop
      Display (All_Directions (I));
   end loop;

end Test_Directions;
```

Listing 91: main.adb

```
with Ada.Command_Line;  use Ada.Command_Line;
with Ada.Text_IO;       use Ada.Text_IO;

with Test_Directions;

procedure Main is
     type Test_Case_Index is
     (Direction_Chk);

   procedure Check (TC : Test_Case_Index) is
   begin
      case TC is
      when Direction_Chk =>
         Test_Directions;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.8.2 Limited Strings

Listing 92: limited_strings.ads

```
package Limited_Strings is

   type Lim_String is limited private;

   function Init (S : String) return Lim_String;

   function Init (Max : Positive) return Lim_String;

   procedure Put_Line (LS : Lim_String);

   procedure Copy (From :        Lim_String;
```

(continues on next page)

(continued from previous page)

```
                  To   : in out Lim_String);

   function "=" (Ref, Dut : Lim_String) return Boolean;

private

   type Lim_String is access String;

end Limited_Strings;
```

Listing 93: limited_strings.adb

```
with Ada.Text_IO;

package body Limited_Strings
is

   function Init (S : String) return Lim_String is
      LS : constant Lim_String := new String'(S);
   begin
      return Ls;
   end Init;

   function Init (Max : Positive) return Lim_String is
      LS : constant Lim_String := new String (1 .. Max);
   begin
      LS.all := (others => '_');
      return LS;
   end Init;

   procedure Put_Line (LS : Lim_String) is
   begin
      Ada.Text_IO.Put_Line (LS.all);
   end Put_Line;

   function Get_Min_Last (A, B : Lim_String) return Positive is
   begin
      return Positive'Min (A'Last, B'Last);
   end Get_Min_Last;

   procedure Copy (From :        Lim_String;
                   To   : in out Lim_String) is
      Min_Last : constant Positive := Get_Min_Last (From, To);
   begin
      To (To'First .. Min_Last)    := From (To'First .. Min_Last);
      To (Min_Last + 1 .. To'Last) := (others => '_');
   end;

   function "=" (Ref, Dut : Lim_String) return Boolean is
      Min_Last : constant Positive := Get_Min_Last (Ref, Dut);
   begin
      for I in Dut'First .. Min_Last loop
         if Dut (I) /= Ref (I) then
            return False;
         end if;
      end loop;

      return True;
   end;

end Limited_Strings;
```

Listing 94: check_lim_string.adb

```
with Ada.Text_IO;     use Ada.Text_IO;

with Limited_Strings; use Limited_Strings;

procedure Check_Lim_String is
   S  : constant String := "----------";
   S1 : constant Lim_String := Init ("Hello World");
   S2 : constant Lim_String := Init (30);
   S3 : Lim_String := Init (5);
   S4 : Lim_String := Init (S & S & S);
begin
   Put ("S1 => ");
   Put_Line (S1);
   Put ("S2 => ");
   Put_Line (S2);

   if S1 = S2 then
      Put_Line ("S1 is equal to S2.");
   else
      Put_Line ("S1 isn't equal to S2.");
   end if;

   Copy (From => S1, To => S3);
   Put ("S3 => ");
   Put_Line (S3);

   if S1 = S3 then
      Put_Line ("S1 is equal to S3.");
   else
      Put_Line ("S1 isn't equal to S3.");
   end if;

   Copy (From => S1, To => S4);
   Put ("S4 => ");
   Put_Line (S4);

   if S1 = S4 then
      Put_Line ("S1 is equal to S4.");
   else
      Put_Line ("S1 isn't equal to S4.");
   end if;
end Check_Lim_String;
```

Listing 95: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Check_Lim_String;

procedure Main is
   type Test_Case_Index is
     (Lim_String_Chk);

   procedure Check (TC : Test_Case_Index) is
   begin
      case TC is
      when Lim_String_Chk =>
         Check_Lim_String;
```

(continues on next page)

(continued from previous page)

```
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.9 Generics

130.9.1 Display Array

Listing 96: display_array.ads

```
generic
   type T_Range is range <>;
   type T_Element is private;
   type T_Array is array (T_Range range <>) of T_Element;
   with function Image (E : T_Element) return String;
procedure Display_Array (Header : String;
                         A      : T_Array);
```

Listing 97: display_array.adb

```
with Ada.Text_IO; use Ada.Text_IO;

procedure Display_Array (Header : String;
                         A      : T_Array) is
begin
   Put_Line (Header);
   for I in A'Range loop
      Put_Line (T_Range'Image (I) & ": " & Image (A (I)));
   end loop;
end Display_Array;
```

Listing 98: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Display_Array;

procedure Main is
   type Test_Case_Index is (Int_Array_Chk,
                            Point_Array_Chk);

   procedure Test_Int_Array is
      type Int_Array is array (Positive range <>) of Integer;

      procedure Display_Int_Array is new
        Display_Array (T_Range => Positive,
                       T_Element => Integer,
```

(continues on next page)

(continued from previous page)

```
                       T_Array   => Int_Array,
                       Image     => Integer'Image);

      A : constant Int_Array (1 .. 5) := (1, 2, 5, 7, 10);
   begin
      Display_Int_Array ("Integers", A);
   end Test_Int_Array;

   procedure Test_Point_Array is
      type Point is record
         X : Float;
         Y : Float;
      end record;

      type Point_Array is array (Natural range <>) of Point;

      function Image (P : Point) return String is
      begin
         return "(" & Float'Image (P.X)
           & ", " & Float'Image (P.Y) & ")";
      end Image;

      procedure Display_Point_Array is new
        Display_Array (T_Range   => Natural,
                       T_Element => Point,
                       T_Array   => Point_Array,
                       Image     => Image);

      A : constant Point_Array (0 .. 3) := ((1.0, 0.5), (2.0, -0.5),
                                            (5.0, 2.0), (-0.5, 2.0));
   begin
      Display_Point_Array ("Points", A);
   end Test_Point_Array;

   procedure Check (TC : Test_Case_Index) is
   begin
      case TC is
         when Int_Array_Chk =>
            Test_Int_Array;
         when Point_Array_Chk =>
            Test_Point_Array;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.9.2 Average of Array of Float

Listing 99: average.ads

```
generic
   type T_Range is range <>;
   type T_Element is digits <>;
   type T_Array is array (T_Range range <>) of T_Element;
function Average (A : T_Array) return T_Element;
```

Listing 100: average.adb

```
function Average (A : T_Array) return T_Element is
   Acc : Float := 0.0;
begin
   for I in A'Range loop
      Acc := Acc + Float (A (I));
   end loop;

   return T_Element (Acc / Float (A'Length));
end Average;
```

Listing 101: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Average;

procedure Main is
   type Test_Case_Index is (Float_Array_Chk,
                            Digits_7_Float_Array_Chk);

   procedure Test_Float_Array is
      type Float_Array is array (Positive range <>) of Float;

      function Average_Float is new
        Average (T_Range   => Positive,
                 T_Element => Float,
                 T_Array   => Float_Array);

      A : constant Float_Array (1 .. 5) := (1.0, 3.0, 5.0, 7.5, -12.5);
   begin
      Put_Line ("Average: " & Float'Image (Average_Float (A)));
   end Test_Float_Array;

   procedure Test_Digits_7_Float_Array is
      type Custom_Float is digits 7 range 0.0 .. 1.0;

      type Float_Array is
        array (Integer range <>) of Custom_Float;

      function Average_Float is new
        Average (T_Range   => Integer,
                 T_Element => Custom_Float,
                 T_Array   => Float_Array);

      A : constant Float_Array (-1 .. 3) := (0.5, 0.0, 1.0, 0.6, 0.5);
   begin
      Put_Line ("Average: "
                & Custom_Float'Image (Average_Float (A)));
   end Test_Digits_7_Float_Array;

```

(continues on next page)

(continued from previous page)

```
   procedure Check (TC : Test_Case_Index) is
   begin
      case TC is
         when Float_Array_Chk =>
            Test_Float_Array;
         when Digits_7_Float_Array_Chk =>
            Test_Digits_7_Float_Array;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.9.3 Average of Array of Any Type

Listing 102: average.ads

```
generic
   type T_Range is range <>;
   type T_Element is private;
   type T_Array is array (T_Range range <>) of T_Element;
   with function To_Float (E : T_Element) return Float is <>;
function Average (A : T_Array) return Float;
```

Listing 103: average.adb

```
function Average (A : T_Array) return Float is
   Acc : Float := 0.0;
begin
   for I in A'Range loop
      Acc := Acc + To_Float (A (I));
   end loop;

   return Acc / Float (A'Length);
end Average;
```

Listing 104: test_item.ads

```
procedure Test_Item;
```

Listing 105: test_item.adb

```
with Ada.Text_IO;      use Ada.Text_IO;

with Average;

procedure Test_Item is
   package F_IO is new Ada.Text_IO.Float_IO (Float);

   type Amount is delta 0.01 digits 12;

```

(continues on next page)

(continued from previous page)

```
   type Item is record
      Quantity : Natural;
      Price    : Amount;
   end record;

   type Item_Array is
     array (Positive range <>) of Item;

   function Get_Total (I : Item) return Float is
     (Float (I.Quantity) * Float (I.Price));

   function Get_Price (I : Item) return Float is
     (Float (I.Price));

   function Average_Total is new
     Average (T_Range   => Positive,
              T_Element => Item,
              T_Array   => Item_Array,
              To_Float  => Get_Total);

   function Average_Price is new
     Average (T_Range   => Positive,
              T_Element => Item,
              T_Array   => Item_Array,
              To_Float  => Get_Price);

   A : constant Item_Array (1 .. 4)
     := ((Quantity =>  5,   Price => 10.00),
         (Quantity => 80,   Price =>  2.50),
         (Quantity => 40,   Price =>  5.00),
         (Quantity => 20,   Price => 12.50));

begin
   Put ("Average per item & quantity: ");
   F_IO.Put (Average_Total (A), 3, 2, 0);
   New_Line;

   Put ("Average price:               ");
   F_IO.Put (Average_Price (A), 3, 2, 0);
   New_Line;
end Test_Item;
```

Listing 106: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Test_Item;

procedure Main is
   type Test_Case_Index is (Item_Array_Chk);

   procedure Check (TC : Test_Case_Index) is
   begin
      case TC is
         when Item_Array_Chk =>
            Test_Item;
      end case;
   end Check;

begin
```

(continues on next page)

(continued from previous page)

```
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.9.4 Generic list

Listing 107: gen_list.ads

```
generic
   type Item is private;
   type Items is array (Positive range <>) of Item;
   Name       :        String;
   List_Array : in out Items;
   Last       : in out Natural;
   with procedure Put (I : Item) is <>;
package Gen_List is

   procedure Init;

   procedure Add (I      :     Item;
                  Status : out Boolean);

   procedure Display;

end Gen_List;
```

Listing 108: gen_list.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Gen_List is

   procedure Init is
   begin
      Last := List_Array'First - 1;
   end Init;

   procedure Add (I      :     Item;
                  Status : out Boolean) is
   begin
      Status := Last < List_Array'Last;

      if Status then
         Last := Last + 1;
         List_Array (Last) := I;
      end if;
   end Add;

   procedure Display is
   begin
      Put_Line (Name);
      for I in List_Array'First .. Last loop
         Put (List_Array (I));
```

(continues on next page)

(continued from previous page)

```
         New_Line;
      end loop;
   end Display;

end Gen_List;
```

Listing 109: test_int.ads

```
procedure Test_Int;
```

Listing 110: test_int.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Gen_List;

procedure Test_Int is

   procedure Put (I : Integer) is
   begin
      Ada.Text_IO.Put (Integer'Image (I));
   end Put;

   type Integer_Array is array (Positive range <>) of Integer;

   A : Integer_Array (1 .. 3);
   L : Natural;

   package Int_List is new
     Gen_List (Item          => Integer,
               Items         => Integer_Array,
               Name          => "List of integers",
               List_Array    => A,
               Last          => L);

   Success : Boolean;

   procedure Display_Add_Success (Success : Boolean) is
   begin
      if Success then
         Put_Line ("Added item successfully!");
      else
         Put_Line ("Couldn't add item!");
      end if;

   end Display_Add_Success;

begin
   Int_List.Init;

   Int_List.Add (2, Success);
   Display_Add_Success (Success);

   Int_List.Add (5, Success);
   Display_Add_Success (Success);

   Int_List.Add (7, Success);
   Display_Add_Success (Success);

   Int_List.Add (8, Success);
```

(continues on next page)

(continued from previous page)

```
   Display_Add_Success (Success);

   Int_List.Display;
end Test_Int;
```

Listing 111: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Test_Int;

procedure Main is
   type Test_Case_Index is (Int_Chk);

   procedure Check (TC : Test_Case_Index) is
   begin
      case TC is
         when Int_Chk =>
            Test_Int;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.10 Exceptions

130.10.1 Uninitialized Value

Listing 112: options.ads

```
package Options is

   type Option is (Uninitialized,
                   Option_1,
                   Option_2,
                   Option_3);

   Uninitialized_Value : exception;

   function Image (O : Option) return String;

end Options;
```

Listing 113: options.adb

```
package body Options is

   function Image (O : Option) return String is
```

(continues on next page)

(continued from previous page)

```
   begin
      case O is
         when Uninitialized =>
            raise Uninitialized_Value with "Uninitialized value detected!";
         when others =>
            return Option'Image (O);
      end case;
   end Image;

end Options;
```

Listing 114: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;
with Ada.Exceptions;   use Ada.Exceptions;

with Options;          use Options;

procedure Main is
   type Test_Case_Index is
     (Options_Chk);

   procedure Check (TC : Test_Case_Index) is

      procedure Check (O : Option) is
      begin
         Put_Line (Image (O));
      exception
         when E : Uninitialized_Value =>
            Put_Line (Exception_Message (E));
      end Check;

   begin
      case TC is
      when Options_Chk =>
         for O in Option loop
            Check (O);
         end loop;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.10.2 Numerical Exception

Listing 115: tests.ads

```
package Tests is

```

(continues on next page)

(continued from previous page)

```
   type Test_ID is (Test_1, Test_2);

   Custom_Exception : exception;

   procedure Num_Exception_Test (ID : Test_ID);

end Tests;
```

Listing 116: tests.adb

```
package body Tests is

   pragma Warnings (Off, "variable ""C"" is assigned but never read");

   procedure Num_Exception_Test (ID : Test_ID) is
      A, B, C : Integer;
   begin
      case ID is
         when Test_1 =>
            A := Integer'Last;
            B := Integer'Last;
            C := A + B;
         when Test_2 =>
            raise Custom_Exception with "Custom_Exception raised!";
      end case;
   end Num_Exception_Test;

   pragma Warnings (On, "variable ""C"" is assigned but never read");

end Tests;
```

Listing 117: check_exception.adb

```
with Tests;          use Tests;

with Ada.Text_IO;    use Ada.Text_IO;
with Ada.Exceptions; use Ada.Exceptions;

procedure Check_Exception (ID : Test_ID) is
begin
   Num_Exception_Test (ID);
exception
   when Constraint_Error =>
      Put_Line ("Constraint_Error detected!");
   when E : others =>
      Put_Line (Exception_Message (E));
end Check_Exception;
```

Listing 118: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;
with Ada.Exceptions;   use Ada.Exceptions;

with Tests;            use Tests;
with Check_Exception;

procedure Main is
   type Test_Case_Index is
     (Exception_1_Chk,
```

(continues on next page)

(continued from previous page)

```
      Exception_2_Chk);

   procedure Check (TC : Test_Case_Index) is

      procedure Check_Handle_Exception (ID : Test_ID) is
      begin
         Check_Exception (ID);
      exception
         when Constraint_Error =>
            Put_Line ("Constraint_Error"
                      & " (raised by Check_Exception) detected!");
         when E : others =>
            Put_Line (Exception_Name (E)
                      & " (raised by Check_Exception) detected!");
      end Check_Handle_Exception;

   begin
      case TC is
      when Exception_1_Chk =>
         Check_Handle_Exception (Test_1);
      when Exception_2_Chk =>
         Check_Handle_Exception (Test_2);
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.10.3 Re-raising Exceptions

Listing 119: tests.ads

```
package Tests is

   type Test_ID is (Test_1, Test_2);

   Custom_Exception, Another_Exception : exception;

   procedure Num_Exception_Test (ID : Test_ID);

end Tests;
```

Listing 120: tests.adb

```
package body Tests is

   pragma Warnings (Off, "variable ""C"" is assigned but never read");

   procedure Num_Exception_Test (ID : Test_ID) is
      A, B, C : Integer;
   begin
```

(continues on next page)

(continued from previous page)

```
      case ID is
         when Test_1 =>
            A := Integer'Last;
            B := Integer'Last;
            C := A + B;
         when Test_2 =>
            raise Custom_Exception with "Custom_Exception raised!";
      end case;
   end Num_Exception_Test;

   pragma Warnings (On, "variable ""C"" is assigned but never read");

end Tests;
```

Listing 121: check_exception.ads

```
with Tests; use Tests;

procedure Check_Exception (ID : Test_ID);
```

Listing 122: check_exception.adb

```
with Ada.Text_IO;    use Ada.Text_IO;
with Ada.Exceptions; use Ada.Exceptions;

procedure Check_Exception (ID : Test_ID) is
begin
   Num_Exception_Test (ID);
exception
   when Constraint_Error =>
      Put_Line ("Constraint_Error detected!");
      raise;
   when E : others =>
      Put_Line (Exception_Message (E));
      raise Another_Exception;
end Check_Exception;
```

Listing 123: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;
with Ada.Exceptions;   use Ada.Exceptions;

with Tests;            use Tests;
with Check_Exception;

procedure Main is
   type Test_Case_Index is
     (Exception_1_Chk,
      Exception_2_Chk);

   procedure Check (TC : Test_Case_Index) is

      procedure Check_Handle_Exception (ID : Test_ID) is
      begin
         Check_Exception (ID);
      exception
         when Constraint_Error =>
            Put_Line ("Constraint_Error"
                      & " (raised by Check_Exception) detected!");
```

(continues on next page)

(continued from previous page)

```
         when E : others =>
            Put_Line (Exception_Name (E)
                      & " (raised by Check_Exception) detected!");
      end Check_Handle_Exception;

   begin
      case TC is
      when Exception_1_Chk =>
         Check_Handle_Exception (Test_1);
      when Exception_2_Chk =>
         Check_Handle_Exception (Test_2);
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.11 Tasking

130.11.1 Display Service

Listing 124: display_services.ads

```
package Display_Services is

   task type Display_Service is
      entry Display (S : String);
      entry Display (I : Integer);
   end Display_Service;

end Display_Services;
```

Listing 125: display_services.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Display_Services is

   task body Display_Service is
   begin
      loop
         select
            accept Display (S : String) do
               Put_Line (S);
            end Display;
         or
            accept Display (I : Integer) do
               Put_Line (Integer'Image (I));
            end Display;
         or
```

(continues on next page)

(continued from previous page)

```
            terminate;
         end select;
      end loop;
   end Display_Service;

end Display_Services;
```

Listing 126: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Display_Services; use Display_Services;

procedure Main is
   type Test_Case_Index is (Display_Service_Chk);

   procedure Check (TC : Test_Case_Index) is
      Display : Display_Service;
   begin
      case TC is
         when Display_Service_Chk =>
            Display.Display ("Hello");
            delay 0.5;
            Display.Display ("Hello again");
            delay 0.5;
            Display.Display (55);
            delay 0.5;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.11.2 Event Manager

Listing 127: event_managers.ads

```
with Ada.Real_Time; use Ada.Real_Time;

package Event_Managers is

   task type Event_Manager is
      entry Start (ID : Natural);
      entry Event (T : Time);
   end Event_Manager;

end Event_Managers;
```

Listing 128: event_managers.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Event_Managers is

   task body Event_Manager is
      Event_ID    : Natural := 0;
      Event_Delay : Time;
   begin
      accept Start (ID : Natural) do
         Event_ID := ID;
      end Start;

      accept Event (T : Time) do
         Event_Delay := T;
      end Event;

      delay until Event_Delay;

      Put_Line ("Event #" & Natural'Image (Event_ID));
   end Event_Manager;

end Event_Managers;
```

Listing 129: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Event_Managers;   use Event_Managers;
with Ada.Real_Time;    use Ada.Real_Time;

procedure Main is
   type Test_Case_Index is (Event_Manager_Chk);

   procedure Check (TC : Test_Case_Index) is
      Ev_Mng : array (1 .. 5) of Event_Manager;
   begin
      case TC is
         when Event_Manager_Chk =>
            for I in Ev_Mng'Range loop
               Ev_Mng (I).Start (I);
            end loop;
            Ev_Mng (1).Event (Clock + Seconds (5));
            Ev_Mng (2).Event (Clock + Seconds (3));
            Ev_Mng (3).Event (Clock + Seconds (1));
            Ev_Mng (4).Event (Clock + Seconds (2));
            Ev_Mng (5).Event (Clock + Seconds (4));
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
```

(continues on next page)

(continued from previous page)

```
end Main;
```

130.11.3 Generic Protected Queue

Listing 130: gen_queues.ads

```
generic
   type Queue_Index is mod <>;
   type T is private;
package Gen_Queues is

   type Queue_Array is array (Queue_Index) of T;

   protected type Queue is
      function Empty return Boolean;
      function Full return Boolean;
      entry Push (V : T);
      entry Pop (V : out T);
   private
      N   : Natural     := 0;
      Idx : Queue_Index := Queue_Array'First;
      A   : Queue_Array;
   end Queue;

end Gen_Queues;
```

Listing 131: gen_queues.adb

```
package body Gen_Queues is

   protected body Queue is

      function Empty return Boolean is
        (N = 0);

      function Full return Boolean is
         (N = A'Length);

      entry Push (V : T) when not Full is
      begin
         A (Idx) := V;

         Idx := Idx + 1;
         N   := N + 1;
      end Push;

      entry Pop (V : out T) when not Empty is
      begin
         N := N - 1;

         V := A (Idx - Queue_Index (N) - 1);
      end Pop;

   end Queue;

end Gen_Queues;
```

Listing 132: queue_tests.ads

```
package Queue_Tests is

   procedure Simple_Test;

   procedure Concurrent_Test;

end Queue_Tests;
```

Listing 133: queue_tests.adb

```
with Ada.Text_IO; use Ada.Text_IO;

with Gen_Queues;

package body Queue_Tests is

   Max : constant := 10;
   type Queue_Mod is mod Max;

   procedure Simple_Test is
      package Queues_Float is new Gen_Queues (Queue_Mod, Float);

      Q_F : Queues_Float.Queue;
      V   : Float;
   begin
      V := 10.0;
      while not Q_F.Full loop
         Q_F.Push (V);
         V := V + 1.5;
      end loop;

      while not Q_F.Empty loop
         Q_F.Pop (V);
         Put_Line ("Value from queue: " & Float'Image (V));
      end loop;
   end Simple_Test;

   procedure Concurrent_Test is
      package Queues_Integer is new Gen_Queues (Queue_Mod, Integer);

      Q_I : Queues_Integer.Queue;

      task T_Producer;
      task T_Consumer;

      task body T_Producer is
         V : Integer := 100;
      begin
         for I in 1 .. 2 * Max loop
            Q_I.Push (V);
            V := V + 1;
         end loop;
      end T_Producer;

      task body T_Consumer is
         V : Integer;
      begin
         delay 1.5;

```

(continues on next page)

(continued from previous page)

```
         while not Q_I.Empty loop
            Q_I.Pop (V);
            Put_Line ("Value from queue: " & Integer'Image (V));
            delay 0.2;
         end loop;
      end T_Consumer;
   begin
      null;
   end Concurrent_Test;

end Queue_Tests;
```

Listing 134: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Queue_Tests;      use Queue_Tests;

procedure Main is
   type Test_Case_Index is (Simple_Queue_Chk,
                            Concurrent_Queue_Chk);

   procedure Check (TC : Test_Case_Index) is
   begin
      case TC is
         when Simple_Queue_Chk =>
            Simple_Test;
         when Concurrent_Queue_Chk =>
            Concurrent_Test;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.12 Design by contracts

130.12.1 Price Range

Listing 135: prices.ads

```
package Prices is

   type Amount is delta 10.0 ** (-2) digits 12;

   --  subtype Price is Amount range 0.0 .. Amount'Last;

   subtype Price is Amount
     with Static_Predicate => Price >= 0.0;
```

(continues on next page)

(continued from previous page)

```
9
10 end Prices;
```

Listing 136: main.adb

```
1  with Ada.Command_Line;  use Ada.Command_Line;
2  with Ada.Text_IO;       use Ada.Text_IO;
3  with System.Assertions; use System.Assertions;
4
5  with Prices;            use Prices;
6
7  procedure Main is
8
9     type Test_Case_Index is
10      (Price_Range_Chk);
11
12    procedure Check (TC : Test_Case_Index) is
13
14       procedure Check_Range (A : Amount) is
15          P : constant Price := A;
16       begin
17          Put_Line ("Price: " & Price'Image (P));
18       end Check_Range;
19
20    begin
21       case TC is
22       when Price_Range_Chk =>
23          Check_Range (-2.0);
24       end case;
25    exception
26       when Constraint_Error =>
27          Put_Line ("Constraint_Error detected (NOT as expected).");
28       when Assert_Failure =>
29          Put_Line ("Assert_Failure detected (as expected).");
30    end Check;
31
32 begin
33    if Argument_Count < 1 then
34       Put_Line ("ERROR: missing arguments! Exiting...");
35       return;
36    elsif Argument_Count > 1 then
37       Put_Line ("Ignoring additional arguments...");
38    end if;
39
40    Check (Test_Case_Index'Value (Argument (1)));
41 end Main;
```

130.12.2 Pythagorean Theorem: Predicate

Listing 137: triangles.ads

```
1  package Triangles is
2
3     subtype Length is Integer;
4
5     type Right_Triangle is record
6        H      : Length := 0;
7        --  Hypotenuse
8        C1, C2 : Length := 0;
```

(continues on next page)

(continued from previous page)

```
      --  Catheti / legs
   end record
     with Dynamic_Predicate => H * H = C1 * C1 + C2 * C2;

   function Init (H, C1, C2 : Length) return Right_Triangle is
     ((H, C1, C2));

end Triangles;
```

Listing 138: triangles-io.ads

```
package Triangles.IO is

   function Image (T : Right_Triangle) return String;

end Triangles.IO;
```

Listing 139: triangles-io.adb

```
package body Triangles.IO is

   function Image (T : Right_Triangle) return String is
     ("("    & Length'Image (T.H)
      & ", " & Length'Image (T.C1)
      & ", " & Length'Image (T.C2)
      & ")");

end Triangles.IO;
```

Listing 140: main.adb

```
with Ada.Command_Line;  use Ada.Command_Line;
with Ada.Text_IO;       use Ada.Text_IO;
with System.Assertions; use System.Assertions;

with Triangles;         use Triangles;
with Triangles.IO;      use Triangles.IO;

procedure Main is

   type Test_Case_Index is
     (Triangle_8_6_Pass_Chk,
      Triangle_8_6_Fail_Chk,
      Triangle_10_24_Pass_Chk,
      Triangle_10_24_Fail_Chk,
      Triangle_18_24_Pass_Chk,
      Triangle_18_24_Fail_Chk);

   procedure Check (TC : Test_Case_Index) is

      procedure Check_Triangle (H, C1, C2 : Length) is
         T : Right_Triangle;
      begin
         T := Init (H, C1, C2);
         Put_Line (Image (T));
      exception
         when Constraint_Error =>
            Put_Line ("Constraint_Error detected (NOT as expected).");
         when Assert_Failure =>
            Put_Line ("Assert_Failure detected (as expected).");
```

(continues on next page)

(continued from previous page)

```
      end Check_Triangle;

   begin
      case TC is
         when Triangle_8_6_Pass_Chk   => Check_Triangle (10,  8,  6);
         when Triangle_8_6_Fail_Chk   => Check_Triangle (12,  8,  6);
         when Triangle_10_24_Pass_Chk => Check_Triangle (26, 10, 24);
         when Triangle_10_24_Fail_Chk => Check_Triangle (12, 10, 24);
         when Triangle_18_24_Pass_Chk => Check_Triangle (30, 18, 24);
         when Triangle_18_24_Fail_Chk => Check_Triangle (32, 18, 24);
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.12.3 Pythagorean Theorem: Precondition

Listing 141: triangles.ads

```
package Triangles is

   subtype Length is Integer;

   type Right_Triangle is record
      H      : Length := 0;
      --  Hypotenuse
      C1, C2 : Length := 0;
      --  Catheti / legs
   end record;

   function Init (H, C1, C2 : Length) return Right_Triangle is
     ((H, C1, C2))
      with Pre => H * H = C1 * C1 + C2 * C2;

end Triangles;
```

Listing 142: triangles-io.ads

```
package Triangles.IO is

   function Image (T : Right_Triangle) return String;

end Triangles.IO;
```

Listing 143: triangles-io.adb

```
package body Triangles.IO is

   function Image (T : Right_Triangle) return String is
     ("("    & Length'Image (T.H)
```

(continues on next page)

(continued from previous page)

```
      & ", " & Length'Image (T.C1)
      & ", " & Length'Image (T.C2)
      & ")");

end Triangles.IO;
```

Listing 144: main.adb

```
with Ada.Command_Line;  use Ada.Command_Line;
with Ada.Text_IO;       use Ada.Text_IO;
with System.Assertions; use System.Assertions;

with Triangles;         use Triangles;
with Triangles.IO;      use Triangles.IO;

procedure Main is

   type Test_Case_Index is
     (Triangle_8_6_Pass_Chk,
      Triangle_8_6_Fail_Chk,
      Triangle_10_24_Pass_Chk,
      Triangle_10_24_Fail_Chk,
      Triangle_18_24_Pass_Chk,
      Triangle_18_24_Fail_Chk);

   procedure Check (TC : Test_Case_Index) is

      procedure Check_Triangle (H, C1, C2 : Length) is
         T : Right_Triangle;
      begin
         T := Init (H, C1, C2);
         Put_Line (Image (T));
      exception
         when Constraint_Error =>
            Put_Line ("Constraint_Error detected (NOT as expected).");
         when Assert_Failure =>
            Put_Line ("Assert_Failure detected (as expected).");
      end Check_Triangle;

   begin
      case TC is
         when Triangle_8_6_Pass_Chk   => Check_Triangle (10,  8,  6);
         when Triangle_8_6_Fail_Chk   => Check_Triangle (12,  8,  6);
         when Triangle_10_24_Pass_Chk => Check_Triangle (26, 10, 24);
         when Triangle_10_24_Fail_Chk => Check_Triangle (12, 10, 24);
         when Triangle_18_24_Pass_Chk => Check_Triangle (30, 18, 24);
         when Triangle_18_24_Fail_Chk => Check_Triangle (32, 18, 24);
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.12.4 Pythagorean Theorem: Postcondition

Listing 145: triangles.ads

```
package Triangles is

   subtype Length is Integer;

   type Right_Triangle is record
      H      : Length := 0;
      --  Hypotenuse
      C1, C2 : Length := 0;
      --  Catheti / legs
   end record;

   function Init (H, C1, C2 : Length) return Right_Triangle is
     ((H, C1, C2))
      with Post => (Init'Result.H * Init'Result.H
                    = Init'Result.C1 * Init'Result.C1
                    + Init'Result.C2 * Init'Result.C2);

end Triangles;
```

Listing 146: triangles-io.ads

```
package Triangles.IO is

   function Image (T : Right_Triangle) return String;

end Triangles.IO;
```

Listing 147: triangles-io.adb

```
package body Triangles.IO is

   function Image (T : Right_Triangle) return String is
     ("("    & Length'Image (T.H)
      & ", " & Length'Image (T.C1)
      & ", " & Length'Image (T.C2)
      & ")");

end Triangles.IO;
```

Listing 148: main.adb

```
with Ada.Command_Line;  use Ada.Command_Line;
with Ada.Text_IO;       use Ada.Text_IO;
with System.Assertions; use System.Assertions;

with Triangles;         use Triangles;
with Triangles.IO;      use Triangles.IO;

procedure Main is

   type Test_Case_Index is
     (Triangle_8_6_Pass_Chk,
      Triangle_8_6_Fail_Chk,
      Triangle_10_24_Pass_Chk,
      Triangle_10_24_Fail_Chk,
      Triangle_18_24_Pass_Chk,
      Triangle_18_24_Fail_Chk);
```

(continues on next page)

(continued from previous page)

```

   procedure Check (TC : Test_Case_Index) is

      procedure Check_Triangle (H, C1, C2 : Length) is
         T : Right_Triangle;
      begin
         T := Init (H, C1, C2);
         Put_Line (Image (T));
      exception
         when Constraint_Error =>
            Put_Line ("Constraint_Error detected (NOT as expected).");
         when Assert_Failure =>
            Put_Line ("Assert_Failure detected (as expected).");
      end Check_Triangle;

   begin
      case TC is
         when Triangle_8_6_Pass_Chk   => Check_Triangle (10,  8,  6);
         when Triangle_8_6_Fail_Chk   => Check_Triangle (12,  8,  6);
         when Triangle_10_24_Pass_Chk => Check_Triangle (26, 10, 24);
         when Triangle_10_24_Fail_Chk => Check_Triangle (12, 10, 24);
         when Triangle_18_24_Pass_Chk => Check_Triangle (30, 18, 24);
         when Triangle_18_24_Fail_Chk => Check_Triangle (32, 18, 24);
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.12.5 Pythagorean Theorem: Type Invariant

Listing 149: triangles.ads

```
package Triangles is

   subtype Length is Integer;

   type Right_Triangle is private
     with Type_Invariant => Check (Right_Triangle);

   function Check (T : Right_Triangle) return Boolean;

   function Init (H, C1, C2 : Length) return Right_Triangle;

private

   type Right_Triangle is record
      H      : Length := 0;
      --  Hypotenuse
      C1, C2 : Length := 0;
      --  Catheti / legs
   end record;
```

(continues on next page)

(continued from previous page)

```
20
21    function Init (H, C1, C2 : Length) return Right_Triangle is
22      ((H, C1, C2));
23
24    function Check (T : Right_Triangle) return Boolean is
25      (T.H * T.H = T.C1 * T.C1 + T.C2 * T.C2);
26
27 end Triangles;
```

Listing 150: triangles-io.ads

```
1  package Triangles.IO is
2
3     function Image (T : Right_Triangle) return String;
4
5  end Triangles.IO;
```

Listing 151: triangles-io.adb

```
1  package body Triangles.IO is
2
3     function Image (T : Right_Triangle) return String is
4       ("("    & Length'Image (T.H)
5        & ", " & Length'Image (T.C1)
6        & ", " & Length'Image (T.C2)
7        & ")");
8
9  end Triangles.IO;
```

Listing 152: main.adb

```
1  with Ada.Command_Line;  use Ada.Command_Line;
2  with Ada.Text_IO;       use Ada.Text_IO;
3  with System.Assertions; use System.Assertions;
4
5  with Triangles;         use Triangles;
6  with Triangles.IO;      use Triangles.IO;
7
8  procedure Main is
9
10    type Test_Case_Index is
11      (Triangle_8_6_Pass_Chk,
12       Triangle_8_6_Fail_Chk,
13       Triangle_10_24_Pass_Chk,
14       Triangle_10_24_Fail_Chk,
15       Triangle_18_24_Pass_Chk,
16       Triangle_18_24_Fail_Chk);
17
18    procedure Check (TC : Test_Case_Index) is
19
20       procedure Check_Triangle (H, C1, C2 : Length) is
21          T : Right_Triangle;
22       begin
23          T := Init (H, C1, C2);
24          Put_Line (Image (T));
25       exception
26          when Constraint_Error =>
27             Put_Line ("Constraint_Error detected (NOT as expected).");
28          when Assert_Failure =>
29             Put_Line ("Assert_Failure detected (as expected).");
```

(continues on next page)

(continued from previous page)

```
      end Check_Triangle;

   begin
      case TC is
         when Triangle_8_6_Pass_Chk   => Check_Triangle (10,  8,  6);
         when Triangle_8_6_Fail_Chk   => Check_Triangle (12,  8,  6);
         when Triangle_10_24_Pass_Chk => Check_Triangle (26, 10, 24);
         when Triangle_10_24_Fail_Chk => Check_Triangle (12, 10, 24);
         when Triangle_18_24_Pass_Chk => Check_Triangle (30, 18, 24);
         when Triangle_18_24_Fail_Chk => Check_Triangle (32, 18, 24);
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.12.6 Primary Colors

Listing 153: color_types.ads

```
package Color_Types is

   type HTML_Color is
     (Salmon,
      Firebrick,
      Red,
      Darkred,
      Lime,
      Forestgreen,
      Green,
      Darkgreen,
      Blue,
      Mediumblue,
      Darkblue);

   subtype Int_Color is Integer range 0 .. 255;

   function Image (I : Int_Color) return String;

   type RGB is record
      Red   : Int_Color;
      Green : Int_Color;
      Blue  : Int_Color;
   end record;

   function To_RGB (C : HTML_Color) return RGB;

   function Image (C : RGB) return String;

   type HTML_Color_RGB_Array is array (HTML_Color) of RGB;

   To_RGB_Lookup_Table : constant HTML_Color_RGB_Array
```

(continues on next page)

(continued from previous page)

```
      := (Salmon      => (16#FA#, 16#80#, 16#72#),
          Firebrick   => (16#B2#, 16#22#, 16#22#),
          Red         => (16#FF#, 16#00#, 16#00#),
          Darkred     => (16#8B#, 16#00#, 16#00#),
          Lime        => (16#00#, 16#FF#, 16#00#),
          Forestgreen => (16#22#, 16#8B#, 16#22#),
          Green       => (16#00#, 16#80#, 16#00#),
          Darkgreen   => (16#00#, 16#64#, 16#00#),
          Blue        => (16#00#, 16#00#, 16#FF#),
          Mediumblue  => (16#00#, 16#00#, 16#CD#),
          Darkblue    => (16#00#, 16#00#, 16#8B#));

   subtype HTML_RGB_Color is HTML_Color
     with Static_Predicate => HTML_RGB_Color in Red | Green | Blue;

   function To_Int_Color (C : HTML_Color;
                          S : HTML_RGB_Color) return Int_Color;
   --  Convert to hexadecimal value for the selected RGB component S

end Color_Types;
```

Listing 154: color_types.adb

```
with Ada.Integer_Text_IO;

package body Color_Types is

   function To_RGB (C : HTML_Color) return RGB is
   begin
      return To_RGB_Lookup_Table (C);
   end To_RGB;

   function To_Int_Color (C : HTML_Color;
                          S : HTML_RGB_Color) return Int_Color is
      C_RGB : constant RGB := To_RGB (C);
   begin
      case S is
         when Red   => return C_RGB.Red;
         when Green => return C_RGB.Green;
         when Blue  => return C_RGB.Blue;
      end case;
   end To_Int_Color;

   function Image (I : Int_Color) return String is
      subtype Str_Range is Integer range 1 .. 10;
      S : String (Str_Range);
   begin
      Ada.Integer_Text_IO.Put (To    => S,
                               Item  => I,
                               Base  => 16);
      return S;
   end Image;

   function Image (C : RGB) return String is
   begin
      return ("(Red => "      & Image (C.Red)
              & ", Green => " & Image (C.Green)
              & ", Blue => "  & Image (C.Blue)
              &")");
   end Image;

```

(continues on next page)

(continued from previous page)

```
end Color_Types;
```

Listing 155: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Color_Types;      use Color_Types;

procedure Main is
   type Test_Case_Index is
     (HTML_Color_Red_Chk,
      HTML_Color_Green_Chk,
      HTML_Color_Blue_Chk);

   procedure Check (TC : Test_Case_Index) is

      procedure Check_HTML_Colors (S : HTML_RGB_Color) is
      begin
         Put_Line ("Selected: " & HTML_RGB_Color'Image (S));
         for I in HTML_Color'Range loop
            Put_Line (HTML_Color'Image (I) & " => "
                      & Image (To_Int_Color (I, S)) & ".");
         end loop;
      end Check_HTML_Colors;

   begin
      case TC is
         when HTML_Color_Red_Chk =>
            Check_HTML_Colors (Red);
         when HTML_Color_Green_Chk =>
            Check_HTML_Colors (Green);
         when HTML_Color_Blue_Chk =>
            Check_HTML_Colors (Blue);
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.13 Object-oriented programming

130.13.1 Simple type extension

Listing 156: type_extensions.ads

```
package Type_Extensions is

   type T_Float is tagged record
      F : Float;
```

(continues on next page)

(continued from previous page)

```
   end record;

   function Init (F : Float) return T_Float;

   function Init (I : Integer) return T_Float;

   function Image (T : T_Float) return String;

   type T_Mixed is new T_Float with record
      I : Integer;
   end record;

   function Init (F : Float) return T_Mixed;

   function Init (I : Integer) return T_Mixed;

   function Image (T : T_Mixed) return String;

end Type_Extensions;
```

Listing 157: type_extensions.adb

```
package body Type_Extensions is

   function Init (F : Float) return T_Float is
   begin
      return ((F => F));
   end Init;

   function Init (I : Integer) return T_Float is
   begin
      return ((F => Float (I)));
   end Init;

   function Init (F : Float) return T_Mixed is
   begin
      return ((F => F,
               I => Integer (F)));
   end Init;

   function Init (I : Integer) return T_Mixed is
   begin
      return ((F => Float (I),
               I => I));
   end Init;

   function Image (T : T_Float) return String is
   begin
      return "{ F => " & Float'Image (T.F) & " }";
   end Image;

   function Image (T : T_Mixed) return String is
   begin
      return "{ F => " & Float'Image (T.F)
        & ", I => " & Integer'Image (T.I) & " }";
   end Image;

end Type_Extensions;
```

Listing 158: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Type_Extensions;  use Type_Extensions;

procedure Main is

   type Test_Case_Index is
     (Type_Extension_Chk);

   procedure Check (TC : Test_Case_Index) is
      F1, F2 : T_Float;
      M1, M2 : T_Mixed;
   begin
      case TC is
      when Type_Extension_Chk =>
         F1 := Init (2.0);
         F2 := Init (3);
         M1 := Init (4.0);
         M2 := Init (5);

         if M2 in T_Float'Class then
           Put_Line ("T_Mixed is in T_Float'Class as expected");
         end if;

         Put_Line ("F1: " & Image (F1));
         Put_Line ("F2: " & Image (F2));
         Put_Line ("M1: " & Image (M1));
         Put_Line ("M2: " & Image (M2));
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.13.2 Online Store

Listing 159: online_store.ads

```
with Ada.Calendar; use Ada.Calendar;

package Online_Store is

   type Amount is delta 10.0**(-2) digits 10;

   subtype Percentage is Amount range 0.0 .. 1.0;

   type Member is tagged record
      Start : Year_Number;
   end record;
```

(continues on next page)

(continued from previous page)

```
12
13    type Member_Access is access Member'Class;
14
15    function Get_Status (M : Member) return String;
16
17    function Get_Price (M : Member;
18                        P : Amount) return Amount;
19
20    type Full_Member is new Member with record
21       Discount : Percentage;
22    end record;
23
24    function Get_Status (M : Full_Member) return String;
25
26    function Get_Price (M : Full_Member;
27                        P : Amount) return Amount;
28
29 end Online_Store;
```

Listing 160: online_store.adb

```
1  package body Online_Store is
2
3     function Get_Status (M : Member) return String is
4       ("Associate Member");
5
6     function Get_Status (M : Full_Member) return String is
7       ("Full Member");
8
9     function Get_Price (M : Member;
10                        P : Amount) return Amount is (P);
11
12    function Get_Price (M : Full_Member;
13                        P : Amount) return Amount is
14      (P * (1.0 - M.Discount));
15
16 end Online_Store;
```

Listing 161: online_store-tests.ads

```
1  package Online_Store.Tests is
2
3     procedure Simple_Test;
4
5  end Online_Store.Tests;
```

Listing 162: online_store-tests.adb

```
1  with Ada.Text_IO; use Ada.Text_IO;
2
3  package body Online_Store.Tests is
4
5     procedure Simple_Test is
6
7        type Member_Due_Amount is record
8           Member     : Member_Access;
9           Due_Amount : Amount;
10       end record;
11
12       function Get_Price (MA : Member_Due_Amount) return Amount is
```

(continues on next page)

(continued from previous page)

```
      begin
         return MA.Member.Get_Price (MA.Due_Amount);
      end Get_Price;

      type Member_Due_Amounts is array (Positive range <>) of Member_Due_Amount;

      DB : constant Member_Due_Amounts (1 .. 4)
        := ((Member     => new Member'(Start => 2010),
             Due_Amount => 250.0),
            (Member     => new Full_Member'(Start    => 1998,
                                            Discount => 0.1),
             Due_Amount => 160.0),
            (Member     => new Full_Member'(Start    => 1987,
                                            Discount => 0.2),
             Due_Amount => 400.0),
            (Member     => new Member'(Start => 2013),
             Due_Amount => 110.0));
   begin
      for I in DB'Range loop
         Put_Line ("Member #" & Positive'Image (I));
         Put_Line ("Status: " & DB (I).Member.Get_Status);
         Put_Line ("Since: " & Year_Number'Image (DB (I).Member.Start));
         Put_Line ("Due Amount: " & Amount'Image (Get_Price (DB (I))));
         Put_Line ("--------");
      end loop;
   end Simple_Test;

end Online_Store.Tests;
```

Listing 163: main.adb

```
with Ada.Command_Line;   use Ada.Command_Line;
with Ada.Text_IO;        use Ada.Text_IO;

with Online_Store;       use Online_Store;
with Online_Store.Tests; use Online_Store.Tests;

procedure Main is

   type Test_Case_Index is
     (Type_Chk,
      Unit_Test_Chk);

   procedure Check (TC : Test_Case_Index) is

      function Result_Image (Result : Boolean) return String is
        (if Result then "OK" else "not OK");

   begin
      case TC is
      when Type_Chk =>
         declare
            AM : constant Member      := (Start    => 2002);
            FM : constant Full_Member := (Start    => 1990,
                                          Discount => 0.2);
         begin
            Put_Line ("Testing Status of Associate Member Type => "
                      & Result_Image (AM.Get_Status = "Associate Member"));
            Put_Line ("Testing Status of Full Member Type => "
                      & Result_Image (FM.Get_Status = "Full Member"));
            Put_Line ("Testing Discount of Associate Member Type => "
```

(continues on next page)

(continued from previous page)

```
                        & Result_Image (AM.Get_Price (100.0) = 100.0));
            Put_Line ("Testing Discount of Full Member Type => "
                        & Result_Image (FM.Get_Price (100.0) = 80.0));
         end;
         when Unit_Test_Chk =>
            Simple_Test;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.14 Standard library: Containers

130.14.1 Simple todo list

Listing 164: todo_lists.ads

```
with Ada.Containers.Vectors;

package Todo_Lists is

   type Todo_Item is access String;

   package Todo_List_Pkg is new Ada.Containers.Vectors
     (Index_Type   => Natural,
      Element_Type => Todo_Item);

   subtype Todo_List is Todo_List_Pkg.Vector;

   procedure Add (Todos : in out Todo_List;
                  Item  : String);

   procedure Display (Todos : Todo_List);

end Todo_Lists;
```

Listing 165: todo_lists.adb

```
with Ada.Text_IO; use Ada.Text_IO;

package body Todo_Lists is

   procedure Add (Todos : in out Todo_List;
                  Item  : String) is
   begin
      Todos.Append (new String'(Item));
   end Add;

   procedure Display (Todos : Todo_List) is
```

(continues on next page)

(continued from previous page)

```
   begin
      Put_Line ("TO-DO LIST");
      for T of Todos loop
         Put_Line (T.all);
      end loop;
   end Display;

end Todo_Lists;
```

Listing 166: main.adb

```
with Ada.Command_Line;  use Ada.Command_Line;
with Ada.Text_IO;       use Ada.Text_IO;

with Todo_Lists;        use Todo_Lists;

procedure Main is
   type Test_Case_Index is
     (Todo_List_Chk);

   procedure Check (TC : Test_Case_Index) is
      T : Todo_List;
   begin
      case TC is
         when Todo_List_Chk =>
            Add (T, "Buy milk");
            Add (T, "Buy tea");
            Add (T, "Buy present");
            Add (T, "Buy tickets");
            Add (T, "Pay electricity bill");
            Add (T, "Schedule dentist appointment");
            Add (T, "Call sister");
            Add (T, "Revise spreasheet");
            Add (T, "Edit entry page");
            Add (T, "Select new design");
            Add (T, "Create upgrade plan");
            Display (T);
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.14.2 List of unique integers

Listing 167: ops.ads

```
with Ada.Containers.Ordered_Sets;

package Ops is

```

(continues on next page)

(continued from previous page)

```
   type Int_Array is array (Positive range <>) of Integer;

   package Integer_Sets is new Ada.Containers.Ordered_Sets
     (Element_Type => Integer);

   subtype Int_Set is Integer_Sets.Set;

   function Get_Unique (A : Int_Array) return Int_Set;

   function Get_Unique (A : Int_Array) return Int_Array;

end Ops;
```

Listing 168: ops.adb

```
package body Ops is

   function Get_Unique (A : Int_Array) return Int_Set is
      S : Int_Set;
   begin
      for E of A loop
         S.Include (E);
      end loop;

      return S;
   end Get_Unique;

   function Get_Unique (A : Int_Array) return Int_Array is
      S  : constant Int_Set := Get_Unique (A);
      AR : Int_Array (1 .. Positive (S.Length));
      I  : Positive := 1;
   begin
      for E of S loop
         AR (I) := E;
         I := I + 1;
      end loop;

      return AR;
   end Get_Unique;

end Ops;
```

Listing 169: main.adb

```
with Ada.Command_Line;          use Ada.Command_Line;
with Ada.Text_IO;               use Ada.Text_IO;

with Ops;                       use Ops;

procedure Main is
   type Test_Case_Index is
     (Get_Unique_Set_Chk,
      Get_Unique_Array_Chk);

   procedure Check (TC : Test_Case_Index;
                    A  : Int_Array) is

      procedure Display_Unique_Set (A : Int_Array) is
         S  : constant Int_Set := Get_Unique (A);
      begin
```

(continues on next page)

(continued from previous page)

```
         for E of S loop
            Put_Line (Integer'Image (E));
         end loop;
      end Display_Unique_Set;

      procedure Display_Unique_Array (A : Int_Array) is
         AU : constant Int_Array := Get_Unique (A);
      begin
         for E of AU loop
            Put_Line (Integer'Image (E));
         end loop;
      end Display_Unique_Array;

   begin
      case TC is
         when Get_Unique_Set_Chk   => Display_Unique_Set (A);
         when Get_Unique_Array_Chk => Display_Unique_Array (A);
      end case;
   end Check;

begin
   if Argument_Count < 3 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   else
      declare
         A : Int_Array (1 .. Argument_Count - 1);
      begin
         for I in A'Range loop
            A (I) := Integer'Value (Argument (1 + I));
         end loop;
         Check (Test_Case_Index'Value (Argument (1)), A);
      end;
   end if;
end Main;
```

130.15 Standard library: Dates & Times

130.15.1 Holocene calendar

Listing 170: to_holocene_year.adb

```
with Ada.Calendar; use Ada.Calendar;

function To_Holocene_Year (T : Time) return Integer is
begin
   return Year (T) + 10_000;
end To_Holocene_Year;
```

Listing 171: main.adb

```
with Ada.Command_Line;        use Ada.Command_Line;
with Ada.Text_IO;             use Ada.Text_IO;
with Ada.Calendar;            use Ada.Calendar;

with To_Holocene_Year;

procedure Main is
```

(continues on next page)

(continued from previous page)

```
   type Test_Case_Index is
     (Holocene_Chk);

   procedure Display_Holocene_Year (Y : Year_Number) is
      HY : Integer;
   begin
      HY := To_Holocene_Year (Time_Of (Y, 1, 1));
      Put_Line ("Year (Gregorian): " & Year_Number'Image (Y));
      Put_Line ("Year (Holocene):  " & Integer'Image (HY));
   end Display_Holocene_Year;

   procedure Check (TC : Test_Case_Index) is
   begin
      case TC is
         when Holocene_Chk =>
            Display_Holocene_Year (2012);
            Display_Holocene_Year (2020);
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.15.2 List of events

Listing 172: events.ads

```
with Ada.Containers.Vectors;

package Events is

   type Event_Item is access String;

   package Event_Item_Containers is new
     Ada.Containers.Vectors
       (Index_Type   => Positive,
        Element_Type => Event_Item);

   subtype Event_Items is Event_Item_Containers.Vector;

end Events;
```

Listing 173: events-lists.ads

```
with Ada.Calendar;                use Ada.Calendar;
with Ada.Containers.Ordered_Maps;

package Events.Lists is

   type Event_List is tagged private;

```

(continues on next page)

(continued from previous page)

```
   procedure Add (Events     : in out Event_List;
                  Event_Time :        Time;
                  Event      :        String);

   procedure Display (Events : Event_List);

private

   package Event_Time_Item_Containers is new
     Ada.Containers.Ordered_Maps
       (Key_Type         => Time,
        Element_Type     => Event_Items,
        "="              => Event_Item_Containers."=");

   type Event_List is new Event_Time_Item_Containers.Map with null record;

end Events.Lists;
```

Listing 174: events-lists.adb

```
with Ada.Text_IO;             use Ada.Text_IO;
with Ada.Calendar.Formatting; use Ada.Calendar.Formatting;

package body Events.Lists is

   procedure Add (Events     : in out Event_List;
                  Event_Time : Time;
                  Event      : String) is
      use Event_Item_Containers;
      E : constant Event_Item := new String'(Event);
   begin
      if not Events.Contains (Event_Time) then
         Events.Include (Event_Time, Empty_Vector);
      end if;
      Events (Event_Time).Append (E);
   end Add;

   function Date_Image (T : Time) return String is
      Date_Img : constant String := Image (T);
   begin
      return Date_Img (1 .. 10);
   end;

   procedure Display (Events : Event_List) is
      use Event_Time_Item_Containers;
      T : Time;
   begin
      Put_Line ("EVENTS LIST");
      for C in Events.Iterate loop
         T := Key (C);
         Put_Line ("- " & Date_Image (T));
         for I of Events (C) loop
            Put_Line ("    - " & I.all);
         end loop;
      end loop;
   end Display;

end Events.Lists;
```

Listing 175: main.adb

```
with Ada.Command_Line;         use Ada.Command_Line;
with Ada.Text_IO;              use Ada.Text_IO;
with Ada.Calendar;
with Ada.Calendar.Formatting; use Ada.Calendar.Formatting;

with Events.Lists;             use Events.Lists;

procedure Main is
   type Test_Case_Index is
     (Event_List_Chk);

   procedure Check (TC : Test_Case_Index) is
      EL : Event_List;
   begin
      case TC is
         when Event_List_Chk =>
            EL.Add (Time_Of (2018, 2, 16),
                    "Final check");
            EL.Add (Time_Of (2018, 2, 16),
                    "Release");
            EL.Add (Time_Of (2018, 12, 3),
                    "Brother's birthday");
            EL.Add (Time_Of (2018, 1, 1),
                    "New Year's Day");
            EL.Display;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.16 Standard library: Strings

130.16.1 Concatenation

Listing 176: str_concat.ads

```
with Ada.Strings.Unbounded; use Ada.Strings.Unbounded;

package Str_Concat is

   type Unbounded_Strings is array (Positive range <>) of Unbounded_String;

   function Concat (USA            : Unbounded_Strings;
                    Trim_Str       : Boolean;
                    Add_Whitespace : Boolean) return Unbounded_String;

   function Concat (USA            : Unbounded_Strings;
                    Trim_Str       : Boolean;
```

(continues on next page)

(continued from previous page)

```
                     Add_Whitespace : Boolean) return String;

end Str_Concat;
```

Listing 177: str_concat.adb

```
with Ada.Strings; use Ada.Strings;

package body Str_Concat is

   function Concat (USA            : Unbounded_Strings;
                    Trim_Str       : Boolean;
                    Add_Whitespace : Boolean) return Unbounded_String is

      function Retrieve (USA        : Unbounded_Strings;
                         Trim_Str   : Boolean;
                         Index      : Positive) return Unbounded_String is
         US_Internal : Unbounded_String := USA (Index);
      begin
         if Trim_Str then
            US_Internal := Trim (US_Internal, Both);
         end if;
         return US_Internal;
      end Retrieve;

      US : Unbounded_String := To_Unbounded_String ("");
   begin
      for I in USA'First .. USA'Last - 1 loop
         US := US & Retrieve (USA, Trim_Str, I);
         if Add_Whitespace then
            US := US & " ";
         end if;
      end loop;
      US := US & Retrieve (USA, Trim_Str, USA'Last);

      return US;
   end Concat;

   function Concat (USA            : Unbounded_Strings;
                    Trim_Str       : Boolean;
                    Add_Whitespace : Boolean) return String is
   begin
      return To_String (Concat (USA, Trim_Str, Add_Whitespace));
   end Concat;

end Str_Concat;
```

Listing 178: main.adb

```
with Ada.Command_Line;        use Ada.Command_Line;
with Ada.Text_IO;             use Ada.Text_IO;
with Ada.Strings.Unbounded;   use Ada.Strings.Unbounded;

with Str_Concat;              use Str_Concat;

procedure Main is
   type Test_Case_Index is
     (Unbounded_Concat_No_Trim_No_WS_Chk,
      Unbounded_Concat_Trim_No_WS_Chk,
      String_Concat_Trim_WS_Chk,
```

(continues on next page)

(continued from previous page)

```
      Concat_Single_Element);

   procedure Check (TC : Test_Case_Index) is
   begin
      case TC is
         when Unbounded_Concat_No_Trim_No_WS_Chk =>
            declare
               S : constant Unbounded_Strings := (
                  To_Unbounded_String ("Hello"),
                  To_Unbounded_String (" World"),
                  To_Unbounded_String ("!"));
            begin
               Put_Line (To_String (Concat (S, False, False)));
            end;
         when Unbounded_Concat_Trim_No_WS_Chk =>
            declare
               S : constant Unbounded_Strings := (
                  To_Unbounded_String (" This "),
                  To_Unbounded_String (" _is_ "),
                  To_Unbounded_String ("  a   "),
                  To_Unbounded_String (" _check "));
            begin
               Put_Line (To_String (Concat (S, True, False)));
            end;
         when String_Concat_Trim_WS_Chk =>
            declare
               S : constant Unbounded_Strings := (
                   To_Unbounded_String ("  This  "),
                   To_Unbounded_String ("  is a  "),
                   To_Unbounded_String ("  test.  "));
            begin
               Put_Line (Concat (S, True, True));
            end;
         when Concat_Single_Element =>
            declare
               S : constant Unbounded_Strings := (
                   1 => To_Unbounded_String ("  Hi "));
            begin
               Put_Line (Concat (S, True, True));
            end;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.16.2 List of events

Listing 179: events.ads

```
with Ada.Strings.Unbounded;  use Ada.Strings.Unbounded;
with Ada.Containers.Vectors;
```

(continues on next page)

(continued from previous page)

```
3
4  package Events is
5
6     subtype Event_Item is Unbounded_String;
7
8     package Event_Item_Containers is new
9       Ada.Containers.Vectors
10        (Index_Type   => Positive,
11         Element_Type => Event_Item);
12
13    subtype Event_Items is Event_Item_Containers.Vector;
14
15 end Events;
```

Listing 180: events-lists.ads

```
1  with Ada.Calendar;                use Ada.Calendar;
2  with Ada.Containers.Ordered_Maps;
3
4  package Events.Lists is
5
6     type Event_List is tagged private;
7
8     procedure Add (Events     : in out Event_List;
9                    Event_Time :        Time;
10                   Event      :        String);
11
12    procedure Display (Events : Event_List);
13
14 private
15
16    package Event_Time_Item_Containers is new
17      Ada.Containers.Ordered_Maps
18        (Key_Type         => Time,
19         Element_Type     => Event_Items,
20         "="              => Event_Item_Containers."=");
21
22    type Event_List is new Event_Time_Item_Containers.Map with null record;
23
24 end Events.Lists;
```

Listing 181: events-lists.adb

```
1  with Ada.Text_IO;              use Ada.Text_IO;
2  with Ada.Calendar.Formatting; use Ada.Calendar.Formatting;
3
4  package body Events.Lists is
5
6     procedure Add (Events     : in out Event_List;
7                    Event_Time : Time;
8                    Event      : String) is
9        use Event_Item_Containers;
10       E : constant Event_Item := To_Unbounded_String (Event);
11    begin
12       if not Events.Contains (Event_Time) then
13          Events.Include (Event_Time, Empty_Vector);
14       end if;
15       Events (Event_Time).Append (E);
16    end Add;
17
```

(continues on next page)

(continued from previous page)

```
   function Date_Image (T : Time) return String is
      Date_Img : constant String := Image (T);
   begin
      return Date_Img (1 .. 10);
   end;

   procedure Display (Events : Event_List) is
      use Event_Time_Item_Containers;
      T : Time;
   begin
      Put_Line ("EVENTS LIST");
      for C in Events.Iterate loop
         T := Key (C);
         Put_Line ("- " & Date_Image (T));
         for I of Events (C) loop
            Put_Line ("    - " & To_String (I));
         end loop;
      end loop;
   end Display;

end Events.Lists;
```

Listing 182: main.adb

```
with Ada.Command_Line;        use Ada.Command_Line;
with Ada.Text_IO;             use Ada.Text_IO;
with Ada.Calendar;
with Ada.Calendar.Formatting; use Ada.Calendar.Formatting;
with Ada.Strings.Unbounded;   use Ada.Strings.Unbounded;

with Events;
with Events.Lists;            use Events.Lists;

procedure Main is
   type Test_Case_Index is
     (Unbounded_String_Chk,
      Event_List_Chk);

   procedure Check (TC : Test_Case_Index) is
      EL : Event_List;
   begin
      case TC is
         when Unbounded_String_Chk =>
            declare
               S : constant Events.Event_Item := To_Unbounded_String ("Checked");
            begin
               Put_Line (To_String (S));
            end;
         when Event_List_Chk =>
            EL.Add (Time_Of (2018, 2, 16),
                    "Final check");
            EL.Add (Time_Of (2018, 2, 16),
                    "Release");
            EL.Add (Time_Of (2018, 12, 3),
                    "Brother's birthday");
            EL.Add (Time_Of (2018, 1, 1),
                    "New Year's Day");
            EL.Display;
      end case;
   end Check;

```

(continues on next page)

(continued from previous page)

```
begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.17 Standard library: Numerics

130.17.1 Decibel Factor

Listing 183: decibels.ads

```
package Decibels is

   subtype Decibel is Float;
   subtype Factor  is Float;

   function To_Decibel (F : Factor) return Decibel;

   function To_Factor (D : Decibel) return Factor;

end Decibels;
```

Listing 184: decibels.adb

```
with Ada.Numerics.Elementary_Functions; use Ada.Numerics.Elementary_Functions;

package body Decibels is

   function To_Decibel (F : Factor) return Decibel is
   begin
      return 20.0 * Log (F, 10.0);
   end To_Decibel;

   function To_Factor (D : Decibel) return Factor is
   begin
      return 10.0 ** (D / 20.0);
   end To_Factor;

end Decibels;
```

Listing 185: main.adb

```
with Ada.Command_Line; use Ada.Command_Line;
with Ada.Text_IO;      use Ada.Text_IO;

with Decibels;         use Decibels;

procedure Main is
   type Test_Case_Index is
     (Db_Chk,
      Factor_Chk);

```

(continues on next page)

(continued from previous page)

```
   procedure Check (TC : Test_Case_Index; V : Float) is

      package F_IO is new Ada.Text_IO.Float_IO (Factor);
      package D_IO is new Ada.Text_IO.Float_IO (Decibel);

      procedure Put_Decibel_Cnvt (D : Decibel) is
         F : constant Factor := To_Factor (D);
      begin
         D_IO.Put (D, 0, 2, 0);
         Put (" dB => Factor of ");
         F_IO.Put (F, 0, 2, 0);
         New_Line;
      end;

      procedure Put_Factor_Cnvt (F : Factor) is
         D : constant Decibel := To_Decibel (F);
      begin
         Put ("Factor of ");
         F_IO.Put (F, 0, 2, 0);
         Put (" => ");
         D_IO.Put (D, 0, 2, 0);
         Put_Line (" dB");
      end;
   begin
      case TC is
         when Db_Chk =>
            Put_Decibel_Cnvt (Decibel (V));
         when Factor_Chk =>
            Put_Factor_Cnvt (Factor (V));
      end case;
   end Check;

begin
   if Argument_Count < 2 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 2 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)), Float'Value (Argument (2)));
end Main;
```

130.17.2 Root-Mean-Square

Listing 186: signals.ads

```
package Signals is

   subtype Sig_Value is Float;

   type Signal is array (Natural range <>) of Sig_Value;

   function Rms (S : Signal) return Sig_Value;

end Signals;
```

Listing 187: signals.adb

```
with Ada.Numerics.Elementary_Functions; use Ada.Numerics.Elementary_Functions;

package body Signals is

   function Rms (S : Signal) return Sig_Value is
      Acc : Float := 0.0;
   begin
      for V of S loop
         Acc := Acc + V * V;
      end loop;

      return Sqrt (Acc / Float (S'Length));
   end;

end Signals;
```

Listing 188: signals-std.ads

```
package Signals.Std is

   Sample_Rate : Float := 8000.0;

   function Generate_Sine (N : Positive; Freq : Float) return Signal;

   function Generate_Square (N : Positive) return Signal;

   function Generate_Triangular (N : Positive) return Signal;

end Signals.Std;
```

Listing 189: signals-std.adb

```
with Ada.Numerics;                      use Ada.Numerics;
with Ada.Numerics.Elementary_Functions; use Ada.Numerics.Elementary_Functions;

package body Signals.Std is

   function Generate_Sine (N : Positive; Freq : Float) return Signal is
      S : Signal (0 .. N - 1);
   begin
      for I in S'First .. S'Last loop
         S (I) := 1.0 * Sin (2.0 * Pi * (Freq * Float (I) / Sample_Rate));
      end loop;

      return S;
   end;

   function Generate_Square (N : Positive) return Signal is
      S : constant Signal (0 .. N - 1) := (others => 1.0);
   begin
      return S;
   end;

   function Generate_Triangular (N : Positive) return Signal is
      S      : Signal (0 .. N - 1);
      S_Half : constant Natural := S'Last / 2;
   begin
      for I in S'First .. S_Half loop
         S (I) := 1.0 * (Float (I) / Float (S_Half));
```

(continues on next page)

(continued from previous page)

```
      end loop;
      for I in S_Half .. S'Last loop
         S (I) := 1.0 - (1.0 * (Float (I - S_Half) / Float (S_Half)));
      end loop;

      return S;
   end;

end Signals.Std;
```

Listing 190: main.adb

```
with Ada.Command_Line;        use Ada.Command_Line;
with Ada.Text_IO;             use Ada.Text_IO;

with Signals;                 use Signals;
with Signals.Std;             use Signals.Std;

procedure Main is
   type Test_Case_Index is
     (Sine_Signal_Chk,
      Square_Signal_Chk,
      Triangular_Signal_Chk);

   procedure Check (TC : Test_Case_Index) is
      package Sig_IO is new Ada.Text_IO.Float_IO (Sig_Value);

      N    : constant Positive := 1024;
      S_Si : constant Signal := Generate_Sine (N, 440.0);
      S_Sq : constant Signal := Generate_Square (N);
      S_Tr : constant Signal := Generate_Triangular (N + 1);
   begin
      case TC is
         when Sine_Signal_Chk =>
            Put ("RMS of Sine Signal: ");
            Sig_IO.Put (Rms (S_Si), 0, 2, 0);
            New_Line;
         when Square_Signal_Chk =>
            Put ("RMS of Square Signal: ");
            Sig_IO.Put (Rms (S_Sq), 0, 2, 0);
            New_Line;
         when Triangular_Signal_Chk =>
            Put ("RMS of Triangular Signal: ");
            Sig_IO.Put (Rms (S_Tr), 0, 2, 0);
            New_Line;
      end case;
   end Check;

begin
   if Argument_Count < 1 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 1 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)));
end Main;
```

130.17.3 Rotation

Listing 191: rotation.ads

```
with Ada.Numerics.Complex_Types;
use  Ada.Numerics.Complex_Types;

package Rotation is

   type Complex_Points is array (Positive range <>) of Complex;

   function Rotation (N : Positive) return Complex_Points;

end Rotation;
```

Listing 192: rotation.adb

```
with Ada.Numerics; use Ada.Numerics;

package body Rotation is

   function Rotation (N : Positive) return Complex_Points is
      C_Angle : constant Complex :=
                   Compose_From_Polar (1.0, 2.0 * Pi / Float (N));
   begin
      return C : Complex_Points (1 .. N + 1) do
         C (1) := Compose_From_Cartesian (1.0, 0.0);

         for I in C'First + 1 .. C'Last loop
            C (I) := C (I - 1) * C_Angle;
         end loop;
      end return;
   end;

end Rotation;
```

Listing 193: angles.ads

```
with Rotation; use Rotation;

package Angles is

   subtype Angle is Float;

   type Angles is array (Positive range <>) of Angle;

   function To_Angles (C : Complex_Points) return Angles;

end Angles;
```

Listing 194: angles.adb

```
with Ada.Numerics;                use Ada.Numerics;
with Ada.Numerics.Complex_Types; use Ada.Numerics.Complex_Types;

package body Angles is

   function To_Angles (C : Complex_Points) return Angles is
   begin
      return A : Angles (C'Range) do
         for I in A'Range loop
```

(continues on next page)

(continued from previous page)

```
            A (I) := Argument (C (I)) / Pi * 180.0;
         end loop;
      end return;
   end To_Angles;

end Angles;
```

Listing 195: rotation-tests.ads

```
package Rotation.Tests is

   procedure Test_Rotation (N : Positive);

   procedure Test_Angles (N : Positive);

end Rotation.Tests;
```

Listing 196: rotation-tests.adb

```
with Ada.Text_IO;            use Ada.Text_IO;
with Ada.Text_IO.Complex_IO;
with Ada.Numerics;           use Ada.Numerics;

with Angles;                 use Angles;

package body Rotation.Tests is

   package C_IO is new Ada.Text_IO.Complex_IO (Complex_Types);
   package F_IO is new Ada.Text_IO.Float_IO (Float);

   --
   --  Adapt value due to floating-point inaccuracies
   --

   function Adapt (C : Complex) return Complex is
      function Check_Zero (F : Float) return Float is
        (if F <= 0.0 and F >= -0.01 then 0.0 else F);
   begin
      return C_Out : Complex := C do
         C_Out.Re := Check_Zero (C_Out.Re);
         C_Out.Im := Check_Zero (C_Out.Im);
      end return;
   end Adapt;

   function Adapt (A : Angle) return Angle is
     (if A <= -179.99 and A >= -180.01 then 180.0 else A);

   procedure Test_Rotation (N : Positive) is
      C : constant Complex_Points := Rotation (N);
   begin
      Put_Line ("---- Points for " & Positive'Image (N) & " slices ----");
      for V of C loop
         Put ("Point: ");
         C_IO.Put (Adapt (V), 0, 1, 0);
         New_Line;
      end loop;
   end Test_Rotation;

   procedure Test_Angles (N : Positive) is
      C : constant Complex_Points := Rotation (N);
```

(continues on next page)

(continued from previous page)

```
      A : constant Angles.Angles  := To_Angles (C);
   begin
      Put_Line ("---- Angles for " & Positive'Image (N) & " slices ----");
      for V of A loop
         Put ("Angle: ");
         F_IO.Put (Adapt (V), 0, 2, 0);
         Put_Line (" degrees");
      end loop;
   end Test_Angles;

end Rotation.Tests;
```

Listing 197: main.adb

```
with Ada.Command_Line;        use Ada.Command_Line;
with Ada.Text_IO;             use Ada.Text_IO;

with Rotation.Tests;          use Rotation.Tests;

procedure Main is
   type Test_Case_Index is
     (Rotation_Chk,
      Angles_Chk);

   procedure Check (TC : Test_Case_Index; N : Positive) is
   begin
      case TC is
         when Rotation_Chk =>
            Test_Rotation (N);
         when Angles_Chk =>
            Test_Angles (N);
      end case;
   end Check;

begin
   if Argument_Count < 2 then
      Put_Line ("ERROR: missing arguments! Exiting...");
      return;
   elsif Argument_Count > 2 then
      Put_Line ("Ignoring additional arguments...");
   end if;

   Check (Test_Case_Index'Value (Argument (1)), Positive'Value (Argument (2)));
end Main;
```

Part XIII

Bug Free Coding with SPARK Ada

Copyright © 2018 – 2022, AdaCore

This book is published under a CC BY-SA license, which means that you can copy, redistribute, remix, transform, and build upon the content for any purpose, even commercially, as long as you give appropriate credit, provide a link to the license, and indicate if changes were made. If you remix, transform, or build upon the material, you must distribute your contributions under the same license as the original. You can find license details on this page[573]



Workshop project: Learn to write maintainable bug-free code with SPARK Ada.

This document was written by Robert Tice.

Note

The code examples in this course use an 80-column limit, which is a typical limit for Ada code. Note that, on devices with a small screen size, some code examples might be difficult to read.

[573] http://creativecommons.org/licenses/by-sa/4.0

CHAPTER

ONE

LET'S BUILD A STACK

In this lab we will build a stack data structure and use the SPARK provers to find the errors in the below implementation.

131.1 Background

So, what is a stack?

A stack is like a pile of dishes...

1. The pile starts out empty.
2. You add (`push`) a new plate (`data`) to the stack by placing it on the top of the pile.
3. To get plates (`data`) out, you take the one off the top of the pile (`pop`).
4. Out stack has a maximum height (`size`) of 9 dishes

Pushing items onto the stack

Here's what should happen if we pushed the string `MLH` onto the stack.

Step 0:
Empty

1:	
2:	
3:	
4:	
5:	

Last = 0

Step 1:
Push("M")

1:	M
2:	
3:	
4:	
5:	

Last = 1

Step 2:
Push("L")

1:	M
2:	L
3:	
4:	
5:	

Last = 2

Step 3:
Push("H")

1:	M
2:	L
3:	H
4:	
5:	

Last = 3

Step 4:
Top()

1:	M
2:	L
3:	H
4:	
5:	

Last = 3
returns:
'H'

The list starts out empty. Each time we push a character onto the stack, `Last` increments by 1.

Popping items from the stack

Here's what should happen if we popped 2 characters off our stack & then clear it.

Step 0:
Start

Last = 3

Step 1:
Pop()



Last = 2
returns:
'H'

Step 2:
Pop()



Last = 1
returns:
'L'

Step 3:
Clear()



Last = 0

Note that pop and `clear` don't unset the `Storage` array's elements, they just change the value of `Last`.

131.2 Input Format

N inputs will be read from stdin/console as inputs, C to the stack.

131.3 Constraints

1 <= N <= 1000

C is any character. Characters d and p will be special characters corresponding to the below commands:

p => Pops a character off the stack

d => Prints the current characters in the stack

131.4 Output Format

If the stack currently has the characters "M", "L", and "H" then the program should print the stack like this:

[M, L, H]

131.5 Sample Input

M L H d p d p d p d

131.6 Sample Output

[M, L, H] [M, L] [M] []

Listing 1: stack.ads

```
package Stack with SPARK_Mode => On is

   procedure Push (V : Character)
     with Pre  => not Full,
          Post => Size = Size'Old + 1;

   procedure Pop (V : out Character)
     with Pre  => not Empty,
          Post => Size = Size'Old - 1;

   procedure Clear
     with Post => Size = 0;

   function Top return Character
     with Post => Top'Result = Tab(Last);

   Max_Size : constant := 9;
   --  The stack size.

   Last : Integer range 0 .. Max_Size := 0;
   --  Indicates the top of the stack. When 0 the stack is empty.

   Tab  : array (1 .. Max_Size) of Character;
   --  The stack. We push and pop pointers to Values.

   function Full return Boolean is (Last = Max_Size);

   function Empty return Boolean is (Last < 1);
```

(continues on next page)

(continued from previous page)

```
29
30    function Size return Integer is (Last);
31
32 end Stack;
```

Listing 2: stack.adb

```
1  package body Stack with SPARK_Mode => On is
2
3     -----------
4     -- Clear --
5     -----------
6
7     procedure Clear
8     is
9     begin
10       Last := Tab'First;
11    end Clear;
12
13    ----------
14    -- Push --
15    ----------
16
17    procedure Push (V : Character)
18    is
19    begin
20       Tab (Last) := V;
21    end Push;
22
23    ---------
24    -- Pop --
25    ---------
26
27    procedure Pop (V : out Character)
28    is
29    begin
30       Last := Last - 1;
31       V := Tab (Last);
32    end Pop;
33
34    ---------
35    -- Top --
36    ---------
37
38    function Top return Character
39    is
40    begin
41       return Tab (1);
42    end Top;
43
44 end Stack;
```

Listing 3: main.adb

```
1  with Ada.Command_Line; use Ada.Command_Line;
2  with Ada.Text_IO;      use Ada.Text_IO;
3  with Stack;            use Stack;
4
5  procedure Main with SPARK_Mode => Off
6  is
```

(continues on next page)

(continued from previous page)

```
7
8     -----------
9     -- Debug --
10    -----------
11
12    procedure Debug
13    is
14    begin
15
16       if not Stack.Empty then
17
18          Put ("[");
19          for I in Stack.Tab'First .. Stack.Size - 1 loop
20             Put (Stack.Tab (I) & ", ");
21          end loop;
22          Put_Line (Stack.Tab (Stack.Size) & "]");
23       else
24          Put_Line ("[]");
25       end if;
26
27    end Debug;
28
29    S : Character;
30
31 begin
32
33    ----------
34    -- Main --
35    ----------
36
37    for Arg in 1 .. Argument_Count loop
38       if Argument (Arg)'Length /= 1 then
39          Put_Line (Argument (Arg) & " is an invalid input to the stack.");
40       else
41          S := Argument (Arg)(Argument (Arg)'First);
42
43          if S = 'd' then
44             Debug;
45          elsif S = 'p' then
46             if not Stack.Empty then
47                Stack.Pop (S);
48             else
49                Put_Line ("Nothing to Pop, Stack is empty!");
50             end if;
51          else
52             if not Stack.Full then
53                Stack.Push (S);
54             else
55                Put_Line ("Could not push '" & S & "', Stack is full!");
56             end if;
57          end if;
58       end if;
59
60    end loop;
61
62 end Main;
```

BIBLIOGRAPHY

[Jorvik] A New Ravenscar-Based Profile by P. Rogers, J. Ruiz, T. Gingold and P. Bernardi, in Reliable Software Technologies — Ada Europe 2017, Springer-Verlag Lecture Notes in Computer Science, Number 10300.

[SEI-C] The Software Engineering Institute. *SEI CERT C Coding Standard*.

[MISRA2013] MISRA. 2015. *Guidelines for the Use of the C Language in Critical Systems*

[Holzmann2006] Holzmann, G. J. 2006. *The Power of 10: Rules for Developing Safety-Critical Code*

[ISO2000] ISO/IEC High Integrity Rapporteur Group. 2000. "ISO/IEC TR 15942:2000 Guide for the Use of the Ada Programming Language in High Integrity Systems." *ISO/IEC TR 15942:2000*, July

[AdaRM2016] ISO/IEC. 2016. *ISO/IEC JTC 1/SC 22/WG9 Ada Reference Manual - Language and Standard Libraries-ISO/IEC 8652:2012/Cor 1:2016*

[AdaRM2020] ISO/IEC. 2020. *ISO/IEC JTC 1/SC 22/WG9 Ada Reference Manual - Language and Standard Libraries-ISO/IEC 8652:2020*

[AdaOOP2016] AdaCore. 2016. High-Integrity Object-Oriented Programming in Ada, Version 1.4[563]

[LiskovWing1994] Liskov, B. and Wing, J. 1994. "A Behavioral Notion of Subtyping." *ACM Transactions on Programming Languages and Systems (TOPLAS)* Vol. 16, Issue 6 (November): 1811-1841.

[DO178C] RTCA DO-178C/EUROCAE ED-12C. 2011. *Software Considerations in Airborne Systems and Equipment Certification*

[Meyer1997] Meyer, B. 1997. "Object-Oriented Software Construction." *Prentice Hall Professional Technical Reference* (2nd Edition)

[MITRE_CWE] MITRE. Common Weakness Enumeration (CWE)[564]

[SEI-Java] The Software Engineering Institute. *SEI CERT Oracle Coding Standard for Java*

[TR24772] ISO/IEC. 2022. *ISO/IEC TR 24772-2:20 Programming Languages - Guidance to Avoiding Vulnerabilities in Programming Languages - Part 2: Ada*

[563] https://www.adacore.com/uploads/techPapers/HighIntegrityAda.pdf
[564] https://cwe.mitre.org/index.html

INDEX

C

Common Weakness Enumeration
    CWE 248, 2024, 2026, 2028
    CWE 252, 2015
    CWE 362, 1993, 1996
    CWE 366, 1993, 1996
    CWE 367, 1993, 1996
    CWE 396, 2006
    CWE 397, 2022
    CWE 401, 1975, 1977, 1978, 1980, 1981, 1988
    CWE 415, 1975, 1978, 1980, 1981, 1986
    CWE 416, 1975, 1978, 1980, 1981, 1986
    CWE 457, 2004
    CWE 459, 1980, 1982
    CWE 478, 2000, 2003
    CWE 496, 2050
    CWE 547, 2019
    CWE 563, 2015
    CWE 567, 1997
    CWE 590, 1987
    CWE 667, 1997
    CWE 670, 2046
    CWE 674, 2016
    CWE 685, 2037
    CWE 754, 2012, 2046
    CWE 758, 1977
    CWE 770, 1983
    CWE 771, 1977, 1978, 1980
    CWE 789, 1983
    CWE 843, 2018
    CWE 1061, 2050
    CWE 1074, 2033
    CWE 1086, 2033
    CWE 1106, 2019
    CWE 1127, 2047
    CWE 1325, 1977, 1978, 1980